Tanimodori 的 LaTeX 备忘录

v 1.0.0

Tanimodori

2020 年 7 月 10 日

0 约定

- TeX 表示内容属于由 Plain TeX

- LaTeX 表示内容属于 LaTeX

- PKG 表示内容属于宏包

- MACRO 表示内容属于本文中的宏

1 基本

1.1 LATEX 文档基本格式 LATEX

```
% !TEX TS-program = xelatex
% !TEX encoding = UTF-8
\XeTeXlinebreaklocale "zh"
\XeTeXlinebreakskip = 0pt plus 1pt      % 编译引擎选项、编码
\documentclass[12pt]{article}           % 全局选项、文档属性
\usepackage{xeCJK,fontspec}             % 宏包及其选项
\usepackage{graphicx}
\usepackage{amsmath,amssymb,amsthm}
\title{\LaTeX\ Test}                    % 标题
\author{\LaTeX\ User}                   % 作者
\date{yyyy.mm.dd}                       % 日期
\begin{document}                        % 导言区结束，进入正文
\maketitle
\section{Foo}                           % 节
\subsection{Bar}                        % 小节
The quick fox jumps over the lazy dog. % 正文
\end{document}                          % 正文结束
```

1.2 空格 TEX LATEX

一次 LATEX 源文件编译过程中的主要步骤包括:

1. 前端编辑器（例如 TeXWorks）根据源文件和用户设置交给对应的引擎（例如 X∃TEX ）

2. 引擎将源文件令牌化

3. 引擎根据令牌序列输出结果。

在令牌化过程中，单个空格、多个空格或者单个换行符会被看作一个空格令牌，多个换行符会被看做换行令牌。但是控制字[1]末尾的空格字符会被忽略，不会作为空格令牌。还需加上"\ "来插入一个控制空格。控制换行符可以通过"\\"插入

```
LATEXwithout space              \LaTeX       without space\\
LATEX with space!               \LaTeX\ with space!
```

我们用尺度（*dimension*）一词来描述空格的长度。尺度由"实数 + 单位"构成，例如"5pt"、"-1.1 em"、"+,6cm"都是合法的尺度。在 TEX 中, 可以通过\hskip <dimen> 、\vskip <dimen> 插入水平和垂直空格。LATEX 的对应命令为\hspace{<dimen>}和\vspace{<dimen>}。一般来说，由于历史遗留问题，我们应尽量使用 LATEX 包装好的命令，避免使用 TEX 命令。

能够产生水平空格的常见指令见下表。

---

[1] Control Word, 由反斜杠和字母序列组成, 例如"\LaTeX", 是控制序列的一种。

空格宽度	文本模式		数学模式	
	代码	示例	代码	示例
.16667em 或 3mu	`a\,b`	a b	`$a\,b$`	$a\,b$
	`a\thinspace b`	a b	`$a\thinspace b$`	$a\,b$
-3mu			`$a\!b$`	ab
			`$a\mkern-\thinmuskip b$`	ab
4.0mu plus 2.0mu minus 4.0mu			`$a\>b$`	$a\,b$
			`$a\:b$`	$a\,b$
			`$a\mkern\medmuskip b$`	$a\,b$
5.0mu plus 5.0mu			`$a\;b$`	$a\,b$
			`$a\mkern\thickmuskip b$`	$a\,b$
.5em	`a\enspace b`	a b	`$a\enspace b$`	$a\ b$
1em	`a\quad b`	a b	`$a\quad b$`	$a\quad b$
2em	`a\qquad b`	a b	`$a\qquad b$`	$a\qquad b$
<len>	`a\hskip 1em b`	a b	`$a\hskip 1em b$`	$a\quad b$
	`a\kern 1pc b`	a b	`$a\kern 1pc b$`	$a\quad b$
	`a\hspace{25pt} b`	a b	`$a\hspace{25pt} b$`	$a\qquad b$
<stuff>	`axyzb`	axyzb	`$axyzb$`	$axyzb$
	`a\hphantom{xyz}b`	a b	`$a\hphantom{xyz}b$`	$a\quad b$
inter-word	`a{ }b`	a b	`$a{ }b$`	ab
	`a\space b`	a b	`$a\space b$`	ab
control	`a\ b`	a b	`$a\ b$`	$a\,b$
unbreakable	`a~b`	a b	`$a~b$`	$a\,b$
rubber	`a\hfill b`	a b	`$a\hfill b$`	$a\qquad b$
	`a\hspace{\fill} b`	a b	`$a\hspace{\fill} b$`	$a\qquad b$

其中 mu 是数学模式下的单位长度。<dimen> plus <dimen> minus <dimen> 除了定义空格的长度以外，还定义了空格的伸缩量。\hphantom会提供与参数水平尺寸相同的空格。"~"、\hspace*和\vspace*产生的空格是不换行空格，也就是说 LaTeX 不会在此处换行。\hfill、\vfill（TeX）、\hspace{\fill}、\vspace{\fill}（LaTeX）将产生填满剩余空间的空格，若有多个，则按照比例分配，例如：

左对齐	
	右对齐
居中	

```
左对齐 \hspace*{\fill}\\
\hspace*{\fill} 右对齐\\
\hspace*{\fill} 居中 \hspace*{\fill}
```

1.3 字体 LaTeX

1.3.1 指定字体

我们首先需要导入xeCJK和fontspec宏包，然后才能指定中英文字体。

```
% 导言区
\usepackage{xeCJK,fontspec}
% 设置英文宋体、黑体、等宽字体
\setmainfont{Source Han Serif SC}
\setsansfont{Source Han Sans SC}
\setmonofont{Sarasa Mono SC}
% 设置中文宋体、黑体、等宽字体
\setCJKmainfont{Source Han Serif SC}
\setCJKsansfont{Source Han Sans SC}
\setCJKmonofont{Sarasa Mono SC}
```

我们还可以给字体指定伪斜体与伪粗体

```
\setmainfont[AutoFakeSlant=0.2, AutoFakeBold=1.5]{Source Han Serif SC}
```

以及设置小型大写字母替代字体

```
\setmainfont[
    SmallCapsFont=TeX Gyre Termes,
    SmallCapsFeatures={Letters=SmallCaps}
]{Source Han Serif SC}
```

1.3.2 指定字形

命令	等价命令	效果
\textnormal{...}	{\normalfont ...}	Sample Text 示例文本
\emph{...}	{\em ...}	*Sample Text 示例文本*
\textrm{...}	{\rmfamily ...}	Sample Text 示例文本
\textsf{...}	{\sffamily ...}	Sample Text 示例文本
\texttt{...}	{\ttfamily ...}	Sample Text 示例文本
\textup{...}	{\upshape ...}	Sample Text 示例文本
\textit{...}	{\itshape ...}	*Sample Text 示例文本*
\textsl{...}	{\slshape ...}	*Sample Text 示例文本*
\textsc{...}	{\scshape ...}	SAMPLE TEXT
\textbf{...}	{\bfseries ...}	**Sample Text 示例文本**
\textmd{...}	{\mdseries ...}	Sample Text 示例文本
\textlf{...}	{\lfseries ...}	不支持

1.3.3　指定字体大小

命令	效果
\tiny	Sample Text 示例文本
\scriptsize	Sample Text 示例文本
\footnotesize	Sample Text 示例文本
\small	Sample Text 示例文本
\normalsize	Sample Text 示例文本
\large	Sample Text 示例文本
\Large	Sample Text 示例文本
\LARGE	Sample Text 示例文本
\huge	Sample Text 示例文本
\Huge	Sample Text 示例文本

1.3.4　指定字体颜色　`PKG`

red text
blue text

```
\usepackage{xcolor} % 导言区
{\color{red} red text}\\
\textcolor{blue}{blue text}
```

2　版式与结构　`PKG`

2.1　页边距

```
% 引言区
\usepackage{geometry}
\geometry{left=1.5cm,right=1.5cm,top=1.5cm,bottom=2cm,a4paper}
```
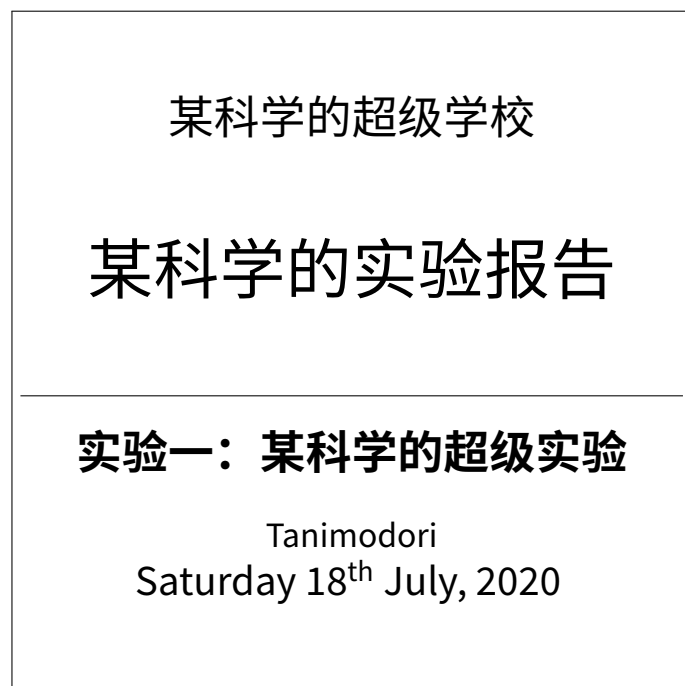
2.2　日期

2020.07.18 2020 年 7 月 18 日

```
\usepackage{datetime} % 导言区
\renewcommand{\dateseparator}{.}
\yyyymmdddate
\today % yyyy.mm.dd
\newdateformat{cndate}{\THEYEAR 年\THEMONTH 月
    ↪ \THEDAY 日}
\cndate\today % yyyy年mm月dd日
```

2.3　分割线

```
\noindent\rule{\textwidth}{0.4pt}
```

2.4 自定义封面

某科学的超级学校

某科学的实验报告

实验一：某科学的超级实验

Tanimodori
Saturday 18th July, 2020

```latex
\begin{document}
    \begin{titlepage}
        \sffamily
        \centering
        \vspace{1cm}
        {\Large 某科学的超级学校\par}
        \vspace{0.8cm}
        {\Huge 某科学的实验报告\par}
        \vspace{0.4cm}
        \noindent\rule{\textwidth}{0.4pt}
        {\bfseries\Large
        实验一：某科学的超级实验\par}
        \vspace{0.4cm}
        {Tanimodori}
        \vfill
        {\large \today}
        \vspace{1.2cm}
    \end{titlepage}
\end{document}
```

2.5 目录

通常结构

```latex
\renewcommand{\contentsname}{\centering 目录}
\begin{document}
\tableofcontents
\thispagestyle{empty} % 禁用页码
\newpage
\setcounter{page}{1}
\end{document}
```

带超链接的目录

```latex
\usepackage[CJKbookmarks]{hyperref}
\hypersetup{
    colorlinks=true,
    linktoc=page,
    linkcolor=blue
}
\begin{document}
\tableofcontents
\end{document}
```

2.6 参考文献

通常结构

```
\usepackage{hyperref}
\usepackage[hyperref=true,backend=biber,sorting=none,backref=false,doi=false,isbn=false,url=false]{
    ↪ biblatex}
\addbibresource{example.bib}
% 引言区
\begin{document}
Foo\parencite{Foo_Bar_2020}
\printbibliography[heading=none]
\end{document}
```

上标方括号参考

```
% 引言区
\DeclareCiteCommand{\supercite}[\mkbibsuperscript]
  {\iffieldundef{prenote}
    {}
    {\BibliographyWarning{Ignoring prenote argument}}%
  \iffieldundef{postnote}
    {}
    {\BibliographyWarning{Ignoring postnote argument}}}
  {\usebibmacro{citeindex}%
  \bibopenbracket\usebibmacro{cite}\bibclosebracket}
  {\supercitedelim}
  {}
```

3 数学模式 TeX LaTeX

下花括号

$$1\underbrace{0\cdots0}_{\text{10 zeros}}$$

```
\[1\underbrace{0\cdots0}_{\text{10 zeros}}\]
```

分类

$$x=\begin{cases}
1, & y=1\\
2, & y=2\\
0, & \text{otherwise.}
\end{cases}$$

```
\[x=\begin{cases}
    1,&y=1\\
    2,&y=2\\
    0,&\text{otherwise}.
\end{cases}\]
```

矩阵

$$A = \begin{bmatrix} 1 & 2 \\ 3 & 4 \end{bmatrix}$$

```
\[A=\begin{bmatrix}
    1&2\\
    3&4
\end{bmatrix}\]
```

等式

$$T_0(k) = \frac{1}{2}T_0(k-1) \tag{1}$$

```
\begin{equation}
    T_{0}(k)=\frac{1}{2} T_{0}(k-1)
\end{equation}
```

连等式

$$\begin{aligned} y &= (x+1)(x-1) \\ &= x^2 - 1 \end{aligned}$$

```
\[\begin{aligned}
y&=(x+1)(x-1)\\
&=x^2-1
\end{aligned}\]
```

微积分

$$\begin{aligned}
\iiint_{\Omega_2} \sqrt{z}\mathrm{d}v &= \iiint_{\Omega_2} \sqrt{r\cos\varphi} \cdot r^2 \sin\varphi \mathrm{d}r\mathrm{d}\theta\mathrm{d}\varphi \\
&= \int_0^{\frac{\pi}{4}} \mathrm{d}\varphi \int_0^{2\pi} \mathrm{d}\theta \int_0^1 r^{\frac{5}{2}} \sin\varphi\sqrt{\cos\varphi}\mathrm{d}r \\
&= -\int_0^{\frac{\pi}{4}} \sqrt{\cos\varphi}\mathrm{d}\cos\varphi \cdot 2\pi \cdot \frac{2}{7} \\
&= -\frac{2}{3}(\cos\varphi)^{\frac{3}{2}}\Bigg|_0^{\frac{\pi}{4}} \cdot \frac{4\pi}{7} \\
&= \frac{4\pi}{21}(2 - \sqrt[4]{2})
\end{aligned}$$

```
\newcommand{\dr}{\mathrm{d}r}
\newcommand{\dth}{\mathrm{d}\theta}
\newcommand{\dph}{\mathrm{d}\varphi}
\newcommand{\dzz}{\mathrm{d}z}
\[\begin{aligned}
\iiint_{\Omega_2}\sqrt{z}\mathrm{d}v&=\iiint_{\Omega_2} \sqrt{r\cos\varphi}\cdot r^2\sin\varphi\dr\dth
    ↪ \dph\\
&=\int_0^{\frac{\pi}4}\dph\int_0^{2\pi}\dth\int_0^1r^{\frac52}\sin\varphi\sqrt{\cos\varphi}\dr \\
&=-\int_0^{\frac{\pi}4}\sqrt{\cos\varphi}\mathrm{d}\cos\varphi\cdot2\pi\cdot\frac27\\
&=-\frac23(\cos\varphi)^{\frac32}\Bigg|_0^{\frac{\pi}4}\cdot\frac{4\pi}7\\
&=\frac{4\pi}{21}(2-\sqrt[4]{2})\\
\end{aligned}\]
```

行列式

$$\begin{vmatrix} a+x_1 & a & a & \cdots & a \\ -x_1 & x_2 & 0 & \cdots & 0 \\ -x_1 & 0 & x_3 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ -x_1 & 0 & 0 & \cdots & x_n \end{vmatrix} \xrightarrow[r_1+(-\frac{a}{x_n})r_n]{\substack{r_1+(-\frac{a}{x_2})r_2\\r_1+(-\frac{a}{x_3})r_3\\\vdots}} \begin{vmatrix} a+x_1\left(1+\frac{a}{x_2}+\frac{a}{x_3}+\cdots+\frac{a}{x_n}\right) & 0 & 0 & \cdots & 0 \\ -x_1 & x_2 & 0 & \cdots & 0 \\ -x_1 & 0 & x_3 & \cdots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ -x_1 & 0 & 0 & \cdots & x_n \end{vmatrix}$$

```latex
\[\begin{vmatrix}
a+x_1 & a   & a   & \cdots & a\\
-x_1 & x_2 & 0   & \cdots & 0\\
-x_1 & 0   & x_3 & \cdots & 0\\
\vdots&\vdots&\vdots& \ddots & \vdots\\
-x_1 & 0   & 0   & \cdots & x_n\\
\end{vmatrix}
\xrightarrow[r_1+(-\frac{a}{x_n})r_n]{\substack{r_1+(-\frac{a}{x_2})r_2\\r_1+(-\frac{a}{x_3})r_3
    \\\vdots}}
\begin{vmatrix}
a+x_1\left(1+\frac{a}{x_2}+\frac{a}{x_3}+\cdots+\frac{a}{x_n}\right) & 0   & 0   & \cdots & 0\\
-x_1 & x_2 & 0   & \cdots & 0\\
-x_1 & 0   & x_3 & \cdots & 0\\
\vdots&\vdots&\vdots& \ddots & \vdots\\
-x_1 & 0   & 0   & \cdots & x_n\\
\end{vmatrix}\]
```

4　图片

4.1　嵌入位图、矢量图、PDF

```latex
\usepackage{graphicx}
\includegraphics[width=1\linewidth]{example.png}
\includegraphics[width=1\linewidth]{example.svg}
\includegraphics[width=1\linewidth]{example.pdf}
```

4.2　图表标题

```latex
% 引言区
\usepackage{caption}
\captionsetup[figure]{name=图}
\captionsetup[table]{name=表}
\renewcommand{\contentsname}{\centering 目录}
\begin{figure}[]
    \centering
    \includegraphics[width=1\linewidth]{example.png}
    \caption{Foo}
    \label{fig:foo}
```

```
\end{figure}
```

5 表格 LaTeX

列表

- item 1
- item 2

```
\begin{itemize} % 无序列表
    \item item 1
    \item item 2
\end{itemize}
```

1. item 1
   (a) Nested item 1
   (b) Nested item 2
2. item 2

```
\begin{enumerate} % 有序列表
    \item item 1
    \begin{enumerate} % 嵌套列表
        \item Nested item 1
        \item Nested item 2
    \end{enumerate}
    \item item 2
\end{enumerate}
```

Apple item 1

Butter item 2

Charlie item 3

```
\begin{description} % 描述列表
    \item [Apple] item 1
    \item [Butter] item 2
    \item [Charlie] item 3
\end{description}
```

tabular

十进制数	4-3-2-1 编码
0	0000
1	0001
2	0010
3	0100
4	1000
5	1001
6	1010
7	1100
8	1101
9	1110

```
\begin{center}
\begin{tabular}{|l|l|l|l|}
\hline
十进制数& 4-3-2-1编码 \\\hline
0       & 0000  \\\hline
1       & 0001  \\\hline
2       & 0010  \\\hline
3       & 0100  \\\hline
4       & 1000  \\\hline
5       & 1001  \\\hline
6       & 1010  \\\hline
7       & 1100  \\\hline
8       & 1101  \\\hline
9       & 1110  \\\hline
\end{tabular}
\end{center}
```

多行与多列 PKG

现态	次态		当前输出
	$X=0$	$X=1$	
a	c	c	1
c	d	f	0
d	f	a	1
f	c	d	0

```latex
\usepackage{multirow} %导言区
\begin{center}
\begin{tabular}{c|cc|c}\hline
    \multirow{2}*{现态}&\multicolumn{2}{|c|}{次态
    ↪ }&\multirow{2}*{当前输出}\\\cline{2-3}
    ~&$X=0$&$X=1$&~\\\hline
    a&c&c&1\\
    c&d&f&0\\
    d&f&a&1\\
    f&c&d&0\\\hline
\end{tabular}
\end{center}
```

6 代码 PKG

Matlab

```matlab
function xbar=mymean(x)
    t=0;
    n=length(x);
    for i=1:n
        t=t+x(i);
    end
    xbar=t/n;
end
```

```latex
\usepackage{listings}
\usepackage{matlab-prettifier} % 导言区
\begin{lstlisting}[style=Matlab-editor]
function xbar=mymean(x)
    t=0;
    n=length(x);
    for i=1:n
        t=t+x(i);
    end
    xbar=t/n;
end
\end{lstlisting}
```

x86 汇编

```
data segment
s db 'Hello World!$'
data ends

code segment
assume cs:code, ds:data
start: mov ax, data
mov ds, ax

lea dx, s
mov ah, 09H
int 21H

mov ax, 4C00H
int 21H

code ends
end start
```

```latex
\usepackage{listings} % 导言区
\lstdefinestyle{customasm}{
language=[x86masm]Assembler,
basicstyle=\linespread{1.0}\small\ttfamily,
commentstyle=\color{Brown},
keywordstyle=\color{blue}\bfseries,
stringstyle=\color{Green}\bfseries,
keepspaces=true,
columns=fixed,
basewidth=0.5em,
}
\lstinputlisting[style=customasm]{examples/x86asm_example.asm}
```

C

```c
int main(int argv, char* argc[]) {
    for (int j = 0; j < 200; ++j) {
        int t, p, found;
        fscanf(input, "(%d,%d) ", &t, &
↪ p);
        found = mem_find(p);
        if (found != -1) {
            ++hit;
            fprintf(output, "%c", mem[
↪ found].data[t]);
        } else {
            found = mem_find_empty();
            mem_load(&mem[found], disk,
↪  p);
            fprintf(output, "%c", mem[
↪ found].data[t]);
        }
    }
    return 0;
}
```

```latex
\usepackage{listings} % 导言区
\lstdefinestyle{customc}{
language=C,%
keepspaces=true,%
columns=fixed,%
basewidth=0.5em,%
basicstyle=\ttfamily,%
breaklines=true,%
commentstyle=\color{Green},%
keywordstyle=\color{blue}\bfseries,%
stringstyle=\color{Brown}\bfseries,%
numberstyle=\ttfamily\color{Gray},%
showstringspaces=false%
}
\lstinputlisting[style=customc]{examples/c_example.c
    ↪ }
```

Python

```python
#!/usr/local/bin/python
# -*- coding: utf-8 -*-
"""
This is an example module
"""

class Example():
    """
    This is an example class
    """

    def __init__(self, arg):
        #  This is an example class
        self.data = arg
        if arg == 'foo':
            print('foo')
        else:
            print('bar')
```

```latex
\usepackage{listings} % 导言区
\lstdefinestyle{custompython}{
    language=Python,
    keepspaces=true,
    columns=fixed,
    basewidth=0.5em,
    basicstyle=\ttfamily,
    breaklines=true,
    commentstyle=\color{Green},
    keywordstyle=\color{blue}\bfseries,
    stringstyle=\color{Brown}\bfseries,
    showstringspaces=false
}
\lstinputlisting[style=custompython]{examples/
    ↪ python_example.py}
```

diff

```
12 -  int i;
13 -  for (i = 0; i < N; i++)
14 -    pthread_create(&tid[i], NULL,
   ↪ thread, &i);
12 +  int i, args[N];
13 +  for (i = 0; i < N; i++) {
14 +    args[i] = i;
15 +    pthread_create(&tid[i], NULL,
   ↪ thread, args + i);
16 +  }
```

```latex
\usepackage{xcolor}
\definecolor{diffstart}{named}{gray}
\definecolor{diffincl}{named}{Green}
\definecolor{diffrem}{named}{Red}
\usepackage{listings}
\lstdefinestyle{customdiff}{
    language=C,
    keepspaces=true,
    columns=fixed,
    basewidth=0.5em,
    basicstyle=\ttfamily,
    breaklines=true,
    commentstyle=\color{Green},
    keywordstyle=\color{blue}\bfseries,
    stringstyle=\color{Brown}\bfseries,
    numberstyle=\ttfamily\color{Gray},
    showstringspaces=false,
    morecomment=[f][\color{diffstart}]{@@},
    morecomment=[f][\color{diffincl}]{+\ },
    morecomment=[f][\color{diffrem}]{-\ },
    numbers=left,
    stepnumber=1
}
% LISTINGS linenumber hack
\makeatletter
\let\orig@lstnumber=\thelstnumber
\newcommand\lstsetnumber[1]{\gdef\thelstnumber
    ↪ {#1}}
\newcommand\lstresetnumber{\global\let
    ↪ \thelstnumber=\orig@lstnumber}
\makeatother
% 导言区
\begin{lstlisting}[style=customdiff,firstnumber
    ↪ =12, mathescape=true]
-  int i;
-  for (i = 0; i < N; i++)
-    pthread_create(&tid[i], NULL, thread, &i)
    ↪ ;$\lstresetnumber\setcounter{lstnumber
    ↪ }{11}$
+  int i, args[N];
+  for (i = 0; i < N; i++) {
+    args[i] = i;
+    pthread_create(&tid[i], NULL, thread,
    ↪ args + i);
+  }
\end{lstlisting}
```

终端

```
C:\>
```

```latex
\usepackage{listings}
\lstdefinestyle{terminal}{
    backgroundcolor=\color{black},
    basicstyle=\ttfamily\color{white},
    numbers=none,
    columns=fixed,
    basewidth=0.5em
} % 导言区
\begin{lstlisting}[style=terminal]
C:\>
\end{lstlisting}
```

伪代码

procedure Select Task

    for all client i in Q **do**
        if s_i is False **then**
            for all task t $(t_1, t_2, \cdots, t_k)$ in Q_i **do**
                if All $a_{t_{k_0}}$ is True **then**
                    $s_i \leftarrow$ True
                    All $a_{t_{k_0}} \leftarrow$ False
                    $Q_i.\mathrm{pop}(t)$
                    Tell client i that these k resources are available
    Delay for a while

```latex
\usepackage{algorithm}
\usepackage[noend]{algpseudocode} % 导言区
% \begin{algorithm}
\begin{algorithmic}
\Procedure{Select Task}{}
\State \ForAll{client $i$ in $Q$}
\If{$s_i$ is False}
\ForAll{task $t$ $(t_1,t_2,\cdots,t_k)$ in $Q_i$}
\If{All $a_{t_{k_0}}$ is True}
\State {$s_i \gets$ True}
\State {All $a_{t_{k_0}} \gets$ False}
\State {$Q_i$.pop($t$)}
\State {Tell client $i$ that these $k$ resources
    ↪ are available}
\EndIf
\EndFor
\EndIf
\EndFor
\State Delay for a while
\EndProcedure
\end{algorithmic}
% \end{algorithm}
```

7 Tikz PKG

7.1 命令示例

**\foreach**
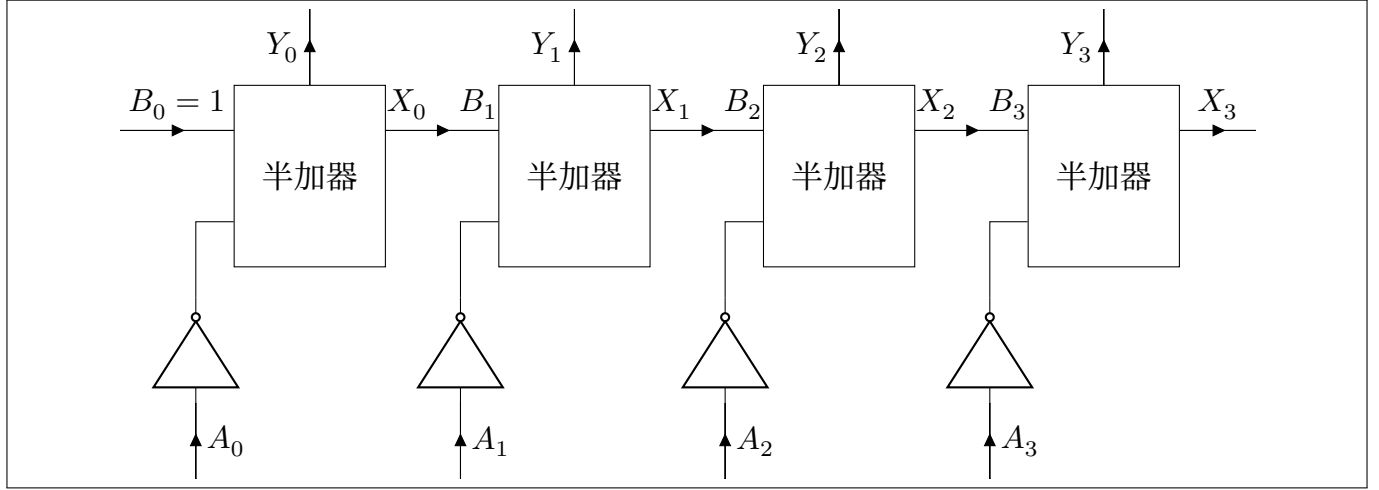

```
\begin{center}
\begin{tikzpicture}[>=latex]
\foreach \x in {1, 2, 3, 4} {
    \pgfmathtruncatemacro{\xminus}{\x-1}
    \draw
    (\xminus*3.5,0) node[draw,minimum width=2cm,minimum height=2.4cm] (ha\x) {半加器}
    ($(ha\x.west)!0.5!(ha\x.south west)$) coordinate (ha\x-a)
    ($(ha\x.west)!0.5!(ha\x.north west)$) coordinate (ha\x-b)
    ($(ha\x.east)!0.5!(ha\x.north east)$) coordinate (ha\x-x)
    ($(ha\x.north)$) coordinate (ha\x-y)
    (ha\x-a) -| ++ (-0.5,-1) node[not port, anchor=out, rotate=90] (ha\x-an) {}
    (ha\x-an.in) to[short,i^<=${A_\xminus}$] ++ (0,-1)
    (ha\x-y) to[short,i^>=${Y_\xminus}$] ++ (0,1);
}
\foreach \x in {1, 2, 3} {
    \pgfmathtruncatemacro{\xminus}{\x-1}
    \pgfmathtruncatemacro{\xplus}{\x+1}
    \draw
    (ha\x-x) to[short,i^>=${X_\xminus\quad B_\x}$] (ha\xplus-b);
}
\draw
(ha1-b) to[short,i_<=${B_0=1}$] ++ (-1.5,0)
(ha4-x) to[short,i^>=${X_3}$] ++ (1,0);
\end{tikzpicture}
\end{center}
```

7.2 内容示例

7.2.1 数字逻辑设计

开关电路
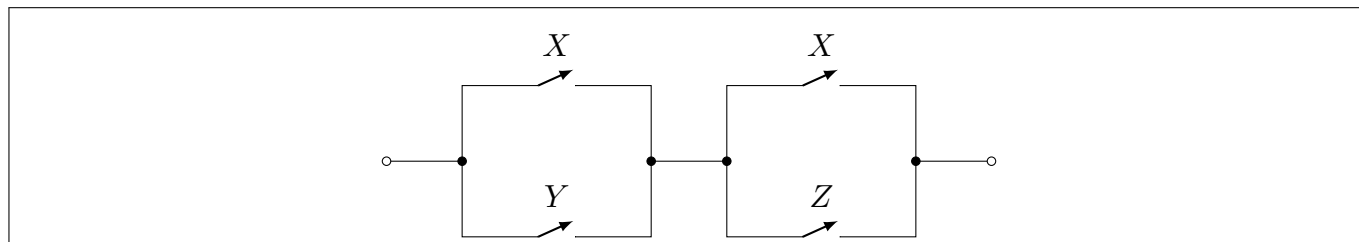

```
\usepackage{tikz}
\usetikzlibrary{arrows,shapes}
\usepackage[american,RPvoltages]{circuitikz}
% 导言区
\begin{center}
\begin{circuitikz}[>=latex]
\draw
(0,0) to [short,o-*] (1,0) coordinate (left_in) --++ (0,1)
--++ (1,0) to[nos,->,l=$X$] ++ (0.5,0) --++ (1,0)
--++ (0,-1) coordinate (left_out) to [short,*-*] ++ (1,0) coordinate (right_start)

(left_in) --++ (0,-1)
--++ (1,0) to[nos,->,l=$Y$] ++ (0.5,0) --++ (1,0)
-- (left_out)

(right_start) --++ (0,1)
--++ (1,0) to[nos,->,l=$X$] ++ (0.5,0) --++ (1,0)
--++ (0,-1) coordinate (right_end) to [short,*-o] ++ (1,0) coordinate(end)

(right_start) --++ (0,-1)
--++ (1,0) to[nos,->,l=$Z$] ++ (0.5,0) --++ (1,0)
-- (right_end);
\end{circuitikz}
\end{center}
```
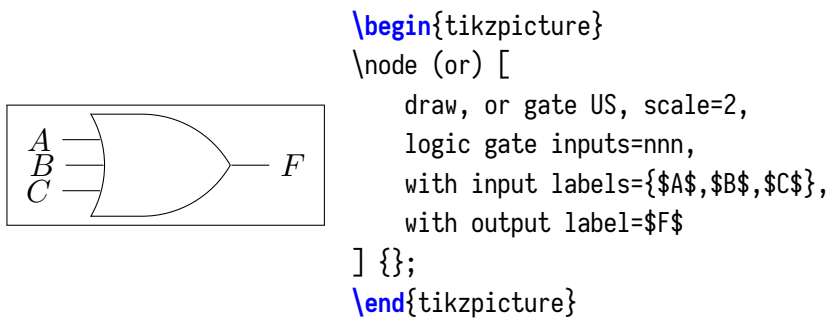
门电路 MACRO

首先导入 xparse 宏包

```
\usepackage{xparse} % 导言区
```

with input labels、**with output label**、**with select labels** 选项可以为门电路标记输入标签、输出标签和选择标签，其用法如下：

```
with input labels={comma-seperated-list}
```

```
with output label=output-label
with select labels={comma-seperated-list}
```

注意：该命令只能处理输入在左侧，输出在右侧的门。使用示例如下。


```
\begin{tikzpicture}
\node (or) [
    draw, or gate US, scale=2,
    logic gate inputs=nnn,
    with input labels={$A$,$B$,$C$},
    with output label=$F$
] {};
\end{tikzpicture}
```

该命令的定义如下：

```
% \fixname from https://tex.stackexchange.com/a/213815/220363
\tikzset{
    keep name/.style={prefix after command={\pgfextra{\let\fixname\tikzlastnode}}},
    pics/input labels/.initial={},
    pics/output label/.initial={},
    pics/select labels/.initial={},
    with input labels/.pic={
        \edef\ilabels{\pgfkeysvalueof{/tikz/pics/input labels}}%
        \foreach \ilabel [count=\li] in \ilabels {
            \draw (\fixname.input \li) ++ (-0.5,0) node (\fixname_i_\li) [left] {\ilabel} -- (\fixname
↪ .input \li);
        }
    },
    with input labels/.style={
        keep name,
        append after command = {
            pic {input labels={#1}, with input labels}
        }
    },
    with output label/.pic={
        \edef\olabel{\pgfkeysvalueof{/tikz/pics/output label}}%
        \draw (\fixname.output) -- ++(0.5,0) node (\fixname_o) [right] {\olabel};
    },
    with output label/.style={
        keep name,
        append after command = {
            pic {output label={#1}, with output label}
        }
    },
    with select labels/.pic={
        \edef\slabels{\pgfkeysvalueof{/tikz/pics/select labels}}%
        \foreach \slabel [count=\li] in \slabels {%
            \draw let \p1=(\fixname.bottom right corner),\p2=(\fixname.select \li) in (\p2) -- (\x2,\y
↪ 1-10) node[below] {\slabel};%
        };
```

```
    },
    with select labels/.style={
        keep name,
        append after command = {
            pic {select labels={#1}, with select labels}
        }
    }
}
```
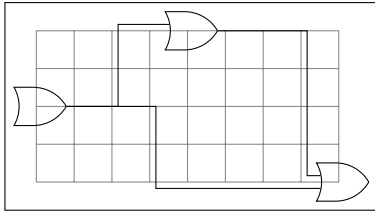
hlink、**vlink** 选项可以为连接两个门之间的输入输出，其用法如下

```
\path (anchor1) to [hlink] (anchor2);
\path (anchor1) to [hlink=offset] (anchor2);
\path (anchor1) to [vlink] (anchor2);
\path (anchor1) to [vlink=offset] (anchor2);
```



```
\begin{tikzpicture}[every node/.style={or gate US, draw}]
\draw [help lines, step=0.5cm] (0,0) grid (4,2);
\node (or1) at (0,1) {};
\node (or2) at (2,2) {};
\node (or3) at (4,0) {};
\draw (or1.output) to [hlink]     (or2.input 1);
\draw (or2.output) to [hlink=0.5] (or3.input 1);
\draw (or1.output) to [hlink=-0.5] (or3.input 2);
\end{tikzpicture}
```
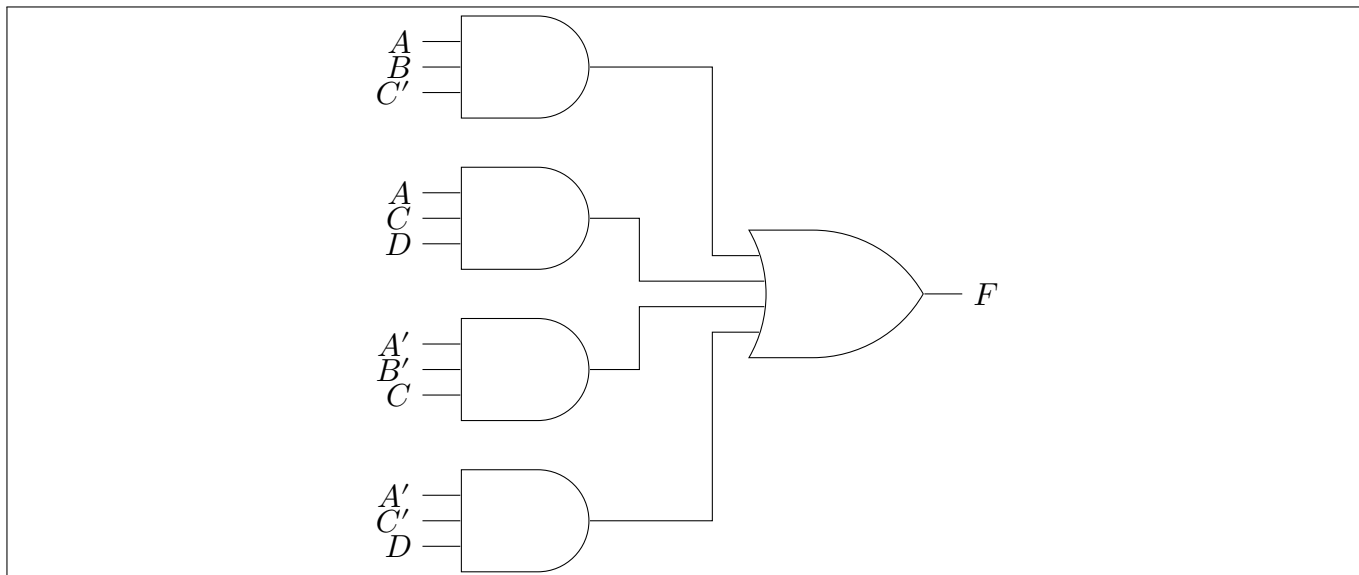
该命令的定义如下：

```
\tikzset{
    hlink/.code = {
        \ifx#1\pgfkeysnovalue%
        \pgfkeysalso{to path={-- ($(\tikztostart)!0.5!(\tikztostart-|\tikztotarget)$) |- (
↪ \tikztotarget) \tikztonodes}}
        \else%
        \pgfkeysalso{to path={-- ($(\tikztostart)!0.5!(\tikztostart-|\tikztotarget)+(#1,0)$) |- (
↪ \tikztotarget) \tikztonodes}}
        \fi%
    },
    vlink/.code = {
        \ifx#1\pgfkeysnovalue%
        \pgfkeysalso{to path={-- ($(\tikztostart)!0.5!(\tikztostart|-\tikztotarget)$) -| (
↪ \tikztotarget) \tikztonodes}}
        \else%
        \pgfkeysalso{to path={-- ($(\tikztostart)!0.5!(\tikztostart|-\tikztotarget)+(0,#1)$) -| (
↪ \tikztotarget) \tikztonodes}}
        \fi%
    }
}
```

使用以上两个命令的基本门电路用例如下：

```latex
\usepackage{tikz}
\usetikzlibrary{arrows,shapes,shapes.gates.logic.US,shapes.gates.logic.IEC}
% 导言区
\begin{center}
\begin{tikzpicture}[>=latex]
\node (or) [
    or gate US, draw, scale=2,
    logic gate inputs=nnnn,
    with output label=$F$
] at (4,-5) {};
\foreach \i/\list/\offset in
{1/{$A$,$B$,$C'$}/0.5,2/{$A$,$C$,$D$}/-0.5,3/{$A'$,$B'$,$C$}/-0.5,4/{$A'$,$C'$,$D$}/0.5}
{
\node (and\i) [
    and gate US, draw, scale=2,
    logic gate inputs=nnn,
    with input labels=\list
] at (0,-\i*2) {};
\draw (and\i.output) to [hlink=\offset] (or.input \i);
}
\end{tikzpicture}
\end{center}
```
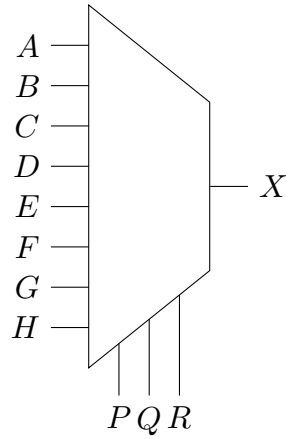
MUX MACRO

    mux 样式的用法如下

```latex
\node [mux=in-ports-numbers] {};
```

    示例代码如下

```
\begin{center}
\begin{tikzpicture}
\node (mux) [
    mux=8,
    with input labels={$A$,$B$,$C$,$D$,$E$,$F$,$G$,$H$},
    with output label=$X$,
    with select labels={$P$,$Q$,$R$}
] {};
\end{tikzpicture}
\end{center}
```

mux 样式的定义如下

```
% see https://stackoverflow.com/questions/61729168/
\pgfkeys{
    /tikz/mux ports/.initial=1
}

\makeatletter
\pgfdeclareshape{muxshape}{
\inheritsavedanchors[from=trapezium]
\inheritanchorborder[from=trapezium]
\inheritbackgroundpath[from=trapezium]
\foreach \anchor in {bottom left corner, top right corner, top left corner, bottom right corner,
    ↪ bottom side, left side, right side, top side, center, text, mid, base, mid west, base west, mid
    ↪  east, base east, west, east, north, south, north west, north east, south west, south east}{
    ↪ \inheritanchor[from=trapezium]{\anchor} }
\savedmacro\numports{%
    \edef\numports{\pgfkeysvalueof{/tikz/mux ports}}%
}
\savedmacro\numselports{%
    \pgfmathtruncatemacro{\selports}{ceil(log2(\pgfkeysvalueof{/tikz/mux ports}))}
    \edef\numselports{\selports}%
}
\anchor{output}{\csname pgf@anchor@muxshape@top side\endcsname}
% input ports and select ports
\pgfutil@g@addto@macro\pgf@sh@s@muxshape{%
    % input ports
    \c@pgf@counta\numports\relax%
```

```latex
    \pgfmathloop%\
    \ifnum\pgfmathcounter>\c@pgf@counta%
    \else%
    \expandafter\xdef\csname pgf@anchor@muxshape@input\space\pgfmathcounter\endcsname{%
        \noexpand\pgf@sh@@muxshapeinputanchor{\pgfmathcounter}%
    }
    \repeatpgfmathloop%
    % select ports
    \c@pgf@counta\numselports\relax
    \pgfmathloop%\
    \ifnum\pgfmathcounter>\c@pgf@counta%
    \else%
    \expandafter\xdef\csname pgf@anchor@muxshape@select\space\pgfmathcounter\endcsname{%
        \noexpand\pgf@sh@@muxshapeselectanchor{\pgfmathcounter}%
    }
    \repeatpgfmathloop%
}
}


\def\pgf@sh@@muxshapeinputanchor#1{%
    \installtrapeziumparameters
    \lowerleftpoint
    \pgf@xa=\pgf@x \pgf@ya=\pgf@y
    \lowerrightpoint
    \pgf@xb=\pgf@x \pgf@yb=\pgf@y
    \pgfmathsetlength{\pgf@x}{\pgf@xa+(\pgf@xb-\pgf@xa)*#1/(\numports+1)}%
    \pgfmathsetlength{\pgf@y}{\pgf@ya+(\pgf@yb-\pgf@ya)*#1/(\numports+1)}%
}


\def\pgf@sh@@muxshapeselectanchor#1{%
    \installtrapeziumparameters
    \lowerrightpoint
    \pgf@xa=\pgf@x \pgf@ya=\pgf@y
    \upperrightpoint
    \pgf@xb=\pgf@x \pgf@yb=\pgf@y
    \pgfmathsetlength{\pgf@x}{\pgf@xa+(\pgf@xb-\pgf@xa)*#1/(\numselports+1)}%
    \pgfmathsetlength{\pgf@y}{\pgf@ya+(\pgf@yb-\pgf@ya)*#1/(\numselports+1)}%
}

\tikzset{
mux/.code={
    \pgfmathtruncatemacro{\si}{ceil(log2(#1))}%
    \pgfkeys{/tikz/mux ports=#1}
    \pgfkeys{
        /tikz/shape=muxshape,
        /tikz/draw,
        /tikz/trapezium stretches,
        /tikz/shape border rotate = 270,
        /tikz/minimum height=(\si+1)*0.4cm,
        /tikz/minimum width=\si*1.6cm
```

```
        }
    }
}
```

线网图 MACRO

paramlines 环境可以用于绘制线网图，其定义和示例如下：
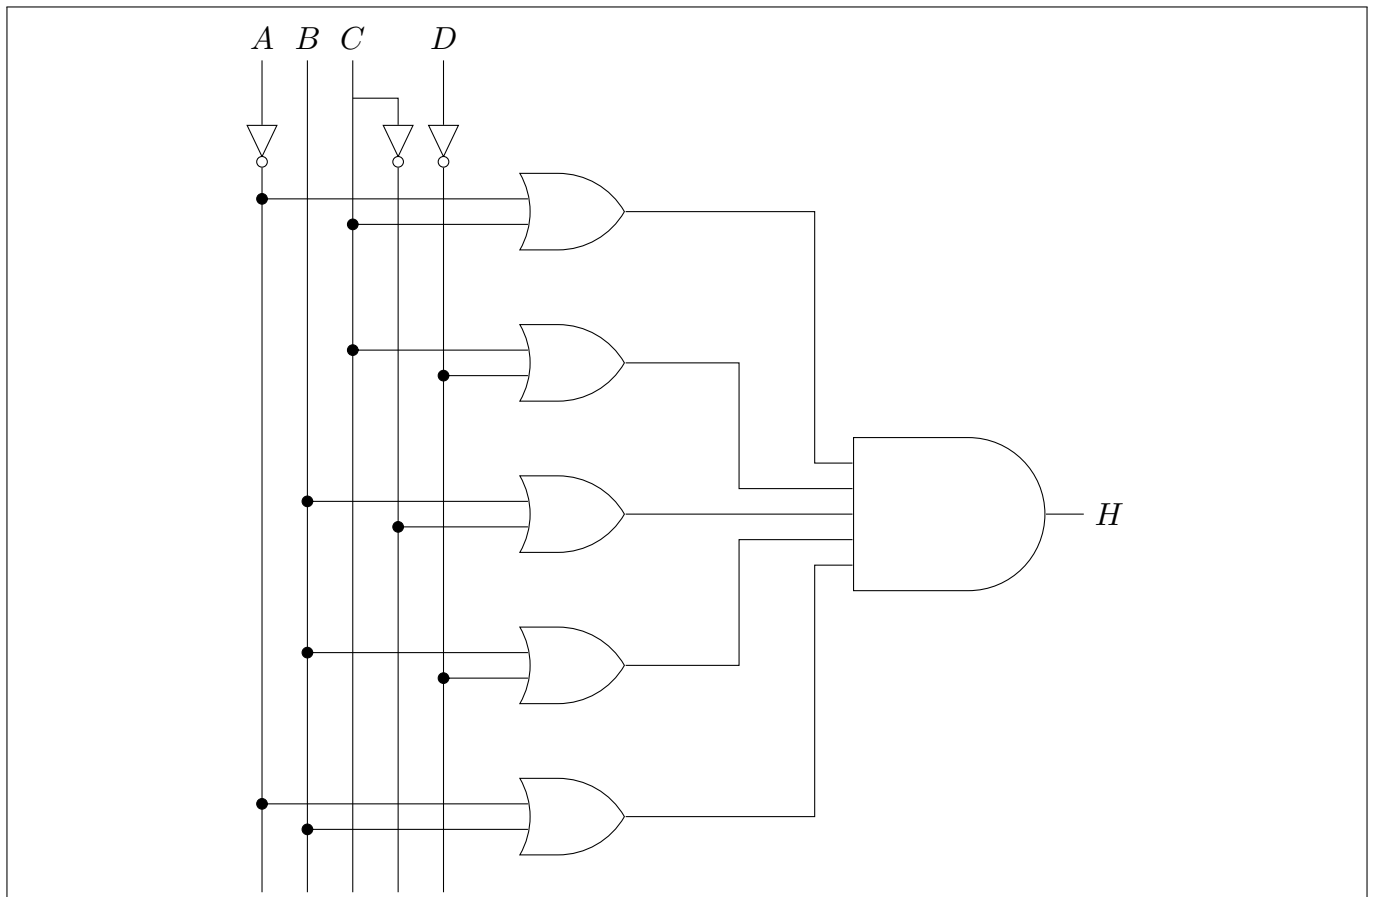
```
\newcounter{pl@@netcount}
\newcounter{pl@@linecount}[pl@@netcount]
\NewDocumentEnvironment{paramlines}{O{5} O{1}}{%
    \stepcounter{pl@@netcount}%
    \newcommand\plparamdef[1]{%
        \expandafter\edef\csname pl@##1\endcsname{\arabic{pl@@linecount}}%
        \stepcounter{pl@@linecount}%
    }
    \newcommand\plsetbasex[1]{%
        \pgfmathsetmacro{\basex}{\csname pl@##1\endcsname*#2}
    }
    \newcommand\plparambase[1]{%
        \plparamdef{##1}%
        \plsetbasex{##1}%
    }
    \newcommand\pldrawbaselabel[1]{%
        \node at (\basex,0.3) {##1};%
    }
    \newcommand\plparamlabel[2]{%
        \plparambase{##1}%
        \pldrawbaselabel{##2}%
        \draw (\basex,0) --+ (0,{-(#1)});%
    }
    \newcommand\plparam[1]{%
        \plparamlabel{##1}{$##1$}%
    }
    \newcommand\plparaminvlabel[2]{%
        \plparambase{##1'}%
        \pldrawbaselabel{##2}%
        \node [not gate US,draw,rotate=270] at (\basex,-1) (not##1'){};%
        \draw (\basex,0) -- (not##1'.input);%
        \draw (not##1'.output) -- (\basex,{-(#1)});%
    }
    \newcommand\plparaminv[1]{%
        \plparaminvlabel{##1}{$##1$}%
    }
    \newcommand\plparambothlabel[2]{%
```

```
        \plparambase{##1}%%
        \pldrawbaselabel{##2}%%
        \draw (\basex,0) --+ (0,{-(#1)});%%
        \node [not gate US,draw,rotate=270] at ({\basex+#2},-1) (not##1){};%%
        \draw (\basex,-0.5)-|(not##1.input);%%
        \draw (not##1.output)--({\basex+#2},{-(#1)});%%
        \plparamdef{##1'}%%
    }
    \newcommand\plparamboth[1]{%%
        \plparambothlabel{##1}{$##1$}%%
    }
    \newcommand\pllink[2]{%%
        \plsetbasex{##1}%%
        \filldraw let \p1=(##2) in (\p1)--(\basex,\y1) circle (2pt);%%
    }
}
{}
```

\begin{center}
\begin{tikzpicture}
\begin{paramlines}[11][0.6]
\plparaminv{A}\plparam{B}\plparamboth{C}\plparaminv{D}
\foreach \x in {1,...,5} {\node [or gate US,draw,scale=2] at (4,-\x*2) (or\x) {};}
\node (and) [
    and gate US, draw, scale=2,
    anchor=input 3, logic gate inputs=nnnnn,
    with output label=H
] at ($(or3.output)+(3,0)$) {};
\pllink{A ' }{or1.input 1} \pllink{C} {or1.input 2}
\pllink{C} {or2.input 1} \pllink{D ' }{or2.input 2}
\pllink{B} {or3.input 1} \pllink{C ' }{or3.input 2}
\pllink{B} {or4.input 1} \pllink{D ' }{or4.input 2}
\pllink{A ' }{or5.input 1} \pllink{B} {or5.input 2}
\draw (or1.output) to [hlink=1] (and.input 1);
\draw (or2.output) to [hlink]   (and.input 2);
\draw (or3.output) to [hlink=-1] (and.input 3);
\draw (or4.output) to [hlink]   (and.input 4);
\draw (or5.output) to [hlink=1] (and.input 5);
\end{paramlines}
\end{tikzpicture}
\end{center}
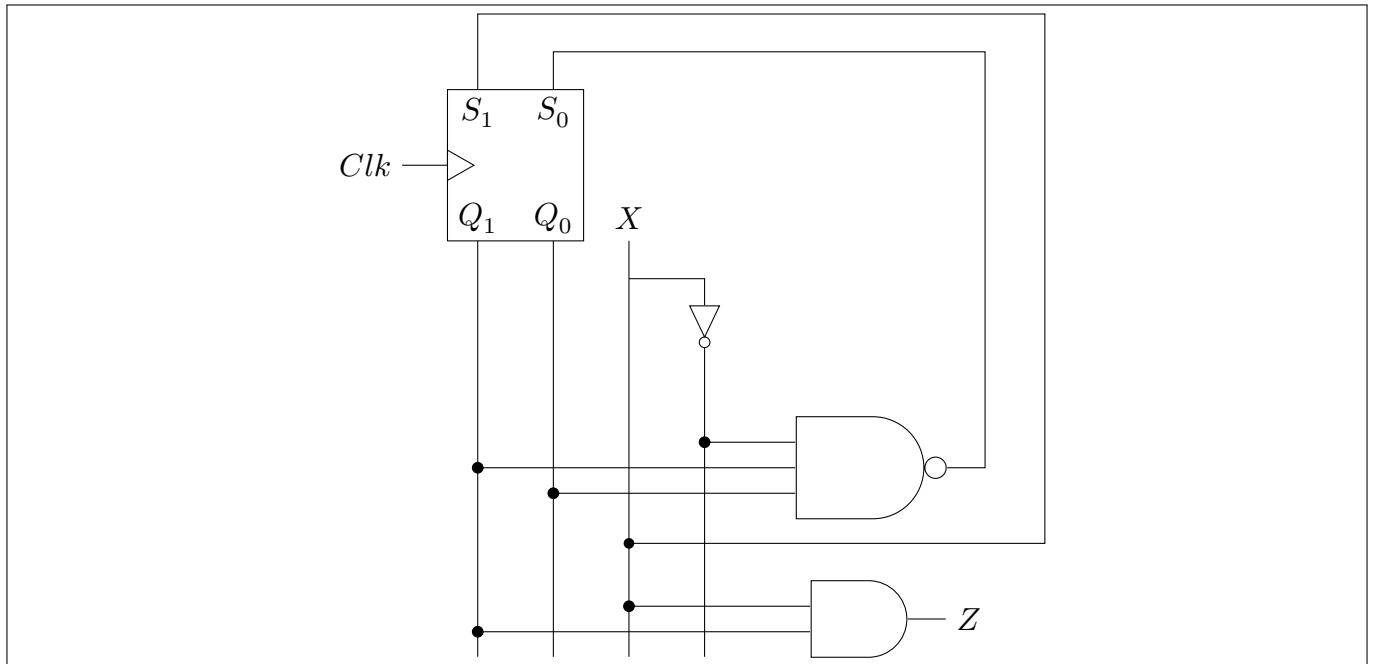
```
\begin{center}
\usepackage{tikz}
\usetikzlibrary{arrows.meta,shapes} % 导言区
\begin{tikzpicture}
\begin{paramlines}[5.5][1]
\plparamlabel{Q1}{$Q_1$}
\plparamlabel{Q0}{$Q_0$}
\plparamboth{X}
\node [draw, shape=rectangle, minimum height=2cm, minimum width=1.8cm] at (0.5,1){};
\node at (0,1.7) {$S_1$};
\node at (1,1.7) {$S_0$};
\node (clk) [left] at (-1,1) {$Clk$};
\draw (clk) -- (-0.4,1)  --+ (0,0.2) --+ (0.35,0) --+(0,-0.2);
% gates
\def\andbasex{5}
\def\orbasex{5}
\node [nand gate US,logic gate inputs=nnn,draw,scale=2] at (\orbasex,-3) (nand1) {};
\node [and gate US,draw,scale=2, with output label=$Z$] at (\andbasex,-5) (and1) {};
\pllink{X}{and1.input 1}
\pllink{Q1}{and1.input 2}
\pllink{X '}{nand1.input 1}
\pllink{Q1}{nand1.input 2}
\pllink{Q0}{nand1.input 3}
\plsetbasex{X}
\draw (nand1.output) --++(0.5,0) |- (1,2.5) -- (1,2);
\draw (\basex,-4) --++(5.5,0) |- (0,3) -- (0,2);
\fill (\basex,-4) circle (2pt);
\end{paramlines}
\end{tikzpicture}
\end{center}
```
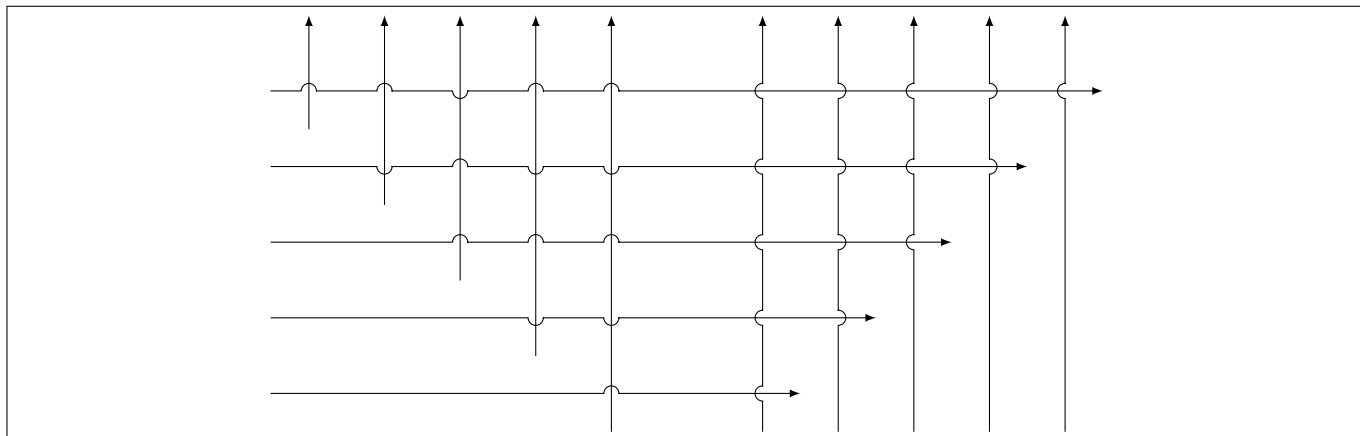
交错连线

   \SegAcross 命令可以绘制绕过连线的线条，其用法如下

```
\SegRef{from}{to}{line}                    % name path
\SegAcross{from}{options}{to}{line}        % single, normal
\SegAcross[]{from}{options}{to}{line}      % single, inverted
\SegAcross*{from}{options}{to}{{comma-sep-lines}} % multiple, normal
\SegAcross[]{from}{options}{to}{{comma-sep-lines}} % multiple, inverted
```

   使用示例如下。


```
\begin{center}
\usetikzlibrary{intersections} % 导言区
\begin{tikzpicture}[>=latex,line cap=rect]
    \gdef\reflista{}%
    \gdef\reflistb{}%
    \foreach \x in {1,...,5} {
        \coordinate (W-\x) at (-5.5,\x);
        \coordinate (E-\x) at (\x+0.5,\x);
        \coordinate (S1-\x) at (-6+\x, 5.5-\x);
        \coordinate (N1-\x) at (-6+\x, 6);
        \coordinate (S2-\x) at (\x, 0.5);
        \coordinate (N2-\x) at (\x, 6);
        \draw [->] (S1-\x) -- (N1-\x);
        \SegRef{S1-\x}{N1-\x}{refa-\x}
        \SegRef{W-\x}{E-\x}{refb-\x}
        \ifnum\x>1%
        \xdef\reflista{\reflista,}%
        \xdef\reflistb{\reflistb,}%
        \fi%
        \xdef\reflista{\reflista refa-\x}%
        \xdef\reflistb{\reflistb refb-\x}%
    }
    \foreach \x in {1,...,5} {
        \ifodd\x%
        \SegAcross*{W-\x}{->}{E-\x}{\reflista}
        \SegAcross*{S2-\x}{->}{N2-\x}{\reflistb}
        \else%
```

22

```
        \SegAcross*[]{W-\x}{->}{E-\x}{\reflista}
        \SegAcross*[]{S2-\x}{->}{N2-\x}{\reflistb}
      \fi
    }
\end{tikzpicture}
\end{center}
```

该命令的定义如下:

```
\makeatletter
\tikzset{%
    startend/.code={%
        \def\@Seg@tmp{#1}%
        \ifx\@Seg@tmp\@nnil%
            \tikzset{%
                start angle=\@Seg@StartAngle,%
                end angle=\@Seg@EndAngle,%
                radius=\@Seg@radius%
            }
        \else%
            \ifdim\@Seg@StartAngle pt<\@Seg@EndAngle pt%
                \tikzset{
                    start angle=\@Seg@StartAngle+360,%
                    end angle=\@Seg@EndAngle,%
                    radius=\@Seg@radius%
                }
            \else
                \tikzset{
                    start angle=\@Seg@StartAngle,%
                    end angle=\@Seg@EndAngle+360,%
                    radius=\@Seg@radius%
                }
            \fi%
        \fi%
    }
}
\def\@Seg@radius{1.mm}
\newcommand*\ComputeIntersection[4]{%
    \path [name intersections={of = #1 and #2, total=\t}]
    \pgfextra{\xdef\@Seg@intcount{\t}};
    \ifnum\@Seg@intcount>0%
        \coordinate (SegCenter) at (intersection-1);
        \path [name path=circle] (SegCenter) circle (\@Seg@radius);
        \path [name intersections={of = circle and #2, sort by=#2}];
        \coordinate (#3) at (intersection-1);
        \coordinate (#4) at (intersection-2);
        \pgfmathanglebetweenpoints{\pgfpointanchor{SegCenter}{center}}{\pgfpointanchor{#3}{center}}%
        \let\@Seg@StartAngle\pgfmathresult%
        \pgfmathanglebetweenpoints{\pgfpointanchor{SegCenter}{center}}{\pgfpointanchor{#4}{center}}%
        \let\@Seg@EndAngle\pgfmathresult%
    \fi
```

```latex
}

\newcommand*\SegRef[3] {
    \path [name path=#3] (#1) -- (#2);%
}
\newcommand*\SegAcrossSingle[5][\@nil]{%
    \path [name path=overlay] (#2) -- (#4);%
    \ComputeIntersection{#5}{overlay}{I1}{I2}%
    \ifnum\@Seg@intcount>0%
    \draw [#3] (#2) -- (I1) arc [startend={#1}] (I2) -- (#4);%
    \else
    \draw [#3] (#2) -- (#4);%
    \fi
}
\newcounter{@Seg@intcounttotal}
\newcommand*\SegAcrossMultiple[5][\@nil]{%
    \def\@Seg@tmp{#1}%
    \path [name path=overlay] (#2) -- (#4);%
    \gdef\@Seg@StartEnd{}%
    \setcounter{@Seg@intcounttotal}{1}%
    % Compute intersections
    \foreach \line in #5 {%
        \ComputeIntersection{\line}{overlay}{I1-\the@Seg@intcounttotal}{I2-\the@Seg@intcounttotal}%
        \ifnum\@Seg@intcount>0%
            \ifnum\the@Seg@intcounttotal>1%
                \xdef\@Seg@StartEnd{\@Seg@StartEnd,}%
            \fi
            \xdef\@Seg@StartEnd{\@Seg@StartEnd\@Seg@StartAngle/\@Seg@EndAngle}%
            \stepcounter{@Seg@intcounttotal}%
        \fi
    }
    % Draw path
    \addtocounter{@Seg@intcounttotal}{-1}%
    \ifnum\the@Seg@intcounttotal>0%
        \draw [#3] (#2)%
        foreach \@Seg@StartAngle/\@Seg@EndAngle [count=\i] in \@Seg@StartEnd {%
            -- (I1-\i) arc [startend={#1}] (I2-\i)%
        } -- (#4);%
    \else%
        \draw [#3] (#2)-- (#4);%
    \fi%
}
\newcommand*\SegAcross{%
    \@ifstar{\SegAcrossMultiple}{\SegAcrossSingle}%
}
\makeatother
```
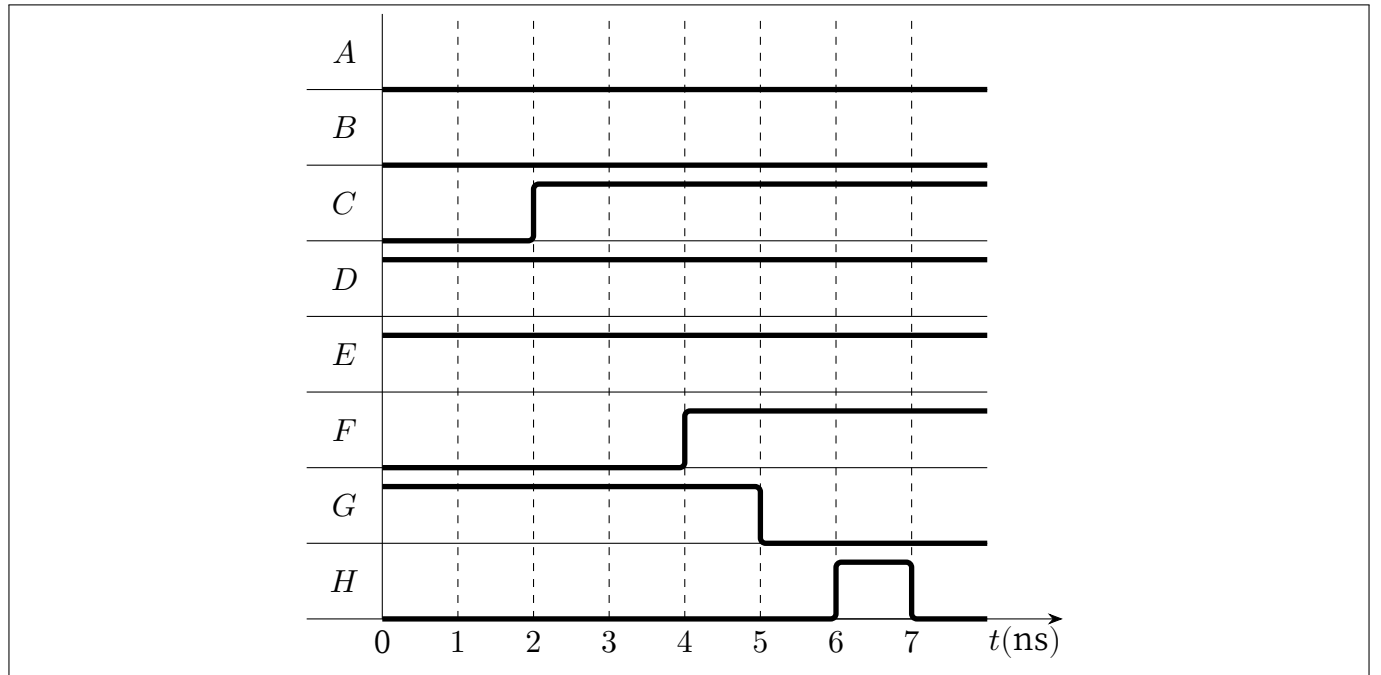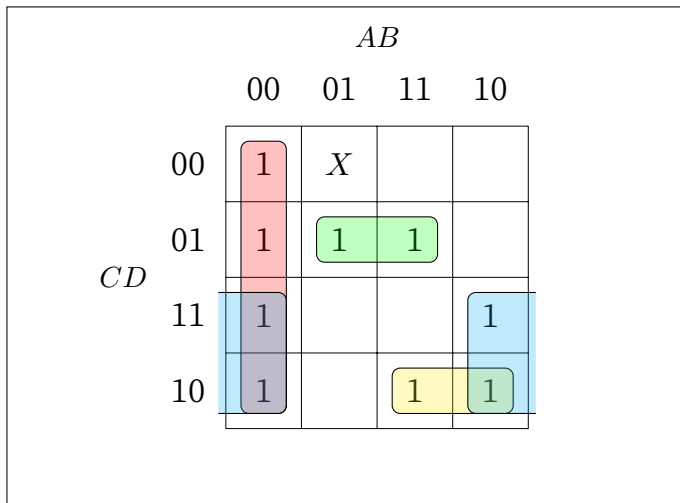
时序图


```
\begin{center}
\begin{tikzpicture}[>={Stealth[length=2mm]}]
\def\lshift{-0.3}      % yshift of label on axies
\def\rlimit{8}         % max x can time line reach
\def\hlevel{0.75}      % yshift of high level signal
% variables
\foreach \label [count=\cnt] in {H,...,A} {%
\node at (-0.5,\cnt-0.5) {$\label$}; \draw (-1,\cnt-1) --++ (\rlimit+1,0);
};
% axies
\draw (0,0)--(0,8); \draw[->] (0,0)--(\rlimit+1,0);
\node at (0,\lshift) {0}; \node at (\rlimit+0.5,\lshift) {$t(\mathrm{ns})$};
% verticle lines
\foreach \x in {1,...,7} {%
\pgfmathtruncatemacro{\label}{\x}
\node at (\x,\lshift) {$\label$};
\draw[dashed] (\x,0) -- ++ (0,\rlimit);
};
% time line
\begin{scope}[line width=2pt,rounded corners=2pt]
\draw (0,7)--(\rlimit,7); % A
\draw (0,6)--(\rlimit,6); % B
\draw (0,5)--++(2,0)|-(\rlimit,5+\hlevel); % C
\draw (0,4+\hlevel)--(\rlimit,4+\hlevel); % D
\draw (0,3+\hlevel)--(\rlimit,3+\hlevel); % E
\draw (0,2)--++(4,0)|-(\rlimit,2+\hlevel); % F
\draw (0,1+\hlevel)--++(5,0)|-(\rlimit,1); % G
\draw (0,0)--++(6,0)|-++(1,\hlevel)|-(\rlimit,0); % H
\end{scope}
\end{tikzpicture}
\end{center}
```
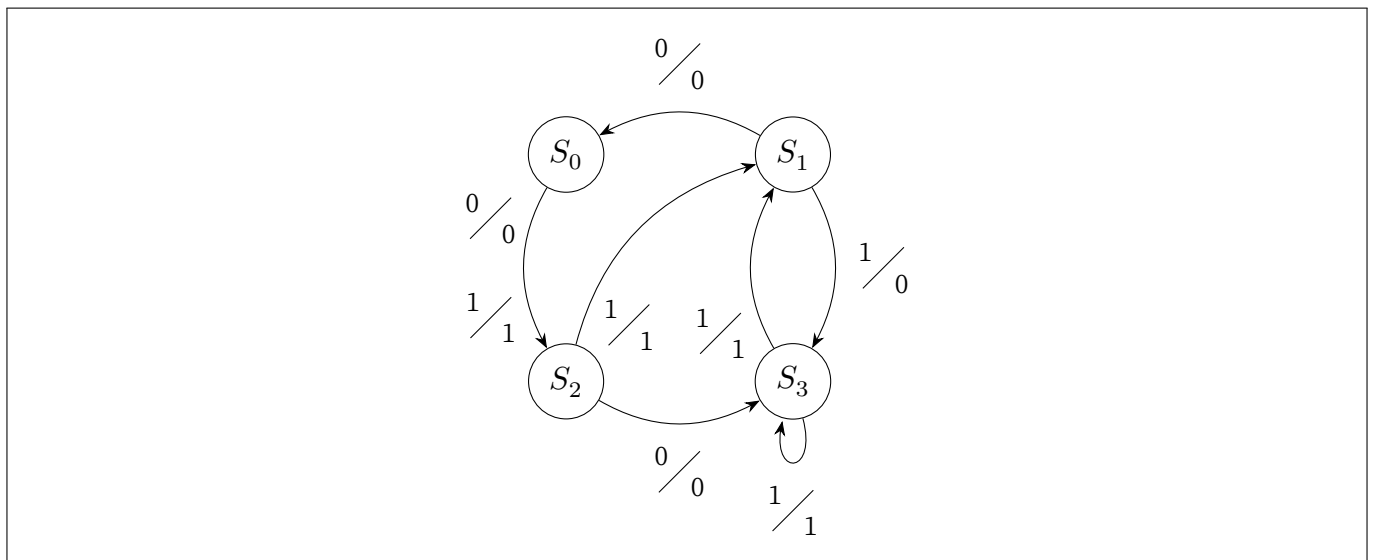
卡诺图

```latex
\usepackage{karnaugh-map} % 导言区
\begin{center}
\begin{karnaugh-map}[4][4][1][$AB$][$CD$]
    \minterms{0,4,5,7,8,10,11,12,14}
    \terms{1}{$X$}
    \implicant{0}{8}
    \implicant{5}{7}
    \implicant{11}{10}
    \implicantedge{12}{8}{14}{10}
    \end{karnaugh-map}
\end{center}
```

自动机


```latex
\usepackage{tikz}
\usetikzlibrary{arrows.meta,calc,graphs,positioning,quotes,shapes} % 导言区
\begin{center}
\begin{tikzpicture}[>={Stealth[length=2mm]}]
\graph[math nodes, nodes={draw,circle}, edge quotes={auto,circle solidus,scale=0.8}, grow right=3cm,
    ↪ branch down=3cm] {
S_0 <- [bend left, "0 \nodepart{lower} 0"] S_1;
S_2 -> [bend right, "0 \nodepart{lower} 0" swap] S_3;
S_0 -> [bend right, "0 \nodepart{lower} 0" {swap,pos=0.4} ,"1 \nodepart{lower} 1" {swap,pos=0.6} ] S
    ↪ _2;
S_2 -> [bend left, "1 \nodepart{lower} 1" {swap,pos=0.2}] S_1;
S_3 -> [bend left, "1 \nodepart{lower} 1" pos=0.3] S_1;
S_1 -> [bend left, "1 \nodepart{lower} 0"] S_3;
S_3 -> [loop below, "1 \nodepart{lower} 1"] S_3;
};
\end{tikzpicture}
\end{center}
```

隐含表 `MACRO`

implicantion 环境可以用于绘制隐含表，其定义和示例如下：

```latex
% Implication Table environment
% #1 cell size
\makeatletter
\newcounter{impt@@netcount}%
\newcounter{impt@@linecount}[impt@@netcount]%
\newcounter{impt@@columncount}[impt@@linecount]%
\newenvironment{implication}[1][1.5]{%
    \stepcounter{impt@@netcount}%
    \pgfmathsetmacro\cellsize{#1}%
    \pgfmathsetlengthmacro\cellsizelength{#1 cm}%
    % \drawcell{label}
    % draw a cell
    \newcommand*\impt@defcxy{%
        \pgfmathsetmacro\cx{\cellsize*\arabic{impt@@columncount}}%
        \pgfmathsetmacro\cy{-\cellsize*\arabic{impt@@linecount}}%
    }
    \newcommand*\impt@putnode[1]{%
        \node [draw,minimum size=\cellsizelength,align=center] at (\cx,\cy) {##1};%
        \stepcounter{impt@@columncount}%
        \ifnum\the\value{impt@@columncount}>\the\value{impt@@linecount}%
            \stepcounter{impt@@linecount}%
        \fi%
    }
    \newcommand*\impt@putx{%
        \draw ({\cx-0.3*\cellsize},{\cy-0.3*\cellsize})--++(0.6*\cellsize,0.6*\cellsize);%
        \draw ({\cx-0.3*\cellsize},{\cy+0.3*\cellsize})--++(0.6*\cellsize,-0.6*\cellsize);
    }
    \newcommand*\drawcell@star[1]{%
        \impt@defcxy%
        \impt@putnode{##1}%
    }
    \newcommand*\drawcell@nostar[1]{%
        \impt@defcxy%
        \impt@putnode{##1}%
        \impt@putx%
    }
    \newcommand*\drawcell{%
        \@ifstar{\drawcell@star}{\drawcell@nostar}%
    }
    % \drawlabelv{labels}
    % draw vertical labels
    \newcommand*\drawlabelv[1]{%
        \foreach \label [count=\n from 0] in {##1}{%
            \node [anchor=east] at ({-\cellsize*0.5},{-\cellsize*\n}) {\label};%
        }%
    }
    % \drawlabelh{labels}
```

```
    % draw horizontal labels
    \newcommand*\drawlabelh[1]{%
        \foreach \label [count=\n from 0] in {##1}{%
            \node [anchor=north] at ({\cellsize*\n},{-\cellsize*(\arabic{impt@@linecount}-0.5)}) {
↪ \label};%
        }%
    }
}{}
\makeatother
```



```
\usepackage{tikz} % 导言区
\begin{center}
\begin{tikzpicture}
\begin{implication}[1.35]
%S_1
\drawcell*{$b-g$}
%c
\drawcell{$b-g$\\$c-f$}
\drawcell{$c-f$}
%d
\drawcell{}
\drawcell{}
\drawcell{}
%e
\drawcell{$b-d$\\$e-f$}
\drawcell{$d-g$\\$e-f$}
\drawcell*{$c-e$\\$d-g$}
\drawcell{}
%f
\drawcell*{$a-f$}
\drawcell{$a-f$\\$b-g$}
\drawcell{$a-c$\\$b-g$}
\drawcell{}
\drawcell{$a-e$\\$b-d$}
%g
\drawcell{}
\drawcell{}
\drawcell{}
\drawcell*{$a-f$}
\drawcell{}
\drawcell{}
%labels
\drawlabelv{$b$,$c$,$d$,$e$,$f$,$g$}
\drawlabelh{$a$,$b$,$c$,$d$,$e$,$f$}
\end{implication}
\end{tikzpicture}
\end{center}
```

寄存器 MACRO

register 样式的定义和用例如下

```latex
\makeatletter
\pgfdeclareshape{register}{
    \inheritsavedanchors[from=rectangle]
    \inheritanchorborder[from=rectangle]
    \foreach \anchor in {north,north west,north east,center,west,east,mid,
      mid west,mid east,base,base west,base east,south,south west,south east}{%
      \inheritanchor[from=rectangle]{\anchor}}%
    \savedanchor\centerpoint{%
        \pgf@x=.5\wd\pgfnodeparttextbox%
        \pgf@y=.5\ht\pgfnodeparttextbox%
        \advance\pgf@y by -.5\dp\pgfnodeparttextbox%
    }
    \backgroundpath{%
        \southwest \pgf@xa=\pgf@x \pgf@ya=\pgf@y%
        \northeast \pgf@xb=\pgf@x \pgf@yb=\pgf@y%
        \centerpoint \pgf@xc=\pgf@x \pgf@yc=\pgf@y%
        \pgfpathmoveto{\pgfpoint{\pgf@xa}{\pgf@ya}}
        \pgfpathlineto{\pgfpoint{\pgf@xa}{\pgf@yb}}
        \pgfpathlineto{\pgfpoint{\pgf@xb}{\pgf@yb}}
        \pgfpathlineto{\pgfpoint{\pgf@xb}{\pgf@ya}}
        \pgfpathclose%
        \pgf@xa=\pgf@xc \advance\pgf@xa by-5pt%
        \pgf@xb=\pgf@xc \advance\pgf@xb by5pt%
        \pgf@yc=\pgf@ya \advance\pgf@yc by8.66pt%
        \pgfpathmoveto{\pgfpoint{\pgf@xa}{\pgf@ya}}
        \pgfpathlineto{\pgfpoint{\pgf@xc}{\pgf@yc}}
        \pgfpathlineto{\pgfpoint{\pgf@xb}{\pgf@ya}}
        \pgfpathclose%
    }
}
\makeatother
```
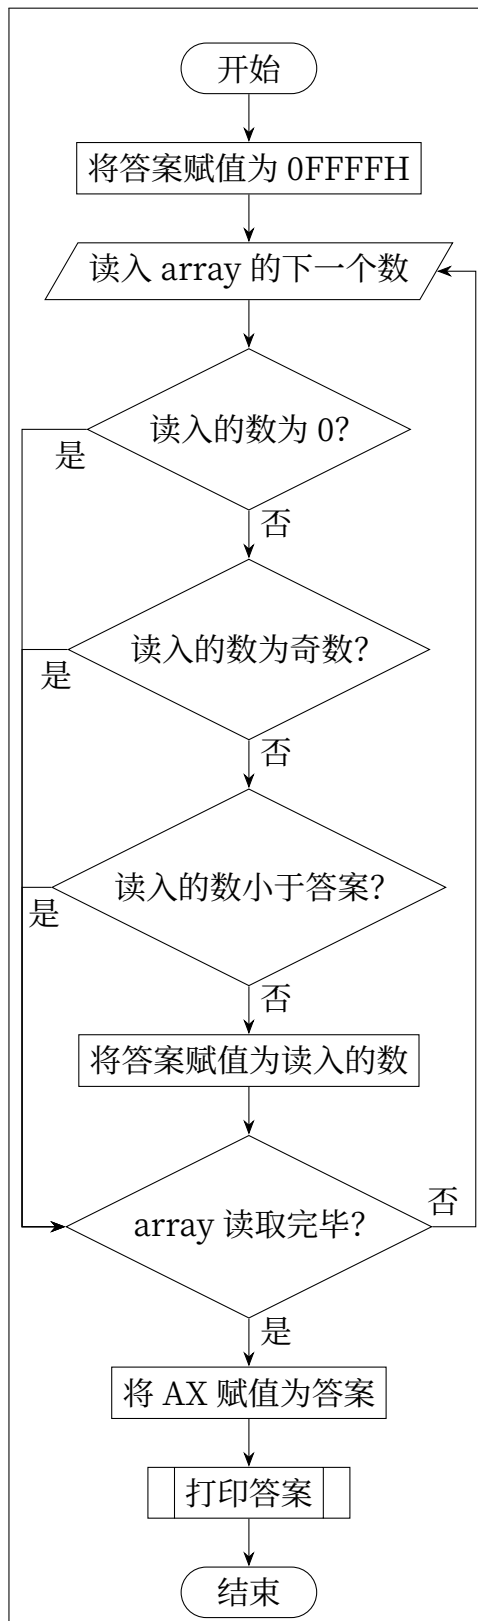
```latex
\usepackage{tikz} % 导言区
\tikzset {
    register/.style={draw,fill=white,shape=register,inner ysep=10pt,minimum width=20pt,
    ↪ minimum height=2cm,align=center}
}
\begin{center}
\begin{tikzpicture}
\node[register] {ICache\\SRAM};
\end{tikzpicture}
\end{center}
```

ICache SRAM

7.2.2 程序设计

流程图

开始

将答案赋值为 0FFFFH

读入 array 的下一个数

读入的数为 0？ —是

否

读入的数为奇数？ —是

否

读入的数小于答案？ —是

否

将答案赋值为读入的数

array 读取完毕？ —否

是

将 AX 赋值为答案

打印答案

结束

```latex
\usepackage{tikz}
\usetikzlibrary{arrows.meta,graphs,quotes}
\usepackage{flowchart}
% 导言区
\begin{center}
\begin{tikzpicture}[
>={Stealth[length=2mm]},
io/.style = {draw, trapezium, trapezium left angle=60, trapezium
    ↪ right angle=120},
decide/.style={draw, diamond, shape aspect=#1},
decide/.default={2},
term/.style = {draw, terminal},
proc/.style = {draw, process},
preproc/.style = {draw, predproc},
hv path/.style =
{to path={-| (\tikztotarget) \tikztonodes}},
vh path/.style =
{to path={|- (\tikztotarget) \tikztonodes}},
skip loop/.style =
{to path={-- ++(0,#1) \tikztonodes -| (\tikztotarget) }},
vskip loop/.style =
{to path={-- ++(#1,0) \tikztonodes |- (\tikztotarget) }},
every to quotes/.style={auto, near start},
every edge quotes/.style={auto, near start}
]
\graph[grow down sep=1.5em]
{
s [term,as=开始]->
a [proc,as=将答案赋值为0FFFFH]->
b [io,as=读入array的下一个数]->
c [decide,as=读入的数为0？ ]->["否"]
d [decide,as=读入的数为奇数？ ]->["否"]
e [decide,as=读入的数小于答案？ ]->["否"]
f [proc,as=将答案赋值为读入的数]->
g [decide,as=array读取完毕？ ]->["是"]
h [proc,as=将AX赋值为答案]->
i [preproc,as=打印答案]->
t [term,as=结束];
c ->["是", vskip loop=-3cm] g;
d ->["是", vskip loop=-3cm] g;
e ->["是", vskip loop=-3cm] g;
g ->["否", vskip loop=3cm] b;
};
\end{tikzpicture}
\end{center}
```
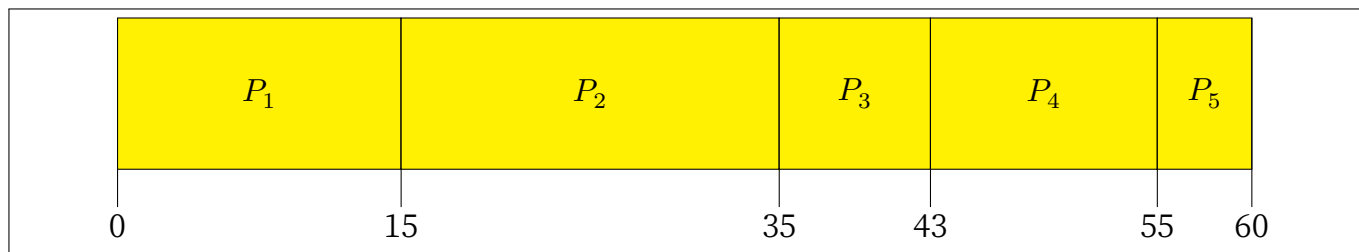
30

7.2.3 操作系统

调度结果图 MACRO

　　dispatchgraph 环境可以用于绘制隐含表，其定义和示例如下：

```
\newcommand*\dgset[1]{%
\pgfkeys{%
/dispatch graph/.cd,#1%
}}
\dgset{
    xscale/.initial = 1,
    height/.initial = 1,
    fill/.initial = yellow!20
}
\newenvironment{dispatchgraph}
{%
    \newcommand*\dgcalc{%
        \edef\dgheight{\pgfkeysvalueof{/dispatch graph/height}}%
        \edef\dgxscale{\pgfkeysvalueof{/dispatch graph/xscale}}%
    }
    \newcommand*\drawdgmark[1][0]{%
        \dgcalc%
        \draw ({##1 * \dgxscale}, -0.5) -- ({##1 * \dgxscale}, \dgheight);%
        \node at ({##1 * \dgxscale}, -0.75) {##1};%
    }
    \newcommand*\drawslice[2]{%
        \dgcalc%
        \filldraw[fill=\pgfkeysvalueof{/dispatch graph/fill}] ({\dgxcur * \dgxscale}, 0) -| ({##1 *
↪ \dgxscale}, \dgheight) -| cycle;%
        \node at ({(\dgxcur + ##1) * \dgxscale * 0.5}, {\dgheight * 0.5}) {##2};%
        \drawdgmark[##1]
        \pgfmathsetmacro\dgxcur{##1}%
    }
    \begin{tikzpicture}%
    \pgfmathsetmacro\dgxcur{0}%
    \drawdgmark[0]%
}{%
    \end{tikzpicture}%
}
```

```latex
\usepackage{tikz}
\dgset{
    height = 2,
    xscale = 0.25,
    fill = yellow
} % 导言区
\begin{center}
\begin{dispatchgraph}
    \drawslice{15}{$P_1$}
    \drawslice{35}{$P_2$}
    \drawslice{43}{$P_3$}
    \drawslice{55}{$P_4$}
    \drawslice{60}{$P_5$}
\end{dispatchgraph}
\end{center}
```