THE QR FACTORIZATION FOR BANDED-PLUS-SEMISEPARABLE MATRICES IS COMPUTABLE IN LINEAR COMPLEXITY

TAO CHEN* AND SHEEHAN OLVER*

Abstract. We show that the QR factorization of a banded-plus-semiseparable (BPS) matrix is computable in optimal linear complexity by showing that the intermediate stages of a QR factorisation as computed using Householder reflection maintain a specific structure. This theoretical result enables the design of stable, linear-complexity algorithms for solving the associated linear systems. For symmetric BPS matrices, we further show that the RQ product—central to eigenvalue computations via the QR algorithm—also preserves the BPS structure, leading to a linear-complexity algorithm for each iteration. Numerical experiments validate the optimal linear complexity, confirm high numerical accuracy, and demonstrate substantial speedups compared with existing hierarchical approaches. The algorithms have been implemented in an open-source Julia package, providing an efficient and accessible platform for practical use.

Key words. banded-plus-semiseparable matrices, QR factorization, linear complexity, structured matrices, direct solvers

AMS subject classifications. 65F05, 65F50, 15A23, 65Y20

1. Introduction.

Banded-plus-semiseparable (BPS) matrices, expressible as

$$A = \underbrace{B}_{\text{banded}} + \underbrace{\operatorname{tril}(UV^\top, -1)}_{\text{lower semiseparable rank } r} + \underbrace{\operatorname{triu}(WS^\top, 1)}_{\text{upper semiseparable rank } p} \in \mathbb{R}^{n\times n},$$

where $U, V \in \mathbb{R}^{n\times r}$ and $W, S \in \mathbb{R}^{n,p}$ arise in numerous applications from spectral methods for differential equations [14] to signal processing, control theory, and eigenvalue problems [22]. Importantly, the inverse of a banded matrix is itself a BPS matrix, making this structure fundamental for representing inverses of banded matrices [19]. Their structure requires only $O(n)$ storage which invites the development of $O(n)$ algorithms, a goal successfully achieved for iterations of the QR algorithm for symmetric semiseparable systems [21], and for solving linear systems with diagonal-plus-semiseparable matrices [11]. However, generalizing these results to the case where the matrix is nonsymmetric, or the banded part B is a genuine banded matrix, rather than merely a diagonal one, and representing the QR factorization in its entirety presents significant algorithmic challenges.

Pioneering work has established $O(n)$ solvers for the BPS matrices via ULV factorization [4]. BPS matrices can also be viewed as hierarchically semiseparable (HSS) matrices, and solvers using HSS structure is a well-developed area [2, 5, 16, 24]. A parallel line of research extensively developed the theory and algorithms for semiseparable matrices, including approaches leveraging rational Krylov techniques [13, 23], structure-preserving analyses [7, 8, 12], and alternative representations [9, 22]. Despite these advances, a clear theoretical guarantee that the standard QR factorization preserves the BPS structure has been missing, with most existing solvers relying on more complex ULV [4] or intricate Givens-based schemes [10, 17, 20]. A special case of BPS matrices with no lower semiseparable part ($r = 0$) are almost banded matrices which were used in [18] to represent discretisations of differential equations using the ultraspherical spectral method. An optimal complexity adaptive QR factorization was introduced, which also gives an optimal complexity QR factorization for this

*Department of Mathematics, Imperial College London, London, UK (t.chen24@imperial.ac.uk, s.olver@imperial.ac.uk).

This manuscript is for review purposes only.

special case. This work also introduced an optimal complexity back-substitution for upper-triangular BPS matrices, an algorithm we also use.

In this paper, we close this theoretical gap and prove that the QR factorization of a BPS matrix yields a factor matrix F, which is the matrix whose upper triangular part contains R and lower triangular part contains the Householder reflectors encoding Q, that is itself BPS. This discovery enables the design of a suite of $O(n)$ algorithms, including a robust QR factorization and a complete direct solver that performs $Q^\top$ application and backward substitution in linear time. Furthermore, we extend this structural analysis to symmetric BPS matrices, proving that the RQ product also retains the BPS structure, which is central to efficient eigenvalue computations.

The core of our idea lies in characterizing the precise structural evolution during the QR factorization process. Although the BPS structure is not strictly invariant under individual Householder transformations, we demonstrate that the intermediate matrices remain within a well-defined space of structured perturbations, denoted as $\mathcal{P}(A)$ (Definition 3.2). The fundamental insight is that each Householder reflection preserves this extended structure (Lemma 3.5), ensuring that the final factor matrix F maintains a compact representation (Theorem 3.6). By leveraging this structural inheritance, we transition from theoretical preservation to the development of $O(n)$ algorithms, bridging the gap between algebraic properties and efficient numerical implementation.

The rest of this paper is organized as follows. Section 2 discusses the factor matrix representation for the QR factorization as computed with Householder reflections, which proves a convenient language to discuss the perturbations of the intermediate stages of the factorization. Section 3 presents our main theoretical contributions on the preservation of a specific perturbation structure and the resulting BPS structure of the final QR factorization. Section 4 details the practical implementation of $O(n)$ algorithms for QR factorization, application of $Q^\top$, and backward substitution. Building on these foundations, Section 5 addresses symmetric BPS matrices, proving that the RQ product preserves the BPS structure and presenting a linear-complexity algorithm for its computation. Section 6 presents numerical experiments that confirm the linear complexity, verify the numerical stability, and demonstrate performance advantages of our algorithms. We conclude in Section 7 with a discussion of future work.

Remark 1.1. *While this paper focuses on real square matrices, the techniques and results naturally extend to complex matrices by replacing transposes with conjugate transposes. The extension to rectangular matrices is also straightforward, as Householder QR factorization applies similarly to rectangular matrices, and the structural arguments carry over with minor adjustments. These extensions are omitted but represent immediate generalizations of the ideas presented here.*

2. The Representation of the QR Factor Matrix.

Consider the computation of the QR factorization using Householder reflections which we can write as:

$$A = \underbrace{(I - \tau_1 \mathbf{y}_1 \mathbf{y}_1^\top) \cdots (I - \tau_{n-1} \mathbf{y}_{n-1} \mathbf{y}_{n-1}^\top)}_{Q} \underbrace{\begin{bmatrix} r_{11} & r_{12} & r_{13} & \cdots & r_{1n} \\ & r_{22} & r_{23} & \cdots & r_{2n} \\ & & r_{33} & \cdots & r_{3n} \\ & & & \ddots & \vdots \\ & & & & r_{nn} \end{bmatrix}}_{R}$$

where

$$\mathbf{y}_k = \begin{bmatrix} 0 \\ \vdots \\ 0 \\ 1 \\ y_{k+1,k} \\ \vdots \\ y_{n,k} \end{bmatrix} \begin{matrix} \left.\vphantom{\begin{matrix}0\\ \vdots \\ 0\end{matrix}}\right\} k-1 \text{ zeros} \\ \left.\vphantom{\begin{matrix}1\\ y_{k+1,k} \\ \vdots \\ y_{n,k}\end{matrix}}\right\} n-k \text{ elements} \end{matrix} \tag{2.1}$$

and $\tau_k = 2\|\mathbf{y}_k\|^{-2}$ so that $\sqrt{\tau_k/2}\mathbf{y}_k$ has unit norm. Following the LAPACK format [1], the QR factorisation can be represented by a *factors matrix* containing the entries of $\mathbf{y}_k$ and R:

$$F = \begin{bmatrix} r_{11} & r_{12} & r_{13} & \cdots & r_{1n} \\ y_{21} & r_{22} & r_{23} & \cdots & r_{2n} \\ y_{31} & y_{32} & r_{33} & \cdots & r_{3n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ y_{n1} & y_{n2} & y_{n3} & \cdots & r_{nn} \end{bmatrix}$$

alongside a vector $\boldsymbol{\tau} = [\tau_1, \ldots, \tau_{n-1}, 0]^\top$.

We will demonstrate that F itself retains a BPS structure, which implies structure in R and the Householder reflections. Specifically, F has lower semiseparable part rank r, upper semiseparable part rank $r+p$, lower bandwidth is ℓ, and upper bandwidth is $\ell + m$.

Intermediate stages of the Householder reflection correspond to a partial factors matrix. In particular, if we apply k Householder reflections to partially upper triangularize A as

$$(I - \tau_k \mathbf{y}_k \mathbf{y}_k^\top) \cdots (I - \tau_1 \mathbf{y}_1 \mathbf{y}_1^\top) A = \begin{bmatrix} r_{11} & r_{12} & r_{13} & \cdots & r_{1,n-2} & r_{1,n-1} & r_{1n} \\ & r_{22} & r_{23} & r_{24} & \cdots & r_{2,n-1} & r_{2n} \\ & & \ddots & \ddots & \ddots & \ddots & \vdots \\ & & & r_{kk} & r_{k,k+1} & \cdots & r_{kn} \\ & & & & a^k_{k+1,k+1} & \cdots & a^k_{k+1,n} \\ & & & & \vdots & \ddots & \vdots \\ & & & & a^k_{n,k+1} & \cdots & a^k_{nn} \end{bmatrix}.$$

We can represent this partial factorisation using the intermediate factor matrix

$$F_k = \begin{bmatrix} r_{11} & r_{12} & r_{13} & \cdots & r_{1,n-2} & r_{1,n-1} & r_{1n} \\ y_{21} & r_{22} & r_{23} & r_{24} & \cdots & r_{2,n-1} & r_{2n} \\ \vdots & \ddots & \ddots & \ddots & \ddots & \ddots & \vdots \\ y_{k1} & \cdots & y_{k,k-1} & r_{kk} & r_{k,k+1} & \cdots & r_{kn} \\ y_{k+1,1} & \cdots & y_{k+1,k-1} & y_{k+1,k} & a^k_{k+1,k+1} & \cdots & a^k_{k+1,n} \\ \vdots & \ddots & \vdots & \vdots & \vdots & \ddots & \vdots \\ y_{n1} & \cdots & y_{n,k-1} & y_{nk} & a^k_{n,k+1} & \cdots & a^k_{nn} \end{bmatrix},$$

alongside $\boldsymbol{\tau}_k = [\tau_1, \ldots, \tau_k, 0, \ldots, 0]^\top$. We can view applying the k-th Householder

transformation as a map

$$\mathcal{H}_k(F_k, \boldsymbol{\tau}_k) := (F_{k+1}, \boldsymbol{\tau}_{k+1}).$$

The intermediate factors matrices *does not* have BPS structure, however, we shall so that it is a structured perturbation of BPS.

3. Structure Preservation of the factors matrix for BPS matrices. We now turn our attention to understanding the structure that F_k exhibits. In particular, we claim it is a structured perturbation of a BPS matrix. To be precise, we first introduce a notation for BPS matrices:

DEFINITION 3.1. *Denote the set of banded-plus-semseparable matrices (BPS) with lower-semisepable rank r, upper-semiseparable rank p, lower-bandwidth ℓ, and upper-band-width m as $\mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)} \subset \mathbb{R}^{n\times n}$. In particular, $A \in \mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)} \subset \mathbb{R}^{n\times n}$ if*

$$A = B + \mathrm{tril}(UV^\top, -1) + \mathrm{triu}(WS^\top, 1)$$

for $U, V \in \mathbb{R}^{n\times r}$, $W, S \in \mathbb{R}^{n\times p}$, and $B = (b_{kj})_{k,j=1}^n \in \mathbb{R}^{n\times n}$ is a banded matrix satisfying $b_{kj} = 0$ for $k - j > l$ or $j - k > m$.

We note that the BPS structure is not uniquely defined, so we assume if we know $A \in BPS$ we have access to U, V, W, S. Note this structure is preserved under principle subsection:

$$\begin{aligned} A[k\!:\!n, k\!:\!n] = B[k\!:\!n, k\!:\!n] &+ \mathrm{tril}(U[k\!:\!n,:]V[k\!:\!n,:]^\top, -1) \\ &+ \mathrm{triu}(W[k\!:\!n,:]S[k\!:\!n,:]^\top, -1) \in \mathrm{BPS}^{n-k+1\times n-k+1}_{(r,p),(\ell,m)}. \end{aligned}$$

The first k-th rows/columns of F_k will maintain the BPS structure, however, the bottom right will be a structured perturbation of a BPS matrix. In particular, the factors matrices will be of the form

$$F_k = A_k + \begin{bmatrix} \mathbf{0} & \mathbf{0} \\ \mathbf{0} & P_k \end{bmatrix}$$

where $A_k \in \mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)}$ and $P_k \in \mathcal{P}(A_k[k\!+\!1\!:\!n, k\!+\!1\!:\!n])$ for the following perturbation space:

DEFINITION 3.2. *Given*

$$A = B + \mathrm{tril}(UV^\top, -1) + \mathrm{triu}(WS^\top, 1) \in \mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)}$$

define the vector space:

$$\begin{aligned} \mathcal{P}(A) := \Bigg\{ & UJS^\top + UKU^\top A + UE + XS^\top + YU^\top A + Z : \\ & J \in \mathbb{R}^{r\times p}, K \in \mathbb{R}^{r\times r}, \\ & E = [E_s \in \mathbb{R}^{r\times \min(\ell+m,n)}, \mathbf{0}] \in \mathbb{R}^{r\times n}, \\ & X = \begin{bmatrix} X_s \in \mathbb{R}^{\min(\ell,n)\times p} \\ \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n\times p}, \\ & Y = \begin{bmatrix} Y_s \in \mathbb{R}^{\min(\ell,n)\times r} \\ \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n\times r}, \\ & Z = \begin{bmatrix} Z_s \in \mathbb{R}^{\min(\ell,n)\times \min(\ell+m,n)} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n\times n} \Bigg\} \subset \mathbb{R}^{n\times n}. \end{aligned}$$

We claim this structure is preserved: if F_k has this form then so does F_{k+1}. The basis case $F_0 := A$ is trivial: we can take the perturbation to be zero.

The first step is to understand the structure of the Householder reflector, which corresponds to the $k+1$-th column of F_{k+1}:

LEMMA 3.3. *Suppose F_k has the prescribed form. Then*

$$F_{k+1k+1} =$$

3.1. Problem Formulation and Notation. We begin by establishing notation for matrix subblocks. For a matrix $M \in \mathbb{R}^{n\times n}$, let $M[i:j, m:n]$ denote the submatrix consisting of rows i through j and columns m through n (inclusive). When extracting a single row or column, the result is a column vector:

$M[i:j, m] \in \mathbb{R}^{j-i+1}$: the m-th column from row i to row j (a column vector).

$M[i, m:n] \in \mathbb{R}^{n-m+1}$: the i-th row from column m to column n (also a column vector).

For brevity, we write $M[k,:]$ for the entire k-th row and $M[:,k]$ for the entire k-th column.

Define vectors $\bar{\mathbf{u}}_k = U[k,:] \in \mathbb{R}^r$, $\bar{\mathbf{v}}_k = V[k,:] \in \mathbb{R}^r$, $\bar{\mathbf{w}}_k = W[k,:] \in \mathbb{R}^p$, and $\bar{\mathbf{s}}_k = S[k,:] \in \mathbb{R}^p$ for $k = 1,\ldots,n$. The matrix A can then be expressed element-wise as:

$$A = \begin{bmatrix} b_{11} & \bar{\mathbf{w}}_1^\top \bar{\mathbf{s}}_2 + b_{12} & \cdots & \bar{\mathbf{w}}_1^\top \bar{\mathbf{s}}_n + b_{1n} \\ \bar{\mathbf{u}}_2^\top \bar{\mathbf{v}}_1 + b_{21} & b_{22} & \cdots & \bar{\mathbf{w}}_2^\top \bar{\mathbf{s}}_n + b_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ \bar{\mathbf{u}}_n^\top \bar{\mathbf{v}}_1 + b_{n1} & \bar{\mathbf{u}}_n^\top \bar{\mathbf{v}}_2 + b_{n2} & \cdots & b_{nn} \end{bmatrix}.$$

Next, we introduce two key definitions and a pivotal lemma.

3.2. Core Definitions and a Key Lemma. While the final factor matrix of a QR factorization is a BPS matrix, at intermediate stages it has a specific structured perturbation. Here we describe this structure in terms of a linear space that, at each stage, the perturbation to the principle submatrix lies in:

In addition, we need to describe the structure of the upper-triangular part in terms of a structured vector:

DEFINITION 3.4. *Given $A \in \mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)}$ and $j = 1,2,...,n$, define the vector space*

$$\mathcal{V}_j(A) := \Big\{ \mathbf{d} + S[j:n,:]\boldsymbol{\alpha} + (A^\top U)[j:n,:]\boldsymbol{\beta} : \\ \mathbf{d} = \begin{bmatrix} \mathbf{d}_s \in \mathbb{R}^{\min(\ell+m, n+1-j)} \\ \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n+1-j}, \boldsymbol{\alpha} \in \mathbb{R}^p, \boldsymbol{\beta} \in \mathbb{R}^r \Big\} \subset \mathbb{R}^{n+1-j}.$$

LEMMA 3.5. *Given $A \in \mathrm{BPS}^{n\times n}_{(r,p),(\ell,m)}$ and $P \in \mathcal{P}(A)$, let $\tilde{C} = (I - \tau\mathbf{y}\mathbf{y}^\top)(A+P)$ where τ is a coefficient, $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$ with $\mathbf{e}_1$ being the first standard basis vector, $U^{(2)} \in \mathbb{R}^{n\times r}$ satisfying $U^{(2)}[1,:] = \mathbf{0}$ and $U^{(2)}[2:n,:] = U[2:n,:]$, $\bar{\mathbf{k}} \in \mathbb{R}^r$, and $\mathbf{b} \in \mathbb{R}^n$ nonzero only in entries 2 through $\min(\ell+1, n)$. Then the following hold:*

1. *The principal submatrix satisfies $\tilde{C}[2:n, 2:n] = A[2:n, 2:n] + \tilde{P}$ for $\tilde{P} \in \mathcal{P}(A[2:n, 2:n])$.*
2. *The first row satisfies $\tilde{C}[1, 2:n] \in \mathcal{V}_2(A)$.*

Proof. Let us introduce some supplementary notations first:

$C = A + UJS^\top + UKU^\top A + UE + XS^\top + YU^\top A + Z$, where J, K, E, X, Y, Z are as in Definition 3.2;

$\tilde{C} = (I - \tau \mathbf{y}\mathbf{y}^\top)C$, where the vector $\mathbf{y}$ can be expressed as $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$. Here, $\mathbf{e}_1 = (1, 0, ..., 0)^\top \in \mathbb{R}^n$, $U^{(2)} \in \mathbb{R}^{n\times r}$ satisfies $U^{(2)}[1, :] = \mathbf{0}$ and $U^{(2)}[2 : n, :] = U[2 : n, :]$, $\bar{\mathbf{k}} \in \mathbb{R}^r$, $\mathbf{b} = (0, b_2, \ldots, b_{\min(\ell+1,n)}, 0, \ldots, 0)^\top \in \mathbb{R}^n$, and τ is a coefficient.

We can also write:

$$\mathbf{e}_1^\top A = \underbrace{\mathbf{d}_1^\top}_{\min(m+1,n)\text{ nonzero entries}} + \underbrace{\bar{\mathbf{w}}_1^\top}_{\in\mathbb{R}^{1\times p}} S^\top,$$

and

$$\mathbf{b}^\top A = \underbrace{\bar{\mathbf{d}}^\top}_{\min(\ell+m+1,n)\text{ nonzero entries}} + \underbrace{\mathbf{f}^\top}_{\mathbf{b}^\top W\in\mathbb{R}^{1\times p}} S^\top.$$

Next define the auxiliary vectors: $\mathbf{c}_1 = J^\top U^\top \mathbf{y} \in \mathbb{R}^p$, $\mathbf{c}_2 = K^\top U^\top \mathbf{y} \in \mathbb{R}^r$, $\mathbf{c}_3 = U^\top \mathbf{y} \in \mathbb{R}^r$, $\mathbf{c}_4 = X^\top \mathbf{y} \in \mathbb{R}^p$, $\mathbf{c}_5 = Y^\top \mathbf{y} \in \mathbb{R}^r$, $\mathbf{c}_6 = Z^\top \mathbf{y} \in \mathbb{R}^n$, which has the form $\mathbf{c}_6 = \begin{bmatrix} \mathbf{c}_{6s} \\ \mathbf{0} \end{bmatrix}$ with $\mathbf{c}_{6s} \in \mathbb{R}^{\min(\ell+m,n)}$.

Also, let $\mathbf{x}^{(1)} = X[1, :] \in \mathbb{R}^p$, $\mathbf{y}^{(1)} = Y[1, :] \in \mathbb{R}^r$, and $\mathbf{z}^{(1)} = Z[1, :] \in \mathbb{R}^n$.

We now compute $(I - \tau\mathbf{y}\mathbf{y}^\top)C$ by distributing the transformation over each term in the definition of C.To maintain clarity in the following derivations, we use the label "nonzero entries" to specifically denote dense subblocks or vectors whose support is confined to the leading indices (determined by ℓ and m). These terms are systematically tracked to ensure they map directly onto the structured generators $\{J, K, E, X, Y, Z\}$ defined in the space $\mathcal{P}(A)$.

(i) Transformation of A: Substituting the expressions $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $\mathbf{e}_1^\top A = \mathbf{d}_1^\top + \bar{\mathbf{w}}_1^\top S^\top$, and $\mathbf{b}^\top A = \bar{\mathbf{d}}^\top + \mathbf{f}^\top S^\top$, we obtain:

(3.1)

$$\begin{aligned}
(I - \tau\mathbf{y}\mathbf{y}^\top)A =& A + \mathbf{e}_1\Big[\underbrace{(-\tau\mathbf{d}_1^\top - \tau\bar{\mathbf{d}}^\top)}_{\min(\ell+m+1,n)\text{ nonzero entries}} + \underbrace{(-\tau\bar{\mathbf{w}}_1^\top - \tau\mathbf{f}^\top)}_{\in\mathbb{R}^{1\times p}} S^\top \\
&+ \underbrace{(-\tau\bar{\mathbf{k}}^\top)}_{\in\mathbb{R}^{1\times r}} U^{(2)\top} A\Big] + U^{(2)} \underbrace{(-\tau\bar{\mathbf{k}}\bar{\mathbf{w}}_1^\top - \tau\bar{\mathbf{k}}\mathbf{f}^\top)}_{\in\mathbb{R}^{r\times p}} S^\top \\
&+ U^{(2)} \underbrace{(-\tau\bar{\mathbf{k}}\bar{\mathbf{k}}^\top)}_{\in\mathbb{R}^{r\times r}} U^{(2)\top} A + U^{(2)} \underbrace{(-\tau\bar{\mathbf{k}}\mathbf{d}_1^\top - \tau\bar{\mathbf{k}}\bar{\mathbf{d}}^\top)}_{\mathbb{R}^{r\times\min(\ell+m+1.n)}\text{ nonzero entries}} \\
&+ \underbrace{(-\tau\mathbf{b}\bar{\mathbf{w}}_1^\top - \tau\mathbf{b}\mathbf{f}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times p}\text{ nonzero entries}} S^\top + \underbrace{(-\tau\mathbf{b}\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}} U^{(2)\top} A \\
&+ \underbrace{(-\tau\mathbf{b}\mathbf{d}_1^\top - \tau\mathbf{b}\bar{\mathbf{d}}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+m+1,n)}\text{ nonzero entries}}.
\end{aligned}$$

Dropping the first column, we see that the first row of the term in brackets is in $\mathcal{V}_2(A)$. Dropping the first row and column of the remaining terms are in $\mathcal{P}(A[2 : n, 2 : n])$.

The transformations of $UJS^\top$, $UKU^\top A$, UE, $XS^\top$, $YU^\top A$, and Z yield expressions that follow this same pattern—terms involving $\mathbf{e}_1$ (after dropping the first column) belong to $\mathcal{V}_2(A)$, while the remaining terms (after dropping first row and column) belong to $\mathcal{P}(A[2 : n, 2 : n])$:

(ii) Transformation of $UJS^\top$: Substituting the expressions $\mathbf{y}^\top UJ = \mathbf{c}_1^\top$, $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, and $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, we obtain

(3.2)
$$(I - \tau\mathbf{y}\mathbf{y}^\top)UJS^\top = \mathbf{e}_1 \underbrace{(\bar{\mathbf{u}}_1^\top J - \tau\mathbf{c}_1^\top)}_{\in\mathbb{R}^{1\times p}} S^\top + U^{(2)} \underbrace{(J - \tau\bar{\mathbf{k}}\mathbf{c}_1^\top)}_{\in\mathbb{R}^{r\times p}} S^\top + \underbrace{(-\tau\mathbf{b}\mathbf{c}_1^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times p}\text{ nonzero entries}} S^\top.$$

(iii) Transformation of $UKU^\top A$: Substituting the expressions $\mathbf{y}^\top UK = \mathbf{c}_2^\top$, $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, and $\mathbf{e}_1^\top A = \mathbf{d}_1^\top + \bar{\mathbf{w}}_1^\top S^\top$, we obtain

(3.3)
$$\begin{aligned}
&(I - \tau\mathbf{y}\mathbf{y}^\top)UKU^\top A \\
=&\mathbf{e}_1\Big[\underbrace{(\bar{\mathbf{u}}_1^\top K\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\mathbf{c}_2^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\min(\ell+m+1,n)\text{ nonzero entries}} + \underbrace{(\bar{\mathbf{u}}_1^\top K\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\mathbf{c}_2^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\in\mathbb{R}^{1\times p}} S^\top + \underbrace{(\bar{\mathbf{u}}_1^\top K - \tau\mathbf{c}_2^\top)}_{\in\mathbb{R}^{1\times r}} U^{(2\top}A\Big] \\
&+ U^{(2)} \underbrace{(K\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\in\mathbb{R}^{r\times p}} S^\top + U^{(2)} \underbrace{(K - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top)}_{\in\mathbb{R}^{r\times r}} U^{(2)\top}A \\
&+ U^{(2)} \underbrace{(K\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\mathbb{R}^{r\times\min(\ell+m+1,n)}\text{ nonzero entries}} + \underbrace{(-\tau\mathbf{b}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times p}\text{ nonzero entries}} S^\top \\
&+ \underbrace{(-\tau\mathbf{b}\mathbf{c}_2^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}} U^{(2)\top}A + \underbrace{(-\tau\mathbf{b}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+m+1,n)}\text{ nonzero entries}}.
\end{aligned}$$

(iv) Transformation of UE: Substituting the expressions $\mathbf{y}^\top U = \mathbf{c}_3^\top$, $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, and $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, we obtain

(3.4)
$$\begin{aligned}
(I - \tau\mathbf{y}\mathbf{y}^\top)UE =& \mathbf{e}_1 \underbrace{(\bar{\mathbf{u}}_1^\top E - \tau\mathbf{c}_3^\top E)}_{\min(\ell+m+1,n)\text{ nonzero entries}} + U^{(2)} \underbrace{(E - \tau\bar{\mathbf{k}}\mathbf{c}_3^\top E)}_{\mathbb{R}^{r\times\min(\ell+m+1,n)}\text{ nonzero entries}} + \\
&\underbrace{(-\tau\mathbf{b}\mathbf{c}_3^\top E)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+m+1,n)}\text{ nonzero entries}}.
\end{aligned}$$

(v) Transformation of $XS^\top$: Substituting the expressions $\mathbf{y}^\top X = \mathbf{c}_4^\top$ and $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, we obtain

(3.5)
$$(I - \tau\mathbf{y}\mathbf{y}^\top)XS^\top = \mathbf{e}_1 \underbrace{(-\tau\mathbf{c}_4^\top)}_{\in\mathbb{R}^{1\times p}} S^\top + U^{(2)} \underbrace{(-\tau\bar{\mathbf{k}}\mathbf{c}_4^\top)}_{\in\mathbb{R}^{r\times p}} S^\top + \underbrace{(X - \tau\mathbf{b}\mathbf{c}_4^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times p}\text{ nonzero entries}} S^\top.$$

(vi) Transformation of $YU^\top A$: Substituting the expressions $\mathbf{y}^\top Y = \mathbf{c}_5^\top$, $\mathbf{y} =$

$\mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, and $\mathbf{e}_1^\top A = \mathbf{d}_1^\top + \bar{\mathbf{w}}_1^\top S^\top$, we obtain

(3.6)

$$
\begin{aligned}
&(I - \tau\mathbf{y}\mathbf{y}^\top)YU^\top A \\
=&\mathbf{e}_1\Big[\underbrace{(-\tau\mathbf{c}_5^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\min(\ell+m+1,n)\text{ nonzero entries}} + \underbrace{(-\tau\mathbf{c}_5^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\in\mathbb{R}^{1\times p}}S^\top + \underbrace{(-\tau\mathbf{c}_5^\top)}_{\in\mathbb{R}^{1\times r}}U^{(2)\top}A\Big] \\
&+ U^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\in\mathbb{R}^{r\times p}}S^\top + U^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\mathbf{c}_5^\top)}_{\in\mathbb{R}^{r\times r}}U^{(2)\top}A + U^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\mathbb{R}^{r\times\min(\ell+m+1,n)}\text{ nonzero entries}} \\
&+ \underbrace{(Y\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\mathbf{b}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times p}\text{ nonzero entries}}S^\top + \underbrace{(Y - \tau\mathbf{b}\mathbf{c}_5^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}}U^{(2)\top}A \\
&+ \underbrace{(Y\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\mathbf{b}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+m+1,n)}\text{ nonzero entries}}.
\end{aligned}
$$

(vii) Transformation of Z: Substituting the expressions $\mathbf{y}^\top Z = \mathbf{c}_6^\top$ and $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, we obtain

(3.7)

$$
\begin{aligned}
(I - \tau\mathbf{y}\mathbf{y}^\top)Z =&\mathbf{e}_1\underbrace{(-\tau\mathbf{c}_6^\top)}_{\min(\ell+m+1,n)\text{ nonzero entries}} + U^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\mathbf{c}_6^\top)}_{\mathbb{R}^{r\times\min(\ell+m+1,n)}\text{ nonzero entries}} \\
&+ \underbrace{(Z - \tau\mathbf{b}\mathbf{c}_6^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+m+1,n)}\text{ nonzero entries}}.
\end{aligned}
$$

Since $\mathcal{P}(A[2:n,2:n])$ and $\mathcal{V}_2(A)$ are both vector spaces, their elements are closed under addition. Therefore, we can sum all contributions of each type separately to obtain the overall structure:

Firstly, the submatrix $\tilde{C}[2:n,2:n]$ satisfies:

$$\tilde{C}[2:n,2:n] = \tilde{A} + \tilde{U}\tilde{J}\tilde{S}^\top + \tilde{U}\tilde{K}\tilde{U}^\top\tilde{A} + \tilde{U}\tilde{E} + \tilde{X}\tilde{S}^\top + \tilde{Y}\tilde{U}^\top\tilde{A} + \tilde{Z}, \tag{3.8}$$

where

$$
\begin{aligned}
\tilde{A} &= A[2:n,2:n] \\
\tilde{U} &= U[2:n,:] \\
\tilde{S} &= S[2:n,:]
\end{aligned}
$$

and the updated modification matrices are given by:

$$
\begin{aligned}
\tilde{J} &= -\tau\bar{\mathbf{k}}\bar{\mathbf{w}}_1^\top - \tau\bar{\mathbf{k}}\mathbf{f}^\top + J - \tau\bar{\mathbf{k}}\mathbf{c}_1^\top + K\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_4^\top - \tau\bar{\mathbf{k}}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top, \\
\tilde{K} &= -\tau\bar{\mathbf{k}}\bar{\mathbf{k}}^\top + K - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top - \tau\bar{\mathbf{k}}\mathbf{c}_5^\top, \\
\tilde{E} &= [\tilde{E}_s, \mathbf{0}] \in \mathbb{R}^{r\times(n-1)}, \quad \text{with} \\
\tilde{E}_s &= (-\tau\bar{\mathbf{k}}\mathbf{d}_1^\top - \tau\bar{\mathbf{k}}\bar{\mathbf{d}}^\top + K\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top + E - \tau\bar{\mathbf{k}}\mathbf{c}_3^\top E \\
&\qquad - \tau\bar{\mathbf{k}}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\bar{\mathbf{k}}\mathbf{c}_6^\top)[:, 2:\min(\ell+m+1,n)], \\
\tilde{X} &= \begin{bmatrix}\tilde{X}_s \\ \mathbf{0}\end{bmatrix} \in \mathbb{R}^{(n-1)\times p}, \quad \text{with} \\
\tilde{X}_s &= (-\tau\mathbf{b}\bar{\mathbf{w}}_1^\top - \tau\mathbf{b}\mathbf{f}^\top - \tau\mathbf{b}\mathbf{c}_1^\top - \tau\mathbf{b}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top + X - \tau\mathbf{b}\mathbf{c}_4^\top
\end{aligned}
$$

$$+ Y\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top - \tau\mathbf{b}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top)[2:\min(\ell+1,n),:],$$

$$\tilde{Y} = \begin{bmatrix}\tilde{Y}_s\\ \mathbf{0}\end{bmatrix} \in \mathbb{R}^{(n-1)\times r}, \quad \text{with}$$

$$\tilde{Y}_s = (-\tau\mathbf{b}\bar{\mathbf{k}}^\top - \tau\mathbf{b}\mathbf{c}_2^\top + Y - \tau\mathbf{b}\mathbf{c}_5^\top)[2:\min(\ell+1,n),:],$$

$$\tilde{Z} = \begin{bmatrix}\tilde{Z}_s & \mathbf{0}\\ \mathbf{0} & \mathbf{0}\end{bmatrix} \in \mathbb{R}^{(n-1)\times(n-1)}, \quad \text{with}$$

$$\tilde{Z}_s = (-\tau\mathbf{b}\mathbf{d}_1^\top - \tau\mathbf{b}\bar{\mathbf{d}}^\top - \tau\mathbf{b}\mathbf{c}_2^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\mathbf{b}\mathbf{c}_3^\top E + Y\bar{\mathbf{u}}_1\mathbf{d}_1^\top - \tau\mathbf{b}\mathbf{c}_5^\top\bar{\mathbf{u}}_1\mathbf{d}_1^\top$$
$$+ Z - \tau\mathbf{b}\mathbf{c}_6^\top)[2:\min(\ell+1,n), 2:\min(\ell+m+1,n)].$$

The forms of $\tilde{J}, \tilde{K}, \tilde{E}, \tilde{X}, \tilde{Y}, \tilde{Z}$ confirm the first part of the lemma.

Secondly, the first row of the transformed matrix, $\tilde{C}[1,2:n]$, can be expressed as:

$$\tilde{C}[1,2:n] = \hat{\mathbf{d}} + S[2:n,:]\boldsymbol{\alpha} + (A^\top U^{(2)})[2:n,:]\boldsymbol{\beta},$$

where

$$\hat{\mathbf{d}} = \begin{bmatrix}\hat{\mathbf{d}}_s\\ \mathbf{0}\end{bmatrix} \in \mathbb{R}^{n-1}, \quad \text{with}$$

$$\hat{\mathbf{d}}_s = (\mathbf{d}_1 - \tau\mathbf{d}_1 - \tau\bar{\mathbf{d}} + \mathbf{d}_1\bar{\mathbf{u}}_1^\top K^\top\bar{\mathbf{u}}_1 - \tau\mathbf{d}_1\bar{\mathbf{u}}_1^\top\mathbf{c}_2 + E^\top\bar{\mathbf{u}} - \tau E^\top\mathbf{c}_3$$
$$+ \mathbf{d}_1\bar{\mathbf{u}}_1^\top\mathbf{y}^{(1)} - \tau\mathbf{d}_1\bar{\mathbf{u}}_1^\top\mathbf{c}_5 + \mathbf{z}^{(1)} - \tau\mathbf{c}_6)[2:\min(\ell+m+1,n)],$$

$$\hat{\boldsymbol{\alpha}} = (\bar{\mathbf{w}}_1 - \tau\bar{\mathbf{w}}_1 - \tau\mathbf{f} + J^\top\bar{\mathbf{u}}_1 - \tau\mathbf{c}_1 + \bar{\mathbf{w}}_1\bar{\mathbf{u}}_1^\top K^\top\bar{\mathbf{u}}_1 - \tau\bar{\mathbf{w}}_1\bar{\mathbf{u}}_1^\top\mathbf{c}_2$$
$$+ \mathbf{x}^{(1)} - \tau\mathbf{c}_4 + \bar{\mathbf{w}}_1\bar{\mathbf{u}}_1^\top\mathbf{y}^{(1)} - \tau\bar{\mathbf{w}}_1\bar{\mathbf{u}}_1^\top\mathbf{c}_5) \in \mathbb{R}^p,$$

$$\hat{\boldsymbol{\beta}} = (-\tau\bar{\mathbf{k}} + K^\top\bar{\mathbf{u}}_1 - \tau\mathbf{c}_2 + \mathbf{y}^{(1)} - \tau\mathbf{c}_5) \in \mathbb{R}^r.$$

Noting that $U^{(2)} = U - \mathbf{e}_1\bar{\mathbf{u}}_1^\top$ and $\mathbf{e}_1^\top A = \mathbf{d}_1^\top + \bar{\mathbf{w}}_1^\top S^\top$, we have $U^{(2)\top}A = U^\top A - \bar{\mathbf{u}}_1\bar{\mathbf{w}}_1^\top S^\top - \bar{\mathbf{u}}_1\mathbf{d}_1^\top$. Substituting this yields an alternative expression:

$$\tilde{C}[1,2:n] = \tilde{\mathbf{d}} + S[2:n,:]\tilde{\boldsymbol{\alpha}} + (A^\top U)[2:n,:]\tilde{\boldsymbol{\beta}}, \tag{3.9}$$

where

$$\tilde{\mathbf{d}} = \begin{bmatrix}\tilde{\mathbf{d}}_s\\ \mathbf{0}\end{bmatrix} \in \mathbb{R}^{n-1}, \quad \text{with}$$

$$\tilde{\mathbf{d}}_s = (\mathbf{d}_1 - \tau\mathbf{d}_1 - \tau\bar{\mathbf{d}} + E^\top\bar{\mathbf{u}}_1 - \tau E^\top\mathbf{c}_3 + \mathbf{z}^{(1)} - \tau\mathbf{c}_6 + \tau\mathbf{d}_1\bar{\mathbf{u}}_1^\top\bar{\mathbf{k}})[2:\min(\ell+m+1,n)],$$

$$\tilde{\boldsymbol{\alpha}} = (\bar{\mathbf{w}}_1 - \tau\bar{\mathbf{w}}_1 - \tau\mathbf{f} + J^\top\bar{\mathbf{u}}_1 - \tau\mathbf{c}_1 + \mathbf{x}^{(1)} - \tau\mathbf{c}_4 + \tau\bar{\mathbf{w}}_1\bar{\mathbf{u}}_1^\top\bar{\mathbf{k}}) \in \mathbb{R}^p,$$

$$\tilde{\boldsymbol{\beta}} = (-\tau\bar{\mathbf{k}} + K^\top\bar{\mathbf{u}}_1 - \tau\mathbf{c}_2 + \mathbf{y}^{(1)} - \tau\mathbf{c}_5) \in \mathbb{R}^r.$$

This confirms that $\tilde{C}[1,2:n] \in \mathcal{V}_2(A)$, completing the proof of the lemma. □

3.3. Structure Preservation Theorem and its Proof. Equipped with lemma 3.5, we now state and prove the main theorem concerning the structure of the QR factor matrix F.

THEOREM 3.6. *After applying the QR factorization to a BPS matrix A (as expressed in Eq. (3.1)) with lower semiseparable rank r, upper semiseparable rank p, lower bandwidth ℓ, and upper bandwidth m, the resulting factor matrix F is also a BPS matrix. Specifically, its lower semiseparable part has rank r; its upper semiseparable part has rank $r+p$; its banded part has lower bandwidth ℓ and upper bandwidth $\ell+m$.*

Proof. The QR factorization is computed by performing a sequence of $n-1$ Householder transformations, eliminating the subdiagonal entries of A column by column.

Let $A^{(i)}$ denote the matrix after the i-th Householder transformation, with $A^{(0)} = A$. Define $A_i = A[i:n, i:n]$, $U_i = U[i:n,:]$, $V_i = V[i:n,:]$, $S_i = S[i:n,:]$, and $W_i = W[i:n,:]$. Let $\bar{\mathbf{u}}_i = (u_i^{(1)}, \dots, u_i^{(r)})^\top$ and $\bar{\mathbf{w}}_i = (w_i^{(1)}, \dots, w_i^{(p)})^\top$. Let $\bar{S} = U^\top A \in \mathbb{R}^{r\times n}$.

We prove by induction that after the j-th transformation ($0 \le j < n$):

1. The submatrix $A^{(j)}[j+1:n, j+1:n] = A_{j+1} + P_{j+1}$ for $P_{j+1} \in \mathcal{P}(A_{j+1})$
2. The j-th row of the final factor F, $F[j, j+1:n]^\top \in \mathcal{V}_{j+1}(A)$.
3. The j-th column of F below the diagonal, $F[j+1:n, j]$, has the form $(U\bar{\mathbf{k}}_{j+1})[j+1:n] + \mathbf{b}_{j+1}[2:n+1-j]$, where $\bar{\mathbf{k}}_{j+1} \in \mathbb{R}^r$ and $\mathbf{b}_{j+1} \in \mathbb{R}^{n+1-j}$ is non-zero only in its first $\min(\ell+1, n+1-j)$ entries.

Base Case ($j=0$): Initially, $A^{(0)} = A$ is trivially $= A_1 + \mathbf{0}_{n\times n}$ for $\mathbf{0}_{n\times n} \in \mathcal{V}(A_1)$(with $J, K, E, X, Y, Z = \mathbf{0}$).

Inductive Step: Assume the induction hypothesis holds for j. That is, $A^{(j)}[j+1:n, j+1:n] = A_{j+1} + P_{j+1}$ for $P_{j+1} \in \mathcal{P}(A_{j+1})$, and for $k = 1, \dots, j$:

$$F[k+1:n, i] = (U\bar{\mathbf{k}}_{k+1})[k+1:n] + \mathbf{b}_{k+1}[2:n+1-k], \tag{3.10}$$

$$F[k, k+1:n]^\top = \tilde{\mathbf{d}}_{k+1}^\top + (\tilde{\boldsymbol{\alpha}}_{k+1}^\top S^\top)[k+1:n] + (\tilde{\boldsymbol{\beta}}_{k+1}^\top \bar{S})[k+1:n], \tag{3.11}$$

with $\tilde{\boldsymbol{\alpha}}_{k+1} \in \mathbb{R}^p$, $\tilde{\boldsymbol{\beta}}_{k+1} \in \mathbb{R}^r$, and $\tilde{\mathbf{d}}_{k+1} \in \mathbb{R}^{n-i}$ non-zero only in its first $\min(\ell+m, n-k)$ entries.

Furthermore, assume:

$$\begin{aligned} A^{(j)}[j+1:n, j+1:n] =& A_{j+1} + U_{j+1}J_{j+1}S_{j+1}^\top + U_{j+1}K_{j+1}U_{j+1}^\top A_{j+1} \\ &+ U_{j+1}E_{j+1} + X_{j+1}S_{j+1}^\top + Y_{j+1}U_{j+1}^\top A_{j+1} + Z_{j+1}, \end{aligned}$$

where the modification matrices $J_{j+1}, K_{j+1}, E_{j+1}, X_{j+1}, Y_{j+1}, Z_{j+1}$ possess the sparsity patterns specified in Definition 3.2.

If $j < n-1$, we now perform the $(j+1)$-th Householder transformation on $A_{j+1} + P_{j+1}$. Let $\mathbf{y}_{j+1}$ be the corresponding Householder vector. It can be expressed as $\mathbf{y}_{j+1}[1:j] = \mathbf{0}$ and $\mathbf{y}_{j+1}[j+1:n] = \mathbf{e}_{j+1} + U^{(j+2)}\bar{\mathbf{k}}_{j+2} + \mathbf{b}_{j+2}$, where $\mathbf{e}_{j+1} \in \mathbb{R}^{n-j}$ is the first standard basis vector, $U^{(j+2)} \in \mathbb{R}^{(n-j)\times r}$ satisfies $U^{(j+2)}[1,:] = \mathbf{0}$ and $U^{(j+2)}[2:n-j,:] = U[j+2:n,:]$, $\bar{\mathbf{k}}_{j+2} \in \mathbb{R}^r$, and $\mathbf{b}_{j+2} \in \mathbb{R}^{n-j}$ is non-zero only in entries 2 through $\min(\ell+1, n-j)$. This vector defines the $(j+1)$-th column of F:

$$F[j+2:n, j+1] = (U\bar{\mathbf{k}}_{j+2})[j+2:n] + \mathbf{b}_{j+2}[2:n-j]. \tag{3.12}$$

We now apply Lemma 3.5 to $A^{(j)}[j+1:n, j+1:n]$, which is $A_{j+1} + P_{j+1}$. The Householder transformation $(I - \tau_{j+1}\mathbf{y}_{j+1}[j+1:n]\mathbf{y}_{j+1}[j+1:n]^\top)$ is applied to $A_{j+1} + P_{j+1}$, here τ_{j+1} is a coefficient found to satisfy the definition of a Householder transformation.

From the lemma, the resulting submatrix $A^{(j+1)}[j+2:n, j+2:n]$ can be expressed as $A_{j+2} + P_{j+2}$ for $P_{j+2} \in \mathcal{P}(A_{j+2})$. Its structure is given by equations analogous to (3.8), with updated modification matrices $J_{j+2}, K_{j+2}, E_{j+2}, X_{j+2}, Y_{j+2}, Z_{j+2}$, which retain the required sparsity patterns.

Furthermore, the lemma states that $A^{(j+1)}[j+1, j+2:n] \in \mathcal{V}_2(A_j)$. This row becomes $F[j+1, j+2:n]$ in the final factor matrix. Following the derivation (3.9)

in the lemma, and using the relation

$$U_{j+1}^\top A_{j+1}[:, 2:n-j] = (U^\top A - \sum_{t=1}^{j} \bar{\mathbf{u}}_t \bar{\mathbf{w}}_t^\top S^\top)[:, j+2:n] - \sum_{t=\max(j-m+2,1)}^{j} \bar{\mathbf{u}}_t (B[t, j+2:n]^\top), \tag{3.13}$$

we can also express this row in the form:

$$F[j+1, j+2:n] = \tilde{\mathbf{d}}_{j+2} + (S\tilde{\boldsymbol{\alpha}}_{j+2})[j+2:n] + (\bar{S}^\top \tilde{\boldsymbol{\beta}}_{j+2})[j+2:n], \tag{3.14}$$

where $\tilde{\mathbf{d}}_{j+2}$ only nonzero in the first $\min(\ell+m, n-j-1)$ entries, $\tilde{\boldsymbol{\alpha}}_{j+2} \in \mathbb{R}^p$, and $\tilde{\boldsymbol{\beta}}_{j+2} \in \mathbb{R}^r$. That means $F[j+1, j+2:n] \in \mathcal{V}_{j+2}(A)$.

By the principle of induction, the hypotheses hold for all $j = 0, \ldots, n-1$.

Upon completion of all $n-1$ transformations, the factor matrix F is fully determined. Aggregating the results from (3.10) and (3.11), we conclude that F can be written in the form:

$$F = B_F + \mathrm{tril}(U\bar{K}^\top, -1) + \mathrm{triu}([\bar{A}, \bar{B}][S, \bar{S}^\top]^\top, 1), \tag{3.15}$$

where

$\bar{K} \in \mathbb{R}^{n\times r}$ is defined by $\bar{K}[k,:] = \bar{\mathbf{k}}_{k+1}^\top$ for $k = 1, \ldots, n-1$ and $\bar{K}[n,:] = \mathbf{0}$.

$\bar{A} \in \mathbb{R}^{n\times p}$ is defined by $\bar{A}[k,:] = \boldsymbol{\alpha}_{k+1}^\top$ for $i = k, \ldots, n-1$ and $\bar{A}[n,:] = \mathbf{0}$.

$\bar{B} \in \mathbb{R}^{n\times r}$ is defined by $\bar{B}[k,:] = \boldsymbol{\beta}_{k+1}^\top$ for $k = 1, \ldots, n-1$ and $\bar{B}[n,:] = \mathbf{0}$.

B_F is a banded matrix with lower bandwidth ℓ and upper bandwidth $\ell+m$, defined by:

$$B_F[k,j] = \begin{cases} A^{(k)}[k,k], & k = j < n \\ A^{(n-1)}[n,n], & k = j = n \\ \mathbf{b}_{j+1}[k-j+1], & 0 < k-j \le \ell \\ \tilde{\mathbf{d}}_{k+1}[j-k], & 0 < j-k \le \ell+m \\ 0, & \text{otherwise.} \end{cases}$$

The representation in (3.15) explicitly shows that F is a BPS matrix with a lower semiseparable rank of r, an upper semiseparable rank of $r+p$, a lower bandwidth of ℓ, and an upper bandwidth of $\ell+m$. This completes the proof. ∎

4. Fast Algorithms for QR Factorization and Direct Solvers.

4.1. Fast QR factorization for BPS Matrices. We now present an $O(n)$ algorithm for computing the QR factorization of a BPS matrix based on theorem 3.6.

Algorithm 4.1.1 Fast QR Factorization for BPS Matrices

Input $B \in \mathbb{R}^{n\times n}$: banded matrix with lower bandwidth ℓ and upper bandwidth m; $U, V \in \mathbb{R}^{n\times r}$: generators for lower semiseparable part (rank r); $W, S \in \mathbb{R}^{n\times p}$: generators for upper semiseparable part (rank p)
Output B_F: banded part of factor matrix F with bandwidths ℓ and $\ell + m$; $\bar{K} \in \mathbb{R}^{n\times r}$: generator for lower semiseparable part of F; $\bar{A} \in \mathbb{R}^{n\times p}, \bar{B} \in \mathbb{R}^{n\times r}, \bar{S} \in \mathbb{R}^{r\times n}$: generators for upper semiseparable part of F; $\boldsymbol{\tau} \in \mathbb{R}^n$: Householder scaling coefficients.
Initialization:
Compute $\bar{S} \leftarrow U^\top A$ (in $O(n)$ utilizing the semiseparable structure of A)
Initialize $B_F \leftarrow \mathbf{0}_{n\times n}$, $\bar{K} \leftarrow \mathbf{0}_{n\times r}$, $\bar{A} \leftarrow \mathbf{0}_{n\times p}$, $\bar{B} \leftarrow \mathbf{0}_{n\times r}$
Initialize HMBPSM modification matrices: $J \leftarrow \mathbf{0}_{r\times p}$, $K \leftarrow \mathbf{0}_{r\times r}$, $E_s \leftarrow \mathbf{0}_{r\times \min(\ell+m,n)}$, $X_s \leftarrow \mathbf{0}_{\min(\ell,n)\times p}$, $Y_s \leftarrow \mathbf{0}_{\min(\ell,n)\times r}$, $Z_s \leftarrow \mathbf{0}_{\min(\ell,n)\times \min(\ell+m,n)}$
for $k = 1$ to $n - 1$ **do**
  Step 1: Form Householder vector $\mathbf{y}_k$
  Run FormHouseholderVector($A^{(k-1)}[k : n, k : n], U[k : n, :], \ell$) (Algorithm 4.1.2) to get:
  $\bar{\mathbf{k}}_{k+1} \leftarrow$ low-rank part from $\mathbf{y}_k$
  $\mathbf{b}_{k+1} \leftarrow$ banded part from $\mathbf{y}_k$
  $\tau_k \leftarrow$ scaling coefficient
  $o \leftarrow$ the diagonal element after the Householder transformation
  $\boldsymbol{\tau}[k] \leftarrow \tau_k$
  Step 2: Store k-th column of F
  $B_F[k, k] \leftarrow o$ (Diagonal entry)
  $\bar{K}[k, :] \leftarrow \bar{\mathbf{k}}_{k+1}^\top$ (Store low-rank generator)
  for $j = k + 1$ to $\min(k + \ell, n)$ **do**
    $B_F[j, k] \leftarrow \mathbf{b}_{k+1}[j - k + 1]$ (Store banded part)
  end for
  Step 3: Compute and store k-th row of F
  $[\tilde{\boldsymbol{\alpha}}_{k+1}, \tilde{\boldsymbol{\beta}}_{k+1}, \tilde{\mathbf{d}}_{k+1}] \leftarrow$ ComputeRowUpdate($A^{(k-1)}, U, S, \bar{S}, \mathbf{k}_{k+1}, \mathbf{b}_{k+1}, \tau_k$) (Algorithm 4.1.3)
  $\bar{A}[k, :] \leftarrow \tilde{\boldsymbol{\alpha}}_{k+1}^\top$
  $\bar{B}[k, :] \leftarrow \tilde{\boldsymbol{\beta}}_{k+1}^\top$
  for $j = k + 1$ to $\min(k + \ell + m, n)$ **do**
    $B_F[k, j] \leftarrow \tilde{\mathbf{d}}_{k+1}[j - k]$ (Store upper banded part)
  end for
  Step 4: Update matrices
  $[J, K, E_s, X_s, Y_s, Z_s] \leftarrow$ UpdateMatrices($J, K, E_s, X_s, Y_s, Z_s, \bar{\mathbf{k}}_{k+1}, \mathbf{b}_{k+1}, \tau_k$) (Algorithm 4.1.4)
end for
Final step:
$B_F[n, n] \leftarrow A^{(n-1)}[n, n]$
return $B_F, \bar{K}, \bar{A}, \bar{B}, \bar{S}, \boldsymbol{\tau}$. Now F is expressed as $B_F + \mathrm{tril}(U\bar{K}^\top, -1) + \mathrm{triu}([\bar{A}, \bar{B}][S, \bar{S}^\top]^\top, 1)$

Complexity Analysis. The algorithm runs for $n - 1$ steps. The cost per step can be expressed as a polynomial in term of r, p, ℓ, and m. Since these are constants independent of n, the total complexity is $O(n)$. The memory footprint is also $O(n)$,

Algorithm 4.1.2 FormHouseholderVector

Input $C \in \mathbb{R}^{(n-k+1)\times(n-k+1)}$: current submatrix; $U_k \in \mathbb{R}^{(n-k+1)\times r}$: $U[k:n,:]$; ℓ: lower bandwidth.
Output $\bar{\mathbf{k}} \in \mathbb{R}^r$, $\mathbf{b} \in \mathbb{R}^{n-k+1}$, $\tau \in \mathbb{R}$ s.t. $\mathbf{y}: = \mathbf{e}_1 + U_k^{(2)}\bar{\mathbf{k}} + \mathbf{b}$ is the Householder vector and $I - \tau\mathbf{y}\mathbf{y}^\top$ is the Householder transformation; $o \in \mathbb{R}$ s.t. $\tilde{C}[1,1] = o$ where $\tilde{C}$ is the submatrix after the Householder transformation.
Extract first column: $\mathbf{a} \leftarrow C[:,1]$
$\bar{\mathbf{k}} \leftarrow U_k^\top \cdot$(the semiseparable part in $\mathbf{a}$)
$\mathbf{b} \leftarrow \mathbf{a} - U_k^{(2)}\bar{\mathbf{k}} - \mathbf{e}_1 \cdot \mathbf{a}[1]$
$\mathbf{b}$ is only nonzero in entries 2 through $\min(\ell+1, n-k+1)$.
$\tau \leftarrow 2/\mathbf{y}^\top\mathbf{y}$
$o \leftarrow -\text{sign}(\mathbf{a}[1])\mathbf{a}^\top\mathbf{a}$
return $\bar{\mathbf{k}}$, $\mathbf{b}$, τ, o

Algorithm 4.1.3 ComputeRowUpdate

Input C: current submatrix represented by modification matrices; $U, S, \bar{S}$: generator matrices; $\mathbf{k}_{k+1}$, $\mathbf{b}_{k+1}$, τ_k: Householder vector and coefficient.
Output $\tilde{\boldsymbol{\alpha}} \in \mathbb{R}^p$, $\tilde{\boldsymbol{\beta}} \in \mathbb{R}^r$, $\tilde{\mathbf{d}} \in \mathbb{R}^{n-k}$
Compute auxiliary vectors $\mathbf{c}_1, \ldots, \mathbf{c}_6$ as in the proof of Lemma 3.5
$\tilde{\boldsymbol{\alpha}} \leftarrow \bar{\mathbf{w}}_k - \tau_k\bar{\mathbf{w}}_k - \tau_k\mathbf{f} + \bar{\mathbf{u}}_k^\top Q - \tau_k\mathbf{c}_1 + \cdots$, full expression from proof
$\tilde{\boldsymbol{\beta}} \leftarrow -\tau_k\bar{\mathbf{k}}_{k+1} + K^\top\bar{\mathbf{u}}_k - \tau_k\mathbf{c}_2 + \cdots$,
$\tilde{\mathbf{d}} \leftarrow$ extract banded part from proof, length $\min(\ell+m, n-k)$
return $\tilde{\boldsymbol{\alpha}}, \tilde{\boldsymbol{\beta}}, \tilde{\mathbf{d}}$

as we store only the generators and banded components.

REMARK 4.1. *To maintain the $O(1)$ per-step complexity in Algorithm 4.1.1, two key quantities must be computed efficiently during the Householder updates:*

Inner product matrix $U_k^\top U_k$: The computation of intermediate vectors $\mathbf{c}_1, \ldots, \mathbf{c}_6$ requires evaluating expressions like $U_k^\top\mathbf{y}_k = U_k^\top(\mathbf{e}_k + U^{(k+1)}\bar{\mathbf{k}}_{k+1} + \mathbf{b}_{k+1})$, which involves $U_k^\top U^{(k+1)}$ that is equal to $U_{k+1}^\top U_{k+1}$. we precompute a lookup table:

$$UU_lookup[k] = U[k:n,:]^\top U[k:n,:] \quad \text{for } k = 1, \ldots, n$$

This can be computed in $O(nr^2)$ time via a backward accumulation.

Partial sum $\sum_{t=1}^{j} \bar{\mathbf{u}}_t\bar{\mathbf{w}}_t^\top$: The update of the upper triangular part in equation (3.13) requires this sum. We precompute:

$$UV_lookup[j] = \sum_{t=1}^{j} \bar{\mathbf{u}}_t\bar{\mathbf{w}}_t^\top \quad \text{for } j = 1, \ldots, n-1$$

This is computed in $O(nrp)$ time via forward accumulation.

Both precomputations require $O(n)$ total time and enable $O(1)$ access to the required quantities at each step of the factorization, thus preserving the overall $O(n)$ complexity.

4.2. Fast Solver for BPS Matrices. Theorem 3.6 not only enables an efficient QR factorization but also facilitates a complete direct solver for linear systems of the form $A\mathbf{x} = \mathbf{b}$, where A is a BPS matrix. The solver consists of two phases after the

Algorithm 4.1.4 UpdateMatrices

Input J, K, E_s, X_s, Y_s, Z_s: current modification matrices; $\bar{\mathbf{k}}_{k+1}$, $\mathbf{b}_{k+1}$, τ_k.
Ensure: Updated J, K, E_s, X_s, Y_s, Z_s
Compute updates using formulas from Lemma 3.5 proof:
$J_{\text{new}} \leftarrow J - \tau_k \bar{\mathbf{k}}_{k+1} \bar{\mathbf{w}}_k^\top - \tau_k \bar{\mathbf{k}}_{k+1} \mathbf{f}^\top - \tau_k \bar{\mathbf{k}}_{k+1} \mathbf{c}_1^\top + \cdots$
$K_{\text{new}} \leftarrow K - \tau_k \bar{\mathbf{k}}_{k+1} \bar{\mathbf{k}}_{k+1}^\top - \tau_k \bar{\mathbf{k}}_{k+1} \mathbf{c}_2^\top + \cdots$
Update E_s, X_s, Y_s, Z_s similarly with banded truncations
return $J_{\text{new}}, K_{\text{new}}, E_s^{\text{new}}, X_s^{\text{new}}, Y_s^{\text{new}}, Z_s^{\text{new}}$

QR factorization $A = QR$: 1. Application of $Q^\top$ to the right-hand side vector $\mathbf{b}$ to form $\mathbf{c} = Q^\top \mathbf{b}$. 2. Solution of the upper triangular system $R\mathbf{x} = \mathbf{c}$ via backward substitution.

We now present $O(n)$ algorithms for both phases, leveraging the structured representation of the factorization output by Algorithm 4.1.1.

4.2.1. Fast Application of $Q^\top$. The orthogonal matrix Q is represented as a product of Householder transformations:

$$Q = (I - \tau_1 \mathbf{y}_1 \mathbf{y}_1^\top)(I - \tau_2 \mathbf{y}_2 \mathbf{y}_2^\top) \cdots (I - \tau_{n-1} \mathbf{y}_{n-1} \mathbf{y}_{n-1}^\top).$$

Applying $Q^\top$ to a vector $\mathbf{b}$ thus requires computing:

$$Q^\top \mathbf{b} = (I - \tau_{n-1} \mathbf{y}_{n-1} \mathbf{y}_{n-1}^\top) \cdots (I - \tau_2 \mathbf{y}_2 \mathbf{y}_2^\top)(I - \tau_1 \mathbf{y}_1 \mathbf{y}_1^\top)\mathbf{b}.$$

The Householder vectors $\mathbf{y}_k$ are stored in the factor matrix F according to the normalization convention established in Section 3:

$$\mathbf{y}_k[j] = \begin{cases} 0, & j < k \\ 1, & j = k \\ F[j,k], & j > k \end{cases} \quad \text{for } k = 1, \ldots, n-1.$$

From Theorem 3.6, the factor matrix F admits the BPS representation:

$$F = B_F + \operatorname{tril}(U_F V_F^\top, -1) + \operatorname{triu}(W_F S_F^\top, 1),$$

where $U_F, V_F \in \mathbb{R}^{n \times r}$, $W_F, S_F \in \mathbb{R}^{n \times (r+p)}$, and B_F is banded with lower bandwidth ℓ and upper bandwidth $\ell + m$.

This structure implies that each Householder vector $\mathbf{y}_k$ can be expressed as:

$$\mathbf{y}_k = \bar{\mathbf{e}}_k + U_F^{(k+1)} \bar{\mathbf{v}}_k + \mathbf{d}_k, \tag{4.1}$$

where:

$\bar{\mathbf{e}}_k \in \mathbb{R}^n$ is the k-th standard basis vector. We use the bar notation to distinguish it from the vector $\mathbf{e}_k \in \mathbb{R}^{n-k+1}$ used in the trailing submatrix. In particular, the vector $\mathbf{e}_k$ appearing previously corresponds to the restriction $\bar{\mathbf{e}}_k[k:n]$.

$U_F^{(k+1)} \in \mathbb{R}^{n \times r}$ satisfies $U_F^{(k+1)}[1:k,:] = \mathbf{0}$ and $U_F^{(k+1)}[k+1:n,:] = U_F[k+1:n,:]$,

$\bar{\mathbf{v}}_k = V_F[k,:]^\top \in \mathbb{R}^r$,

$\mathbf{d}_k \in \mathbb{R}^n$ is non-zero only in entries $k+1$ through $\min(k+\ell, n)$, with $\mathbf{d}_k[j] = B_F[j,k]$ for $j = k+1, \ldots, \min(k+\ell, n)$.

Algorithm 4.2.1 exploits this structure to compute $Q^\top \mathbf{b}$ in $O(n)$ operations by maintaining a compressed representation of the intermediate vectors throughout the transformation process.

Algorithm 4.2.1 Fast Application of $Q^\top$ to a Vector

Input: Factor matrix F in BPS form: $F = B_F + \mathrm{tril}(U_F V_F^\top, -1) + \mathrm{triu}(W_F S_F^\top, 1)$; coefficient vector $\boldsymbol{\tau} = [\tau_1, \ldots, \tau_{n-1}, 0]^\top \in \mathbb{R}^n$; right-hand side vector $\mathbf{b} \in \mathbb{R}^n$
Output: $\mathbf{c} = Q^\top \mathbf{b} \in \mathbb{R}^n$
Initialize:
  $O \leftarrow \mathbf{0}_{n\times r}$: Storage for accumulated low-rank updates
  $G \leftarrow \mathbf{0}_{n\times(\ell+1)}$: Storage for banded component updates
  $\mathbf{h} \leftarrow \mathbf{0}_r$: Accumulator for semiseparable component
  Let $\mathbf{o}_i$ denote the i-th column of O
  Let $\mathbf{g}_i$ denote the i-th column of G
Express initial vector: $\mathbf{b}^{(0)} = \mathbf{b} + U_F^{(1)}\mathbf{h} + \sum_{j=1}^{r} \mathbf{o}_j + \sum_{j=1}^{l+1} \mathbf{g}_j$
for $k = 1$ to $n-1$ **do**
  Compute inner product: $c \leftarrow \mathbf{y}_k^\top \mathbf{b}^{(k-1)}$ (exploit BPS structure of $\mathbf{y}_k$ and precompute some lookup tables for for $O(1)$ computation)
  Update low-rank storage: $O[k,:] \leftarrow U_F[k,:] \odot \mathbf{h}$ (element-wise multiplication)
  Update semiseparable accumulator: $\mathbf{h} \leftarrow \mathbf{h} - \tau_k c V_F[k,:]$
  Update banded component:
  $G[k,1] \leftarrow -\tau_k c$ (diagonal contribution)
  for $t = 1$ to $\min(\ell, n-k)$ **do**
    $G[k+t, t+1] \leftarrow -\tau_k c \cdot B_F[k+t, k]$ (subdiagonal contributions)
  end for
  Current representation: $\mathbf{b}^{(k)} = \mathbf{b} + U_F^{(k+1)}\mathbf{h} + \sum_{j=1}^{r} \mathbf{o}_j + \sum_{j=1}^{\ell+1} \mathbf{g}_j$
end for
Compute final result explicitly: $\mathbf{c} \leftarrow \mathbf{b} + U_F^{(n)}\mathbf{h} + \sum_{j=1}^{r} \mathbf{o}_j + \sum_{j=1}^{l+1} \mathbf{g}_j$
return c

THEOREM 4.1. *Algorithm 4.2.1 computes* $\mathbf{c} = Q^\top \mathbf{b}$ *in* $O(n)$ *operations.*

Proof. The proof proceeds by induction on the transformation steps. Let $\mathbf{b}^{(0)} = \mathbf{b}$ and assume that after $k-1$ steps, the algorithm maintains the representation:

$$\mathbf{b}^{(k-1)} = \mathbf{b} + U_F^{(k)}\mathbf{h}^{(k-1)} + \sum_{j=1}^{r} \mathbf{o}_j^{(k-1)} + \sum_{j=1}^{\ell+1} \mathbf{g}_j^{(k-1)},$$

where the superscripts on $\mathbf{h}$, $\mathbf{o}$, and $\mathbf{g}$ denote the state after the $(k-1)$-th iteration.

The k-th Householder transformation gives:

$$\mathbf{b}^{(k)} = (I - \tau_k \mathbf{y}_k \mathbf{y}_k^\top)\mathbf{b}^{(k-1)} = \mathbf{b}^{(k-1)} - \tau_k(\mathbf{y}_k^\top \mathbf{b}^{(k-1)})\mathbf{y}_k.$$

Substituting the structured form of $\mathbf{y}_k$ from (4.1) and the inductive representation:

$$\begin{aligned}
\mathbf{b}^{(k)} &= \mathbf{b} + U_F^{(k)}\mathbf{h}^{(k-1)} + \sum_{j=1}^{r} \mathbf{o}_j^{(k-1)} + \sum_{j=1}^{\ell+1} \mathbf{g}_j^{(k-1)} \\
&\quad - \tau_k c(\bar{\mathbf{e}}_k + U_F^{(k+1)}\bar{\mathbf{v}}_k + \mathbf{d}_k) \\
&= \mathbf{b} + U_F^{(k+1)}(\mathbf{h}^{(k-1)} - \tau_k c \bar{\mathbf{v}}_k) \\
&\quad + \left(\sum_{j=1}^{r} \mathbf{o}_j^{(k-1)} + (U_F^{(k)} - U_F^{(k+1)})\mathbf{h}^{(k-1)} \right)
\end{aligned}$$

$$+\left(\mathbf{g}_1^{(k-1)} - \tau_k c\bar{\mathbf{e}}_k\right) + \left(\sum_{j=2}^{\ell+1} \mathbf{g}_j^{(k-1)} - \tau_k c\mathbf{d}_k\right).$$

The algorithm updates precisely these components:
$\mathbf{h}^{(k)} = \mathbf{h}^{(k-1)} - \tau_k c\bar{\mathbf{v}}_k$,
$O[k,:] = U_F[k,:] \odot \mathbf{h}^{(k-1)}$ captures $(U_F^{(k)} - U_F^{(k+1)})\mathbf{h}^{(k-1)}$,
Banded updates in G capture the remaining terms.

Thus, the representation is maintained correctly throughout all $n-1$ steps. Each step requires $O(1)$ operations due to the constant-bounded parameters r, p, ℓ, m, yielding overall $O(n)$ complexity. ∎

4.2.2. Fast Backward Substitution. After computing $\mathbf{c} = Q^\top \mathbf{b}$, we solve the upper triangular system $R\mathbf{x} = \mathbf{c}$, where $R = \mathrm{triu}(F)$ inherits the BPS structure of F. Specifically, the upper triangular part of F satisfies:

$$R = B_R + \mathrm{triu}(W_F S_F^\top, 1),$$

where $B_R = \mathrm{triu}(B_F)$ is the upper triangular part of the banded component, maintaining upper bandwidth $\ell + m$.

Algorithm 4.2.2, which is equivalent to the one introduced in [18], exploits this structure to perform backward substitution in $O(n)$ operations by maintaining a running sum for the semiseparable contributions.

Algorithm 4.2.2 Fast Backward Substitution for Structured R

Input: Upper triangular matrix $R = \mathrm{triu}(F)$ in structured form; transformed right-hand side $\mathbf{c} \in \mathbb{R}^n$
Output: Solution $\mathbf{x} \in \mathbb{R}^n$ satisfying $R\mathbf{x} = \mathbf{c}$
Initialize:
  $\mathbf{x} \leftarrow \mathbf{0}_n$: solution vector
  $\mathbf{s} \leftarrow \mathbf{0}_{r+p}$: Accumulator for semiseparable contributions
for $j = n$ down to 1 **do**
  Initialize residual: res $\leftarrow 0$
  Add semiseparable contribution: res $\leftarrow$ res $+ W_F[j,:]^\top \mathbf{s}$
  Add banded contributions:
  for $k = j+1$ to $\min(j+\ell+m, n)$ **do**
    res $\leftarrow$ res $+ B_R[j,k] \cdot \mathbf{x}[k]$
  end for
  Solve for x_j: $\mathbf{x}[j] \leftarrow (\mathbf{c}[j] - \mathrm{res})/B_R[j,j]$
  Update semiseparable accumulator: $\mathbf{s} \leftarrow \mathbf{s} + S_F[j,:]^\top \mathbf{x}[j]$
end for
return x

THEOREM 4.2. *Algorithm 4.2.2 solves $R\mathbf{x} = \mathbf{c}$ in $O(n)$ operations.*

Proof. For completeness we include the proof from [18]. The algorithm implements standard backward substitution while exploiting the structure of R. For each index j from n down to 1, the equation:

$$R[j,j]x_j + \sum_{k=j+1}^{n} R[j,k]x_k = c_j$$

is solved for x_j.

The key insight is that the off-diagonal entries $R[j,k]$ for $k > j$ can be decomposed as:

$$R[j,k] = B_R[j,k] + W_F[j,:]^\top S_F[k,:].$$

The banded contributions $B_R[j,k]$ are non-zero only for $k = j+1, \ldots, \min(j+l+m, n)$, requiring $O(1)$ operations per row. The semiseparable contributions are accumulated in the vector $\mathbf{s}$, which stores:

$$\mathbf{s} = \sum_{k=j+1}^{n} x_k S_F[k,:].$$

At step j, the product $W_F[j,:]^\top \mathbf{s}$ thus captures all semiseparable contributions from previously computed solution components. After computing x_j, the accumulator is updated to include its contribution.

Each iteration requires $O(1)$ operations, yielding overall $O(n)$ complexity. The correctness follows by induction from $j = n$ down to 1. ∎

4.2.3. Overall Solver Complexity. Combining the QR factorization (Algorithm 4.1.1), the fast application of $Q^\top$ (Algorithm 4.2.1), and the fast backward substitution (Algorithm 4.2.2) yields a complete direct solver for BPS linear systems with $O(n)$ complexity.

COROLLARY 4.3. *For a BPS matrix $A \in \mathbb{R}^{n\times n}$ with constant-bounded ranks and bandwidths, the linear system $A\mathbf{x} = \mathbf{b}$ can be solved in $O(n)$ operations using the QR-based approach.*

5. Fast RQ Computation for Symmetric BPS Matrices. The fast QR factorization developed in the previous section not only provides a direct linear system solver but also forms the foundation for iterative algorithms such as the QR algorithm for computing eigenvalues. A core step in the QR iteration is the formation of the RQ product. For symmetric BPS matrices, we show that the RQ product also preserves the BPS structure, leading to the design of a linear-complexity algorithm for its fast computation.

5.1. Structure, Definitions, and a Key Lemma for the Symmetric Case. Consider a symmetric BPS matrix A of the form

$$A = B_s + \mathrm{tril}(UV^\top, -1) + \mathrm{triu}(VU^\top, 1), \tag{5.1}$$

where B_s is a symmetric banded matrix with lower and upper bandwidth ℓ, and $U, V \in \mathbb{R}^{n\times r}$ generate the lower and upper semiseparable parts of rank r. Let $A = QR$ be its QR factorization. Since $RQ = (Q^{-1}A)Q = Q^\top AQ$ and A is symmetric, RQ is also symmetric.

To describe the structure of intermediate matrices in the computation of RQ, we introduce definitions analogous to those in Section 3 but tailored for the symmetric case and the R factor.

DEFINITION 5.1. *Given an $n \times n$ upper triangular matrix R and an $n \times r$ matrix U, define the vector space:*

$$\mathcal{H}(R;U) := \Big\{ RU\Omega U^\top + \Phi U^\top + RU\Psi + \Lambda : \Omega \in \mathbb{R}^{r\times r},$$

$$\Phi = \begin{bmatrix} \Phi_s \in \mathbb{R}^{\min(\ell,n)\times r} \\ \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n\times r},$$
$$\Psi = [\Psi_s \in \mathbb{R}^{r\times \min(\ell,n)}, \mathbf{0}] \in \mathbb{R}^{r\times n},$$
$$\Lambda = \begin{bmatrix} \Lambda_s \in \mathbb{R}^{\min(\ell,n)\times \min(\ell,n)} & \mathbf{0} \\ \mathbf{0} & \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n\times n} \Bigg\} \subset \mathbb{R}^{n\times n}.$$

Definition 5.2. *Given an $n \times n$ upper triangular matrix R, an $n \times r$ matrix U, and $j = 1, 2, ..., n$, define the vector space:*

$$\mathcal{W}_j(R;U) := \Bigg\{ \boldsymbol{\eta} + ((RU)[j:n,:])\boldsymbol{\mu} : \boldsymbol{\eta} = \begin{bmatrix} \boldsymbol{\eta}_s \in \mathbb{R}^{\min(\ell,n+1-j)} \\ \mathbf{0} \end{bmatrix} \in \mathbb{R}^{n+1-j}, \boldsymbol{\mu} \in \mathbb{R}^r \Bigg\} \subset \mathbb{R}^{n+1-j}.$$

These definitions characterize the structured perturbations that appear in the R factor when it is right-multiplied by a sequence of Householder reflectors (i.e., by Q). The following lemma is the symmetric counterpart to Lemma 3.5 and is the engine of the inductive proof.

Lemma 5.3. *Given an $n \times n$ upper triangular matrix R, an $n \times r$ matrix U, and $H \in \mathcal{H}(R;U)$, let $\Gamma := R + H$ and consider its right-multiplication by a vector: $\widetilde{\Gamma} = \Gamma(I - \tau\mathbf{y}\mathbf{y}^\top)$. Assume $\mathbf{y}$ has the form $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, where $\mathbf{e}_1$ is the first standard basis vector, $U^{(2)} \in \mathbb{R}^{n\times r}$ satisfies $U^{(2)}[1,:] = \mathbf{0}$ and $U^{(2)}[2:n,:] = U[2:n,:]$, $\bar{\mathbf{k}} \in \mathbb{R}^r$, and $\mathbf{b} \in \mathbb{R}^n$ is nonzero only in its entries 2 through $\min(\ell+1, n)$. Then the following hold:*

1. *The principal submatrix satisfies $\widetilde{\Gamma}[2:n, 2:n] = R[2:n, 2:n] + \tilde{H}$ for $\tilde{H} \in \mathcal{H}(R[2:n, 2:n]; U[2:n,:])$.*
2. *The first column satisfies $\widetilde{\Gamma}[2:n, 1] \in \mathcal{W}_2(R;U)$.*

Proof. Let $U = (\mathbf{u}_1, \ldots, \mathbf{u}_r)$ where $\mathbf{u}_i = (u_1^{(i)}, \ldots, u_n^{(i)})^\top$, and denote $\bar{\mathbf{u}}_1 = (u_1^{(1)}, \ldots, u_1^{(r)})^\top \in \mathbb{R}^r$. Write $\Gamma = R + RU\Omega U^\top + \Phi U^\top + RU\Psi + \Lambda$ with matrices $\Omega, \Phi, \Psi, \Lambda$ having the sparsity patterns specified in Definition 5.1.

Write $\boldsymbol{\gamma} := R\mathbf{b}$ where $\boldsymbol{\gamma}$ is nonzero only in its first $\min(\ell+1, n)$ entries, and define the auxiliary vectors:

$$\boldsymbol{\delta}_1 = \Omega U^\top \mathbf{y} \in \mathbb{R}^r, \qquad \boldsymbol{\delta}_2 = U^\top \mathbf{y} \in \mathbb{R}^r,$$
$$\boldsymbol{\delta}_3 = \Psi \mathbf{y} \in \mathbb{R}^r, \qquad \boldsymbol{\delta}_4 = \Lambda \mathbf{y} \in \mathbb{R}^n.$$

Note that $\boldsymbol{\delta}_4$ has the form $\boldsymbol{\delta}_4 = \begin{bmatrix} \boldsymbol{\delta}_{4s} \\ \mathbf{0} \end{bmatrix}$ with $\boldsymbol{\delta}_{4s} \in \mathbb{R}^{\min(\ell,n)}$ due to the structure of Λ.

Also let $\mathbf{r}^{(1)} = R[1,:]$, $\boldsymbol{\phi}^{(1)} = \Phi[1,:]$, $\boldsymbol{\psi}^{(1)} = \Psi[:,1]$, and $\boldsymbol{\lambda}^{(1)} = \Lambda[:,1]$.

We compute $\widetilde{\Gamma} = \Gamma - \tau\Gamma\mathbf{y}\mathbf{y}^\top$ by distributing the operation over each term in Γ.

(i) Transformation of R: Using $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$ and $R\mathbf{b} = \boldsymbol{\gamma}$, we get:

(5.2)

$$\begin{aligned} R(I - \tau\mathbf{y}\mathbf{y}^\top) =& R + \underbrace{R(-\tau\mathbf{e}_1)\mathbf{e}_1^\top}_{\text{the (1,1) entry}} + \big[RU^{(2)}\underbrace{(-\tau\bar{\mathbf{k}})}_{\mathbb{R}^r} + \underbrace{(-\tau\boldsymbol{\gamma})}_{\min(\ell+1,n)\text{ nonzero entries}}\big]\mathbf{e}_1^\top \\ & \underbrace{-\tau R\mathbf{e}_1\bar{\mathbf{k}}^\top U^{(2)\top} - \tau R\mathbf{e}_1\mathbf{b}^\top}_{\text{only affect the first row}} + \big[RU^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{r\times r}}U^{(2)\top} \\ & + \underbrace{(-\tau\boldsymbol{\gamma}\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}} U^{(2)\top} + RU^{(2)}\underbrace{(-\tau\bar{\mathbf{k}}\mathbf{b}^\top)}_{\mathbb{R}^{r\times\min(\ell+1,n)}\text{ nonzero entries}} + \\ & \underbrace{(-\tau\boldsymbol{\gamma}\mathbf{b}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+1,n)}\text{ nonzero entries}}\big]. \end{aligned}$$

We see that the terms in the first bracket after dropping the first row, are in $\mathcal{W}_2(R;U)$. Dropping the first row and column of the terms in the second bracket are in $\mathcal{H}(R[2:n,2:n];U[2:n,:])$.

Similarly, the following transformations follow the same pattern:

(ii) Transformation of $RU\Omega U^\top$: Using $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $\Omega U^\top\mathbf{y} = \boldsymbol{\delta}_1$, and $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, we get:

(5.3)

$$\begin{aligned} RU\Omega U^\top(I - \tau\mathbf{y}\mathbf{y}^\top) =& \underbrace{R\mathbf{e}_1(\bar{\mathbf{u}}_1^\top\Omega\bar{\mathbf{u}}_1 - \tau\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_1)\mathbf{e}_1^\top}_{\text{the (1,1) entry}} + \big[RU^{(2)}\underbrace{(\Omega\bar{\mathbf{u}}_1 - \tau\boldsymbol{\delta}_1)}_{\mathbb{R}^r}\big]\mathbf{e}_1^\top \\ & \underbrace{+R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\Omega U^{(2)\top} - \tau R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_1\bar{\mathbf{k}}^\top U^{(2)\top} - \tau R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_1\mathbf{b}^\top}_{\text{only affect the first row}} \\ & + \big[RU^{(2)}\underbrace{(\Omega - \tau\boldsymbol{\delta}_1\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{r\times r}}U^{(2)\top} + RU^{(2)}\underbrace{(-\tau\boldsymbol{\delta}_1\mathbf{b}^\top)}_{\mathbb{R}^{r\times\min(\ell+1,n)}\text{ nonzero entries}}\big]. \end{aligned}$$

(iii) Transformation of $\Phi U^\top$: Using $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $U^\top\mathbf{y} = \boldsymbol{\delta}_2$, and $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, we get:

(5.4)

$$\begin{aligned} \Phi U^\top(I - \tau\mathbf{y}\mathbf{y}^\top) =& \big[\underbrace{(\Phi\bar{\mathbf{u}}_1 - \tau\Phi\boldsymbol{\delta}_2)}_{\min(\ell+1,n)\text{ nonzero entries}}\big]\mathbf{e}_1^\top \\ & + \big[\underbrace{(\Phi - \tau\Phi\boldsymbol{\delta}_2\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}} U^{(2)\top} + \underbrace{(-\tau\Phi\boldsymbol{\delta}_2\mathbf{b}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+1,n)}\text{ nonzero entries}}\big]. \end{aligned}$$

(iv) Transformation of $RU\Psi$: Using $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$, $\Psi\mathbf{y} = \boldsymbol{\delta}_3$, and $U = \mathbf{e}_1\bar{\mathbf{u}}_1^\top + U^{(2)}$, we get:

$$\begin{aligned} RU\Psi(I - \tau\mathbf{y}\mathbf{y}^\top) =& \underbrace{(-\tau R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_3)\mathbf{e}_1^\top}_{\text{the (1,1) entry}} + \big[RU^{(2)}\underbrace{(-\tau\boldsymbol{\delta}_3)}_{\mathbb{R}^r}\big]\mathbf{e}_1^\top \\ & \underbrace{+R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\Psi - \tau R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_3\bar{\mathbf{k}}^\top U^{(2)\top} - \tau R\mathbf{e}_1\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_3\mathbf{b}^\top}_{\text{only affect the first row}} \\ & + \big[RU^{(2)}\underbrace{(-\tau\boldsymbol{\delta}_3\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{r\times r}}U^{(2)\top} + RU^{(2)}\underbrace{(\Psi - \tau\boldsymbol{\delta}_3\mathbf{b}^\top)}_{\mathbb{R}^{r\times\min(\ell+1,n)}\text{ nonzero entries}}\big]. \end{aligned} \tag{5.5}$$

(v) Transformation of Λ: Using $\mathbf{y} = \mathbf{e}_1 + U^{(2)}\bar{\mathbf{k}} + \mathbf{b}$ and $\Lambda\mathbf{y} = \boldsymbol{\delta}_4$, we get:

$$\begin{aligned}\Lambda(I - \tau\mathbf{y}\mathbf{y}^\top) =& \Big[\underbrace{(-\tau\boldsymbol{\delta}_4)}_{\min(\ell+1,n)\text{ nonzero entries}} \Big]\mathbf{e}_1^\top + \\ & \Big[\underbrace{(-\tau\boldsymbol{\delta}_4\bar{\mathbf{k}}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times r}\text{ nonzero entries}} U^{(2)\top} + \underbrace{(\Lambda - \tau\boldsymbol{\delta}_4\mathbf{b}^\top)}_{\mathbb{R}^{\min(\ell+1,n)\times\min(\ell+1,n)}\text{ nonzero entries}} \Big].\end{aligned} \tag{5.6}$$

Since $\mathcal{H}(R[2:n, 2:n]; U[2:n,:])$ and $\mathcal{W}_2(R)$ are both vector spaces, their elements are closed under addition. Therefore, summing contributions (i)–(v), we identify the following:

First, the submatrix $\widetilde{\Gamma}[2:n, 2:n]$ satisfies:

$$\widetilde{\Gamma}[2:n, 2:n] = \tilde{R} + \tilde{R}\tilde{U}\tilde{\Omega}\tilde{U}^\top + \tilde{\Phi}\tilde{U}^\top + \tilde{R}\tilde{U}\tilde{\Psi} + \tilde{\Lambda}, \tag{5.7}$$

where $\tilde{R} = R[2:n, 2:n]$, $\tilde{U} = U[2:n,:]$, and the updated matrices are:

$$\tilde{\Omega} = -\tau\bar{\mathbf{k}}\bar{\mathbf{k}}^\top + \Omega - \tau\boldsymbol{\delta}_1\bar{\mathbf{k}}^\top - \tau\boldsymbol{\delta}_3\bar{\mathbf{k}}^\top \in \mathbb{R}^{r\times r},$$

$$\tilde{\Phi} = \begin{bmatrix}\tilde{\Phi}_s \\ \mathbf{0}\end{bmatrix} \in \mathbb{R}^{(n-1)\times r}, \quad \tilde{\Phi}_s = (-\tau\boldsymbol{\gamma}\bar{\mathbf{k}}^\top + \Phi - \tau\Phi\boldsymbol{\delta}_2\bar{\mathbf{k}}^\top - \tau\boldsymbol{\delta}_4\bar{\mathbf{k}}^\top)[2:\min(\ell+1,n),:] \in \mathbb{R}^{\min(\ell,n-1)\times r},$$

$$\tilde{\Psi} = [\tilde{\Psi}_s, \mathbf{0}] \in \mathbb{R}^{r\times(n-1)}, \quad \tilde{\Psi}_s = (-\tau\bar{\mathbf{k}}\mathbf{b}^\top - \tau\boldsymbol{\delta}_1\mathbf{b}^\top + \Psi - \tau\boldsymbol{\delta}_3\mathbf{b}^\top)[:, 2:\min(\ell+1,n)] \in \mathbb{R}^{r\times\min(\ell,n-1)},$$

$$\tilde{\Lambda} = \begin{bmatrix}\tilde{\Lambda}_s & \mathbf{0} \\ \mathbf{0} & \mathbf{0}\end{bmatrix} \in \mathbb{R}^{(n-1)\times(n-1)},$$

$$\tilde{\Lambda}_s = (-\tau\boldsymbol{\gamma}\mathbf{b}^\top - \tau\Phi\boldsymbol{\delta}_2\mathbf{b}^\top + \Lambda - \tau\boldsymbol{\delta}_4\mathbf{b}^\top)[2:\min(\ell+1,n), 2:\min(\ell+1,n)] \in \mathbb{R}^{\min(\ell,n-1)\times\min(\ell,n-1)}.$$

This confirms the first part of the lemma.

Second, the vector $\widetilde{\Gamma}[2:n, 1]$ is given by:

$$\widetilde{\Gamma}[2:n, 1] = \boldsymbol{\eta} + (RU\boldsymbol{\mu})[2:n], \tag{5.8}$$

where

$$\boldsymbol{\eta} = \begin{bmatrix}\boldsymbol{\eta}_s \\ \mathbf{0}\end{bmatrix}, \quad \boldsymbol{\eta}_s = (-\tau\boldsymbol{\gamma} + \Phi\bar{\mathbf{u}}_1 - \tau\Phi\boldsymbol{\delta}_2 - \tau\boldsymbol{\delta}_4 + \boldsymbol{\lambda}^{(1)})[2:\min(\ell+1,n)] \in \mathbb{R}^{\min(\ell,n-1)},$$

$$\boldsymbol{\mu} = -\tau\bar{\mathbf{k}} + \Omega\bar{\mathbf{u}}_1 - \tau\boldsymbol{\delta}_1 - \tau\boldsymbol{\delta}_3 + \boldsymbol{\psi}^{(1)} \in \mathbb{R}^r.$$

This shows the second part of the lemma.

Moreover, the $(1,1)$ entry of $\widetilde{\Gamma}$ is updated as:

$$\begin{aligned}\tilde{\Gamma}[1,1] =& R[1,1] - \tau R[1,1] - \tau\mathbf{r}^{(1)\top}U^{(2)}\bar{\mathbf{k}} - \tau\gamma[1] \\ & + R[1,1](\bar{\mathbf{u}}_1^\top\Omega\bar{\mathbf{u}}_1 - \tau\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_1) + \mathbf{r}^{(1)\top}U^{(2)}(\Omega\bar{\mathbf{u}}_1 - \tau\boldsymbol{\delta}_1) \\ & + \boldsymbol{\phi}^{(1)\top}\bar{\mathbf{u}}_1 - \tau\boldsymbol{\phi}^{(1)\top}\boldsymbol{\delta}_2 - \tau R[1,1]\bar{\mathbf{u}}_1^\top\boldsymbol{\delta}_3 + R[1,1]\bar{\mathbf{u}}_1^\top\boldsymbol{\psi}^{(1)} \\ & - \tau\mathbf{r}^{(1)\top}U^{(2)}\boldsymbol{\delta}_3 + \mathbf{r}^{(1)\top}U^{(2)}\boldsymbol{\psi}^{(1)} - \tau\boldsymbol{\delta}_4[1] + \Lambda[1,1].\end{aligned} \tag{5.9}$$

The updates (5.7), (5.8), and (5.9) provide the complete formulas needed to advance the structured representation by one Householder transformation. ∎

5.2. Structure-Preserving Theorem for RQ. Equipped with Lemma 5.3, we can now state and prove the main structural result for the RQ product.

THEOREM 5.4. *Let A be a symmetric BPS matrix of the form (5.1), with both lower and upper semiseparable rank r and lower and upper bandwidth ℓ. Let $A = QR$ be its QR factorization. Then the matrix RQ is also a symmetric BPS matrix, with the same lower and upper semiseparable rank r and the same lower and upper bandwidth ℓ.*

Proof. We will show that RQ can be expressed as

$$RQ = B_R + \mathrm{tril}(\Theta\Delta^\top, -1) + \mathrm{triu}(\Delta\Theta^\top, 1), \tag{5.10}$$

where

$\Theta = RU \in \mathbb{R}^{n\times r}$,

$\Delta \in \mathbb{R}^{n\times r}$ is a low-rank generator matrix,

B_R is a symmetric banded matrix with lower and upper bandwidth ℓ.

The proof proceeds by induction on the steps of applying Q (as a product of Householder reflectors) to R from the right. Define $R^{(0)} = R$ and $R^{(j)} = R(I - \tau_1\mathbf{y}_1\mathbf{y}_1^\top)\cdots(I - \tau_j\mathbf{y}_j\mathbf{y}_j^\top)$ for $j = 1, \ldots, n-1$, so that $R^{(n-1)} = RQ$.

From the proof of Theorem 3.6, the Householder vectors have the form:

$$\mathbf{y}_k[1:k-1] = \mathbf{0} \text{ and } \mathbf{y}_k[k:n] = \mathbf{e}_k + U^{(k+1)}\bar{\mathbf{k}}_{k+1} + \mathbf{b}_{k+1}, \quad k = 1, \ldots, n-1,$$

where $\mathbf{e}_k$ is the first standard basis in $\mathbb{R}^{n-k+1}$, $U^{(k+1)} \in \mathbb{R}^{(n-k+1)\times r}$ satisfies $U^{(k+1)}[1,:] = \mathbf{0}$ and $U^{(k+1)}[2:n-k+1,:] = U[k+1:n,:]$, $\bar{\mathbf{k}}_{k+1} \in \mathbb{R}^r$, and $\mathbf{b}_{k+1} \in \mathbb{R}^{n-k+1}$ is nonzero only in its entries 2 through $\min(\ell+1, n-k+1)$.

Let $R_k = R[k:n, k:n]$ and $U_k = U[k:n,:]$. We prove by induction that for $j = 0, \ldots, n-1$:

1. $R^{(j)}[j+1:n, j+1:n] = R_{j+1} + H_{j+1}$ for $H_{j+1} \in \mathcal{H}(R_{j+1}; U_{j+1})$.
2. $R^{(j)}[j+1:n, j] \in \mathcal{W}_{j+1}(R; U)$.

Base case ($j = 0$): $R^{(0)} = R$ is trivially $= R_1 + \mathbf{0}_{n\times n}$ for $\mathbf{0}_{n\times n} \in \mathcal{H}(R_1; U_1)$ (with Ω, Φ, Ψ, $\Lambda = \mathbf{0}$).

Inductive step: Assume the statement holds for some $j < n-1$. That is,

$$R^{(j)}[j+1:n, j+1:n] = R_{j+1} + R_{j+1}U_{j+1}\Omega_{j+1}U_{j+1}^\top + \Phi_{j+1}U_{j+1}^\top + R_{j+1}U_{j+1}\Psi_{j+1} + \Lambda_{j+1},$$

with $\Omega_{j+1}, \Phi_{j+1}, \Psi_{j+1}, \Lambda_{j+1}$ having the required sparsity patterns.

We now compute $R^{(j+1)} = R^{(j)}(I - \tau_{j+1}\mathbf{y}_{j+1}\mathbf{y}_{j+1}^\top)$. Applying Lemma 5.3 with $\Gamma = R^{(j)}[j+1:n, j+1:n]$, $R = R_{j+1}$, $U = U_{j+1}$, and $\mathbf{y} = \mathbf{y}_{j+1}[j+1:n]$, we obtain:

1. $\widetilde{\Gamma}[2:n-j, 2:n-j] = R^{(j+1)}[j+2:n, j+2:n] = R_{j+2} + H_{j+2}$ for $H_{j+2} \in \mathcal{S}(R_{j+2}; U_{j+2})$.
2. $\widetilde{\Gamma}[2:n-j, 1] = R^{(j+1)}[j+2:n, j+1] \in \mathcal{W}_{j+2}(R; U)$.

The lemma also provides explicit update formulas for the parameters, showing they retain the correct sparsity patterns. This completes the inductive step.

By induction, the structured form holds for all j. In particular, for each $j = 0, \ldots, n-2$, we have:

$$R^{(j+1)}[j+2:n, j+1] = \boldsymbol{\eta}_{j+2} + (R_{j+1}U_{j+1}\boldsymbol{\mu}_{j+2})[2:n-j].$$

Since $R_{j+1}U_{j+1}[2:n-j,:] = RU[j+2:n,:]$, this can be rewritten as:

$$\begin{aligned}
&(RQ)[j+1, j+2:n] \\
&\underbrace{= (RQ)[j+2:n, j+1]}_{\text{by symmetry of } RQ} \\
&\underbrace{= R^{(j+1)}[j+2:n, j+1]}_{\text{by definition of } R^{(j+1)}} \\
&= \boldsymbol{\eta}_{j+2} + (RU\boldsymbol{\mu}_{j+2})[j+2:n].
\end{aligned}$$

Let $\Delta \in \mathbb{R}^{n\times r}$ be defined by $\Delta[j,:] = \boldsymbol{\mu}_{j+1}^\top$ for $j = 1,\ldots,n-1$ and $\Delta[n,:] = \mathbf{0}$. Let $\Theta = RU$. Then the semiseparable part of RQ is exactly $\mathrm{tril}(\Theta\Delta^\top, -1) + \mathrm{triu}(\Delta\Theta^\top, 1)$.

The banded part B_R is constructed from the diagonal entries of $R^{(j)}$ and the vectors $\boldsymbol{\eta}_{j+1}$, which are nonzero only in their first $\min(\ell, n-j)$ entries. The symmetry of B_R follows from the symmetry of RQ and the symmetry of the semiseparable representation.

Thus, RQ admits the representation (5.10), confirming it is a symmetric BPS matrix with the stated properties. ∎

5.3. Fast RQ Multiplication. Theorem 5.4 is constructive and leads directly to a fast algorithm for computing the RQ product without explicitly forming the dense orthogonal matrix Q.

Complexity analysis. Step 1, the QR factorization, requires $O(n)$ operations by Theorem 3.6. The computation of $\Theta = RU$ can be performed in $O(nr)$ time due to the structure of R. The forward recursion in Step 3 performs a constant amount of work per iteration, as all matrix operations involve matrices whose dimensions (e.g., $r\times r$, $r\times\ell$, $\ell\times\ell$) are independent of n. Therefore, Algorithm 5.3.1 runs in $O(n)$ time and uses $O(n)$ storage.

Remark 5.1. *A subtle but crucial point in Algorithm 5.3.1 is that during the forward recursion, we track only the evolving structure of the submatrix $R^{(j)}[j+1:n, j+1:n]$, even though the entire matrix $R^{(j)}[:, j+1:n]$ is being modified. More precisely, after applying the first j Householder transformations from the right, the first j columns of $R^{(j)}$ have reached their final state and will not change in subsequent steps. However, the first j rows of $R^{(j)}$ (in columns $j+1:n$) are still subject to modification by later transformations. Nevertheless, because the final product RQ is known to be symmetric, these pending row entries are not independent: they must eventually equal the corresponding entries in the already-fixed columns. This allows the algorithm to safely disregard the explicit updating of these rows and focus solely on the lower-right square submatrix, which is the only part whose future evolution is not predetermined.*

Remark 5.2 (Shifted QR Algorithm). *The results extend directly to the shifted QR algorithm for eigenvalue computations. Given a shift $\mu \in \mathbb{R}$, the shifted matrix $A - \mu I = (B_s - \mu I) + \mathrm{tril}(UV^\top, -1) + \mathrm{triu}(VU^\top, 1)$ remains a symmetric BPS matrix, requiring only a diagonal adjustment to B. The resulting RQ product can then be shifted back to obtain $RQ + \mu I$, which maintains the same BPS structure. Hence, each iteration of the shifted QR algorithm—factorization of $A^{(k)} - \mu I = QR$ followed by formation of $A^{(k+1)} = RQ + \mu I$—can both be performed in $O(n)$ time while preserving the BPS structure throughout.*

Algorithm 5.3.1 Fast RQ computation for Symmetric BPS Matrices

Input: A symmetric BPS matrix A given by its generators: symmetric banded B_s (bandwidth ℓ), and $U, V \in \mathbb{R}^{n\times r}$ satisfying $A = B_s + \mathrm{tril}(UV^\top, -1) + \mathrm{triu}(VU^\top, 1)$.
Output: The RQ product in structured form: symmetric banded matrix B_R, and low-rank generators Θ and Δ.

1. **Compute fast QR factorization:**
Run Algorithm 4.1.1 on A to obtain the structured factor matrix F and coefficients $\boldsymbol{\tau}$. Extract the structured representation of the R factor and all Householder vectors $\mathbf{y}_k$ (with parameters $\bar{\mathbf{k}}_k$, $\mathbf{b}_k$).
Compute and store $\Theta = RU$ using the structured R in $O(n)$.

2. **Initialize HMUTM parameters:**
Set $\Omega_1 \leftarrow \mathbf{0}_{r\times r}$, $\Phi_1 \leftarrow \mathbf{0}_{n\times r}$, $\Psi_1 \leftarrow \mathbf{0}_{r\times n}$, $\Lambda_1 \leftarrow \mathbf{0}_{n\times n}$.
Initialize $\Delta \leftarrow \mathbf{0}_{n\times r}$.

3. **Forward recursion (apply Q from the right):**
for $k = 1$ to $n-1$ **do**
a. Retrieve the Householder parameters $\bar{\mathbf{k}}_{k+1}$ and $\mathbf{b}_{k+1}$ for step k.
b. Using the update formulas from Lemma 5.3 (as derived in its proof), compute the new parameters $(\Omega_{k+1}, \Phi_{k+1}, \Psi_{k+1}, \Lambda_{k+1})$ from $(\Omega_k, \Phi_k, \Psi_k, \Lambda_k, \bar{\mathbf{k}}_{k+1}, \mathbf{b}_{k+1})$.
c. Compute the parameters $\boldsymbol{\mu}_{k+1}$ and $\boldsymbol{\eta}_{k+1}$ from the relevant update formulas in the proof of Lemma 5.3.
d. Set $\Delta[k,:] \leftarrow \boldsymbol{\mu}_{k+1}$ and $B_R[k+1:\min(k+1,n), k] \leftarrow \boldsymbol{\eta}_{k+1}[k+1:\min(k+1,n)]$.
e. Compute the diagonal element from the formula in the proof of Lemma 5.3 and store it in $B_R[k,k]$.
end for

4. **Final State**
Set $B_R[n,n] \leftarrow R^{(n-1)}[n,n]$

5. **Return** B_R, Θ, Δ.

6. Numerical results. To validate the theoretical complexity and demonstrate the practical efficiency of our proposed algorithms, we implemented the fast QR factorization, the complete linear solver, and the fast RQ product computation for symmetric BPS matrices in Julia. The implementation is publicly available in the SemiseparableMatrices.jl package [6], providing an open-source resource for the scientific computing community. Computations were carried out on a MacBook Air equipped with an Apple M2 chip (8-core CPU, 8 GB RAM), without GPU acceleration or access to external computing resources.

6.1. Linear Complexity Verification. To verify that the theoretical $O(n)$ complexity holds for matrices with different structural characteristics, we test four parameter sets (ℓ, m, r, p) representing different balances between the banded and semiseparable components. Minimal structure: $(1,1,1,1)$; balanced case: $(4,5,5,4)$; band-dominated: $(8,8,1,1)$; semiseparable-dominated: $(1,1,8,8)$.

Figure 1 demonstrates the linear time complexity of our complete QR solver for

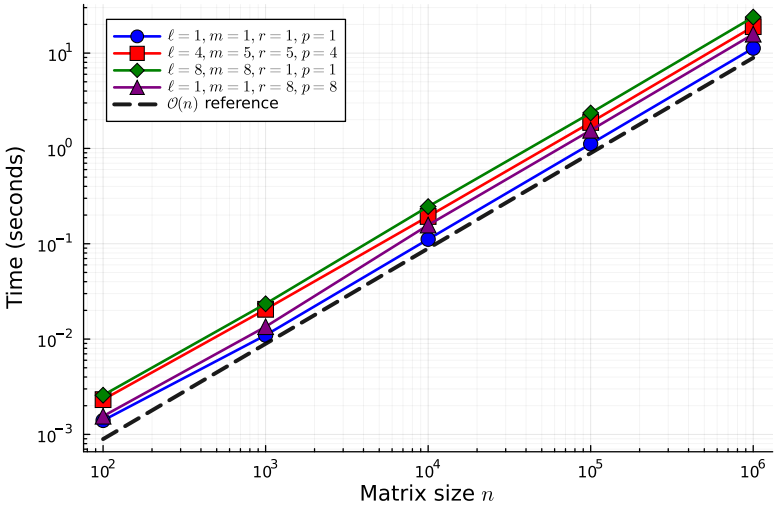

FIG. 1. *Log-log plot of the total solver time (QR factorization + application of $Q^\top$ + backward substitution) versus matrix size n for four parameter sets (ℓ, m, r, p). The dashed line has slope 1, indicating linear scaling.*

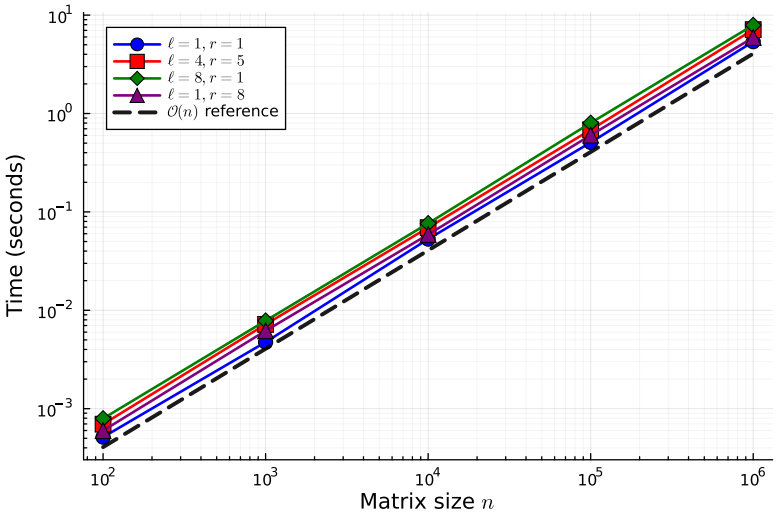

FIG. 2. *Log-log plot of the RQ computation time for symmetric BPS matrices versus n for four parameter sets (ℓ, r). The dashed line has slope 1, indicating linear scaling.*

BPS linear systems. The total execution time scales as $O(n)$ across five orders of magnitude, from $n = 100$ to $n = 10^6$, for four different parameter configurations. All curves align with the reference line of slope 1, confirming the analysis in Section 4.

Figure 2 confirms the $O(n)$ complexity of computing the RQ product for symmetric BPS matrices, a key operation in the QR eigenvalue algorithm. Four parameter sets exhibit linear scaling, with all curves parallel to the $O(n)$ reference line, confirming the analysis in Section 5.

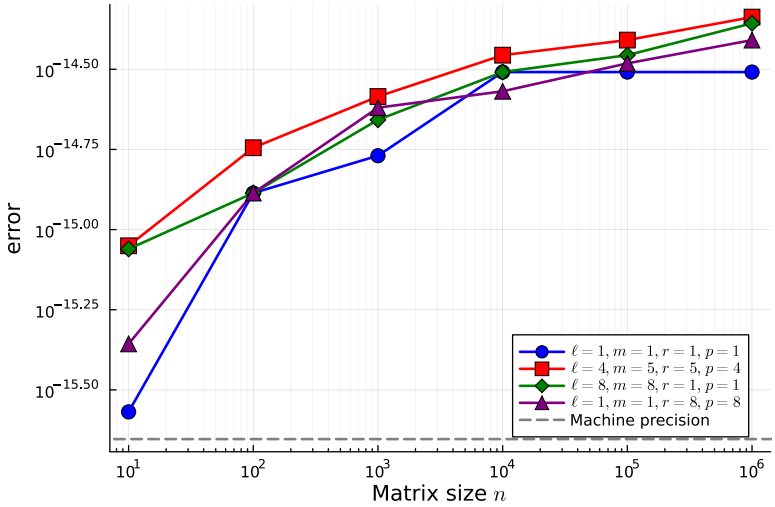

FIG. 3. *Log-log plot of the maximum residual* $\max|A\mathbf{x} - \mathbf{b}|$ *versus matrix size* n *for four parameter sets* (ℓ, m, r, p). *Here* $\mathbf{x}$ *is computed by our complete QR solver (QR factorization followed by application of* $Q^\top$ *and backward substitution). The dashed gray line indicates the machine precision* $\epsilon_{\text{machine}} \approx 2.22 \times 10^{-16}$.

6.2. Numerical Stability of the QR Solver. The numerical stability of a QR-based linear solver is crucial for its practical utility. Figure 3 demonstrates the excellent stability properties of our structured QR solver across a wide range of matrix sizes and structural parameters. We measure the accuracy through the maximum norm of the residual vector:

$$\max|A\mathbf{x} - \mathbf{b}|,$$

where $\mathbf{x}$ is the solution computed by our solver for a randomly generated right-hand side $\mathbf{b}$.

To isolate the numerical behavior of the QR factorization itself, all test matrices are constructed to be well-conditioned; more precisely, they are diagonally dominant. This ensures that the observed residuals are not influenced by ill-conditioning of the linear system, but instead reflect only the numerical errors introduced by the factorization and solution process.

For all parameter configurations and across six orders of magnitude in n (from $n = 10$ to $n = 10^6$), the computed residuals remain very small. The growth of the error is gradual: for smaller matrices, it is near machine precision ($\sim 10^{-16}$), while for the largest matrices, the maximum error corresponds to approximately 14 digits of accuracy. Even for the most challenging case (semiseparable-dominated with $r = p = 8$) and the largest $n = 10^6$, the algorithm achieves a maximum residual of about 4.6×10^{-15}, demonstrating its robustness and reliable numerical stability across a wide range of matrix structures and sizes.

REMARK 6.1. *Measuring the accuracy of large-scale QR factorization presents a methodological challenge. Traditional approaches—comparing the factor matrix* $\tilde{F}$ *generated by our structured QR algorithm against the factor matrix* F_{dense} *produced by a standard dense QR routine, or evaluating the reconstruction error* $\|\tilde{Q}\tilde{R} - A\|$ *where* $\tilde{Q}, \tilde{R}$ *are extracted from* $\tilde{F}$*—require* $O(n^3)$ *operations and become infeasible for* $n > 10^4$.

We overcome this limitation by leveraging the structure of BPS matrices: after obtaining the solution $\mathbf{x}$ *via our* $O(n)$ *solver, we compute the residual* $A\mathbf{x} - \mathbf{b}$ *using the* $O(n)$ *matrix-vector multiplication algorithm for BPS matrices [3]. This approach allows us to verify accuracy for matrices as large as* $n = 10^6$ *while maintaining overall* $O(n)$ *computational cost.*

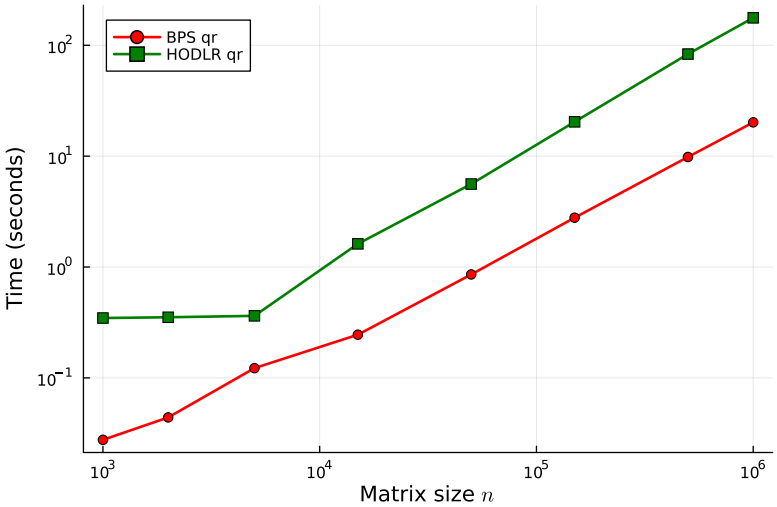

FIG. 4. *Comparison of QR factorization times between our fast BPS QR algorithm and the HODLR QR implementation from [16]. Both algorithms operate on banded-plus-semiseparable matrices with parameters* $\ell = 4$, $m = 5$, $r = 2$, $p = 3$.

6.3. Comparison with HODLR QR. We compare our fast QR factorization against the state-of-the-art HODLR (Hierarchically Off-Diagonal Low-Rank) QR implementation from the hm-toolbox [16]. The hm-toolbox provides efficient MATLAB routines for various structured matrices, including HODLR and HSS matrices, and represents one of the most mature implementations for hierarchical matrix computations.

Figure 4 compares the execution times of QR factorization for BPS matrices obtained using the two approaches. Our algorithm consistently exhibits superior performance as the matrix size increases. This advantage arises from its explicit exploitation of the banded-plus-semiseparable structure, which avoids the overhead associated with general hierarchical representations.

Moreover, the performance gap widens with increasing n, confirming that our method is particularly well suited for large-scale problems. For $n = 1{,}000{,}000$, our implementation achieves an approximate $9\times$ speedup over the HODLR approach, highlighting the practical benefits of the proposed specialized algorithm.

7. Conclusions. In this paper, we have established a fundamental theoretical result for BPS matrices and developed efficient algorithms based on this foundation. Our main contribution is the proof that the QR factorization of a BPS matrix preserves the BPS structure, with precisely characterized ranks and bandwidths in the resulting factor matrix. This theoretical insight enabled the design of a complete $O(n)$ direct solver for BPS linear systems, comprising:

a structure-preserving QR factorization algorithm (Algorithm 4.1.1);

an efficient $O(n)$ application of $Q^\top$ (Algorithm 4.2.1);
a fast backward substitution routine (Algorithm 4.2.2).

Furthermore, for symmetric BPS matrices, we have shown that the RQ product—a key operation in the QR algorithm for eigenvalues—also maintains the BPS structure. This led to the development of another $O(n)$ algorithm (Algorithm 5.3.1) for computing RQ without explicitly forming the dense orthogonal matrix Q, opening the door to efficient eigenvalue computations for symmetric BPS matrices.

The numerical experiments confirm the linear scaling and accuracy of our approach, while demonstrating significant performance advantages over existing HODLR-based methods. Our implementation in the SemiseparableMatrices.jl package provides the scientific computing community with efficient, open-source tools for working with this important class of structured matrices.

Future Work. A compelling extension involves applying our methodology to specific blocked banded matrices arising in *hp*-FEM [15]. These have optimal complexity so-called reverse Cholesky factorizations (Cholesky from the bottom right instead of the top left) for positive definite problems. One of our motativations for the present work is developing an optimal complexity QL factorization for these special block banded matrices. The key challenge is generalizing our framework to block BPS matrices while maintaining $O(N)$ complexity. The primary difficulty lies in applying Householder transformations from one block to subsequent blocks in $O(n)$ time (where n is block size and N the total size), rather than $O(n^3)$. While our current framework doesn't directly apply, the core insight of structure preservation provides a promising foundation for this challenging extension.

REFERENCES

[1] E. Anderson, Z. Bai, C. Bischof, L. S. Blackford, J. Demmel, J. Dongarra, J. Du Croz, A. Greenbaum, S. Hammarling, A. McKenney, and D. Sorensen, *LAPACK Users' Guide*, Society for Industrial and Applied Mathematics, third ed., 1999.

[2] S. Chandrasekaran, P. Dewilde, M. Gu, W. Lyons, and T. Pals, *A fast solver for HSS representations via sparse matrices*, SIAM Journal on Matrix Analysis and Applications, 29 (2007), pp. 67–81.

[3] S. Chandrasekaran, P. Dewilde, M. Gu, T. Pals, and A.-J. van der Veen, *Fast stable solver for sequentially semi-separable linear systems of equations*, in International Conference on High-Performance Computing, Springer, 2002, pp. 545–554.

[4] S. Chandrasekaran and M. Gu, *Fast and stable algorithms for banded plus semiseparable systems of linear equations*, SIAM Journal on Matrix Analysis and Applications, 25 (2003), pp. 373–384.

[5] S. Chandrasekaran, M. Gu, and T. Pals, *A fast ULV decomposition solver for hierarchically semiseparable representations*, SIAM Journal on Matrix Analysis and Applications, 28 (2006), pp. 603–622.

[6] T. Chen, S. Olver, et al., *SemiseparableMatrices.jl*, 2026, https://github.com/JuliaLinearAlgebra/SemiseparableMatrices.jl.

[7] S. Delvaux and M. Van Barel, *Rank structures preserved by the QR-algorithm: the singular case*, Journal of Computational and Applied Mathematics, 189 (2006), pp. 157–178.

[8] S. Delvaux and M. Van Barel, *Structures preserved by the QR-algorithm*, Journal of Computational and Applied Mathematics, 187 (2006), pp. 29–40.

[9] S. Delvaux and M. Van Barel, *A Givens-weight representation for rank structured matrices*, SIAM Journal on Matrix Analysis and Applications, 29 (2008), pp. 1147–1170.

[10] S. Delvaux and M. Van Barel, *A QR-based solver for rank structured matrices*, SIAM Journal on Matrix Analysis and Applications, 30 (2008), pp. 464–490.

[11] Y. Eidelman and I. Gohberg, *Inversion formulas and linear complexity algorithm for diagonal plus semiseparable matrices*, Computers & Mathematics with Applications, 33 (1997), pp. 69–79.

[12] Y. Eidelman, I. Gohberg, and V. Olshevsky, *The QR iteration method for Hermitian*

quasiseparable matrices of an arbitrary order, Linear Algebra and its Applications, 404 (2005), pp. 305–324.

[13] D. Fasino, *Rational Krylov matrices and QR steps on Hermitian diagonal-plus-semiseparable matrices*, Numerical linear algebra with applications, 12 (2005), pp. 743–754.

[14] A. Iserles, *Stable spectral methods for time-dependent problems and the preservation of structure*, Foundations of Computational Mathematics, 25 (2025), pp. 683–723.

[15] K. Knook, S. Olver, and I. Papadopoulos, *Quasi-optimal complexity hp-FEM for Poisson on a rectangle*, IMA Journal of Numerical Analysis, (2025), p. draf102.

[16] S. Massei, L. Robol, and D. Kressner, *hm-toolbox: MATLAB software for HODLR and HSS matrices*, SIAM Journal on Scientific Computing, 42 (2020), pp. C43–C68.

[17] N. Mastronardi, S. Chandrasekaran, and S. Van Huffel, *Fast and stable two-way algorithm for diagonal plus semi-separable systems of linear equations*, Numerical linear algebra with applications, 8 (2001), pp. 7–12.

[18] S. Olver and A. Townsend, *A fast and well-conditioned spectral method*, siam REVIEW, 55 (2013), pp. 462–489.

[19] P. Rózsa, R. Bevilacqua, F. Romani, and P. Favati, *On band matrices and their inverses*, Linear Algebra and Its Applications, 150 (1991), pp. 287–295.

[20] E. Van Camp, N. Mastronardi, and M. Van Barel, *Two fast algorithms for solving diagonal-plus-semiseparable linear systems*, Journal of Computational and Applied Mathematics, 164 (2004), pp. 731–747.

[21] R. Vandebril, M. Van Barel, and N. Mastronardi, *An implicit QR algorithm for symmetric semiseparable matrices*, Numerical Linear Algebra with Applications, 12 (2005), pp. 625–658.

[22] R. Vandebril, M. Van Barel, and N. Mastronardi, *A note on the representation and definition of semiseparable matrices*, Numerical Linear Algebra with Applications, 12 (2005), pp. 839–858.

[23] R. Vandebril, M. Van Barel, and N. Mastronardi, *Rational QR-iteration without inversion*, Numerische Mathematik, 110 (2008), pp. 561–575.

[24] J. Xia, S. Chandrasekaran, M. Gu, and X. S. Li, *Fast algorithms for hierarchically semiseparable matrices*, Numerical Linear Algebra with Applications, 17 (2010), pp. 953–976.