

2 Variable Plotting with ggplot2

In this lecture we will briefly show some examples of how you can compare two variables from a dataset. For these examples, you'll need the full control of ggplot instead of using qplot(), but we will show a quick example of what qplot is capable of. We'll use the built-in ggplot2 movies dataset:


In []:

```
library(ggplot2)
df <- movies
```

qplot()

In [28]:

```
qplot(x=year, y=rating, data = df, geom = "density2d")
```

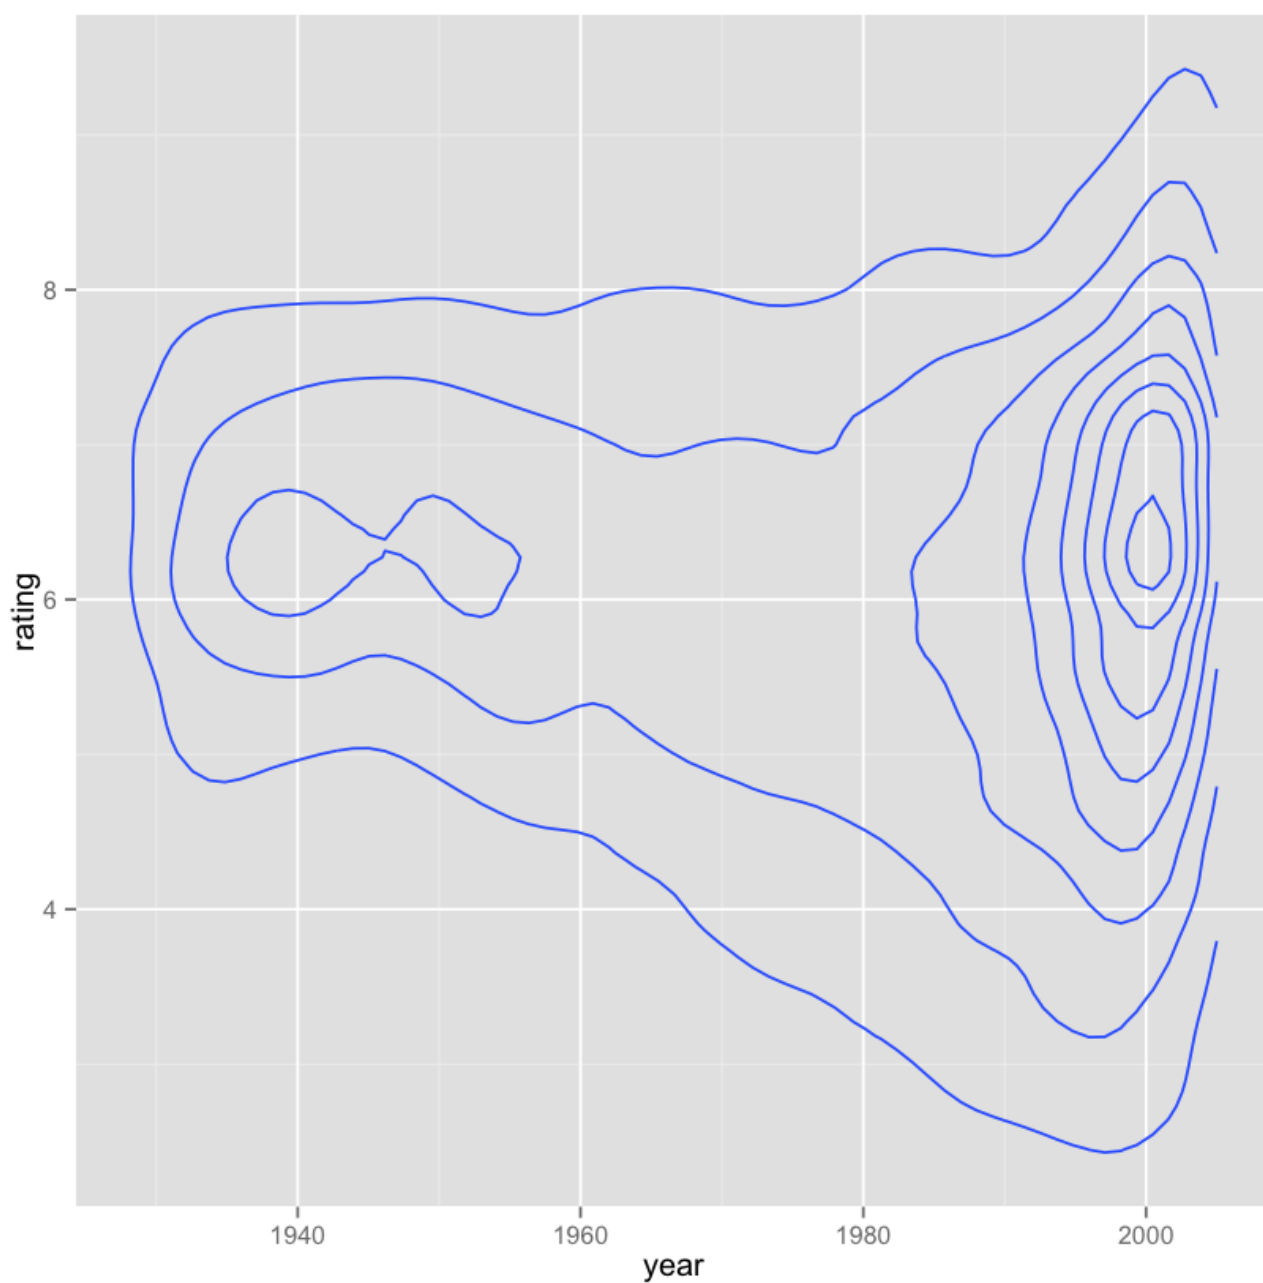

```
In [ ]:
```


```
In [6]:
```

```
pl <- ggplot(movies,aes(x = year,y=rating))
```

2d Bin Chart


```
In [7]:
```

```
pl + geom_bin2d()
```

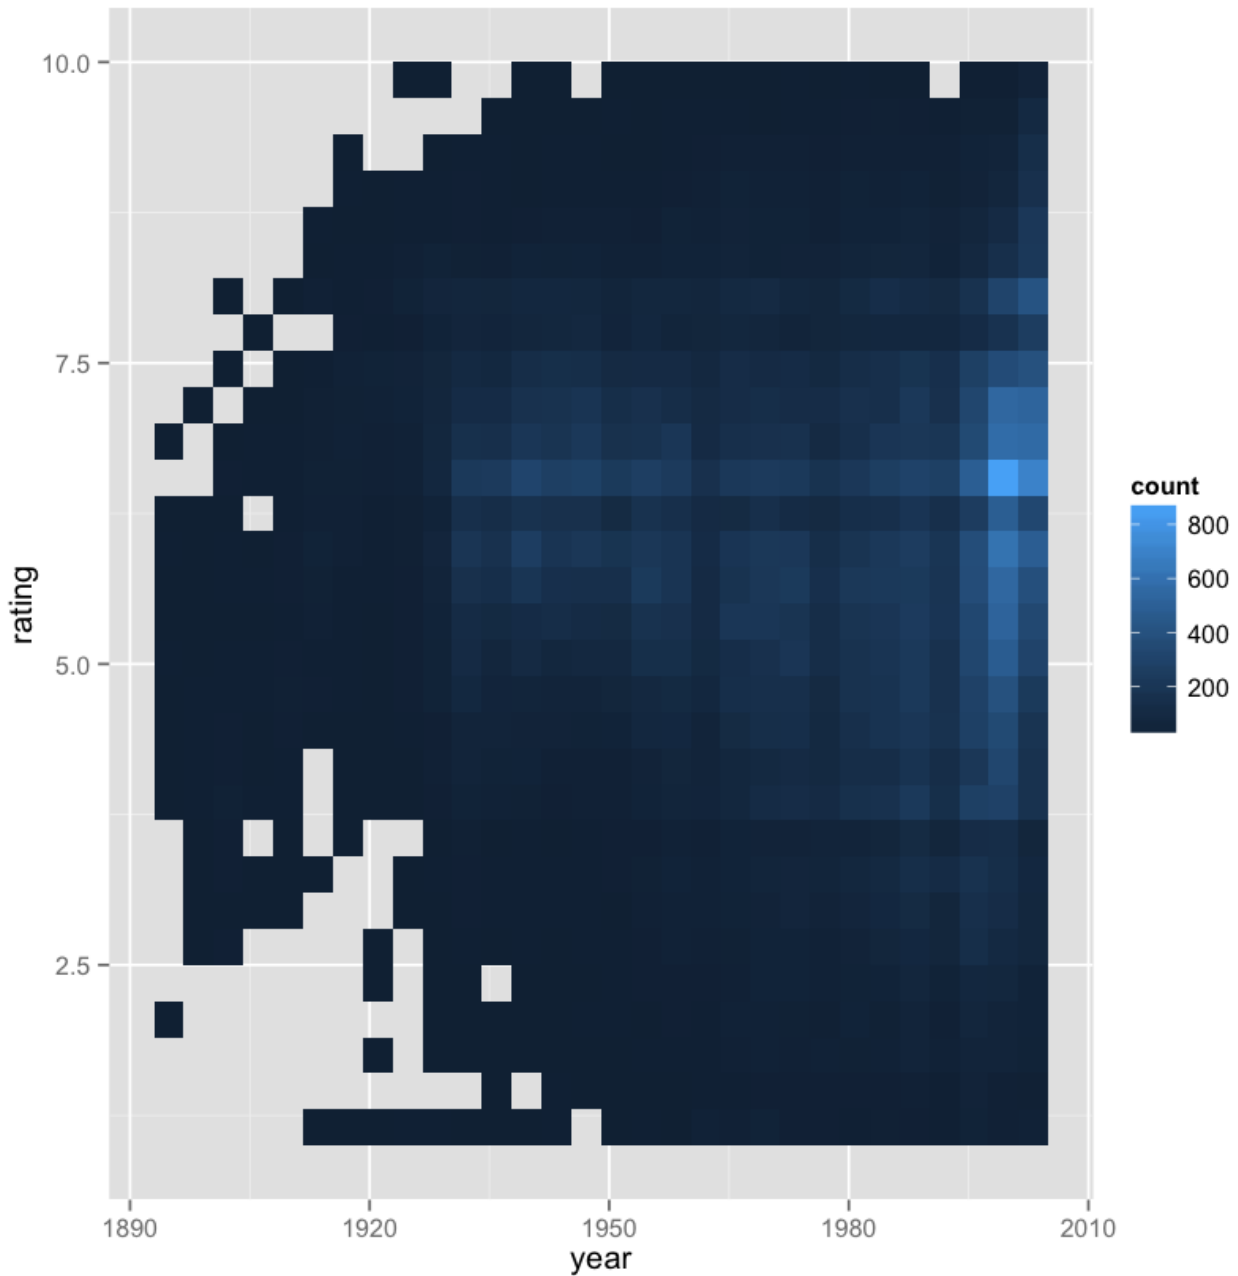

```
In [13]:
```


```
# Control bin sizes  
pl + geom_bin2d(binwidth=c(2,1))
```

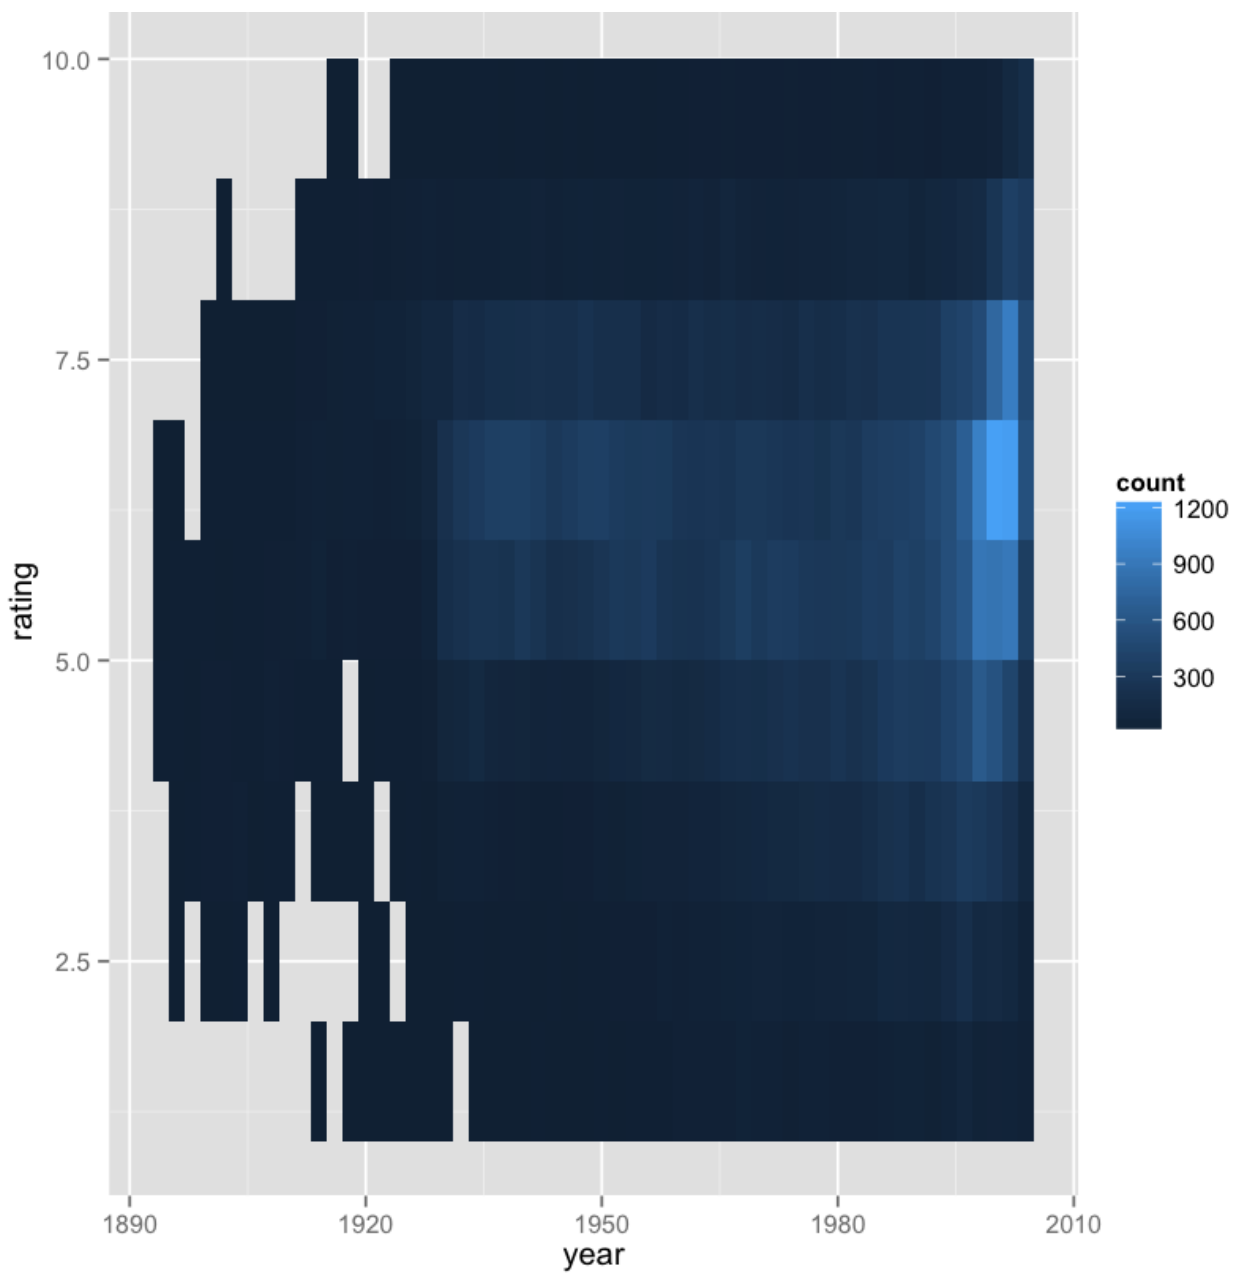

2d Density Plot

In [29]:

```
pl + geom_density2d()
```

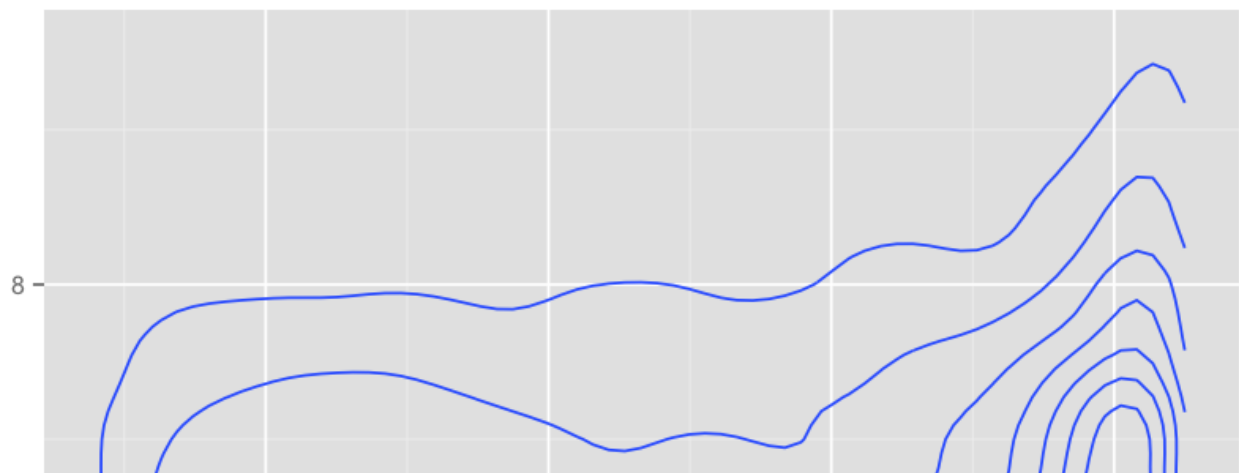





2d Hex Plot

In [30]:


```
pl + geom_hex()
```

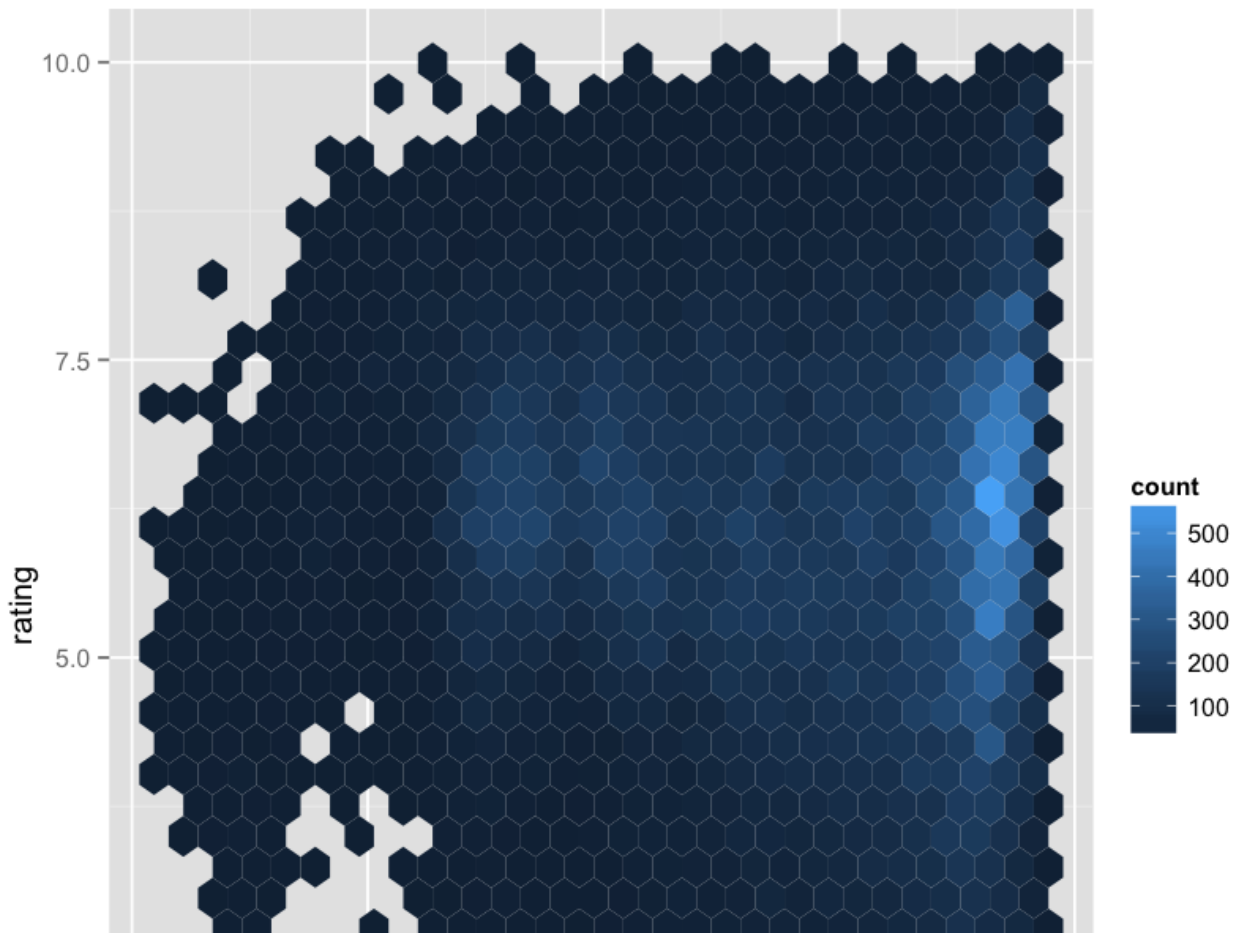

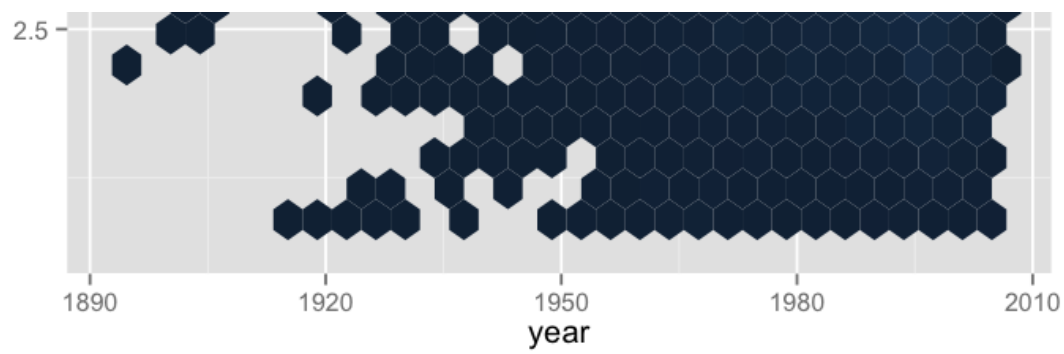

In [32]:

```
pl + geom_hex() + scale_fill_gradient(high='red',low='blue')
```

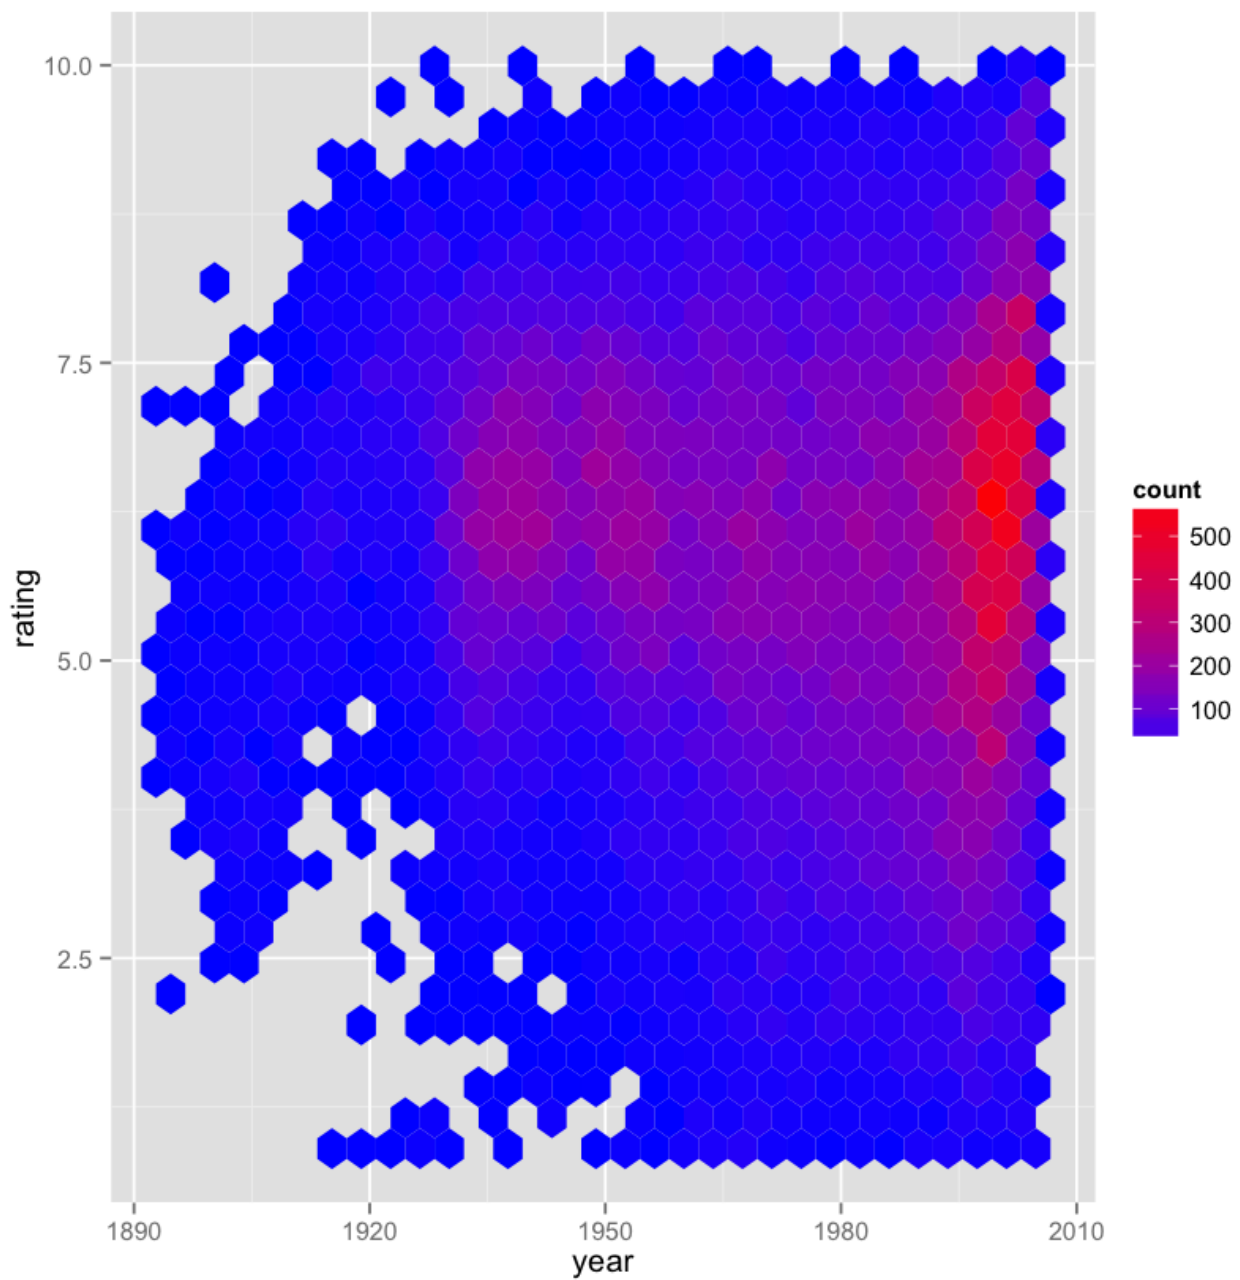

Alright that's it for the basics of plotting 2 variables against each other!