

Lab 2

the solution of the tasks its in the bottom

Ali Jafar Altaweel 2240006456 7MA2

```
In [1]: import cv2
import numpy as np
import matplotlib.pyplot as plt
```

1. Define the functions

```
In [2]: def sample_image(image, factor):
        """
        Downsamples the image by the given factor.
        Args:
            image (numpy array): Original image.
            factor (int): Factor by which to downsample.
        Returns:
            numpy array: Downsampled image.
        """
        height, width = image.shape[:2]
        sampled_image = cv2.resize(image, (width // factor, height // factor),
                                   interpolation=cv2.INTER_NEAREST)
        return sampled_image

def quantize_image(image, levels):
    """
    Reduces the number of grayscale levels in the image.
    Args:
        image (numpy array): Original image.
        levels (int): Number of grayscale levels.
    Returns:
        numpy array: Quantized image.
    """
    quantized_image = np.floor(image / (256 // levels)) * (256 // levels)
    quantized_image = quantized_image.astype(np.uint8)
    return quantized_image

def plot_images(original, sampled, quantized):
    """
    Plots the original, sampled, and quantized images side by side.
    Args:
        original (numpy array): Original image.
        sampled (numpy array): Sampled image.
        quantized (numpy array): Quantized image.
    """
    plt.figure(figsize=(12, 4))
    plt.subplot(1, 3, 1)
    plt.imshow(original, cmap='gray')
    plt.title('Original Image')
    plt.axis('off')
```

```
plt.subplot(1, 3, 2)
plt.imshow(sampled, cmap='gray')
plt.title('Sampled Image')
plt.axis('off')

plt.subplot(1, 3, 3)
plt.imshow(quantized, cmap='gray')
plt.title('Quantized Image')
plt.axis('off')

plt.show()
```


2. Image sampling and quantization

```
In [3]: image_path = './images/lena_gray_256.tif'
sampling_factor = 14
quantization_levels = 9

# Load image in grayscale
original_image = cv2.imread(image_path, cv2.IMREAD_GRAYSCALE)
if original_image is None:
    print(f"Error: Unable to load image at {image_path}")

# Sample and quantize
sampled_image = sample_image(original_image, sampling_factor)
quantized_image = quantize_image(original_image, quantization_levels)

# Plot results
plot_images(original_image, sampled_image, quantized_image)
```

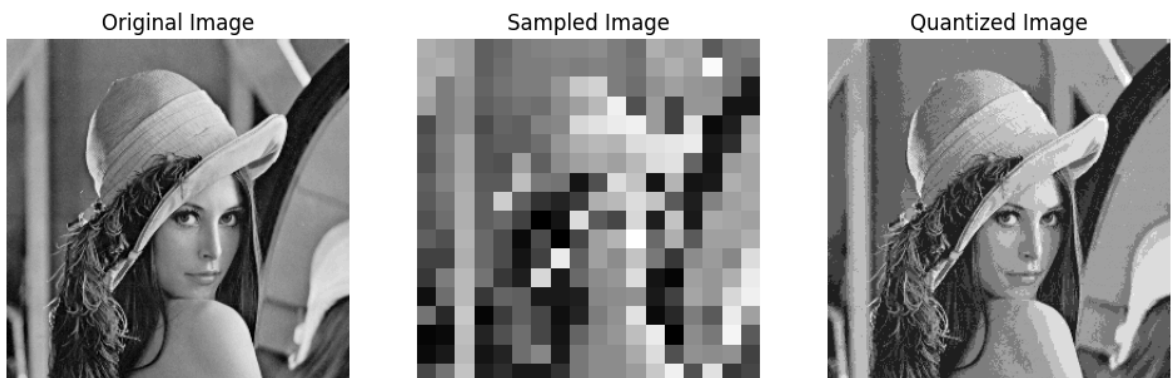

```
In [4]: print("original : shape =", original_image.shape,
            " pixels =", original_image.size,
            " gray levels used =", len(np.unique(original_image)))
print("sampled : shape =", sampled_image.shape,
            " pixels =", sampled_image.size,
            " gray levels used =", len(np.unique(sampled_image)),
            f" -> {original_image.size / sampled_image.size:.1f}x fewer pixels")
print("quantized : shape =", quantized_image.shape,
            " pixels =", quantized_image.size,
            " gray levels used =", len(np.unique(quantized_image)))
print()
print("step between two gray levels (256 // 9) =", 256 // quantization_levels)
print("gray levels kept by the quantizer : ", np.unique(quantized_image))
```

original : shape = (256, 256) pixels = 65536 gray levels used = 210
sampled : shape = (18, 18) pixels = 324 gray levels used = 150 -> 202.3x
fewer pixels

quantized : shape = (256, 256) pixels = 65536 gray levels used = 9

step between two gray levels (256 // 9) = 28

gray levels kept by the quantizer : [0 28 56 84 112 140 168 196 224]

3. Arithmetic operations

```
In [5]: from PIL import Image
img1 = Image.open('./images/lena_gray_256.tif')
img2 = Image.open('./images/cameraman.tif')

resize = (400, 400)
img1 = img1.resize(resize, Image.Resampling.LANCZOS)
img2 = img2.resize(resize, Image.Resampling.LANCZOS)

im1arr = np.asarray(img1)
im2arr = np.asarray(img2)

addition = im1arr + im2arr
resultImage = Image.fromarray(addition)
# resultImage.show()      # <- the manual's line (external viewer)
display(resultImage)      # inline version, so the result is stored in the
                           # notebook
```



```
In [6]: plt.figure(figsize=(12, 4))
for k, (im, t) in enumerate([(im1arr, 'img1 : lena (400x400)'),
                             (im2arr, 'img2 : cameraman (400x400)'),
                             (addition, 'img1 + img2 (uint8, wraps around)')]):
    plt.subplot(1, 3, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=10)
```

```

plt.axis('off')
plt.tight_layout()
plt.show()

print("dtype of the arrays :", im1arr.dtype)
print("im1arr[0,0] =", im1arr[0, 0], " im2arr[0,0] =", im2arr[0, 0],
      " -> real sum =", int(im1arr[0, 0]) + int(im2arr[0, 0]),
      " but addition[0,0] =", addition[0, 0])
print("pixels whose sum exceeds 255 :",
      int((im1arr.astype(np.int16) + im2arr.astype(np.int16) > 255).sum()),
      "/", im1arr.size)

```

img1 : lena (400x400)



img2 : cameraman (400x400)



img1 + img2 (uint8, wraps around)



dtype of the arrays : uint8
im1arr[0,0] = 162 im2arr[0,0] = 156 -> real sum = 318 but addition[0,0] = 62
pixels whose sum exceeds 255 : 86212 / 160000

```

In [7]: # (a) OpenCV saturating addition : everything above 255 is clipped to 255
        addition_sat = cv2.add(im1arr, im2arr)

        # (b) blending (average) : the result stays inside 0..255 by construction
        blend = ((im1arr.astype(np.float64) + im2arr.astype(np.float64)) /
        2).astype(np.uint8)

        plt.figure(figsize=(12, 4))
        for k, (im, t) in enumerate([(addition, 'uint8 wrap-around (manual)'),
                                     (addition_sat, 'cv2.add : saturated at 255'),
                                     (blend, 'average (img1 + img2) / 2')]):

            plt.subplot(1, 3, k + 1)
            plt.imshow(im, cmap='gray', vmin=0, vmax=255)
            plt.title(t, fontsize=10)
            plt.axis('off')
        plt.tight_layout()
        plt.show()

```

uint8 wrap-around (manual)



cv2.add : saturated at 255



average (img1 + img2) / 2




4. Sets and logical operations


```
In [8]: img3 = Image.open('./images/A.png')
display(img3)          # manual: img3.show()
img4 = Image.open('./images/B.png')
display(img4)          # manual: img4.show()

resize = (400, 400)
img3 = img3.resize(resize, Image.Resampling.LANCZOS)
img4 = img4.resize(resize, Image.Resampling.LANCZOS)

im3arr = np.asarray(img3)
im4arr = np.asarray(img4)

union = im4arr | im3arr
resultImage2 = Image.fromarray(union)
# resultImage2.show()    # <- the manual's line (external viewer)
display(resultImage2)
```



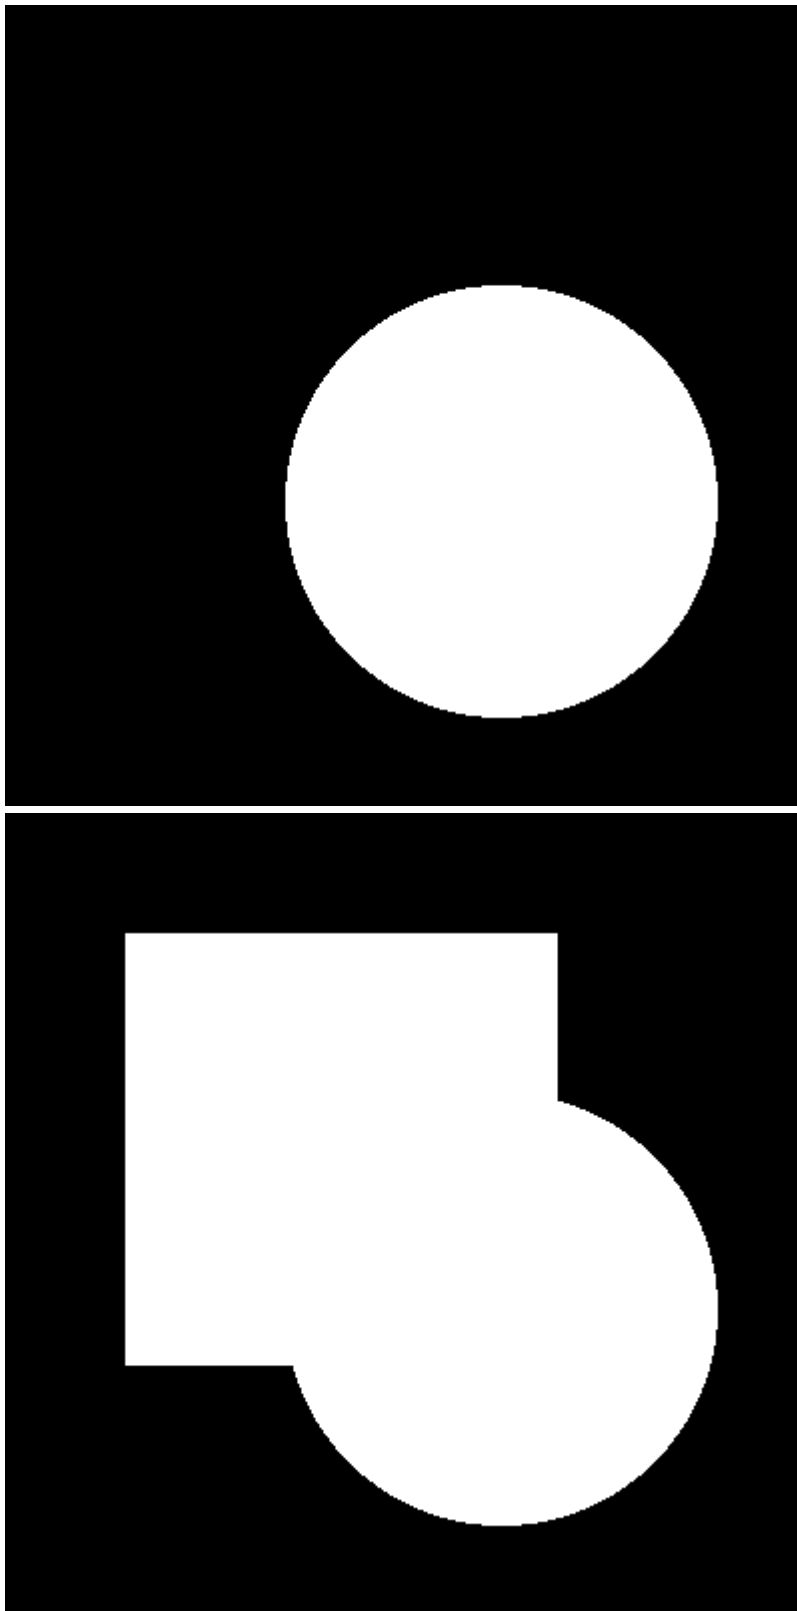


```
In [9]: plt.figure(figsize=(12, 4))
        for k, (im, t) in enumerate([(im3arr, 'A (square)'),
                                      (im4arr, 'B (disc)'),
                                      (union, 'A | B = union')]):

            plt.subplot(1, 3, k + 1)
            plt.imshow(im, cmap='gray', vmin=0, vmax=255)
            plt.title(t, fontsize=10)
            plt.axis('off')
        plt.tight_layout()
        plt.show()

        print("values present in A      :", np.unique(im3arr))
```

```
print("values present in B      :", np.unique(im4arr))
print("values present in A | B :", np.unique(union))
print("white pixels : A =", int((im3arr == 255).sum()),
      " B =", int((im4arr == 255).sum()),
      " A|B =", int((union == 255).sum()))
```

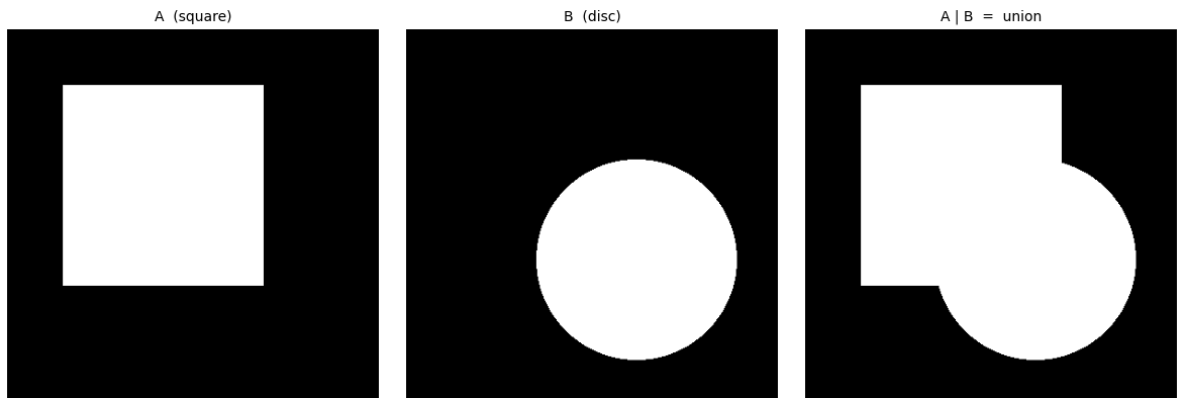

```
values present in A      : [  0 255]
values present in B      : [  0 255]
values present in A | B : [  0 255]
white pixels : A = 46656  B = 36608  A|B = 67348
```

5. Student tasks

Task 1

Change the sampling and quantization parameters and observe the effects.

Task 2

Read two images, convert them into arrays, and perform the following operations on them.

1. Subtract two images and display the result.
2. Add one image with a constant value of 175 and display it.
3. Apply the set difference operation on two Gray-Scale images.
4. Apply the symmetric difference operation on two Gray-Scale images.
5. Apply Intersection operations on two Gray-Scale images.

Task 1 Solution – Changing the sampling and quantization parameters


```
In [10]: # ---- sampling : keep 1 pixel out of every "factor" pixels ----
factors = [1, 2, 4, 8, 16, 32, 64]

plt.figure(figsize=(15, 6))
for k, f in enumerate(factors):
    s = sample_image(original_image, f)
    plt.subplot(2, 4, k + 1)
    plt.imshow(s, cmap='gray', vmin=0, vmax=255)
    plt.title(f'factor = {f}\n{s.shape[0]}x{s.shape[1]} px', fontsize=9)
    plt.axis('off')
plt.suptitle('Task#1a - effect of the SAMPLING factor (spatial resolution)')
```

```
plt.tight_layout()
plt.show()

print(f"{'factor':>7} | {'size':>11} | {'pixels':>7} | {'bytes':>7} | data
reduction")
print('-' * 60)
for f in factors:
    s = sample_image(original_image, f)
    print(f"{'f':>7} | {'s.shape[0]:>4}x{'s.shape[1]:<6}' | {'s.size:>7}' |
{'s.nbytes:>7}' | "
        f" {'original_image.size / s.size:>10.1f}x")
```

Task#1a - effect of the SAMPLING factor (spatial resolution)

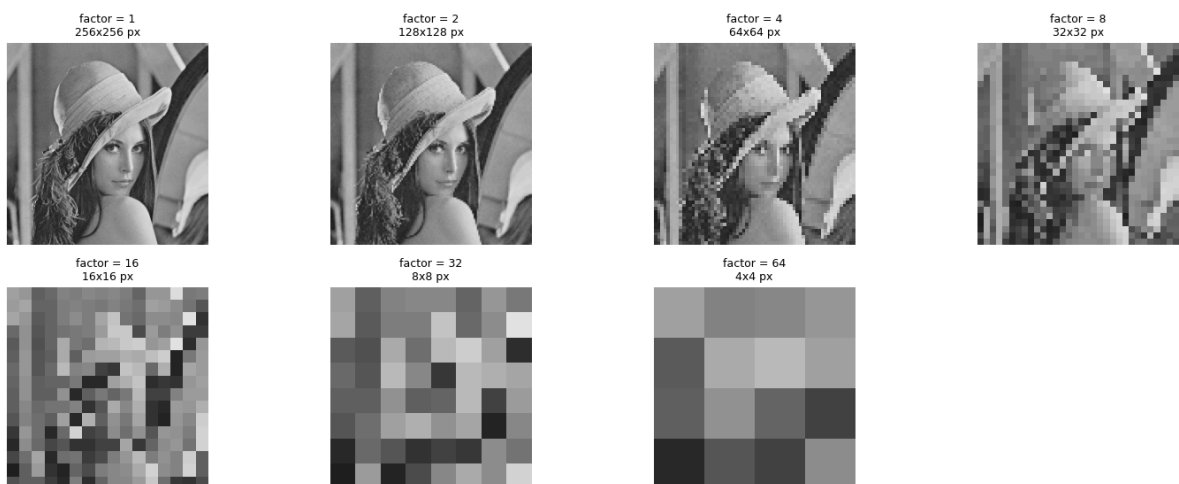

factor	size	pixels	bytes	data reduction
1	256x256	65536	65536	1.0x
2	128x128	16384	16384	4.0x
4	64x64	4096	4096	16.0x
8	32x32	1024	1024	64.0x
16	16x16	256	256	256.0x
32	8x8	64	64	1024.0x
64	4x4	16	16	4096.0x

```
In [11]: # ---- quantization : keep only "levels" gray levels ----
levels_list = [256, 64, 16, 9, 8, 4, 2]

plt.figure(figsize=(15, 6))
for k, L in enumerate(levels_list):
    q = quantize_image(original_image, L)
    plt.subplot(2, 4, k + 1)
    plt.imshow(q, cmap='gray', vmin=0, vmax=255)
    plt.title(f'levels = {L}\n{len(np.unique(q))} real levels', fontsize=9)
    plt.axis('off')
plt.suptitle('Task#1b - effect of the QUANTIZATION levels (gray-level
resolution)')
plt.tight_layout()
plt.show()

print(f"{'levels':>7} | {'step':>5} | {'real levels':>11} |
{'bits/pixel':>10}")
print('-' * 45)
for L in levels_list:
    q = quantize_image(original_image, L)
    real = len(np.unique(q))
    print(f"{'L':>7} | {'256 // L:>5}' | {'real:>11}' |
{'np.ceil(np.log2(real)):>10.0f}")
```

Task#1b - effect of the QUANTIZATION levels (gray-level resolution)



levels	step	real levels	bits/pixel
--------	------	-------------	------------

256	1	210	8
64	4	54	6
16	16	15	4
9	28	9	4
8	32	8	3
4	64	4	2
2	128	2	1

```
In [12]: # ---- the two effects combined ----
plt.figure(figsize=(13, 8))
k = 1
for f in [1, 4, 16]:
    for L in [256, 16, 4, 2]:
        img_sq = quantize_image(sample_image(original_image, f), L)
        plt.subplot(3, 4, k)
        plt.imshow(img_sq, cmap='gray', vmin=0, vmax=255)
        plt.title(f'factor {f} / {L}')
        levels = img_sq.shape[0] * img_sq.shape[1]
        plt.axis('off')
        k += 1
plt.suptitle('Task#1c - sampling (rows) x quantization (columns)')
plt.tight_layout()
plt.show()
```

Task#1c - sampling (rows) x quantization (columns)



Task 2 Solution – Operations on two images

```
In [13]: # Read the two images and convert them into arrays (they are already 400x400)
A = im1arr      # lena
B = im2arr      # cameraman

print("A :", A.shape, A.dtype, " min/max =", A.min(), A.max())
print("B :", B.shape, B.dtype, " min/max =", B.min(), B.max())
```

```
A : (400, 400) uint8  min/max = 6 245
B : (400, 400) uint8  min/max = 0 255
```

1. Subtract two images and display the result

```
In [14]: subtraction = A - B                                # uint8 -> wraps around when the result
is negative
subtraction_sat = cv2.subtract(A, B)                        # saturated : negative results become 0
difference_abs = cv2.absdiff(A, B)                          # absolute difference |A - B|

plt.figure(figsize=(15, 4))
for k, (im, t) in enumerate([(A, 'A (lena)'), (B, 'B (cameraman)'),
                             (subtraction, 'A - B (uint8 wrap-around)'),
                             (subtraction_sat, 'cv2.subtract(A, B)
(saturated)'),
                             (difference_abs, '|A - B| (absdiff)')]):
    plt.subplot(1, 5, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.tight_layout()
plt.show()

# take a pixel where A < B, i.e. where the true difference is negative
r, c = [int(v[0]) for v in np.nonzero(A < B)]
```

```

print(f"pixel [{r},{c}] : A =", A[r, c], " B =", B[r, c],
      " real difference =", int(A[r, c]) - int(B[r, c]))
print("A - B      :", subtraction[r, c], " (wrapped : -x becomes 256-x)")
print("cv2.subtract :", subtraction_sat[r, c], " (saturated to 0)")
print("cv2.absdiff  :", difference_abs[r, c], " (absolute value)")
print("pixels where A < B (i.e. pixels that wrap) :", int((A < B).sum()), "/",
      A.size)

```



```

pixel [0,9] : A = 157   B = 158   real difference = -1
A - B      : 255   (wrapped : -x becomes 256-x)
cv2.subtract : 0   (saturated to 0)
cv2.absdiff  : 1   (absolute value)
pixels where A < B (i.e. pixels that wrap) : 76020 / 160000

```

2. Add one image with a constant value of 175 and display it

```

In [15]: constant = 175

add_const_wrap = A + np.uint8(constant)           # uint8 -> wraps at
256
add_const_sat = cv2.add(A, constant)               # saturated at 255
add_const_clip = np.clip(A.astype(np.int16) + constant, 0,
255).astype(np.uint8)   # same, NumPy

plt.figure(figsize=(15, 4))
for k, (im, t) in enumerate([(A, 'A (original)'),
                             (add_const_wrap, f'A + {constant} (uint8 wrap-
around)'),
                             (add_const_sat, f'cv2.add(A, {constant})
(saturated)'),
                             (add_const_clip, f'np.clip(A + {constant}, 0,
255)')]):
    plt.subplot(1, 4, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.tight_layout()
plt.show()


print("mean of A      :", round(float(A.mean()), 2))
print("mean of A + 175 (wrapped)      :", round(float(add_const_wrap.mean()),
2))
print("mean of A + 175 (saturated)      :", round(float(add_const_sat.mean()),
2))
print("cv2.add == np.clip      :", np.array_equal(add_const_sat,
add_const_clip))
print("pixels that exceed 255 before clipping :",
      int((A.astype(np.int16) + constant > 255).sum()), "/", A.size)

```



```
mean of A : 124.01
mean of A + 175 (wrapped) : 98.62
mean of A + 175 (saturated) : 249.63
cv2.add == np.clip : True
pixels that exceed 255 before clipping : 125243 / 160000
```

```
In [16]: # the histogram explains what "adding a constant" does : it shifts the histogram
         # to the right
plt.figure(figsize=(11, 3.5))
plt.subplot(1, 2, 1)
plt.hist(A.ravel(), bins=256, range=(0, 256))
plt.title('Histogram of A')
plt.xlabel('gray level')
plt.ylabel('pixels')
plt.subplot(1, 2, 2)
plt.hist(add_const_sat.ravel(), bins=256, range=(0, 256))
plt.title('Histogram of A + 175 (saturated)')
plt.xlabel('gray level')
plt.tight_layout()
plt.show()
```

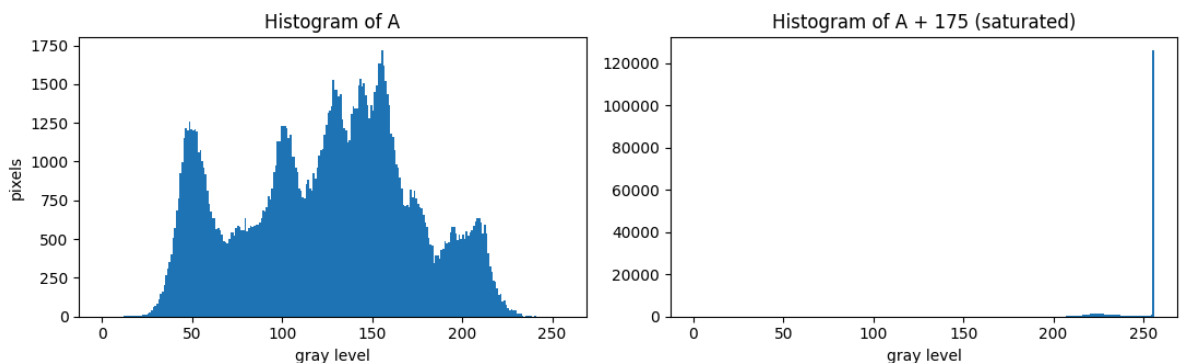

3. Set difference on two gray-scale images

```
In [17]: B_complement = 255 - B                                # complement of B
set_difference_AB = np.minimum(A, B_complement)                # A - B
set_difference_BA = np.minimum(B, 255 - A)                     # B - A

plt.figure(figsize=(15, 4))
for k, (im, t) in enumerate([(A, 'A'), (B, 'B'), (B_complement, 'B^c = 255 - B')],
                              (set_difference_AB, 'A - B = min(A, B^c)'),
                              (set_difference_BA, 'B - A = min(B, A^c)')):
    plt.subplot(1, 5, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.tight_layout()
plt.show()
```

```
print("mean A      :", round(float(A.mean()), 2))
print("mean A - B :", round(float(set_difference_AB.mean()), 2))
print("mean B - A :", round(float(set_difference_BA.mean()), 2))
print("A - B differs from B - A -> the set difference is NOT commutative :",
      not np.array_equal(set_difference_AB, set_difference_BA))
```




```
mean A      : 124.01
mean A - B : 95.37
mean B - A : 89.7
A - B differs from B - A -> the set difference is NOT commutative : True
```

4. Symmetric difference on two gray-scale images

```
In [18]: symmetric_difference = np.maximum(set_difference_AB, set_difference_BA)

plt.figure(figsize=(15, 4))
for k, (im, t) in enumerate([(A, 'A'), (B, 'B'),
                             (set_difference_AB, 'A - B'),
                             (set_difference_BA, 'B - A'),
                             (symmetric_difference, 'A XOR B = (A-B) U (B-
A)')]):
    plt.subplot(1, 5, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.tight_layout()
plt.show()

print("mean of the symmetric difference :",
      round(float(symmetric_difference.mean()), 2))
print("the symmetric difference IS commutative :",
      np.array_equal(symmetric_difference,
                     np.maximum(set_difference_BA, set_difference_AB)))
```

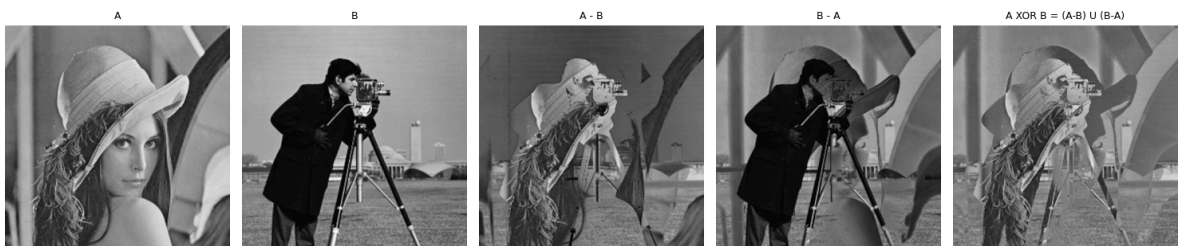

```
mean of the symmetric difference : 120.95
the symmetric difference IS commutative : True
```

5. Intersection on two gray-scale images

```
In [19]: intersection = np.minimum(A, B)
union_gray = np.maximum(A, B)                                # union, for comparison


plt.figure(figsize=(15, 4))
```

```

for k, (im, t) in enumerate([(A, 'A'), (B, 'B'),
                             (intersection, 'A inter B = min(A, B)'),
                             (union_gray, 'A union B = max(A, B)')]):
    plt.subplot(1, 4, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.tight_layout()
plt.show()

print("mean A          :", round(float(A.mean()), 2))
print("mean B          :", round(float(B.mean()), 2))
print("mean intersection :", round(float(intersection.mean()), 2), " (<= both means)")
print("mean union       :", round(float(union_gray.mean()), 2), " (>= both means)")
print("check min(A,B) + max(A,B) == A + B :",
      np.array_equal(intersection.astype(int) + union_gray.astype(int),
                     A.astype(int) + B.astype(int)))

```

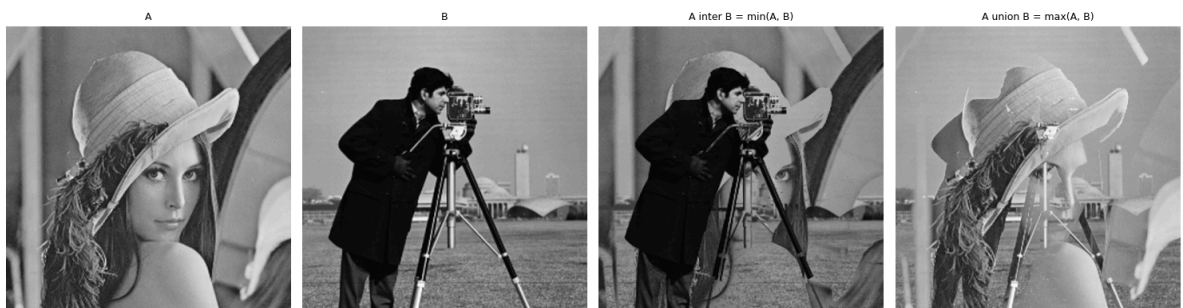

```

mean A          : 124.01
mean B          : 118.33
mean intersection : 92.75 (<= both means)
mean union       : 149.58 (>= both means)
check min(A,B) + max(A,B) == A + B : True

```

```

In [20]: Ab, Bb = im3arr, im4arr           # binary square and disc, 400x400


ops = [('A', Ab),
       ('B', Bb),
       ('union A | B', Ab | Bb),
       ('intersection A & B', Ab & Bb),
       ('difference A & ~B', Ab & ~Bb),
       ('symmetric diff. A ^ B', Ab ^ Bb)]

plt.figure(figsize=(14, 6))
for k, (t, im) in enumerate(ops):
    plt.subplot(2, 3, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=10)
    plt.axis('off')
plt.tight_layout()
plt.show()

# the bitwise operators and the min / max definitions agree on binary images
print("union      : | == np.maximum      :", np.array_equal(Ab | Bb,
                                                             np.maximum(Ab, Bb)))
print("intersection : & == np.minimum      :", np.array_equal(Ab & Bb,
                                                             np.minimum(Ab, Bb)))
print("difference  : A & ~B == min(A, 255-B) :",
      np.array_equal(Ab & ~Bb, np.minimum(Ab, 255 - Bb)))

```

```
print("symmetric : A ^ B == max(A-B, B-A) :",
      np.array_equal(Ab ^ Bb, np.maximum(np.minimum(Ab, 255 - Bb),
                                          np.minimum(Bb, 255 - Ab))))
```

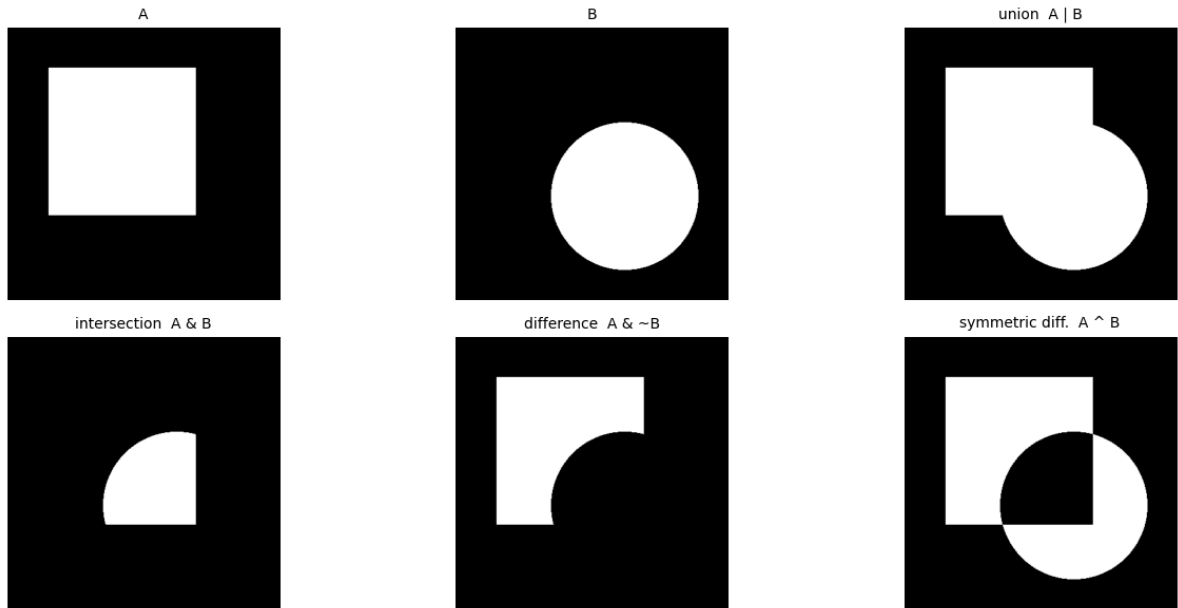

```
union      : | == np.maximum      : True
intersection : & == np.minimum    : True
difference  : A & ~B == min(A, 255-B) : True
symmetric   : A ^ B == max(A-B, B-A) : True
```

```
In [21]: # ---- final summary of every operation of the Lab ----
summary = [
    ('original', original_image), ('sampled (14)', sampled_image),
    ('quantized (9)', quantized_image), ('A + B', addition),
    ('A - B', subtraction_sat), ('A + 175', add_const_sat),
    ('set difference', set_difference_AB), ('symmetric diff.',
symmetric_difference),
    ('intersection', intersection), ('union', union_gray),
    ('binary A | B', union), ('binary A ^ B', Ab ^ Bb),
]


plt.figure(figsize=(14, 9))
for k, (t, im) in enumerate(summary):
    plt.subplot(3, 4, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(t, fontsize=9)
    plt.axis('off')
plt.suptitle('Lab 2 - Digital Image Fundamentals : summary of all the
operations')
plt.tight_layout()
plt.show()
```

Lab 2 - Digital Image Fundamentals : summary of all the operations

original



sampled (14)



quantized (9)



$A + B$



$A - B$



$A + 175$



set difference



symmetric diff.




intersection



union



binary $A \mid B$



binary $A \wedge B$

