

Lab 4

the solution of the tasks its in the bottom

Ali Jafar Altaweel 2240006456 7MA2

```
In [1]: import cv2
import numpy as np
import matplotlib.pyplot as plt
```

1. Thresholding

```
In [2]: import cv2
# Load the image in grayscale
# img = cv2.imread('../images/Parrot.png', cv2.IMREAD_GRAYSCALE) # <- manual
# path
img = cv2.imread('../images/Parrot.png', cv2.IMREAD_GRAYSCALE) # image kept
# inside the Lab4 folder
# Set the threshold values
threshold_values = [0, 50, 100, 150, 200]
# Apply thresholding with different threshold values
plt.figure(figsize=(16, 7))
for k, threshold_value in enumerate(threshold_values):
    ret, thresh = cv2.threshold(img, threshold_value, 255, cv2.THRESH_BINARY)
    # cv2.imshow(f'Thresholded Image ({threshold_value})', thresh)
    plt.subplot(2, 3, k + 2)
    plt.imshow(thresh, cmap='gray', vmin=0, vmax=255)
    plt.title(f'Thresholded Image ({threshold_value})')
    plt.axis('off')
# Display the original image
# cv2.imshow('Original Image', img)
# cv2.waitKey(0)
# cv2.destroyAllWindows()
plt.subplot(2, 3, 1)
plt.imshow(img, cmap='gray', vmin=0, vmax=255)
plt.title('Original Image')
plt.axis('off')
plt.tight_layout()
plt.show()
```




```
In [3]: # how much of the image becomes foreground (white) for each threshold
print(f"{'threshold':>9} | {'white pixels':>12} | {'white %':>7}")
print('-' * 36)
for t in threshold_values:
    _, th = cv2.threshold(img, t, 255, cv2.THRESH_BINARY)
    print(f"{'t':>9} | {'int((th == 255).sum()):>12} | {'100 * (th == 255).mean():>6.1f}%"")

# Otsu picks the threshold automatically from the histogram
otsu_t, otsu = cv2.threshold(img, 0, 255, cv2.THRESH_BINARY + cv2.THRESH_OTSU)
print("\nOtsu threshold :", otsu_t)

plt.figure(figsize=(14, 4))
plt.subplot(1, 2, 1)
plt.hist(img.ravel(), bins=256, range=(0, 256))
for t in threshold_values:
    plt.axvline(t, color='gray', ls='--', lw=1)
plt.axvline(otsu_t, color='r', lw=2, label=f'Otsu = {otsu_t:.0f}')
plt.title('histogram of the parrot and the thresholds')
plt.xlabel('gray level')
plt.legend()
plt.subplot(1, 2, 2)
plt.imshow(otsu, cmap='gray')
plt.title(f'Otsu thresholding ({otsu_t:.0f})')
plt.axis('off')
plt.tight_layout()
plt.show()
```

threshold	white pixels	white %
0	154019	100.0%
50	152614	99.1%
100	96844	62.9%
150	29315	19.0%
200	4679	3.0%

Otsu threshold : 128.0

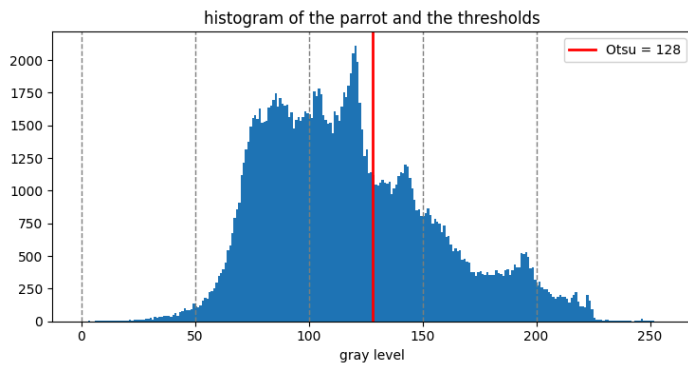

2. Histogram processing

```
In [4]: import matplotlib
import matplotlib.pyplot as plt
import numpy as np
from skimage import data, img_as_float
from skimage import exposure
```

```
In [5]: img = data.moon()
print("moon :", img.shape, img.dtype, " min/max =", img.min(), img.max())
```

moon : (512, 512) uint8 min/max = 0 255



```
In [6]: # Contrast stretching
p2, p98 = np.percentile(img, (2, 98))
img_rescale = exposure.rescale_intensity(img, in_range=(p2, p98))
print("2nd percentile =", p2, " 98th percentile =", p98)
print("after stretching : min/max =", img_rescale.min(), img_rescale.max())
```

2nd percentile = 78.0 98th percentile = 129.0
after stretching : min/max = 0 255


```
In [7]: fig = plt.figure(figsize=(10, 7))
fig.add_subplot(2, 1, 1)
plt.imshow(img, cmap = 'gray')
plt.axis('off')
plt.title('Original image')
fig.add_subplot(2, 1, 2)
plt.hist(img.flat, bins = 256, range=(0, 255))
plt.xlabel('gray level values')
plt.ylabel('Number of pixels')
plt.show()

fig = plt.figure(figsize=(10, 7))
fig.add_subplot(2, 1, 1)
plt.imshow(img_rescale, cmap = 'gray')
plt.axis('off')
plt.title('Contrast stretch')
fig.add_subplot(2, 1, 2)
plt.hist(img_rescale.flat, bins = 256, range=(0, 255))
plt.xlabel('gray level values')
plt.ylabel('Number of pixels')
plt.show()
```

Original image

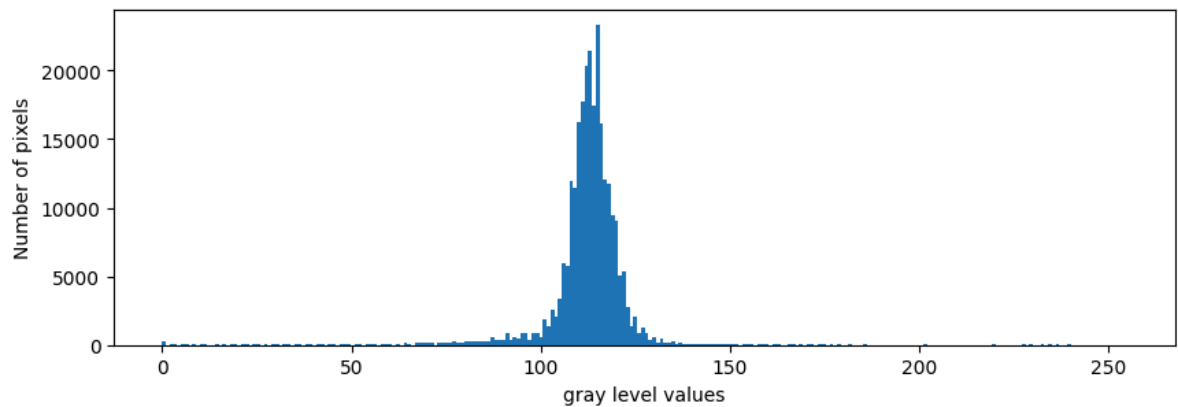

Contrast stretch

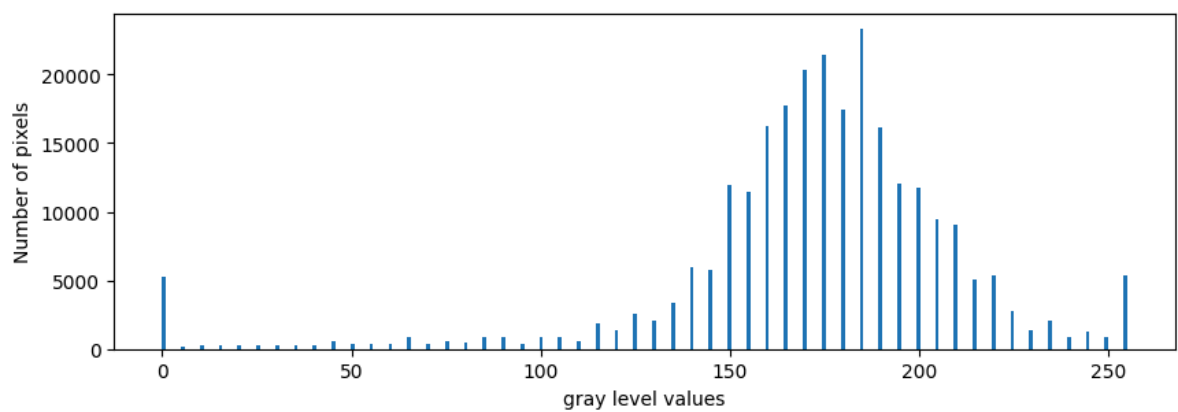

```
In [8]: def show_with_hist(image, title, bins_range=(0, 255)):
        """Image on the left, histogram + cumulative histogram on the right."""
        fig, (a1, a2) = plt.subplots(1, 2, figsize=(14, 4.5))
        a1.imshow(image, cmap='gray', vmin=bins_range[0], vmax=bins_range[1])
        a1.set_title(title)
        a1.axis('off')
        a2.hist(image.ravel(), bins=256, range=bins_range)
        a2.set_xlabel('gray level values')
        a2.set_ylabel('Number of pixels')
```

```

cdf, centers = exposure.cumulative_distribution(image, 256)
a3 = a2.twinx()
a3.plot(centers, cdf, 'r')
a3.set_ylabel('cumulative fraction', color='r')
a3.set_ylim(0, 1.02)
a2.set_title(f'histogram (used range {image.min()} - {image.max()})')
plt.tight_layout()
plt.show()

```

3. Student tasks

Task 1

Using the same "moon image" Rescale intensity values to include all the intensities that fall within the 3rd and 80th percentiles, and plot the histogram

Task 2

Using the same "moon image" and the `exposure.equalize_hist` function, display the image and the histogram of the image after flattening the histogram.

Task 3

Use the rocket (as reference) and Chelsea images (from `skimage.data`) and implement histogram matching

Task 1 Solution – Contrast stretching between the 3rd and 80th percentiles

```

In [9]: p3, p80 = np.percentile(img, (3, 80))
img_rescale_3_80 = exposure.rescale_intensity(img, in_range=(p3, p80))

print("3rd percentile =", p3, " 80th percentile =", p80)
print("pixels below p3 (become 0)  :", int((img < p3).sum()), f"({100 * (img < p3).mean():.1f}%)")
print("pixels above p80 (become 255) :", int((img > p80).sum()), f"({100 * (img > p80).mean():.1f}%)")





show_with_hist(img, 'Original image')
show_with_hist(img_rescale_3_80, 'Contrast stretch (3rd - 80th percentiles)')

```




```

3rd percentile = 87.0   80th percentile = 118.0
pixels below p3 (become 0)  : 7464 (2.8%)
pixels above p80 (become 255) : 43340 (16.5%)

```

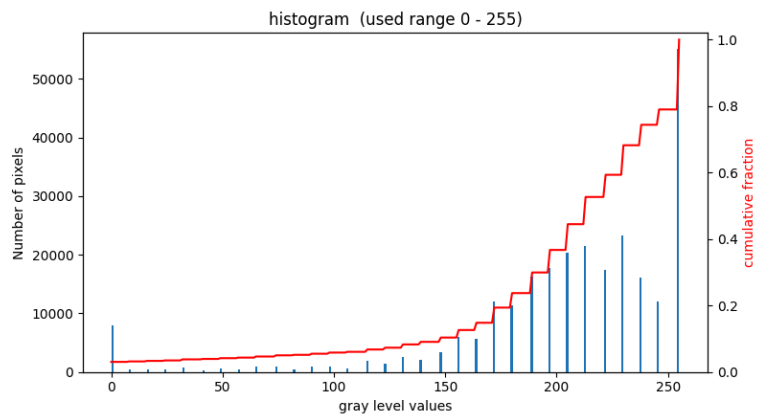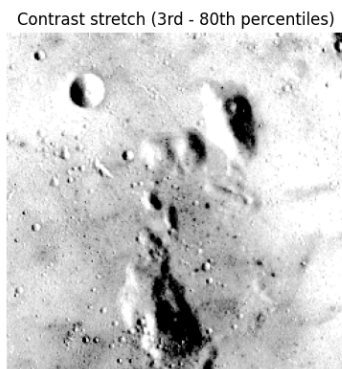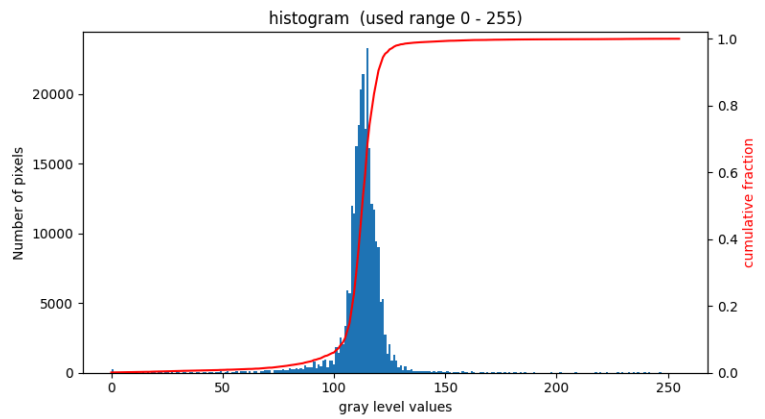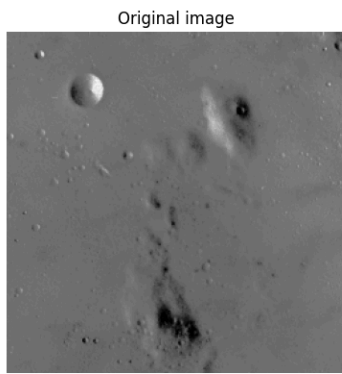

```
In [10]: # comparison with the 2 - 98 stretch of the manual
plt.figure(figsize=(15, 4.5))
for k, (im, t) in enumerate([(img, 'original'), (img_rescale, 'stretch 2% - 98%'),
                             (img_rescale_3_80, 'stretch 3% - 80%')]):
    plt.subplot(1, 3, k + 1)
    plt.imshow(im, cmap='gray', vmin=0, vmax=255)
    plt.title(f'{t}\nmean = {im.mean():.1f} std = {im.std():.1f}')
    plt.axis('off')
plt.tight_layout()
plt.show()
```

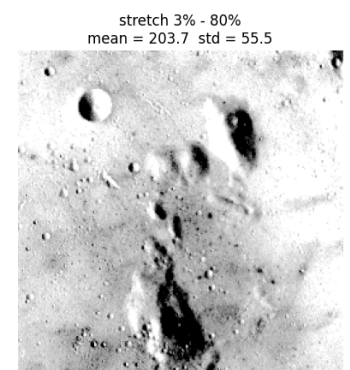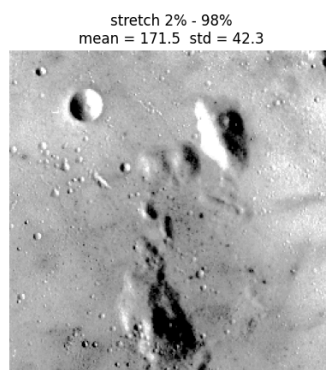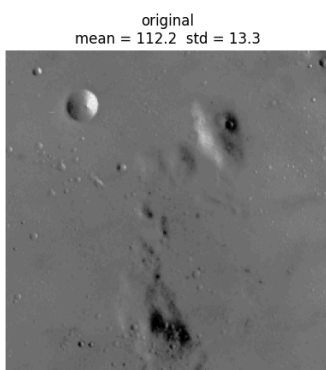

Explanation: the 80th percentile is much lower than the 98th, so the input range that gets stretched over 0-255 is narrower. The mid tones gain more contrast, but the brightest 20% of the pixels are all clipped to 255, which shows up as a tall spike at the right end of the histogram and as burned-out white areas on the moon surface.




Task 2 Solution – Histogram equalization

```
In [11]: img_eq = exposure.equalize_hist(img) # returns floats in [0, 1]
print("equalize_hist output :", img_eq.dtype, " min/max =", round(img_eq.min(),
4), round(img_eq.max(), 4))

# convert back to 0..255 so the histogram can be compared with the original one
from skimage import img_as_ubyte
img_eq_u8 = img_as_ubyte(img_eq)

show_with_hist(img, 'Original image')
show_with_hist(img_eq_u8, 'Histogram equalization')
```


equalize_hist output : float64 min/max = 0.0009 1.0

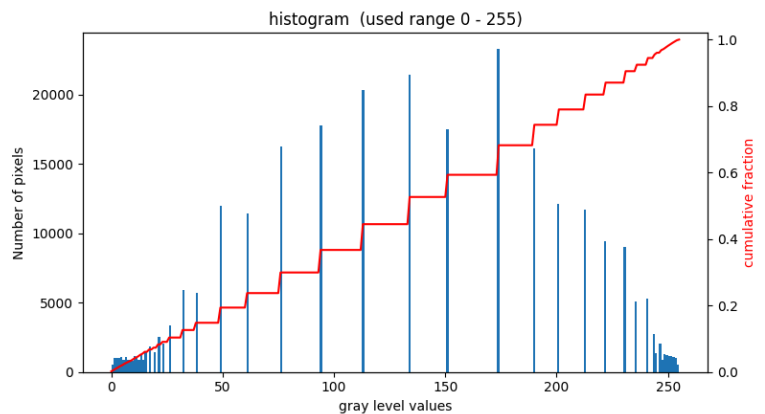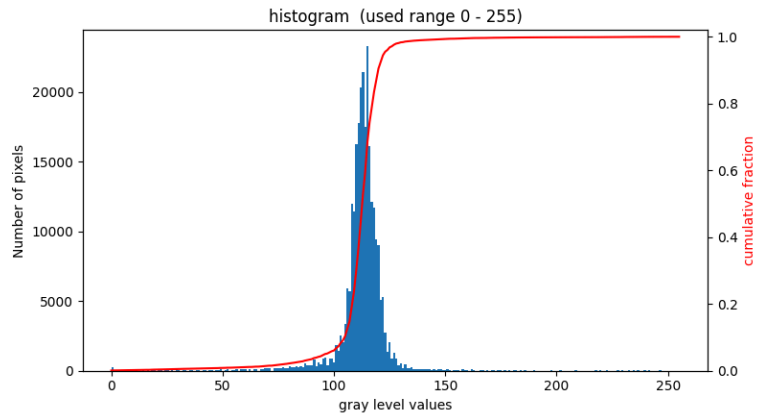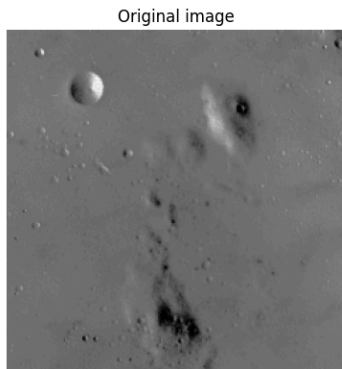

```
In [12]: # the cumulative histogram of the equalized image is (almost) a straight line
cdf_o, c_o = exposure.cumulative_distribution(img, 256)
cdf_e, c_e = exposure.cumulative_distribution(img_eq_u8, 256)

plt.figure(figsize=(7, 5))
plt.plot(c_o, cdf_o, label='original')
plt.plot(c_e, cdf_e, label='equalized')
plt.plot([0, 255], [0, 1], 'k--', lw=1, label='ideal uniform')
plt.xlabel('gray level')
plt.ylabel('cumulative fraction of pixels')
plt.title('Cumulative distribution before / after equalization')
plt.legend()
plt.grid(alpha=0.3)
plt.show()

print("std original :", round(float(img.std()), 1))
print("std equalized :", round(float(img_eq_u8.std()), 1))
print("max distance of the equalized CDF from the ideal line :",
      round(float(np.abs(cdf_e - c_e / 255).max()), 3))
```

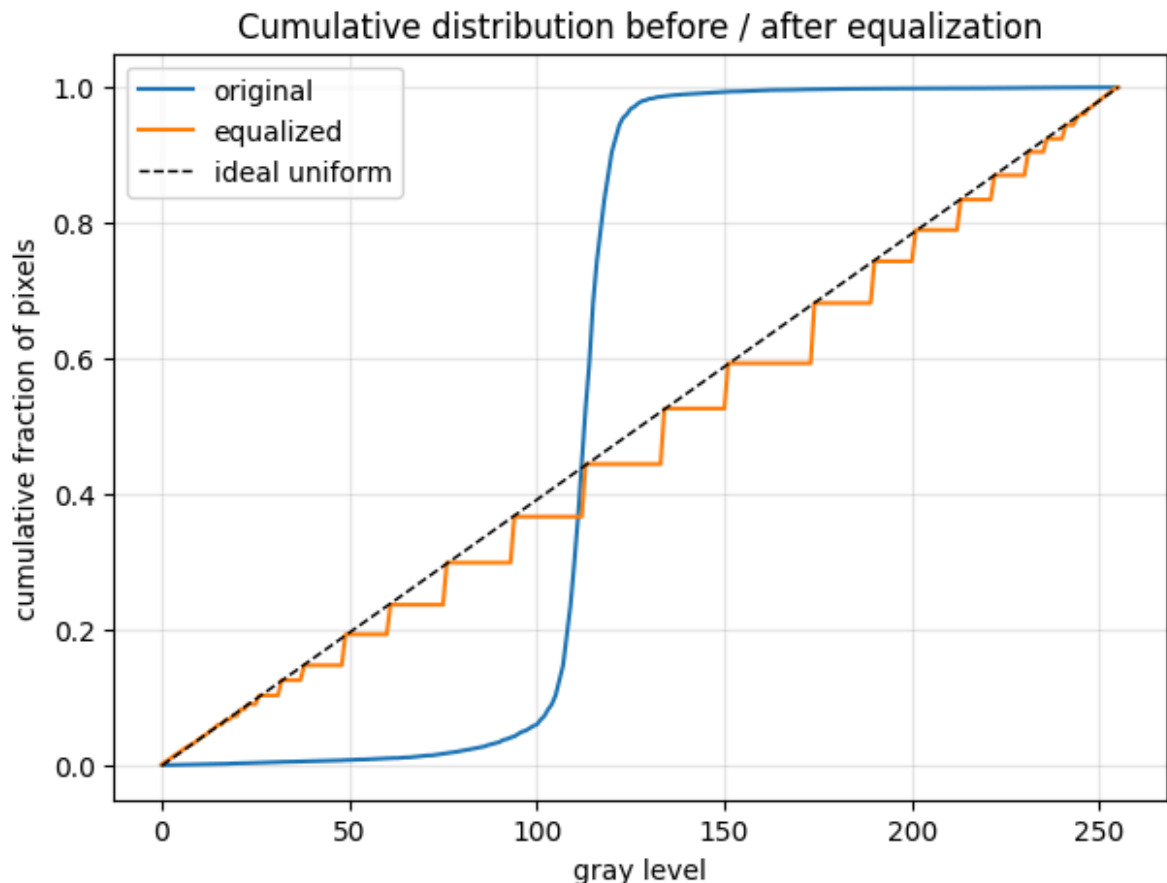

std original : 13.3

std equalized : 73.9

max distance of the equalized CDF from the ideal line : 0.085

Explanation: `equalize_hist` maps every gray level through the cumulative distribution of the image, so the output levels are spread over the whole range and the cumulative histogram becomes close to a straight line. The histogram is not perfectly flat, because pixels that share one input level must share one output level, so equalization can only move the bars apart, never split them.

Task 3 Solution – Histogram matching


```
In [13]: from skimage.exposure import match_histograms

reference = data.rocket()
image = data.chelsea()
print("reference (rocket) :", reference.shape, reference.dtype)
print("image (chelsea)    :", image.shape, image.dtype)


matched = match_histograms(image, reference, channel_axis=-1)

fig, axes = plt.subplots(1, 3, figsize=(16, 4.5))
for ax, (im, t) in zip(axes, [(image, 'Source (chelsea)'), (reference,
'Reference (rocket)'),
                             (matched, 'Matched')]):
    ax.imshow(im.astype(np.uint8))
    ax.set_title(t)
    ax.axis('off')
plt.tight_layout()
plt.show()
```

```
reference (rocket) : (427, 640, 3) uint8
image (chelsea)    : (300, 451, 3) uint8
```

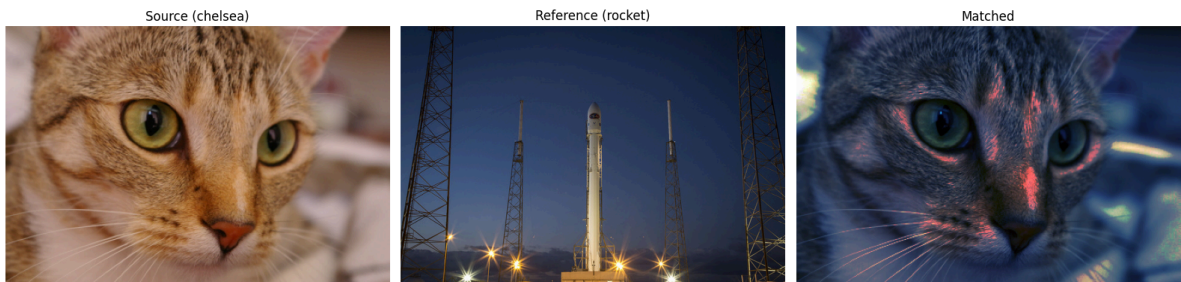

```
In [14]: # histograms and cumulative histograms of every channel
fig, axes = plt.subplots(3, 3, figsize=(14, 9))
colors = ['red', 'green', 'blue']
for col, (im, t) in enumerate([(image, 'Source'), (reference, 'Reference'),
                               (matched, 'Matched')]):
    axes[0, col].set_title(t)
    for ch, color in enumerate(colors):
        hist, bins = exposure.histogram(im[..., ch].astype(np.uint8),
        source_range='dtype')
        axes[ch, col].plot(bins, hist / hist.max(), color=color)
        cdf, cbins = exposure.cumulative_distribution(im[...,
        ch].astype(np.uint8))
        axes[ch, col].plot(cbins, cdf, 'k')
        axes[ch, 0].set_ylabel(color)
plt.tight_layout()
plt.show()
```

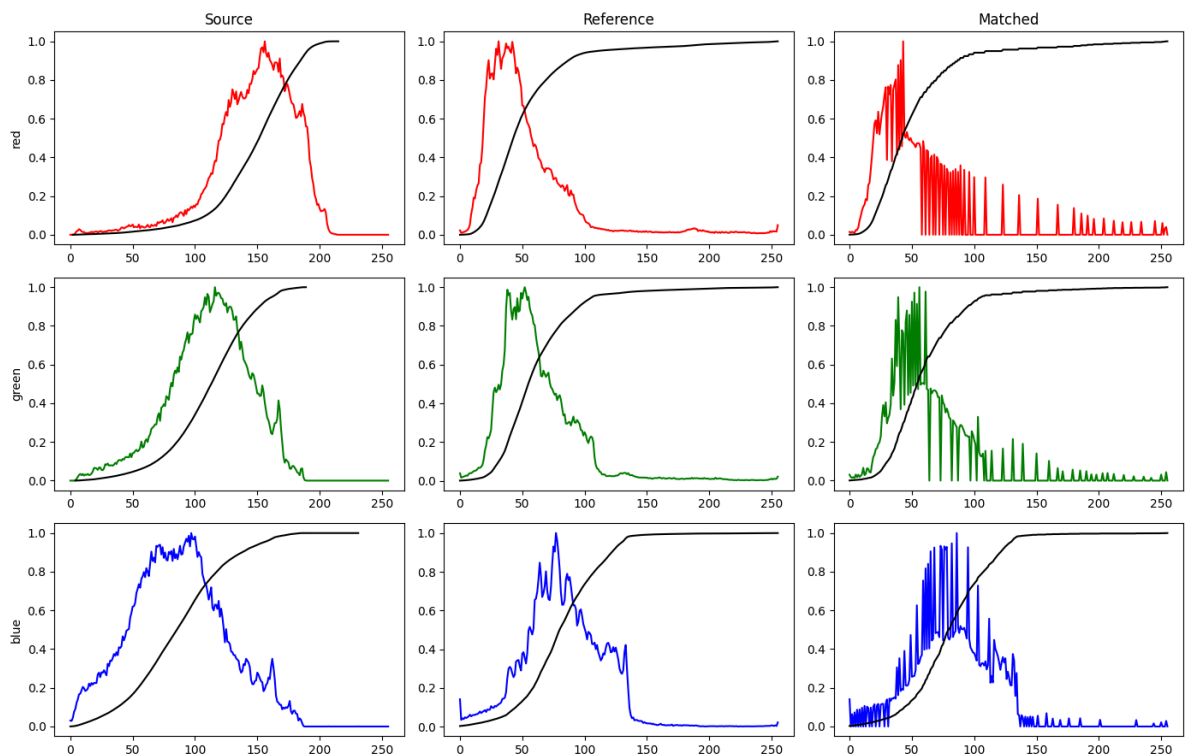

```
In [15]: # numeric check : after matching, the per-channel statistics follow the
reference
print(f"{'channel':>7} | {'source mean':>11} | {'reference mean':>14} |
{'matched mean':>12} | {'max CDF gap':>11}")
print('-' * 70)
for ch, name in enumerate(['R', 'G', 'B']):
    cdf_r, b_r = exposure.cumulative_distribution(reference[..., ch])
    cdf_m, b_m = exposure.cumulative_distribution(matched[...,
```

```

ch].astype(np.uint8))
gap = np.abs(np.interp(np.arange(256), b_r, cdf_r) -
np.interp(np.arange(256), b_m, cdf_m)).max()
print(f"{name:>7} | {image[... , ch].mean():>11.1f} | {reference[... ,
ch].mean():>14.1f} | "
      f"{matched[... , ch].mean():>12.1f} | {gap:>11.3f}")

```

channel	source mean	reference mean	matched mean	max CDF gap
R	147.7	52.3	52.1	0.019
G	111.4	61.3	60.8	0.017
B	86.8	82.3	81.7	0.015

Explanation: histogram matching maps each channel of the source through its own CDF and then through the inverse CDF of the reference, so the matched cat keeps its shapes and edges but takes the color distribution of the rocket image. The cumulative histograms of the matched image line up with those of the reference, while the two images still have different sizes, which the method does not care about since it only uses the histograms.