# IBM Cloud Pak for Business Automation Demos and Labs 2024

Author Automation with IBM watsonx Orchestrate Automation Builder.

V 1.0

Bu Feng Hou - houbf@cn.ibm.com Juergen Lukas - jlukas@de.ibm.com Paul Pacholski - pacholsk@ca.ibm.coom Zhong Tao Gao - gaozt@cn.ibm.com

## Table of Contents

# CP4BA Demos and Labs 2024

3.8.3 Move the Manager Approval task to the Approval required Path	50
3.9 Add and configure the Send Campaign Email Branch	51
3.9.1 Add the Send Campaign Email Branch	51
3.9.2 Configure the Send Campaign Email Branch	52
3.9.3 Move the Send Campaign Email task to Send Campaign Email F	<sup>9</sup> ath53
3.10 Test the Workflow Automation	53
3.10.1 Test 1 – Approval Required Case	53
3.10.2 Test 2 – Auto Approved Case	56
3.10.3 Examine Completed Instances in the Process Admin Console	58
3.10.4 Verify the Upsell Offer Email	60
4 Exercise: Expose Workflow as a wxO Skill	62
4.1 Create an Operation	
4.2 Create a New Version of the Automation	64
4.3 Publish the Automation as a wxO Skill	66
4.4 Enhance and Publish the Automation wxO Skill	67
4.5 Add the Automation Skill to Personal Skills	69
5 Exercise: Test the Workflow Skill in the Chat	71
5.1 Test the Auto Approval Case	71
5.2 Test the Approval Required Case	

# 1 Introduction

#### 1.1 IBM watsonx Orchestrate Automations

#### 1.1.1 Automations

A watsonx Orchestrate (wxO) automation is a collection of components (Decisions and Workflows) that fulfill a business purpose. You create automations in the wxO Automation Builder and publish them to the wxO *Skills and apps* page as a skill. Users can then invoke the skill by entering a phrase (that matches the added skill) in the wxO chat bar. Automations created in the automation builder can also be reused in other automations.

#### 1.1.2 Automation Builder

You create your automation and its logic in the wxO Automation Builder. Automation contains one or more automation components. An automation component fulfills a business purpose and contains business logic. The following are the types of automation components currently available:

#### 1. Decision

An automation component type that captures and automates repeatable intelligent business decisions. For example, a business decision to authorize a loan based on established rules and policies. A decision can be implemented with decision models, rule flow models, and prediction models.

Decision models offer a straightforward and low-code approach to modeling business decisions through a structured, visual representation of a decision.

Ruleflow models offer a more advanced way to define decisions.

Prediction models offer insights from historical data to help you make more informed decisions.

#### 2. Workflow

An automation component type that models a business process. For example, a process to approve an upsell offer. A workflow is composed of a sequence of activities and tasks. Tasks include generated user interfaces required to complete tasks by users participating in a workflow. Activities can be other workflows, decisions, automations, or skills you can combine to create powerful automations.

Automation Builder provides all the capabilities needed to develop (no-code editors), test (unit test playback environment), version, and share automations with other authors. It also includes the capability to create operations to publish automations and expose them as skills.

#### 1.2 Lab Scenario and Lab Overview

## 1.2.1 Client Onboarding Use Case

Focus Corp is a business services provider that offers various services for different industries. Focus Corp uses a fully automated client onboarding solution to provide onboarding services to its clients. Watch this video to see how client onboarding requests are completed: <a href="https://ibm.box.com/v/CLIENT-ONBORDING-USE-CASE">https://ibm.box.com/v/CLIENT-ONBORDING-USE-CASE</a>

## 1.2.2 Upsell Solution

The company's quarterly services upsell initiative is critical to demand generation; however, it is increasingly difficult to manage and execute. Quarterly sales campaigns are time-consuming and ineffective. It takes over ten weeks to complete quarterly promotions. Due to time limitations, the sales team cannot include all eligible customers. Managers are looking for a faster and more effective way of launching upsell offers.

Two labs cover the Upsell Solution:

1. Building the User Facing Solution

In this lab, you will build an IBM watsonx Orchestrate solution that re-imagines the quarterly services upsell initiative. You will be reusing the existing IT assets to author an intelligent, AI-driven solution that pulls customer data from the system of records and creates targeted emails.

2. Building the Sales Campaign Approval Workflow, which is a component of the user facing solution

In this lab, you will use the Automation Builder to create an Automation used in the user facing solution as a skill. This Automation automates the Sales Campaign Approval Process. It is composed of two components:

- A decision that considers the customer scoreboarding information and helps to decide if the upsell offer is to be auto-approved, auto-rejected, or has to be looked at by a sales manager.
- A workflow that orchestrates the Scoreboard skill, the approval decision component, the Manager Approval User Task, and the Send Campaign Email skill.

## 1.2.3 Sales Campaign Approval Workflow Architecture

#### 1.2.3.1 Automation

In this lab, you will build the Sales Campaign Approval Workflow, a component of the user-facing solution.

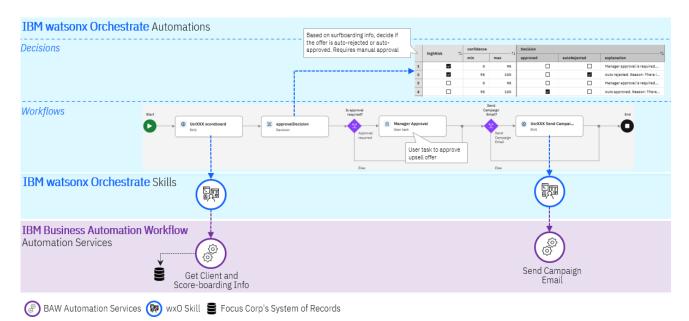


Figure 1. Sales Campaign Approval Workflow Architecture

Let's examine the Activities in this Workflow:



The Start node. The input parameters of the Workflow are client name and upsell services list.



The first Activity is a wxO skill that uses existing IT automation to retrieve customer data and the related scoreboarding information.



The second Activity is implemented in Automation Builder as Decision automation. It uses the scoreboarding information retrieved in the previous skill to determine if the sales campaign will be auto-approved, auto-rejected, or has to be looked at by a sales manager.

Y Branch

The third Activity is a Branch that decides based on the output of the second Activity if a sales manager's approval is required. If it is, the fourth Activity is called. Otherwise, it is skipped.

User task

The fourth Activity is a User Task which provides the user interface with the information (client data, scoreboarding information, list of upsell services) for use by the sales manager, who can change the upsell services and approve or reject the sales campaign.

Y Branch

The fifth Activity is a Branch that checks if the sales campaign has been approved (auto-approved by the Decision or manually approved by the Sales Manager). If approved, it will move to the path executing the sixth Activity. Otherwise, it will be skipped.

Skill

The sixth Activity is a wxO skill that uses an existing IT automation. The automation uses the upsell information and customer details to compose a customized upsell offer email message and sends it out to the customer.



The Workflow output includes the client's name, a list of upsell services (possibly adjusted by the sales manager), the approval decision, and the email status (sent or not sent).

#### 1.2.3.2 Skills

The wxO skills you will use in this lab are implemented by two Service Flows authored using Business Automation Workflow: scoreboard and sendCampaignEmailUAB. These Service flows are exposed as operations (scoreboard and sendCampaignEmailUAB) in a single OpenAPI file.

See the figures below showing the services in Business Automation Workflow:

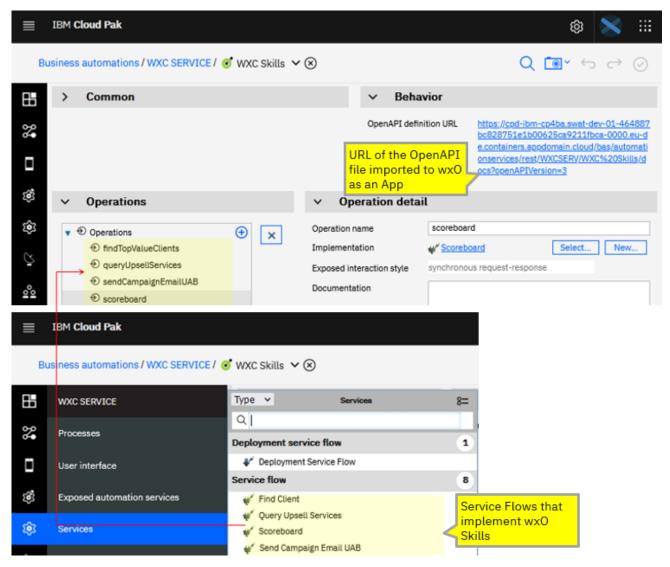


Figure 2. Service Flows that implement wxO skills

#### 1.2.4 Lab Overview

In this lab, you will perform the following steps to author, test, and publish the Sales Campaign Automation:

- 1. Import and publish Skills to the Skills Catalog
- 2. Create the Automation and the Workflow
- 3. Add and configure the wxO Scoreboard Skill
- 4. Create and author the Decision
- 5. Add and configure the Decision
- 6. Configure the Manager Approval User Task
- 7. Add and configure the wxO Send Campaign Email Skill
- 8. Add and configure the Approval Branch and the Send Campaign Email Branch
- 9. Unit test the Workflow Automation
- 10. Expose Workflow as a wxO Skill (create a version, create an operation, and publish it as a Skill)
- 11. Test the Workflow Skill in the Chat

Approximate Duration of this lab: 2-3 hours.

# 1.3 Lab Setup Instructions

## 1.3.1 Systems, Lab Files, and Credentials

#### 1.3.1.1 Tech Jam Event

If you are performing this lab as part of an IBM event, access the document that lists the available systems, URLs, and login instructions.

For this lab, you will need to access:

- IBM watsonx Orchestrate
- Local Mail Client

#### 1.3.1.2 Jam in a Box Event


You can also do this lab as part of <u>Jam-in-a-Box for Business Automation</u> (starting with V23.0.1). In this case, access to an IBM watsonx Orchestrate instance is required as a prerequisite. You need a Builder or Administrator role to do all parts of the lab. If you are an IBMer or IBM Business Partner, you can look at the wxO content on Seismic to learn how to access such a wxO instance. Otherwise, you can contact your IBM representative to get access. When doing the lab as part of Jam-in-a-Box, please also carefully read the section Lab Considerations in the Jam-in-a-Box Readme.md page to guide you on the necessary access.

For this lab, you will need to access:

- IBM watsonx Orchestrate
- IBM Cloudpak Dashboard
- Local Mail Client

# 1.3.2 Customize the OpenAPI File

Download the watsonx Orchestrate Client Onboarding Skills - UAB.yaml file from the Lab Data folder to your computer.



The OpenAPI file watsonx Orchestrate Client Onboarding Skills - UAB.yaml includes definitions of the REST call to invoke the two REST Services, which expose Service Flows authored in IBM Business Automation Workflow. You will use this file to create Skills in wxO.

Since we are using a shared wxO environment, you need to perform the steps below to ensure your Skills have unique names and to define the connection to the Server where the Service Flows are running.

- \_1. Use a text editor of your choice to **Open** the *watsonx Orchestrate Client Onboarding Skills UAB.yaml* file (see <u>1.3.1 Systems</u>, <u>Lab Files</u>, <u>and Credentials</u>)
- \_2. Replace all six occurrences of **UsrXXX** with **the user id you received** when registering for your CP4BA Credentials., e.g., Usr002 (use Replace all in your editor of choice to ensure you don't miss one or multiple of the six occurrences).
- Double-check that you replaced all six occurrences of UsrXXX.

```
openapi: 3.0.1
info:
   title: UsrXXX Client Onboarding App UAB
   version: tipSnapshot
   description: UsrXXX Client Onboarding Skills
   x-ibm-application-id: CP4BAUARUSrXXX
   x-ibm-application-name: UsrXXX Client Onboarding App UAB
   x-ibm-application-icon: >-
```

You must change the server URL if you are doing this lab as part of Jam-in-a-Box for Business Automation. You can skip this step if you are doing the lab as part of a Tech Jam.

Replace the placeholder <IBM Cloudpak Dashboard URL> with the URL of the IBM Cloudpak Dashboard (see 1.4.1 Systems, Lab Files, and Credentials).


\_3. Save and close watsonx Orchestrate Client Onboarding Skills - UAB.yaml file.

## 1.3.3 Login to wxO

\_1. In your Web Browser, open **IBM wastsonx Orchestrate** (see <u>1.3.1 Systems, Lab Files, and Credentials</u>)

\_2. Enter your IBM ID and click **Continue to log in**.

# Log in to IBM Watson Orchestrate




# 2 Exercise: Import and Publish Skills


Because you have a Builder role, you can create skills from OpenAPI specifications and add them to the Skill Catalog for reuse in wxO.

# 2.1 Import Skills

\_1. Click the **Hamburger** menu in the top-left corner.




\_2. Click **Skills and apps.** 




\_3. In the top-right, click Add skills.




\_4. From Choose the source, click From a file.




\_5. From your file system, **drag and drop** watsonx Orchestrate Client Onboarding Skills - UAB.yaml file to the upload box or click the blue link to upload the file.

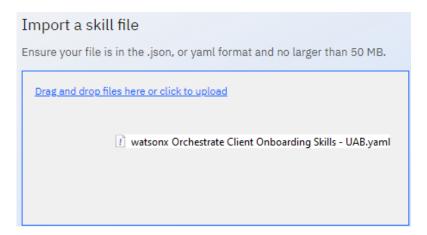


Make sure you see "...good to go!" message.



\_6. In the bottom-right corner, click the **Next** button.



\_7. **Select** all the skills you imported and click the **Add** button.

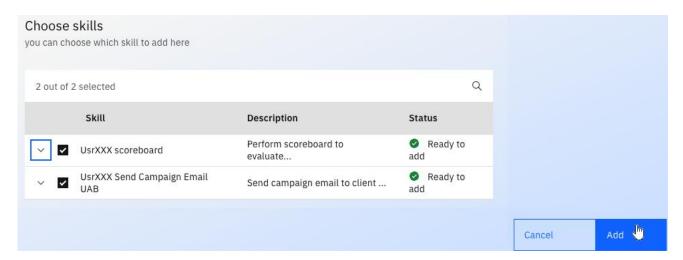

You will now see a confirmation message.




\_8. Click the Skills tab.

## Skills and apps

Add new skills, train them to be more effective, and publish




\_9. To see your skill, in the *search bar*, enter **UsrXXX** (where XXX are the digits of your CP4BA Credentials user id) and hit the **Enter key**.



#### Notes:

- Your published skills will be prefixed with UsrXXX (where XXX is the user ID you used when you replaced the value in the yaml file). Also, note that the status of your skills is set to "Ready to publish."
- If you cannot find your skill using a partial name, try entering the full skill name, i.e., UsrXXX scoreboard.




\_10. Click **X** to close the message.




# 2.2 Publish Skills to the Skills Catalog

The skills in the "Ready to publish" state can be published to make them available in the Skills Catalog. Before publishing, we can make some changes and enhancements. Let's explore Skill enhancement and publishing.

\_1. On the row with UsrXXX scoreboard, select the vertical ellipses (3 dots), then click Enhance this Skill.

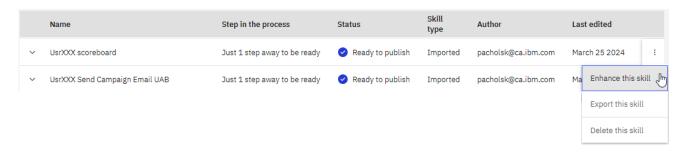


\_2. Examine the tabs that we can use to enhance a skill before publishing.

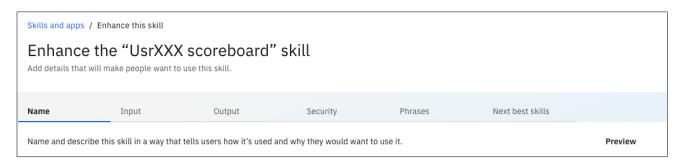

Tab	Enhancements
Name	Name and describe this skill in a way that tells users how it's used and why they would want to use it. The preview shows how a skill tile will appear in the Skill Set and the Skills Catalog.
Input	You can define how the requested inputs, inherited from the OpenAPI, are displayed to the skill users. The inputs are typically requested in a form format. For example, you can define the language that is used in the form that asks for user input on each parameter.
Output	You can configure how to display the output of the tasks to the users. Results are typically shown in table format. By default, the table headers are each output field name. You can rename any header, reorder the results, or hide fields that users are not interested in.
Security	You can review the authentication type and the server, which are inherited from the OpenAPI. For more information, see <u>Configuring the API security scheme</u> .
Phrases	Phrases are the texts you can use to find and use a skill in the chat bar. You can manually enter or generate new phrases based on IBM Granite Models (experimental).
Next best skill	The next best skills feature helps you find skills to complete tasks that naturally follow the current work. You can add up to five skills as the next best skills.

\_3. Without making any changes, in the bottom-right corner, click the **Publish** button.



\_4. Rerun the Search to see only your skills.



Note that the state has changed to Published.

	Name	Step in the process	Status
~	UsrXXX scoreboard	Ready to use	Published

\_5. Click **X** to close the message.



\_6. Click the **Skills** tab.

## Skills and apps

Add new skills, train them to be more effective, and publish



\_7. Repeat the above five steps (1-5) to publish UsrXXX Send Campaign Email UAB skill.




\_8. Verify that all the skills you have imported are published.

	Name	Step in the process	Status
~	UsrXXX Send Campaign Email UAB	Ready to use	Published
~	UsrXXX scoreboard	Ready to use	Published

# 2.3 Add Skills from the Skill Catalog to your Personal Skills


In the previous steps (in the Builder role), you imported skills using the *watsonx Orchestrate Client Onboarding Skills - UAB.yaml* and added them to the Skills Catalog as an App.




You will now (in the User role) add skills to your Personal Skills from the Skills Catalog. Recall that you have added new skills to the Skills Catalog in the previous part of the lab in the "Builder" role.

Note: You must add the skills you just added to your personal skills to make them available to Workflow.


\_1. Click the **Hamburger** menu in the top-left corner.



#### \_2. Click Chat.



\_3. Ensure **Personal skills** (NOT team skills) are selected in the top drop-down.




\_4. Click Add skills from the catalog.




You should now see all the Apps available in the Skills Catalog.


\_5. Locate the **UsrXXX Client Onboarding...** (remember that XXX are the last three digits of your CP4BA Credentials user id) by using the search and **click on the tile** to open.




\_6. Locate the *UsrXXX scoreboard* skill and click the **Add skill +** button.



You should now see the Added check mark for your skill.




- \_7. Repeat the above step for the other skill.
- 8. Make sure all skills have the Added check mark.



- \_9. Click **X** on all Add skill information messages (if any).
- \_10. In the top-right corner, click **Connect app** to specify the security credentials for your skills.



\_11. For username and password, enter your Credentials (see <u>1.3.1 Systems, Lab Files, and Credentials</u>).

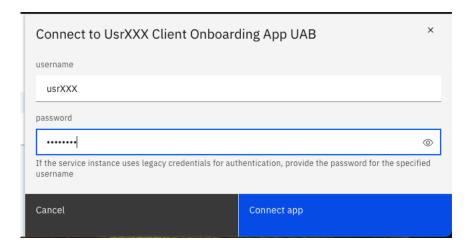

You should now see Connected in the top-right corner.




Note that wxO does not verify the login. If you enter an incorrect password or credentials, no error message will be displayed in this step.


# 2.4 Test the Skill Connectivity

Since wxO does not verify the login when connecting your app, you can test the connectivity using the Chat.


\_1. Click the **Hamburger** menu in the top-left corner.




#### \_2. Click Chat.




\_3. Enter **perform scoreboard to evaluate the risk** in the Chat entry field and click **Send.** 

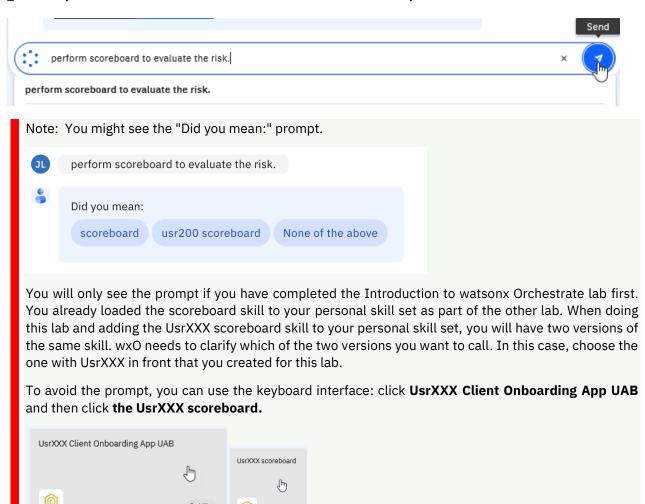

\_4. For ClientName enter Automation Elite and then click Apply.

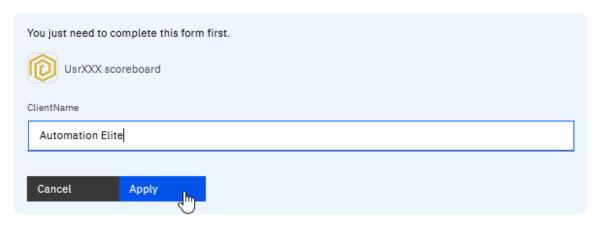

If the connection credentials are correct, you should see a response as shown below:

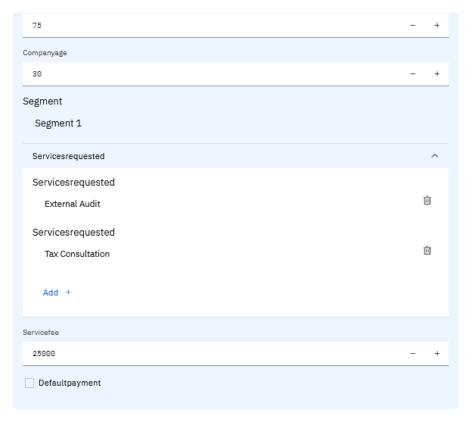

If you do not see the response above the first time, try again several times.


If you do not see the response consistently, return to Skill Catalog and enter the correct credentials.

# 3 Exercise: Author the Sales Campaign Automation


# 3.1 Create the Automation and the Workflow

## 3.1.1 Create the Automation


\_1. Click the **Hamburger** menu in the top-left corner.




\_2. Click Automations.



\_3. On the top-right, click Create automation +.



\_4. For *Name*, enter **UsrXXXSalesCampaignAutomation** (remember to replace XXX with your CP4BA Credentials user id) and click **Create**.

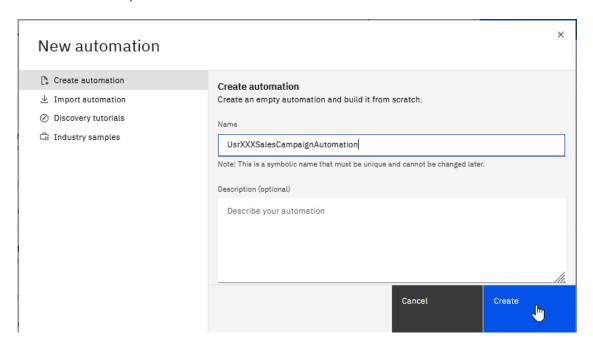


#### 3.1.2 Create the Workflow

\_1. Click the Workflow tile.




\_2. For *Name*, enter **UsrXXXSalesCampaignApprovalWorkflow** and click **Create**.

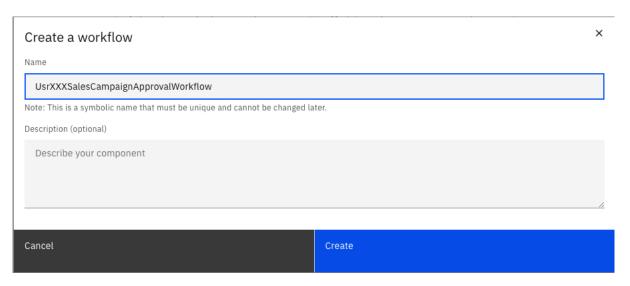

# 3.2 Testing your Workflow as you develop

You should now see the Workflow Editor with a single User Task activity.

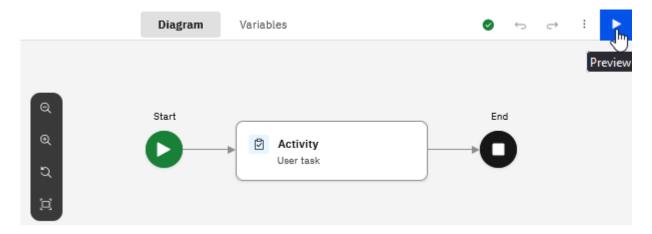


Note the Blue Preview button on the top right corner. You can use this button to test your Workflow anytime you make a significant change and want to test your work. When you preview your Workflow, a test instance is created, where you can ensure that the Workflow runs correctly.

In section <u>3.10 Test the Workflow Automation</u>, you will find a detailed description of the steps required to test your Workflow.


# 3.3 Add and configure the wxO Scoreboard Skill

#### 3.3.1 Add Scoreboard Skill


\_1. Position the mouse cursor between Start and Activity and click the + icon.




#### \_2. Click Skill.




Note, If you see Choose a skill set to view the skill catalog window, select the **Personal skills** tile, and click **Go to Skill catalog.**Choose a skill set to view the skill catalog




\_3. Click the **UsrXXX Client Onboarding App UAB** tile (remember that XXX is your CP4BA Credentials user id)




\_4. Select the UsrXXX scoreboard skill.




## \_5. Click Save.

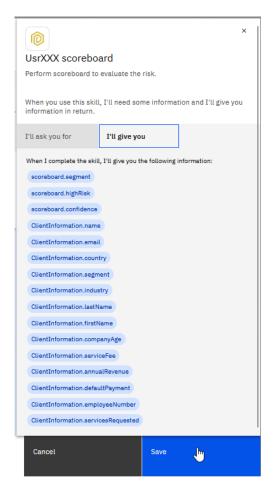


You should now see the skill added to the Workflow.



\_6. Click the **Data** tab.




Note: When you added the scoreboard skill, wxO automatically created two data types based on the information about the skill for you: ClientInformationType and scoreboardType. These data types are part of the scoreboard's skill interface. The following steps will create new workflow variables using these data types.

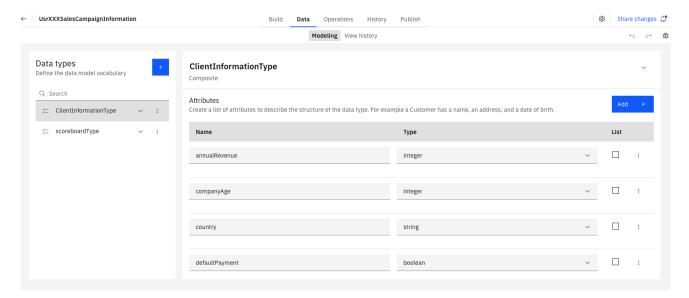

## 3.3.2 Create the Workflow Variables.


Diagram

\_1. Click the **Build** tab

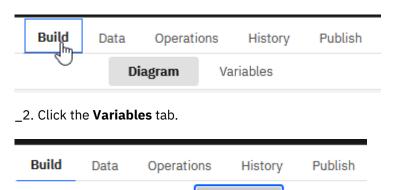

\_3. Click the **Create variable +** button **five times** to create five new workflow variables.


Variables



\_4. Configure each variable according to the table below

Name	Data Type	List	Input	Output
clientName	String	Single value	Yes	Yes
scoreboard	scoreboardType	Single value	No	No
clientInformation	clientInformationType	Single value	No	No
upsellServices	String	Multiple values	Yes	Yes
sendEmailStatus	String	Single value	No	Yes

The Variables should look as shown below.

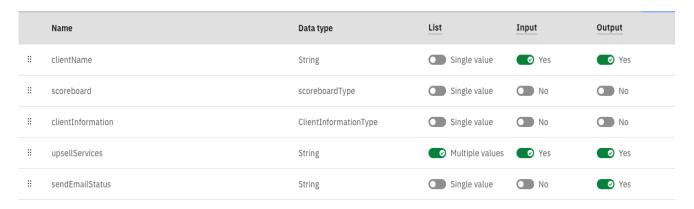

# 3.3.3 Define Input and Output Data mapping for the Scoreboard skill


\_1. Click the **Diagram** tab.




\_2. Click UsrXXX scoreboard skill.




\_3. Click **Define data mapping** button on the right side.




\_4. In the input mapping section, click on **Select a variable** (Input mapping).



\_5. Select the clientName variable



The Input mapping should look as shown below.




Note: You can also click on Insert suggestions in the top right corner and see which mapping wxO suggests to make your life easier!


\_6. Click the Output mapping tab.




\_7. For the scoreboard variable, click **Select a variable.** 




\_8. Select the **scoreboard** variable.



\_9. For ClientInformation click the **Select a variable** button and then select **clientInformation**.

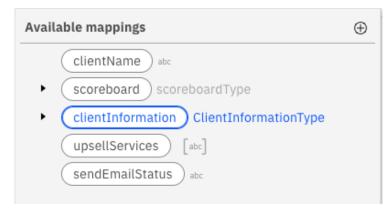

The Output mapping should look as shown below.

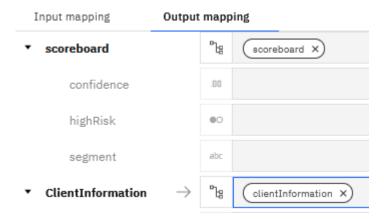

\_10. Click the **OK** button to save your variable mapping.




## 3.4 Create and Author the Decision

#### 3.4.1 Create the Decision

\_1. In the bottom left corner, click Create component +.




\_2. Click the **Decision** tile.



\_3. Click the **Decision model** tile.




\_4. For *Name*, enter **approvalDecision** and click **Create**.

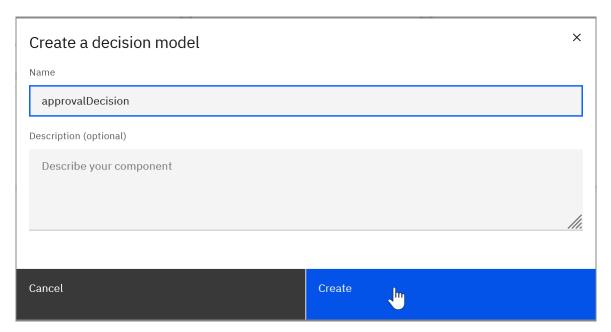


# 3.4.2 Create Data Types for the Decision


\_1. Click the **Data** tab.




\_2. In the upper left area click the + button to create a new Data Type.



\_3. Select Composite.



\_4. Change the Composite from new type to ApprovalDecisionType.

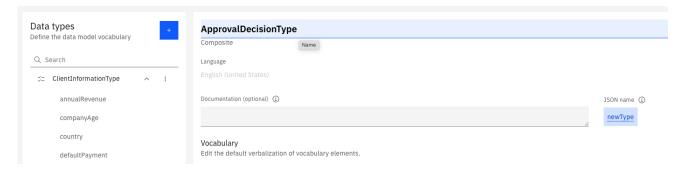


\_5. In the lower right area, click the **Add +** button **three times** to add three Attributes.



\_6. Configure each Attribute according to the table below:

Name	Туре	List
approved	boolean	No
explanation	string	No
autoRejected	boolean	No


The Attributes should look as shown below:

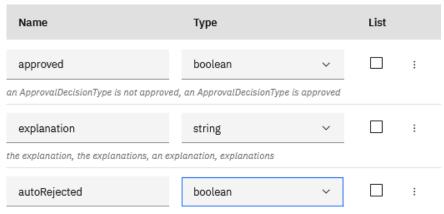


an ApprovalDecisionType is autoRejected, an ApprovalDecisionType is not autoRejected

# 3.4.3 Define the Output types


\_1. Click the **Build** tab.



\_2. Click the Input node.



\_3. In the right section select **scoreboardType** for the *Output type*.

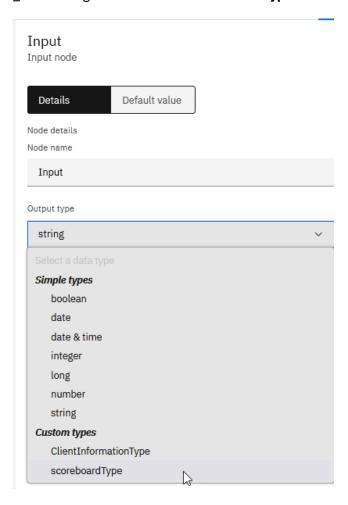


The Output type should look as shown below.



\_4. Click the **Decision** node in the diagram.



\_5. For Output type, select ApprovalDecisionType.

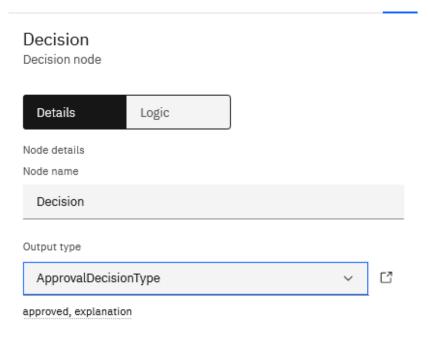


## 3.4.4 Create the Decision Table

\_1. In the right section, click the **Logic** button.




\_2. Click the + button and select Decision table.

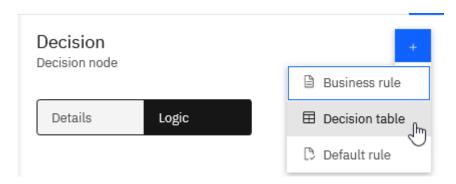


\_3. Enter the *Create decision table* parameters **exactly in the order specified** below and as shown in the screenshot:

The exact order is essential because it determines how the decision table is built. We need the "High Risk" column before the "Confidence" column for grouping purposes.

- 1) Name: approvalDecisionTable
- 2) Input, select: 'Input' is highRisk
- 3) Input, select: the confidence of 'input'
- 4) Click Create

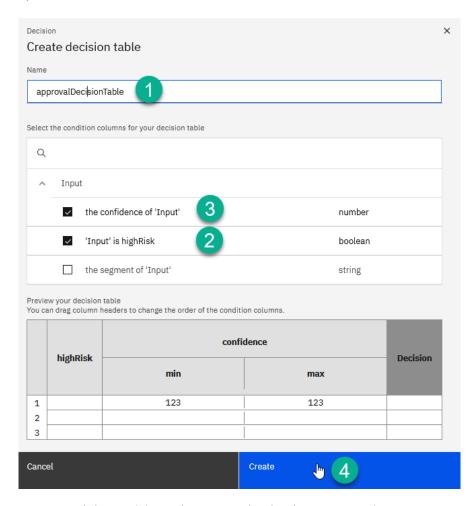


\_4. Expand the Decision column to make the data entry easier.




\_5. Configure each variable according to the table below.

Row	high Risk	Confidence min	Confidence max	approved	autoRejected	explanation
1	true	0	95	false	false	Manager approval is required. Reason: There is a high risk of payment default, and the confidence level from the predictive score is below 95.
2	true	95	100	false	true	Auto rejected. Reason: There is a high risk of payment default, and the confidence level from the predictive score is above 95.
3	false	0	95	false	false	Manager approval is required. Reason: There is a low risk of payment default, but the confidence level from the predictive score is below 95.
4	false	95	100	true	false	Auto approved. Reason: There is a low risk of payment default, and the confidence level from the predictive score is above 95.

The Variables should look as shown below:

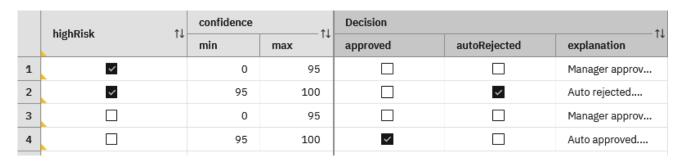


Note that there are some warnings that we need to fix!

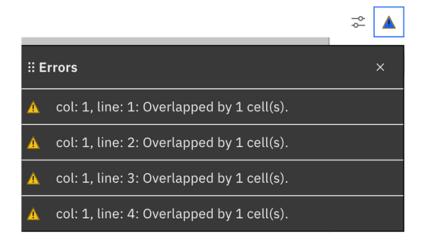

\_6. Use Ctrl - Mouse Click to select cell 1 and 2 in the highRisk column.

	highRisk ↑↓	confidence	<b>†</b> 1
	highRisk ↑↓	min	max
1	✓	0	95
2	~	95	100
3		0	95
4		95	100

\_7. With the two cells selected, right-mouse click and choose Group.

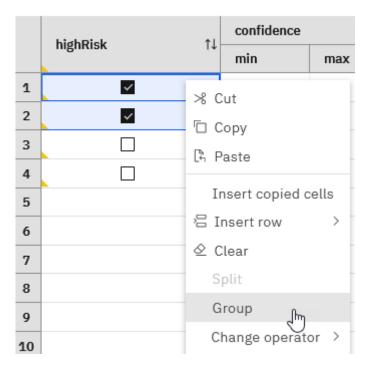

- \_8. Use the above steps to group highRisk cells in rows 3 and 4.
- \_9. The table should now look as shown below with no error markers in the editor.


	highRisk ↑↓	confidence	↑↓
	iligilitisk   +	min	max
1	✓	0	95
2	~	95	100
3		0	95
4		95	100

Note: The separator line between cells 1 and 2 and cells 3 and 4 in the highRisk row is lighter.

# 3.5 Add and configure the Decision

### 3.5.1 Add the Decision Node to the Workflow


 $\_1$ . In the left pane, select UsrXXXSalesCampaignApprovalWorkflow.




\_2. Click the + icon between UsrXXX scoreboard and Activity.



\_3. Select **Decision (1).** 



### \_4. Select approvalDecision.




You should now see the Decision approval Decision added as part of the Workflow.




# 3.5.2 Create a new variable for the Decision Output

\_1. Click the Variables tab.



\_2. Click **Create variable +** to create the output variable.



\_3. Configure the new variable according to the table below.

Name	Data Type	List	Input	Output
approvalDecision	ApprovalDecisionType	Single value	No	Yes

The variable should look as shown below.



# 3.5.3 Define the Input and Output Data Mapping


\_1. Click the **Diagram** tab.




\_2. Select the approvalDecision Decision.




\_3. Click **Define data mapping.** 




\_4. In the input mapping section, click on **Select a variable** (Input mapping tab).

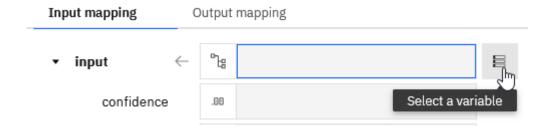


\_5. Select the **scoreboard** variable.

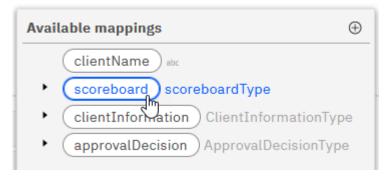

The Input mapping should look exactly like this.




\_6. Click the Output mapping tab.



\_7. For the ApprovalDecision\_ApprovalDecision variable, click Select a variable.



\_8. Select the **approvalDecision** variable.

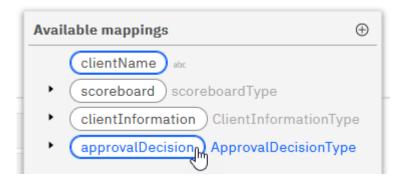

The Output mapping should look exactly like this.

► approvalDecision\_approvalDecision ×


\_9. Click the **OK** button to save your variable data mapping.



# 3.6 Configure the Manager Approval User Task


### 3.6.1 Rename the User task

\_1. Click the **Activity** User task.



# 3.6.2 Assign User


\_1. Ensure the User assignment is set to Workflow initiator




Note that you would typically select specific users authorized to see and complete a task. In this case, you selected the Workflow Initiator since you will be the only user to run and test this Workflow and User task.

### 3.6.3 Author User Interface

\_1. Click **Edit user interface**.



\_2. Click Instructions +.




\_3. In the Instructions section, replace Placeholder text with the following text:

The upsell offer requires a manager's approval.


Carefully review customer information, upsell services offered and scoreboard information. You can add or remove the upsell services included in this upsell offer.

### Activity

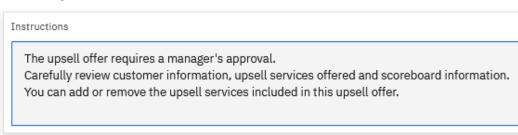


\_4. **Drag and drop** all the variables from the Variables section to the **Drag variables here to start building** your user interface section.

Please follow the order shown in the screenshot below. Drop the next variable below the last one you added (the bottom of the already added variables).

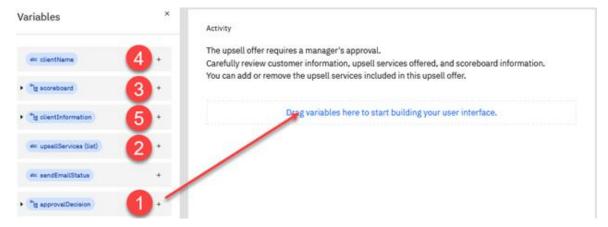


The completed UI form should look as shown in the red rectangle in the figure below:

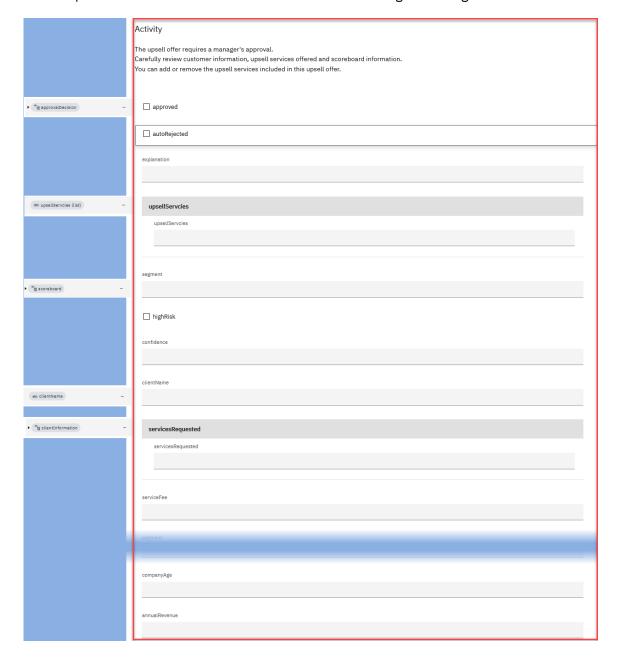

\_5. Click the **autoRejected** checkbox element.



\_6. Set the Field properties to Read-only.

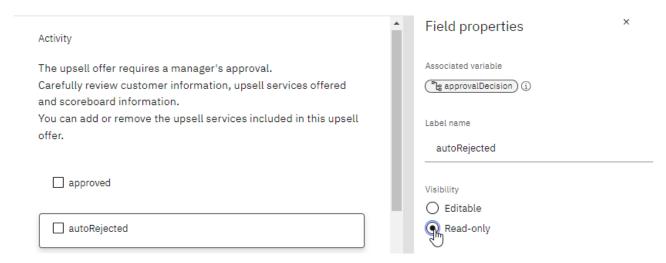

\_7. Follow the steps above to set all fields to **Read-only** except the ones listed in the table below.

Filed Name	Visibility	Explanation
approved	Editable	The Approval Decision initially sets the approval. However, when a manager's approval is required, the manager must be able to edit the approved field after reviewing the upsell offer information.
upsellServices	Editable	The manager reviewing the upsell offer can modify the offer by adding or removing the upsell services.

\_8. In the top left, click the **Back to UsrXXXSalesCampaignWorkflow** link.




# 3.7 Add and configure the wxO Send Campaign Email Skill

# 3.7.1 Add the Send Campaign Email Skill to the Workflow

\_1. Position the mouse cursor between Manager Approval and End and click the + icon.




\_2. Click Skill.






\_3. Click the **UsrXXX Client Onboarding App UAB** tile (remember that XXX is your CP4BA Credentials user id).



\_4. Select the UsrXXX Send Campaign Email UAB skill.



#### \_5. Click Save.

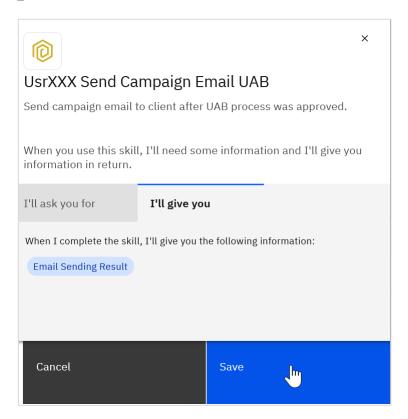


You should now see the skill added to the Workflow.




# 3.7.2 Define the Input and Output Data Mapping


\_1. Click the UsrXXX Send Campai... Skill.




\_2. Click the **Define data mapping** button.




\_3. In the Input mapping section for ClientName, click on **Select a variable**.




\_4. Select the clientName variable.




\_5. In the input mapping section for UpsellServices, click on Select a variable.



\_6. Select upsellServices.

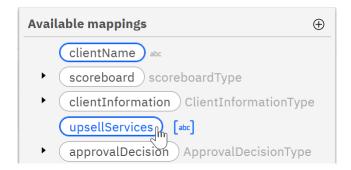


The Input mapping should look exactly as shown below.




\_7. Click the Output mapping tab.



\_8. For SendEmailStatus variable, click Select a variable.



\_9. Select the **sendEmailStatus** variable.



The Output mapping should look exactly like this.




\_10. Click the **OK** button to save your variable mapping.




# 3.8 Add and configure the Approval Branch

# 3.8.1 Add the Approval Branch

\_1. Click the + icon between approvalDecision and Manager Approval nodes.




\_2. Select Branch.




# 3.8.2 Configure the Approval Branch

\_1. In Branch Properties, change the Name from Branch to Is approval required?



\_2. Change the first Path name from Path 1 to Approval required.




\_3. Click the **Edit conditions** button.




\_4. Click **New condition +** to add a second row.



\_5. In the first condition row, click **Select variable.** 



\_6. Select approvalDecision > approved.



\_7. For Select a value from the drop-down menu, select **False**.



\_8. In the second condition variable, click the **Select variable** button, and for the variable, select **approvalDecision > autoRejected** 



\_9. For Select a value from the drop-down menu, select False.

The condition set should look as shown below.




- Note that "All of the following are true" is selected at the top, i.e., this path is only taken if the upsell offer is neither auto-approved nor auto-rejected based on the previously defined decision service.
- \_10. Click **Save** to save the conditions.




## 3.8.3 Move the Manager Approval task to the Approval required Path

\_1. In Manager Approval, select the **User task handle** (the area with dots on the right side within the activity box).




\_2. Click and hold the left mouse button and move **Manager Approval** User task to the **Approval required** branch.

You can release the mouse button when the Approval required line becomes blue. If needed, you can also use the zoom-in function of the diagram to position the Activity better.



The flow should now look as shown below.




# 3.9 Add and configure the Send Campaign Email Branch

## 3.9.1 Add the Send Campaign Email Branch

\_1. Click the + icon to the left of UsrXXX Send Campai... Activity.



\_2. Select Branch.



# 3.9.2 Configure the Send Campaign Email Branch

\_1. In Branch Properties, set Name to Send Campaign Email?



\_2. Change the first Path name to Send Campaign Email.




\_3. Click the **Edit Conditions** button.



\_4. In the condition variable, click **Select variable.** 



\_5. Select approvalDecision > approved.



\_6. For Select a value from the drop-down menu, select **True**.




\_7. Clock **Save** to save the conditions.



# 3.9.3 Move the Send Campaign Email task to Send Campaign Email Path

\_1. Select Skill UsrXXX Send Campai... handle.



\_2. Click and hold the left mouse button and move **Skill UsrXXX Send Campai...** to the **Send Campaign Email** branch.




The flow should now look as shown below.




### 3.10 Test the Workflow Automation

## 3.10.1 Test 1 - Approval Required Case


\_1. Click the **Preview** button (top right corner).




\_2. Select New instance.




\_3. In the *New Instance* window for *clientName* enter **Legacy Consulting**, and for *upsellServices* enter **service 1** and click the **Run** button.

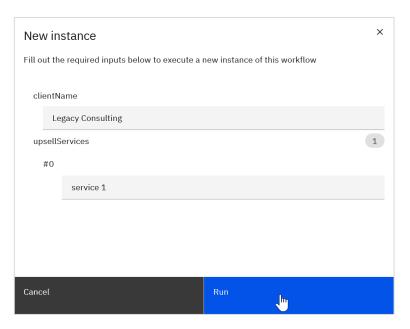

- \_4. You should shortly see a *Preview mode* Web Browser window with an **Active** status, but there are probably no tasks.
  - If you cannot see this window, check if this pop-up window is blocked in your browser. If so, change your browser setting to allow pop-ups from wxO.



\_5. Click **Refresh task list** or just wait until you see a task.

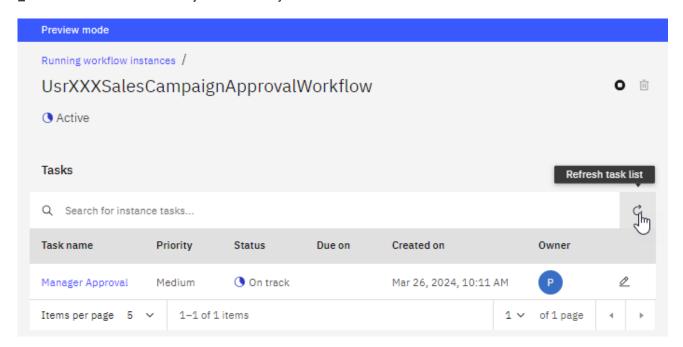


Recall that approval is required because Legacy Consulting is a low-risk customer, but it has a low confidence (of being low-risk) score.

\_6. Click Manager Approval (the task name) to claim it and open the task UI




\_7. Check approved check box and click the + in upsellServices, then add service 2.

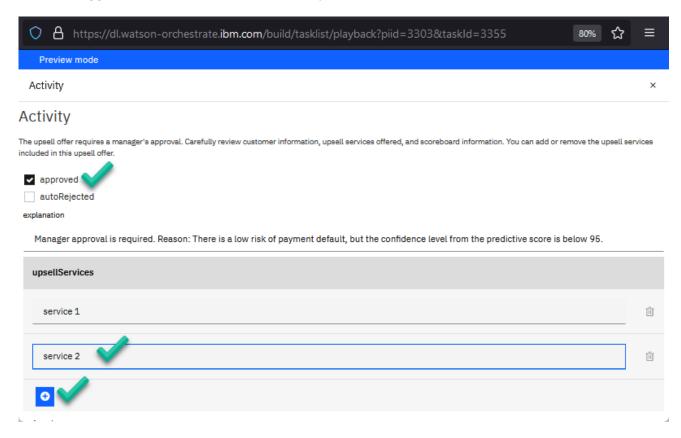

\_8. Scroll to the bottom of the form and click Submit.




\_9. **Close** the *Preview mode* Web Browser window.

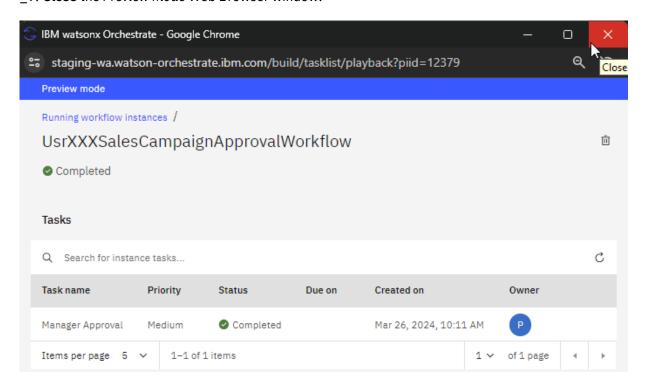


# 3.10.2 Test 2 - Auto Approved Case


\_1. Click the **Preview** button (top right corner).




\_2. Select New instance.




\_3. In the *New Instance* window, change the *clientName* to **Automation Elite,** and for *upsellServices* keep **service 1** and then click **Run.** 

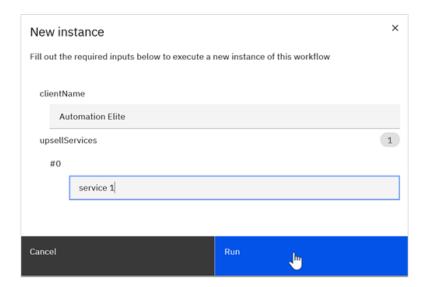

When the Run button stops spinning, you should see the Preview mode window with the instance's state set to *Active*.

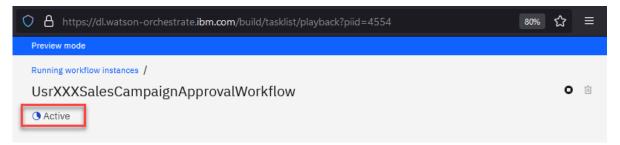

\_4. Wait. You should shortly see a *Preview mode* Web Browser window with a **Completed** status for the Workflow.

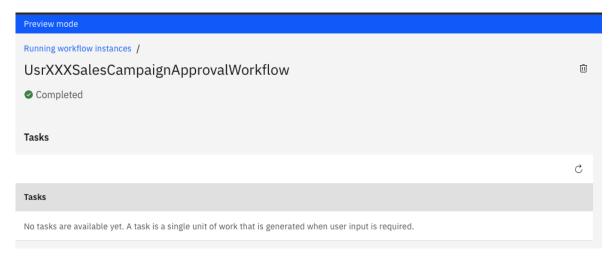

Since Automation Elite is a low-risk customer with a high confidence (of being low-risk) score, the upsell offer is auto-approved. Hence, we do not see a user task.

\_5. Close the Preview mode Web Browser window



### 3.10.3 Examine Completed Instances in the Process Admin Console

If the wxO user id you are using has the Builder role, skip this section and go directly to <u>3.9.4</u> <u>Verify the Upsell Offer Email is in the Client's Mailbox</u>. Alternatively, look at the flow of actions to learn how to use Workflow Inspector to examine workflow instances.

The following section requires the wxO Admin role and cannot be performed with the Builder role only. You will see no instances in the Process Admin Console or the Inspector with the Builder role.


\_1. Click the **left arrow** in the top left corner.



2. Click Workflow Admin.



\_3. Click Workflow Inspector.



\_4. Expand Workflow automations and versions




\_5. Find and select your Workflow automation - UsrXXXSalesCampaignAutomation (UXXXSCA)



Note that UsrXXX is your ID, and the acronym in the brackets may differ.


\_6. Click the second instance (that corresponds to the first run, with Legacy Consulting as input).



### \_7. Expand Tasks (4).




Note the execution path you need to read bottom up and compare it with the Workflow. It includes the manual approval step.





\_8. Select the first instance (that corresponds to the first run, with Automation Elite as input).




#### \_9. Expand Tasks (3).

Note the execution path and compare it with the Workflow. It does not include a manual approval activity.





\_10. Expand Data > scoreboard(scoreboardType).




Note that the upsell offer was auto approved because the Automation Elite customer is not at high risk of default, and the confidence that the risk is low is high (99.9557).

# 3.10.4 Verify the Upsell Offer Email


- \_1. Open the Local Mail Client in your browser (see <u>1.3.1 Systems, Lab Files, and Credentials</u>)
- \_2. Enter your CP4BA Credentials and click the **LOGIN** button.



#### \_3. You should now see two emails.

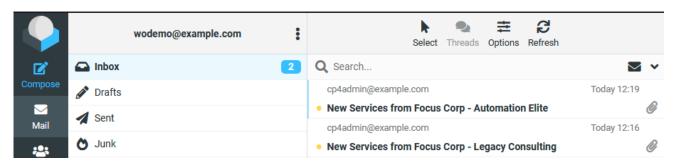

#### Note that the emails are customized for each client:

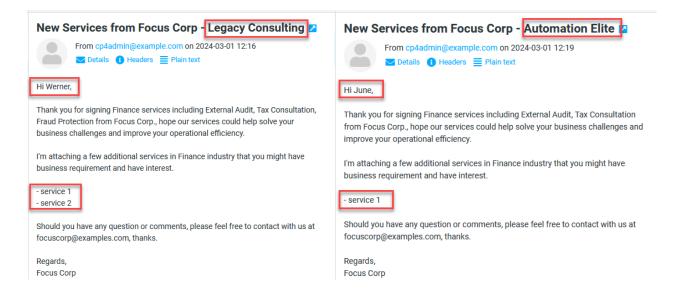


# 4 Exercise: Expose Workflow as a wxO Skill


# 4.1 Create an Operation

In this part of the lab, you will create an operation to expose the workflow component in your automation as a wxO skill so others can use it directly in their automations, chats, skill flows, or other Automations.


\_1. Click the **Operations** tab.



\_3. For the *Operation name* enter **UsrXXXSalesCampaignApproval** (where XXX are the digits of your CP4BA Credentials user id). For the *Component*, select **UsrXXXSalesCampaignApprovalWorkflow** and then click **Save**.

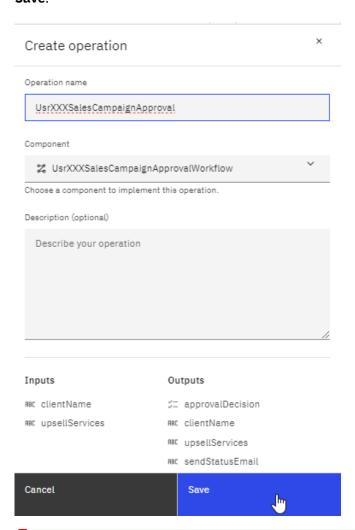

**Note:** You will encounter an error if the operation name exceeds 31 characters.



In this case, reduce the prefix (UsrXXXXXXXXXX) length to eliminate the error.

You should now see a new operation.




### 4.2 Create a New Version of the Automation

### \_1. Click the **History** tab.




Note that you will see a message that you have local changes in your automation.

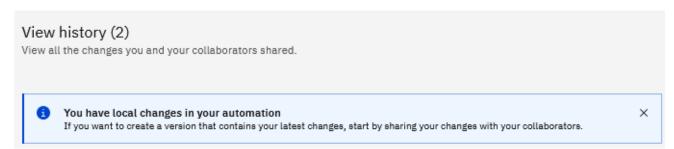

You will need to share your changes to create the latest version that contains your latest changes.


### \_2. Click **Share changes.**



\_3. Click the **Share** button.



\_4. In the Share pop-up Window, click Share again.

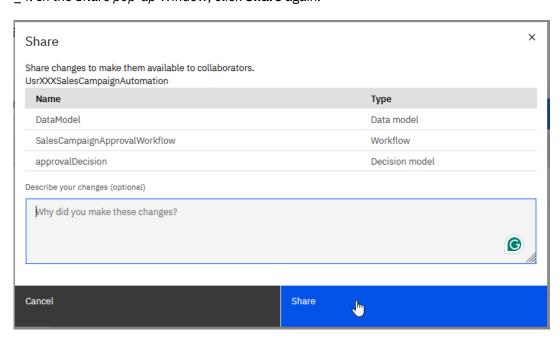

\_5. Click the Back to UsrXXXSalesCampaignAutomation link.




\_6. Click the **History** tab.



\_7. Click Version + on the topmost entry to ensure you will use the version with the latest changes!



\_8. For Name, enter 1.0.0 (if you wonder why this form (see semantic versioning format) and click Create.

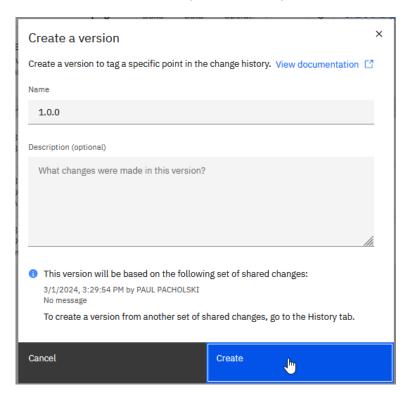


\_9. You should now see that your latest set of shared changes has been versioned.



# 4.3 Publish the Automation as a wxO Skill


## \_1. Click the **Publish** tab



### \_2. Click the Version Twisty.





### \_3. Click Publish.

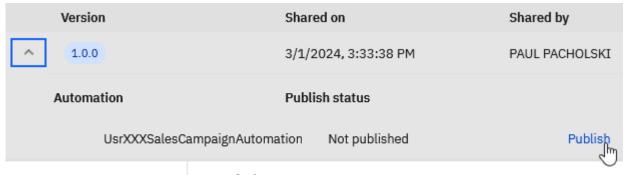


Items per page: 20 ∨ 1–1 of 1 items

\_4. Click the **Publish** button to start publishing the Automation.

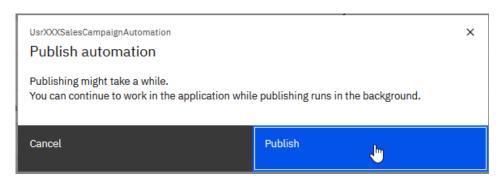

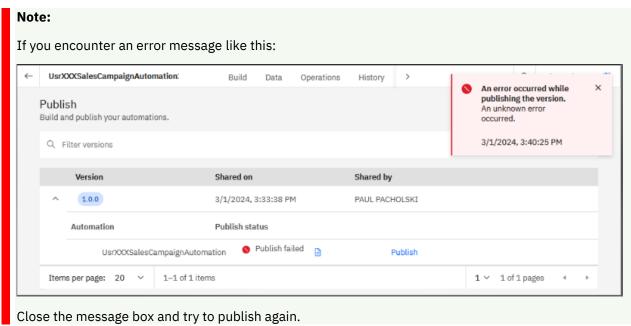


\_5. Wait until the Publish status changes from "Publish in progress" to "Published on...".

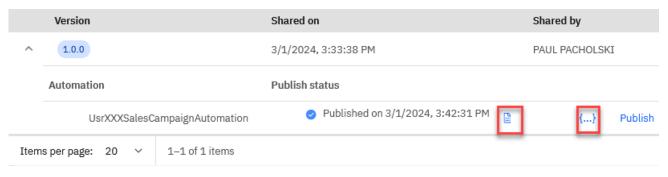


Note: the **"document"** link shows the publishing logs, and the "{...}" link points to the Swagger UI for the OpenAPI file

### 4.4 Enhance and Publish the Automation wxO Skill

\_1. Click the **Hamburger** menu in the top-left corner.



\_2. Click Skills and apps.



\_3. Click the **Skills** tab.

## Skills and apps

Add new skills, train them to be more effective, and publish



\_4. In the Search, enter UsrXXXSalesCampaignApproval (remember XXX is your user id) and press Enter.



\_5. Click the vertical ellipses (3 dots) ... and then select Enhance this Skill.




\_6. Click the **Phrases** tab.



You might want to add a phrase in your local language to make access to this Automation skill easier within the chat.

### \_7. Enter start sales campaign approval workflow phrase.

Phrases are the text your user types in the chat bar to find and use a skill.



#### \_8. Click Publish.




You should see a Published successful message.




### 4.5 Add the Automation Skill to Personal Skills

\_1. Click the **Hamburger** menu in the top-left corner.




\_2. Click Chat.




\_3. Click Add skills from the catalog tile.




\_4. To find the skill in the Skill Calaog type **UsrXXXSalesCampaignAutomation** (remember XXX is your user id) in the *search bar* and hit **enter key**.

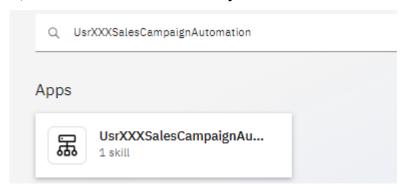

\_5. Click the **UsrXXXSalesCampaignAutomation** App (remember XXX is your user id).



\_6. Click Add skill +




You should now see the "Added" status.




# 5 Exercise: Test the Workflow Skill in the Chat

# **5.1 Test the Auto Approval Case**


\_1. Click the **Hamburger** menu in the top-left corner.



\_2. Click Chat



\_3. In the Chat, type "start" and select the suggestion "start sales campaign approval workflow".




\_4. Click the **Send** button to start the Workflow.




Note that we are using a natural language interface to start the Workflow. Alternatively, we could click the Workflow.



- \_5. Enter input data and start the Workflow skill:
- 1) For clientName enter Automation Elite
- 2) Click the upsellServices Twistie
- 3) Click Add +
- 4) For upsellService enter service 1,
- 5) Click Apply

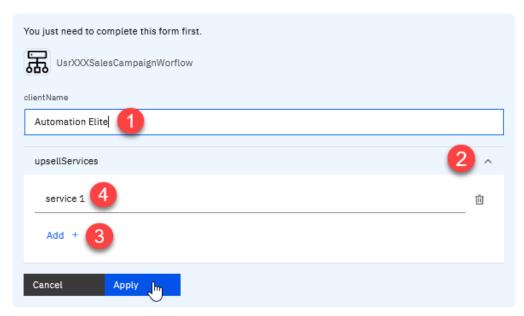




You should see a confirmation message.

Working on getting the results might take a while. You can continue waiting or you can ask for something else to be done.

\_6. Wait until the Workflow is completed.

\_7. When the Workflow is complete, you will see the workflow skill output message.

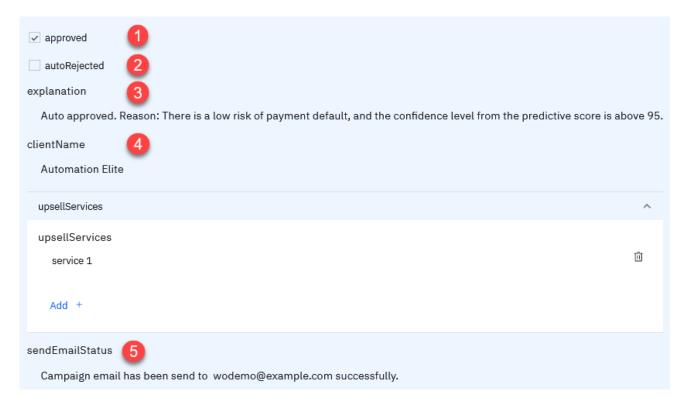


#### Note:


- 1) The sales campaign upsell offer was approved by the decision service.
- 2) It was not auto-rejected by the decision service.
- 3) Note the explanation provided by the decision service telling us why the upsell offer was autoapproved
- 4) The customer name
- 5) Shows the confirmation from the email service in the Workflow that an email upsell email was sent to the customer.

# **5.2 Test the Approval Required Case**


\_1. In the Chat, type "start" and select the suggestion "start sales campaign approval workflow".



\_2. Click the **Send** button to start the Workflow.




\_3. For clientName enter Legacy Consulting, add upsellService service 1, and then click Apply.

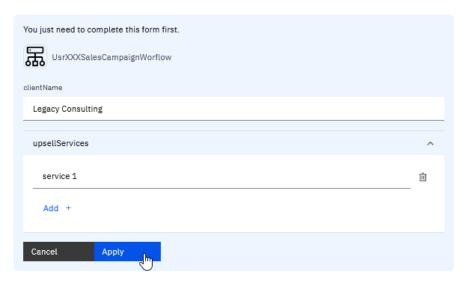

You should see a confirmation message.

- Working on getting the results might take a while. You can continue waiting or you can ask for something else to be done.
- \_4. Click the Messages Icon in the top right corner of the chat window and expand Task in progress (1).



Note that the message indicates that the skill is in progress. This status will persist until we complete the Workflow that implements this skill. Specifically, we need to complete the Manager Approval task created for this customer.


\_5. Click the **Tasks icon** in the top-right corner.



\_6. To complete the Task, click Manager Approval in the Task name column.



### \_7. Select the approved checkbox and add to upsellServices service 2.

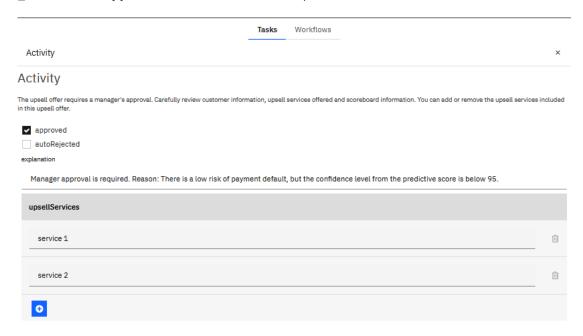


\_8. Scroll to the bottom of the form and click Submit.




\_9. Click the **Hamburger** menu in the top-left corner.




### \_10. Click Chat.



\_11. Click the **Messages Icon** in the top right corner of the chat window and expand **Results (1),** then click the latest run at the top of **start sales campaign approval workflow** task.



In the Chat, note the output of the approval process, including service 2 added by the approver.

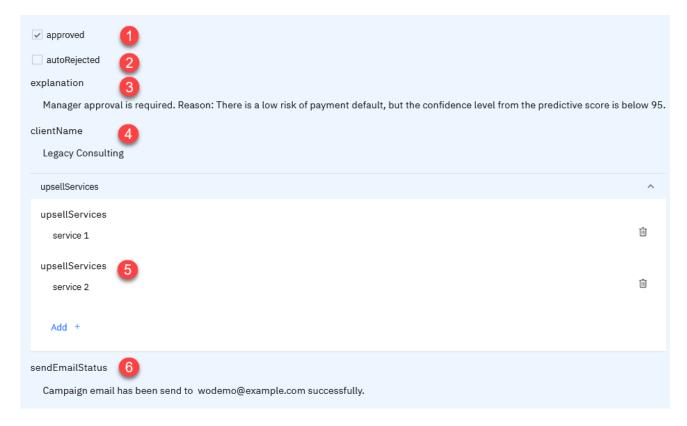

#### Note:

- 1) The sales manager approved the upsell offer.
- 2) It was not auto-rejected by the decision service.
- 3) Note the explanation provided by the decision service telling us why the upsell offer was not auto-approved or auto-rejected but required a manager's approval.
- 4) The customer name
- 5) The sales manager added the upsell service "service 2".
- 6) Shows the confirmation from the email service in the Workflow that an email upsell email was sent to the customer.

### Congratulations on completing the lab!

#### **NOTICES**

This information was developed for products and services offered in the USA.

IBM may not offer the products, services, or features discussed in this document in other countries. Consult your local IBM representative for information on the products and services currently available in your area. Any reference to an IBM product, program, or Service is not intended to state or imply that only that IBM product, program, or Service may be used. Any functionally equivalent product, program, or Service that does not infringe any IBM intellectual property right may be used instead. However, it is the user's responsibility to evaluate and verify the operation of any non-IBM product, program, or Service.

IBM may have patents or pending patent applications covering subject matter described in this document. The furnishing of this document does not grant you any license to these patents. You can send license inquiries, in writing, to:

IBM Director of Licensing IBM Corporation North Castle Drive, MD-NC119 Armonk, NY 10504-1785 United States of America

The following paragraph does not apply to the United Kingdom or any other country where such provisions are inconsistent with local law: INTERNATIONAL BUSINESS MACHINES CORPORATION PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions, therefore, this statement may not apply to you.

This information could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in new editions of the publication. IBM may make improvements and/or changes in the product(s) and/or the program(s) described in this publication at any time without notice.

Any references in this information to non-IBM websites are provided for convenience only and do not in any manner serve as an endorsement of those websites. The materials at those websites are not part of the materials for this IBM product and use of those websites is at your own risk.

IBM may use or distribute any of the information you supply in any way it believes appropriate without incurring any obligation to you.

Information concerning non-IBM products was obtained from the suppliers of those products, their published announcements or other publicly available sources. IBM has not tested those products and cannot confirm the accuracy of performance, compatibility or any other claims related to non-IBM products. Questions on the capabilities of non-IBM products should be addressed to the suppliers of those products.

This information contains examples of data and reports used in daily business operations. To illustrate them as completely as possible, the examples include the names of individuals, companies, brands, and products. All of these names are fictitious and any similarity to the names and addresses used by an actual business enterprise is entirely coincidental.

#### **TRADEMARKS**

IBM, the IBM logo, and ibm.com are trademarks or registered trademarks of International Business Machines Corp., registered in many jurisdictions worldwide. Other product and service names might be trademarks of IBM or other companies. A current list of IBM trademarks is available on the web at "Copyright and trademark information" at www.ibm.com/legal/copytrade.shtml.

Adobe, the Adobe logo, PostScript, and the PostScript logo are either registered trademarks or trademarks of Adobe Systems Incorporated in the United States, and/or other countries.

Cell Broadband Engine is a trademark of Sony Computer Entertainment, Inc. in the United States, other countries, or both and is used under license therefrom.

Intel, Intel logo, Intel Inside, Intel Inside logo, Intel Centrino, Intel Centrino logo, Celeron, Intel Xeon, Intel SpeedStep, Itanium, and Pentium are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

IT Infrastructure Library is a Registered Trade Mark of AXELOS Limited.

ITIL is a Registered Trade Mark of AXELOS Limited.

Java and all Java-based trademarks and logos are trademarks or registered trademarks of Oracle and/or its affiliates.

Linear Tape-Open, LTO, the LTO Logo, Ultrium, and the Ultrium logo are trademarks of HP, IBM Corp. and Quantum in the US and other countries

Linux is a registered trademark of Linus Torvalds in the United States, other countries, or both.

Microsoft, Windows, Windows NT, and the Windows logo are trademarks of Microsoft Corporation in the United States, other countries, or both.

UNIX is a registered trademark of The Open Group in the United States and other countries.

© Copyright International Business Machines Corporation 2020.

This document may not be reproduced in whole or in part without the prior written permission of IBM.

US Government Users Restricted Rights - Use, duplication or disclosure restricted by GSA ADP Schedule Contract with IBM Corp.