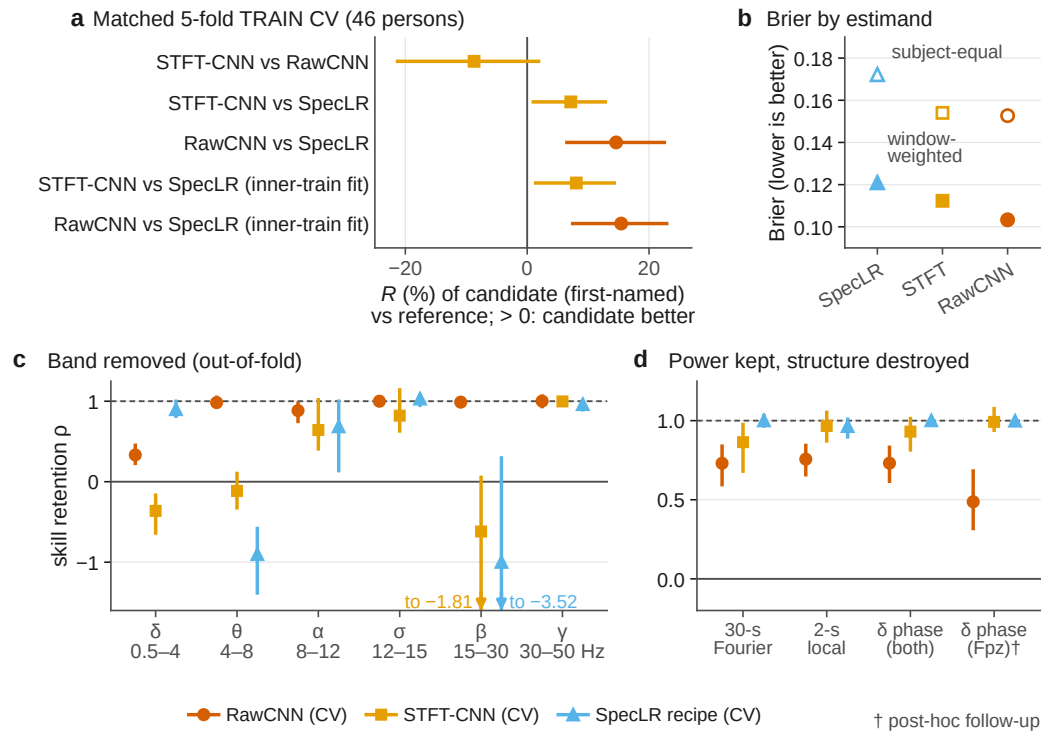
a Matched 5-fold TRAIN CV (46 persons)
STFT-CNN vs RawCNN
STFT-CNN vs SpecLR
RawCNN vs SpecLR
STFT-CNN vs SpecLR (inner-train fit)
RawCNN vs SpecLR (inner-train fit)
−20
0
20
R (%) of candidate (first-named) vs reference; > 0: candidate better
b Brier by estimand
Brier (lower is better)
0.18
0.16
0.14
0.12
0.10
subject-equal
window-weighted
SpecLR
STFT
RawCNN
c Band removed (out-of-fold)
skill retention ρ
1
0
−1
to −1.81
to −3.52
δ 0.5–4
θ 4–8
α 8–12
σ 12–15
β 15–30
γ 30–50 Hz
d Power kept, structure destroyed
1.0
0.5
0.0
30-s Fourier
2-s local
δ phase (both)
δ phase (Fpz)†
RawCNN (CV)
STFT-CNN (CV)
SpecLR recipe (CV)
† post-hoc follow-up