

Verify successful login with valid credentials

The screenshot shows the Postman interface with a workspace named 'Restful Booker'. The selected collection is 'Login Functionality (Authentication)' and the specific test is 'Valid username and password'. The request is a POST to 'https://restful-booker.herokuapp.com/auth' with a JSON body containing 'username': 'admin' and 'password': 'password123'. The response is a 200 OK status with a JSON body containing a 'token': 'c89eda9e75446e3'.

```
POST https://restful-booker.herokuapp.com/auth

{
  "username": "admin",
  "password": "password123"
}
```

```
{
  "token": "c89eda9e75446e3"
}
```

Check if Token Format is Valid


The screenshot shows the Postman interface with the same workspace and collection. The selected test is 'Check if Token Format is Valid'. The request is a GET to 'https://restful-booker.herokuapp.com/booking' with an 'Authorization' header set to 'token=c89eda9e75446e3'. The response is a 200 OK status with a JSON array of booking objects.

```
GET https://restful-booker.herokuapp.com/booking


Authorization: token=c89eda9e75446e3
```

```
[
  {
    "bookingid": 838
  },
  {
    "bookingid": 1395
  },
  {
    "bookingid": 156
  },
  {
    "bookingid": 1868
  }
]
```

Verify login fails with invalid username invalid password

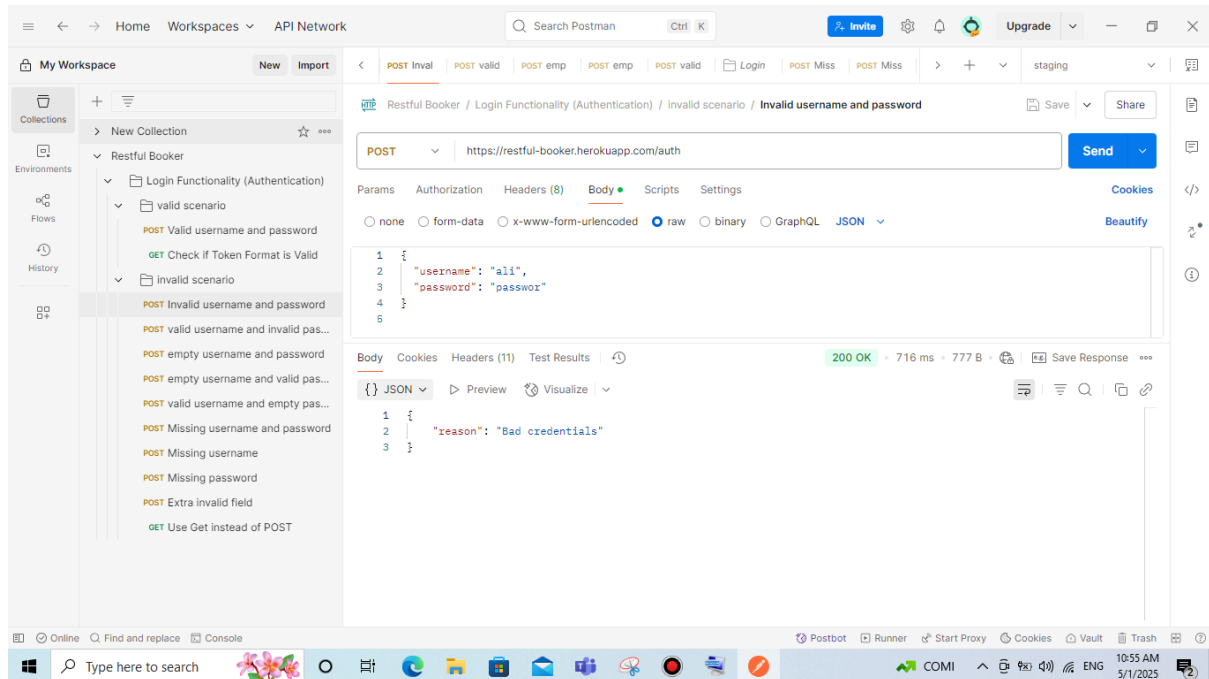

Verify login fails with valid username invalid password

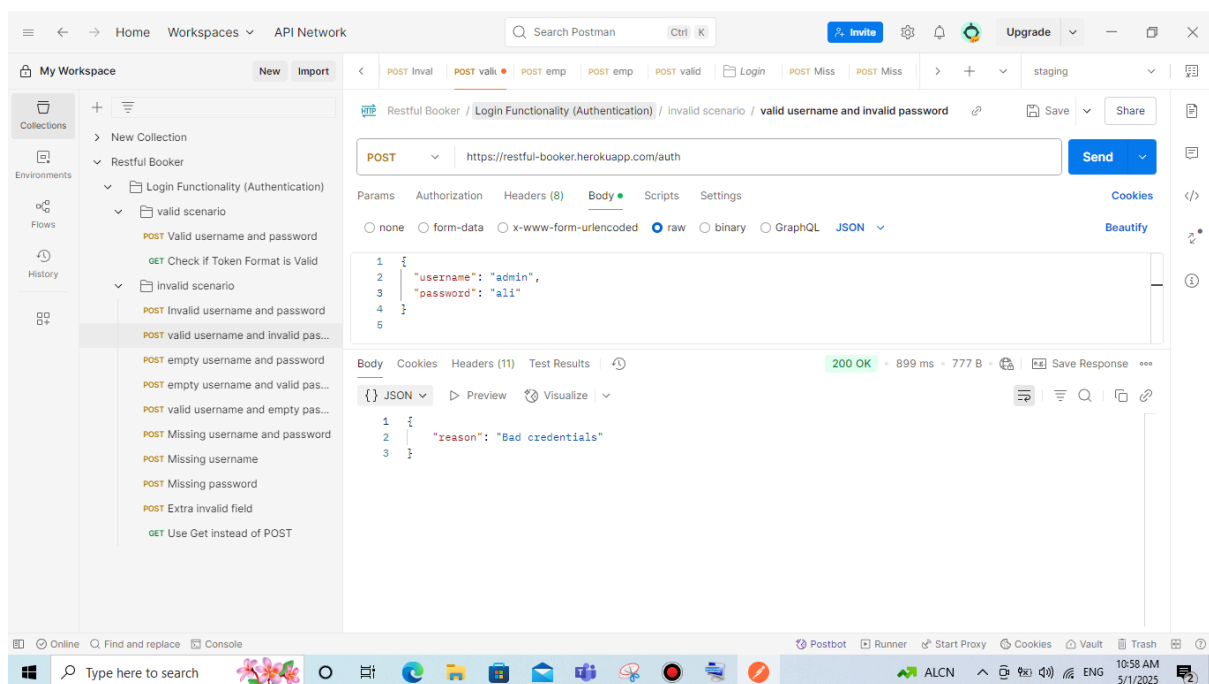

Verify login fails with empty username and password

This screenshot shows the Postman interface for a REST client. The workspace is named "My Workspace" and contains a collection named "Restful Booker". Under this collection, there is a folder named "Login Functionality (Authentication)" which contains two sub-folders: "valid scenario" and "invalid scenario". The "invalid scenario" folder is selected, and a specific test case named "POST empty username and password" is highlighted. The test case details show a POST request to the URL "https://restful-booker.herokuapp.com/auth". The request body is a JSON object with empty fields for "username" and "password". The response is a 200 OK status with a response time of 164 ms and a body of 777 B. The response body is a JSON object with the field "reason" set to "Bad credentials".

```
POST https://restful-booker.herokuapp.com/auth

{
  "username": "",
  "password": ""
}
```

```
{
  "reason": "Bad credentials"
}
```

Verify login fails with empty username and valid password


This screenshot shows the Postman interface for a REST client, similar to the first one. The workspace is named "My Workspace" and contains a collection named "Restful Booker". Under this collection, there is a folder named "Login Functionality (Authentication)" which contains two sub-folders: "valid scenario" and "invalid scenario". The "invalid scenario" folder is selected, and a specific test case named "POST empty username and valid password" is highlighted. The test case details show a POST request to the URL "https://restful-booker.herokuapp.com/auth". The request body is a JSON object with an empty "username" field and a valid "password" field set to "password123". The response is a 200 OK status with a response time of 773 ms and a body of 777 B. The response body is a JSON object with the field "reason" set to "Bad credentials".

```
POST https://restful-booker.herokuapp.com/auth


{
  "username": "",
  "password": "password123"
}
```

```
{
  "reason": "Bad credentials"
}
```

Verify login fails with valid username and empty password

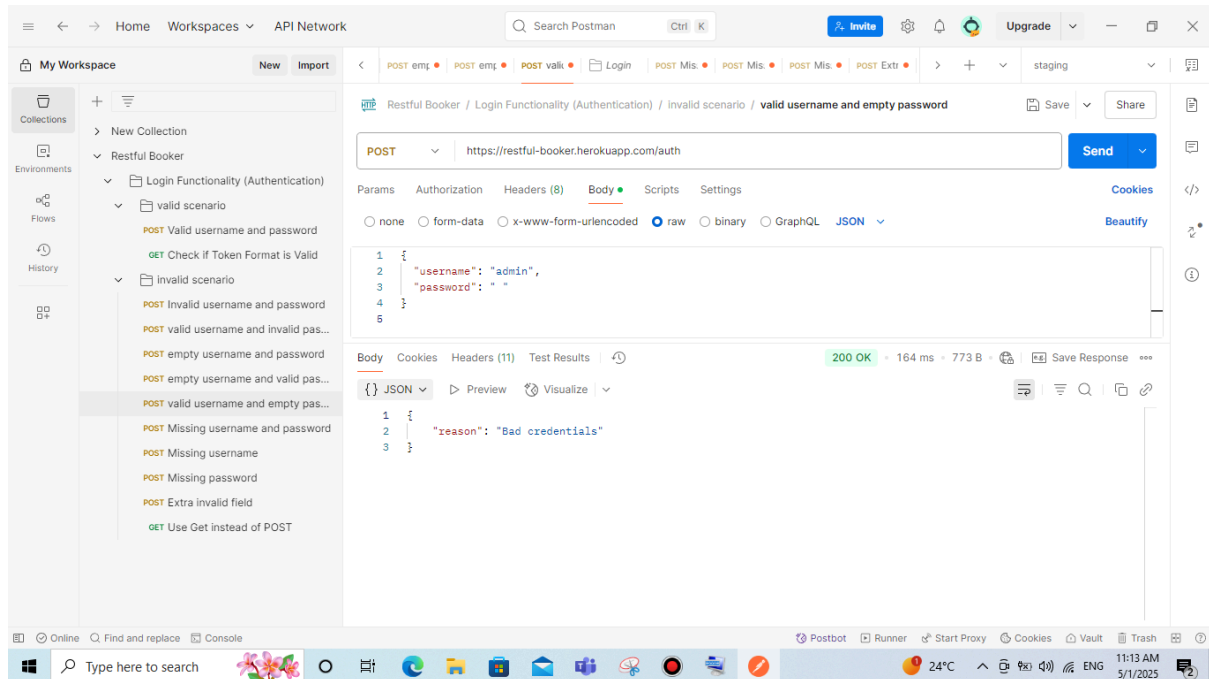

Verify login fails with Missing username and password

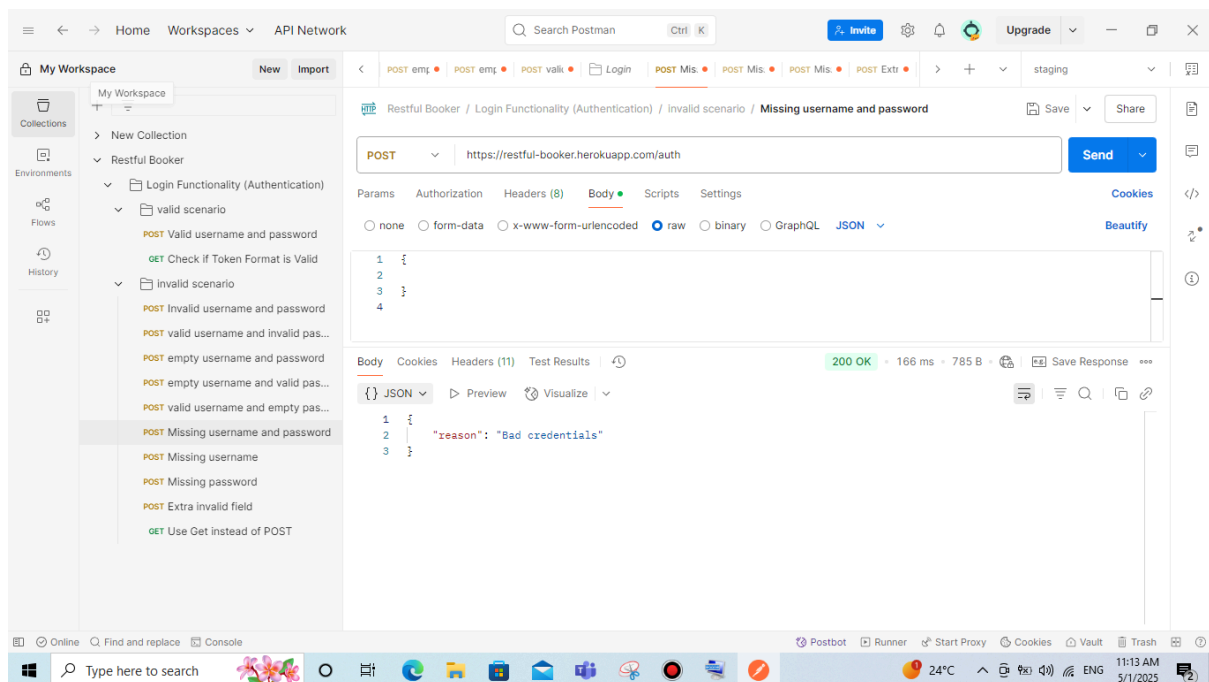

Verify login fails with Missing username

The screenshot shows the Postman application interface. On the left, the 'My Workspace' sidebar is expanded to 'Restful Booker' > 'Login Functionality (Authentication)' > 'Invalid scenario' > 'Missing username'. The main panel displays a POST request to `https://restful-booker.herokuapp.com/auth` with a body of `{ "password": "password123" }`. The response is a 200 OK status with a body of `{ "reason": "Bad credentials" }`. The status bar at the bottom shows the system clock as 11:14 AM on 5/1/2025.

Verify login fails with Missing password

The screenshot shows the Postman application interface. On the left, the 'My Workspace' sidebar is expanded to 'Restful Booker' > 'Login Functionality (Authentication)' > 'Invalid scenario' > 'Missing password'. The main panel displays a POST request to `https://restful-booker.herokuapp.com/auth` with a body of `{ "username": "admin" }`. The response is a 200 OK status with a body of `{ "reason": "Bad credentials" }`. The status bar at the bottom shows the system clock as 11:16 AM on 5/1/2025.

Verify Extra invalid field

The screenshot shows the Postman interface with a workspace named 'My Workspace'. The left sidebar shows a collection 'Restful Booker' with a folder 'Login Functionality (Authentication)' containing several scenarios. The 'POST Extra invalid field' scenario is selected. The main panel shows a POST request to 'https://restful-booker.herokuapp.com/auth' with a JSON body:

```
{  "username": "admin",  "password": "password123",  "name": "ali essam"}
```

. The response is 200 OK with a token:

```
{  "token": "b2f63cdb8eb3988"}
```

.

Verify Use Get instead of POST

The screenshot shows the Postman interface with the same workspace. The 'GET Use Get instead of POST' scenario is selected. The main panel shows a GET request to 'https://restful-booker.herokuapp.com/auth'. The response is 404 Not Found.