

# Chapter 4 – Requirements Engineering

## Lecture 1

# Topics covered

---

- ✧ Functional and non-functional requirements
- ✧ The software requirements document
- ✧ Requirements specification
- ✧ Requirements engineering processes
- ✧ Requirements elicitation and analysis
- ✧ Requirements validation
- ✧ Requirements management

# Requirements engineering

---



- ✧ The process of **establishing the services** that the customer **requires from a system** and the **constraints under which it operates** and is developed.
- ✧ The **requirements** themselves are the descriptions of the system services and constraints that are **generated during the requirements engineering process**.

# What is a requirement?

---

- ✧ It may range from a **high-level** abstract statement of a service or of a system constraint to a **detailed mathematical functional** specification.
- ✧ This is **inevitable** as requirements may serve a dual function
  - May be the basis for a **bid for a contract** - therefore must be open to interpretation;
  - May be the basis for the **contract itself** - therefore must be defined in detail;
  - Both these statements may be called requirements.

# Requirements abstraction (Davis)

---



“If a company wishes to **let a contract for a large software development project**, it must **define its needs in a sufficiently abstract way** that a solution is not pre-defined. The requirements must be written so that several contractors can bid for the contract, offering, perhaps, different ways of meeting the client organization’s needs. **Once a contract has been awarded, the contractor must write a system definition for the client in more detail** so that the client understands and can validate what the software will do. Both of these documents may be called the requirements document for the system.”

# Types of requirement

---




## ✧ User requirements

- Statements in natural language plus diagrams of the services the system provides and its operational constraints. **Written for customers.**

## ✧ System requirements

- A structured document setting out **detailed descriptions of the system's functions**, services and operational constraints. Defines what should be implemented so may be part of a contract between client and contractor.

# User and system requirements - Mental Health Care Patient Management System (MHC-PMS)





## User Requirement Definition

1. The MHC-PMS shall generate monthly management reports showing the cost of drugs prescribed by each clinic during that month.

## System Requirements Specification

- 1.1 On the last working day of each month, a summary of the drugs prescribed, their cost, and the prescribing clinics shall be generated.
- 1.2 The system shall automatically generate the report for printing after 17.30 on the last working day of the month.
- 1.3 A report shall be created for each clinic and shall list the individual drug names, the total number of prescriptions, the number of doses prescribed, and the total cost of the prescribed drugs.
- 1.4 If drugs are available in different dose units (e.g., 10 mg, 20 mg) separate reports shall be created for each dose unit.
- 1.5 Access to all cost reports shall be restricted to authorized users listed on a management access control list.

# Readers of different types of requirements specification

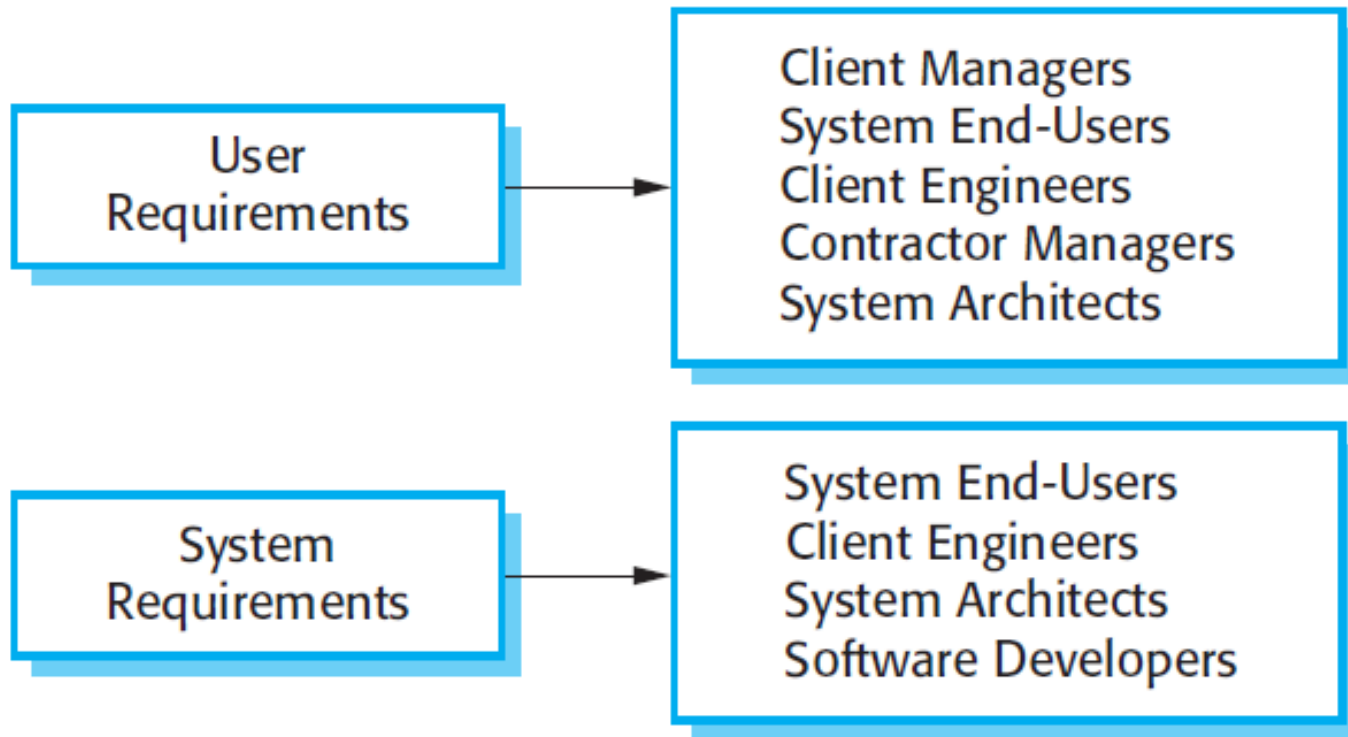



# Functional and non-functional requirements

---



## ✧ Functional requirements

- Statements of **services the system should provide**, **how the system should react to particular inputs** and **how the system should behave in particular situations**.
- May state what the system should not do.

## ✧ Non-functional requirements

- **Constraints on the services or functions offered by the system** such as timing constraints, constraints on the development process, standards, etc.
- **Often apply to the system as a whole** rather than individual features or services.

## ✧ Domain requirements

- Constraints on the system from the domain of operation


# Functional requirements

---

- ✧ Describe **functionality or system services**.
- ✧ Depend on the type of software, expected users and the type of system where the software is used.
- ✧ **Functional user requirements** may be high-level statements of what the system should do.
- ✧ **Functional system requirements** should describe the system services in detail.

# Functional requirements for the MHC-PMS

---



- ✧ A user shall be able to search the appointments lists for all clinics.
- ✧ The system shall generate each day, for each clinic, a list of patients who are expected to attend appointments that day.
- ✧ Each staff member using the system shall be uniquely identified by his or her 8-digit employee number.

# Requirements imprecision

---

- ✧ Problems arise when requirements are **not precisely stated**.
- ✧ Ambiguous requirements may be **interpreted in different ways by developers and users**.
- ✧ Consider the term 'search' in requirement 1
  - User intention – search for a patient name across all appointments in all clinics;
  - Developer interpretation – search for a patient name in an individual clinic. User chooses clinic then search.

# Requirements completeness and consistency

---




- ✧ In principle, **requirements should be both complete and consistent.**
- ✧ Complete
  - They should include descriptions of all **facilities required.**
- ✧ Consistent
  - There should be **no conflicts or contradictions** in the descriptions of the system facilities.
- ✧ In practice, it is impossible to produce a complete and consistent requirements document.

# Non-functional requirements

---

- ✧ These define **system properties and constraints** e.g. reliability, response time and storage requirements. Constraints are I/O device capability, system representations, etc.
- ✧ Process requirements may also be specified **mandating a particular IDE, programming language or development method**.
- ✧ Non-functional requirements **may be more critical** than functional requirements. If these are not met, the system may be useless.



# Non-functional requirements implementation

---

- ✧ Non-functional requirements may affect the **overall architecture of a system** rather than the individual components.
  - For example, to ensure that performance requirements are met, you may have to organize the system to minimize communications between components.
- ✧ A single **non-functional requirement**, such as a security requirement, **may generate a number of related functional requirements** that define system services that are required.
  - It may also generate requirements that restrict existing requirements.

# Non-functional classifications

---

## ✧ Product requirements

- Requirements which specify that the delivered **product must behave in a particular way** e.g. execution speed, reliability, etc.

## ✧ Organisational requirements



- Requirements which are a consequence of organisational policies and procedures e.g. process standards used, implementation requirements, etc.

## ✧ External requirements

- Requirements which arise from factors which are **external to the system and its development process** e.g. interoperability requirements, legislative requirements, etc.




# Types of nonfunctional requirement

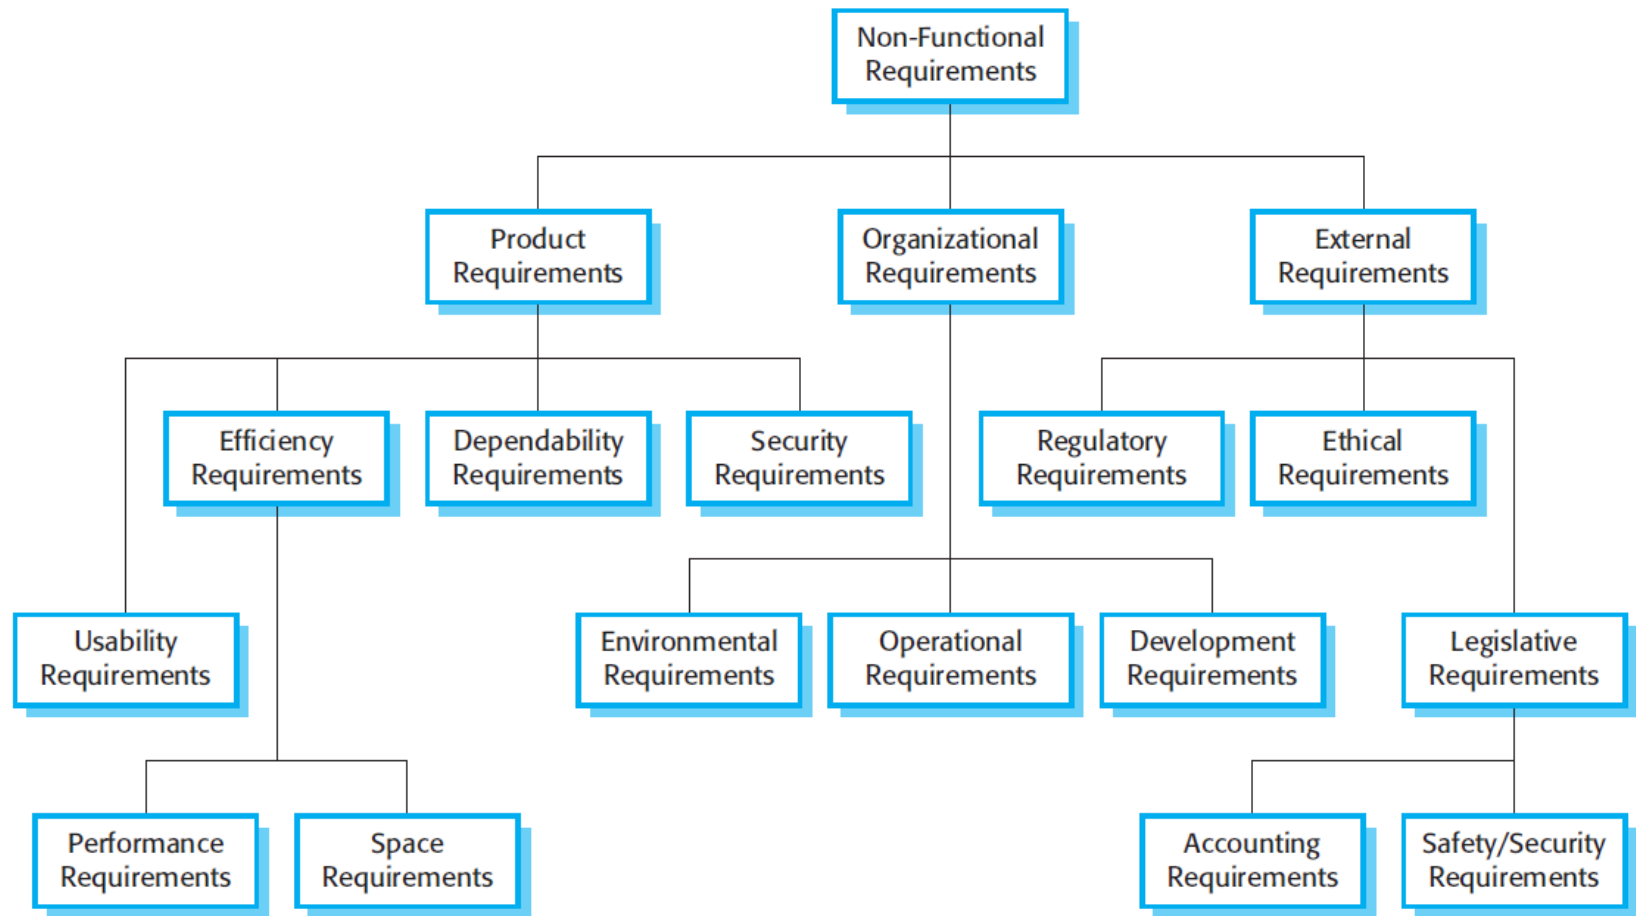

# Examples of nonfunctional requirements in the MHC-PMS

---



## **Product requirement**

The MHC-PMS shall be available to all clinics during normal working hours (Mon–Fri, 08:30–17:30). Downtime within normal working hours shall not exceed five seconds in any one day.

## **Organizational requirement**

Users of the MHC-PMS system shall authenticate themselves using their health authority identity card.

## **External requirement**

The system shall implement patient privacy provisions as set out in HStan-03-2006-priv.

# Goals and requirements

---



- ✧ Non-functional requirements **may be very difficult to state precisely** and imprecise requirements may be difficult to verify.
  - Example: user specified goal
    - A general intention of the user such as ease of use.
- ✧ Verifiable non-functional requirement
  - A statement using some measure that can be objectively tested.
- ✧ Goals are helpful to developers as they convey the intentions of the system users. However, can cause issues as they may be ambiguous.


# Usability requirements

---



- ✧ The system should be easy to use by medical staff and should be organized in such a way that user errors are minimized. (Goal)
- ✧ Medical staff shall be able to use all the system functions after four hours of training. After this training, the average number of errors made by experienced users shall not exceed two per hour of system use. (Testable non-functional requirement)

# Metrics for specifying nonfunctional requirements



Property	Measure
Speed	Processed transactions/second User/event response time Screen refresh time
Size	Mbytes Number of ROM chips
Ease of use	Training time Number of help frames
Reliability	Mean time to failure Probability of unavailability Rate of failure occurrence Availability
Robustness	Time to restart after failure Percentage of events causing failure Probability of data corruption on failure
Portability	Percentage of target dependent statements Number of target systems


# Availability Examples

---

- ✧ Carrier airlines (2002 FAA fact book)
  - 41 accidents, 6.7M departures
  - 99.9993% (five nines) availability
- ✧ 911 Phone service (1993 NRIC report)
  - 29 minutes per line per year
  - 99.994% (four nines) availability
- ✧ Standard phone service (various sources)
  - 53+ minutes per line per year
  - 99.99+% (> four nines) availability
- ✧ End-to-end Internet Availability
  - 95% - 99.6% (one to two nines) availability

# Domain requirements

---



- ✧ The **system's operational domain** imposes requirements on the system.
  - For example, a train control system has to take into account the braking characteristics in different weather conditions.
- ✧ Domain requirements may be **new functional requirements, constraints on existing requirements** or define **specific computations**.
- ✧ If domain requirements are not satisfied, the system may be unworkable.


# Train protection system

---

- ✧ This is a domain requirement for a train protection system:
- ✧ The deceleration of the train shall be computed as:
  - $D_{train} = D_{control} + D_{gradient}$
  - where  $D_{gradient}$  is  $9.81ms^2 * compensated\ gradient / \alpha$  and where the values of  $9.81ms^2 / \alpha$  are known for different types of train.
- ✧ It is **difficult for a non-specialist** to understand the **implications** of this and how it interacts with other requirements.



# Example

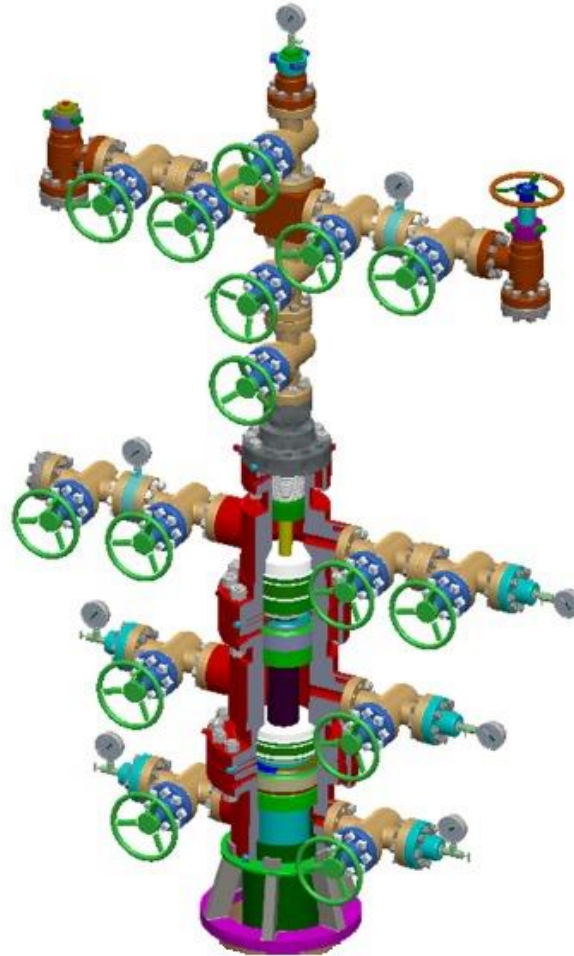

# Domain requirements problems

---



## ✧ Understandability

- Requirements are expressed in the language of the application domain;
- This is often not understood by software engineers developing the system.

## ✧ Implicitness


- Domain specialists understand the area so well that they do not think of making the domain requirements explicit.

# Key points

---



- ✧ Requirements for a software system **set out what the system should do** and **define constraints** on its operation and implementation.
- ✧ Functional requirements are **statements of the services that the system must provide** or are descriptions of how some computations must be carried out.
- ✧ Non-functional requirements **often constrain the system being developed** and the development process being used.
  - They often relate to the **emergent properties of the system** and therefore apply to the system as a whole.



# The software requirements document

---


- ✧ The software requirements document is the **official statement** of what is required of the system developers.
- ✧ Should include both a definition of **user requirements** and a specification of the **system requirements**.
- ✧ It is **NOT a design document**. As far as possible, it should set of **WHAT the system should do** rather than **HOW** it should do it.

# Agile methods and requirements



- ✧ Many **agile methods** argue that producing a requirements document is a **waste of time** as **requirements change so quickly**.
- ✧ The document is therefore **always out of date**.
- ✧ Methods such as XP use incremental requirements engineering and express requirements as '**user stories**'.
- ✧ This may be **practical for business systems** but problematic for systems that require a **lot of pre-delivery analysis** (e.g. critical systems) or systems developed by several teams.

# Users of a requirements document

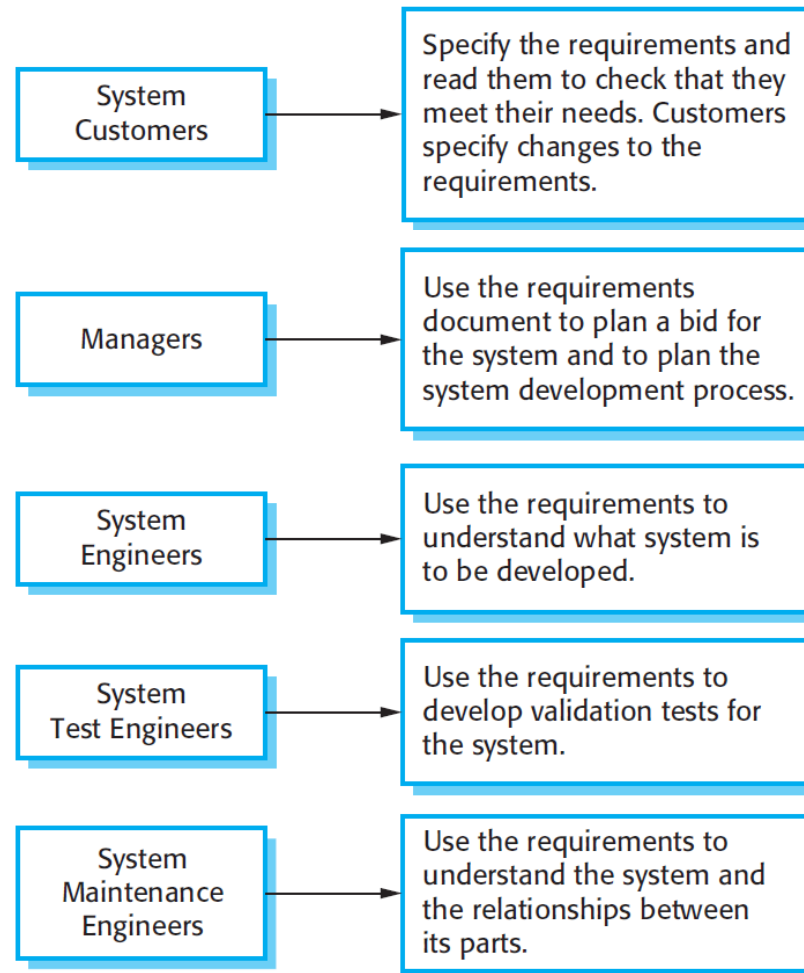


# Requirements document variability

---

- ✧ Information in requirements document depends
  - type of system
  - the development approach used
- ✧ Systems **developed incrementally** will, typically, have **less detail** in the requirements document.
- ✧ Requirements documents standards have been designed e.g. IEEE standard.
  - These are mostly applicable to the requirements for large systems engineering projects.


# The structure of a requirements document



Chapter	Description
Preface	This should define the expected readership of the document and describe its version history, including a rationale for the creation of a new version and a summary of the changes made in each version.
Introduction	This should describe the <b>need for the system</b> . It should briefly <b>describe the system's functions</b> and explain <b>how it will work with other systems</b> . It should also describe <b>how the system fits into the overall business</b> or strategic objectives of the organization commissioning the software.
Glossary	This should <b>define the technical terms</b> used in the document. You should not make assumptions about the experience or expertise of the reader.
User requirements definition	Here, you <b>describe the services</b> provided for the user. The nonfunctional system requirements should also be described in this section. <b>This description may use natural language, diagrams, or other notations that are understandable to customers</b> . Product and process standards that must be followed should be specified.
System architecture	This chapter should present a <b>high-level overview of the anticipated system architecture</b> , showing the distribution of functions across system modules. Architectural components that are reused should be highlighted.



# The structure of a requirements document



Chapter	Description
System requirements specification	This should describe the <b>functional and nonfunctional requirements in more detail</b> . If necessary, further detail may also be added to the nonfunctional requirements. Interfaces to other systems may be defined.
System models	This might include graphical system models showing the <b>relationships between the system components and the system and its environment</b> . Examples of possible models are <b>object models, data-flow models, or semantic data models</b> .
System evolution	This should describe the <b>fundamental assumptions</b> on which the system is based, and any <b>anticipated changes due to hardware evolution</b> , changing user needs, and so on. This section is useful for system designers as it may help them avoid design decisions that would constrain likely future changes to the system.
Appendices	These should provide <b>detailed, specific information</b> that is related to the application being developed; for example, hardware and database descriptions. Hardware requirements define the minimal and optimal configurations for the system. Database requirements define the logical organization of the data used by the system and the relationships between data.
Index	Several indexes to the document may be included. As well as a normal alphabetic index, there may be an index of diagrams, an index of functions, and so on.

# Requirements specification

---

- ✧ The process of writing the user and system requirements in a requirements document.
- ✧ **User requirements** have to be understandable by **end-users and customers** who do not have a technical background.
- ✧ **System requirements** are more **detailed requirements** and may include **more technical** information.
- ✧ The requirements may be **part of a contract** for the system development
  - It is therefore important that these are **as complete as possible**.


# Requirements and design

---



- ✧ In principle, requirements should state what the system should do and the design should describe how it does this.
- ✧ In practice, requirements and design are inseparable
  - A system architecture may be designed to structure the requirements;
  - The system may inter-operate with other systems that generate design requirements;
  - The use of a specific architecture to satisfy non-functional requirements may be a domain requirement.
  - This may be the consequence of a regulatory requirement.

# Ways of writing a system requirements specification



Notation	Description
Natural language	The requirements are written <b>using numbered sentences</b> in natural language. Each sentence should express one requirement.
Structured natural language	The requirements are written in natural language on a standard form or template. Each field provides information about an aspect of the requirement.
Design description languages	This approach uses a language like a programming language, but with more abstract features to specify the requirements by defining an operational model of the system. This approach is now rarely used although it can be useful for interface specifications.
Graphical notations	Graphical models, supplemented by text annotations, are used to define the functional requirements for the system; UML use case and sequence diagrams are commonly used.
Mathematical specifications	These notations are based on mathematical concepts such as finite-state machines or sets. Although these unambiguous specifications <b>can reduce the ambiguity in a requirements document, most customers don't understand a formal specification</b> . They cannot check that it represents what they want and are reluctant to accept it as a system contract

# Natural language specification

---



- ✧ Requirements are written as natural language sentences supplemented by diagrams and tables.
- ✧ Used for writing requirements because it is **expressive, intuitive and universal**. This means that the requirements can be understood by users and customers.

# Guidelines for writing requirements using natural language


---



- ✧ Invent a standard format and use it for all requirements.
- ✧ Use language in a consistent way. Use shall for mandatory requirements, should for desirable requirements.
- ✧ Use text highlighting to identify key parts of the requirement.
- ✧ Avoid the use of computer jargon.
- ✧ Include an explanation (rationale) of why a requirement is necessary.

# Example requirements for the insulin pump software system

---



**3.2** The system shall measure the blood sugar and deliver insulin, if required, every 10 minutes. *(Changes in blood sugar are relatively slow so more frequent measurement is unnecessary; less frequent measurement could lead to unnecessarily high sugar levels.)*

**3.6** The system shall run a self-test routine every minute with the conditions to be tested and the associated actions defined in Table 1. *(A self-test routine can discover hardware and software problems and alert the user to the fact the normal operation may be impossible.)*

# Problems with natural language

---



## ✧ Lack of clarity

- Precision is difficult without making the document difficult to read.

## ✧ Requirements confusion

- Functional and non-functional requirements **tend to be mixed-up.**

## ✧ Requirements amalgamation

- Several different requirements may be expressed together.



# Structured specifications

---



- ✧ An approach to writing requirements where the **freedom of the requirements writer is limited** and requirements are **written in a standard way**.
- ✧ This works well for some types of requirements e.g. requirements for **embedded control system** but is sometimes too rigid for writing business system requirements.


# Form-based specifications

---



- ✧ Definition of the function or entity.
- ✧ Description of inputs and where they come from.
- ✧ Description of outputs and where they go to.
- ✧ Information about the information needed for the computation and other entities used.
- ✧ Description of the action to be taken.
- ✧ Pre and post conditions (if appropriate).
- ✧ The side effects (if any) of the function.

# A structured specification of a requirement for an insulin pump



## *Insulin Pump/Control Software/SRS/3.3.2*

<b>Function</b>	Compute insulin dose: Safe sugar level.
<b>Description</b>	Computes the dose of insulin to be delivered when the current measured sugar level is in the safe zone between 3 and 7 units.
<b>Inputs</b>	Current sugar reading (r2), the previous two readings (r0 and r1).
<b>Source</b>	Current sugar reading from sensor. Other readings from memory.
<b>Outputs</b>	CompDose—the dose in insulin to be delivered.
<b>Destination</b>	Main control loop.
<b>Action</b>	CompDose is zero if the sugar level is stable or falling or if the level is increasing but the rate of increase is decreasing. If the level is increasing and the rate of increase is increasing, then CompDose is computed by dividing the difference between the current sugar level and the previous level by 4 and rounding the result. If the result, is rounded to zero then CompDose is set to the minimum dose that can be delivered.
<b>Requirements</b>	Two previous readings so that the rate of change of sugar level can be computed.
<b>Pre-condition</b>	The insulin reservoir contains at least the maximum allowed single dose of insulin.
<b>Post-condition</b>	r0 is replaced by r1 then r1 is replaced by r2.
<b>Side effects</b>	None.

## هزینه ورود به طرح ترافیک چقدر است؟

- ۱- اگر خودرویی ورودش بعد از ساعت ۱۰ صبح و خروجش قبل از ساعت ۱۶ ثبت شود، در صورتی که دارای معاینه فنی برتر باشد عوارضش برای آن روز ۱۳ هزار و ۴۰۰ تومان خواهد بود.
- ۲- اگر خودرویی ورودش بعد از ساعت ۱۰ و خروجش قبل از ساعت ۱۶ ثبت شده باشد اما دارای معاینه فنی عادی باشد، عوارض یک روز تردد برای این خودرو ۱۶ هزار و ۸۰۰ تومان خواهد بود.
- ۳- اگر ورود خودرویی به داخل محدوده طرح ترافیک قبل از ساعت ۱۰ و خروجش قبل از ساعت ۱۶ باشد اگر دارای معاینه فنی برتر باشد عوارضش ۱۹ هزار و ۲۰۰ تومان خواهد بود.
- ۴- اگر ورود خودرویی به داخل محدوده طرح ترافیک قبل از ساعت ۱۰ و خروجش قبل از ساعت ۱۶ باشد اگر دارای معاینه فنی عادی باشد نرخ عوارض برای این خودرو ۲۴ هزار تومان خواهد بود.
- ۵- اگر ورود خودرویی قبل از ساعت ۱۰ و خروج آن نیز بعد از ساعت ۱۶ باشد اگر این خودرو معاینه فنی برتر داشته باشد نرخ عوارض ۲۸ هزار و ۸۰۰ تومان خواهد بود.
- ۶- اگر ورود خودرویی قبل از ساعت ۱۰ و خروج آن نیز بعد از ساعت ۱۶ باشد اگر این خودرو با این شرایط دارای معاینه فنی عادی باشد ۳۶ هزار تومان عوارض برای آن محاسبه می‌شود.


# Tabular specification

---



- ✧ Used to **supplement natural language**.
- ✧ Particularly useful when you have to **define a number of possible alternative** courses of action.
- ✧ For example, the insulin pump systems bases its computations on the rate of change of blood sugar level and the tabular specification explains how to calculate the insulin requirement for different scenarios.

# Tabular specification of computation for an insulin pump





Condition	Action
Sugar level falling ( $r2 < r1$ )	CompDose = 0
Sugar level stable ( $r2 = r1$ )	CompDose = 0
Sugar level increasing and rate of increase decreasing ( $(r2 - r1) < (r1 - r0)$ )	CompDose = 0
Sugar level increasing and rate of increase stable or increasing ( $(r2 - r1) \geq (r1 - r0)$ )	CompDose = round $((r2 - r1)/4)$ If rounded result = 0 then CompDose = MinimumDose

# Requirements engineering processes


---

- ✧ The processes used for RE vary widely depending on
  - the application domain
  - the people involved
  - the organisation developing the requirements.
- ✧ However, there are a number of generic activities common to all processes
  - Requirements elicitation;
  - Requirements analysis;
  - Requirements validation;
  - Requirements management.
- ✧ In practice, RE is an iterative process in which these activities are interleaved.

# A spiral view of the requirements engineering process

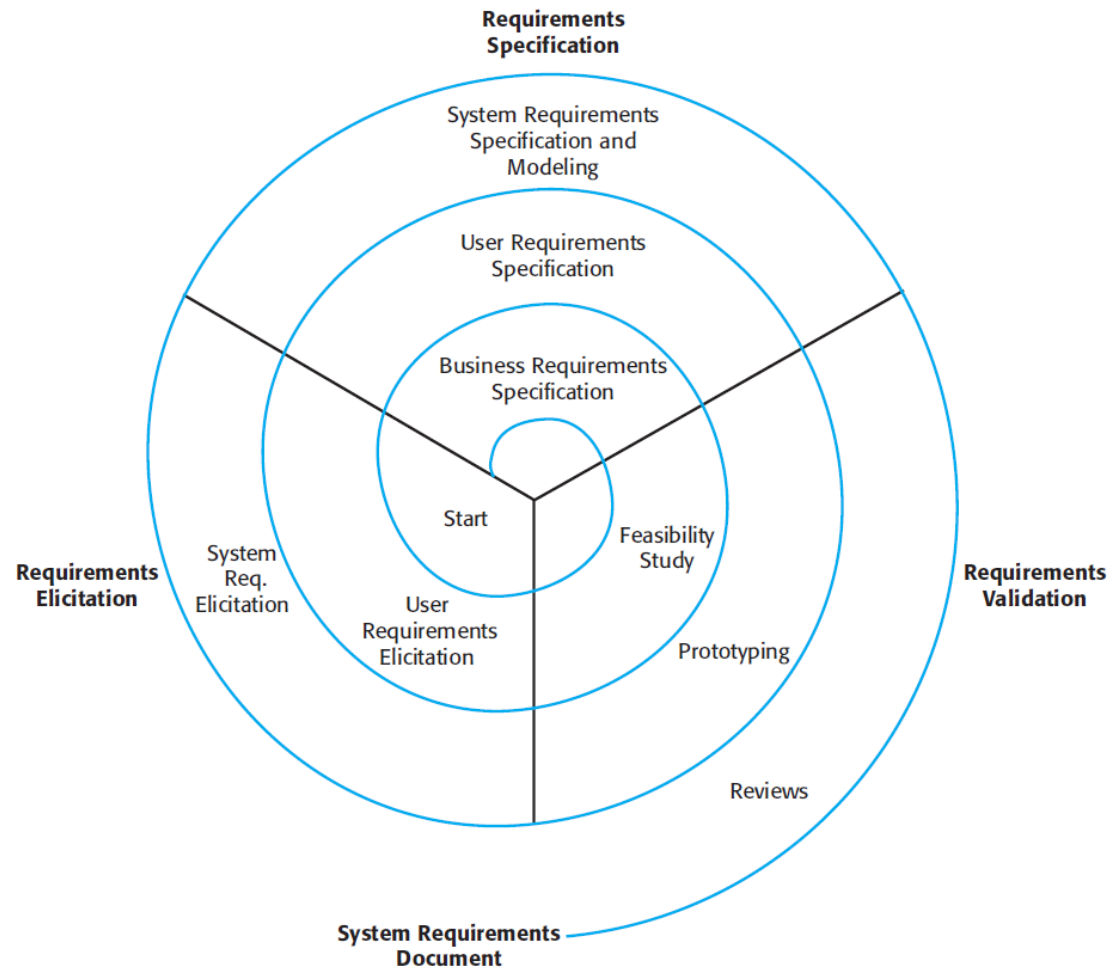





# Requirements elicitation and analysis

---

- ✧ Sometimes called requirements elicitation or requirements discovery.
- ✧ Involves **technical staff working with customers** to find out about the **application domain**, the **services that the system should provide** and the **system's operational constraints**.
- ✧ May involve end-users, managers, engineers involved in maintenance, domain experts, trade unions, etc. These are called ***stakeholders***.

# Problems of requirements elicitation

---




- ✧ Stakeholders don't know what they really want.
- ✧ Stakeholders express requirements in their own terms.
- ✧ Different stakeholders may have conflicting requirements.
- ✧ Organisational and political factors may influence the system requirements.
- ✧ The requirements change during the analysis process. New stakeholders may emerge and the business environment change.

# Requirements elicitation and analysis

✧ Stages include:

- discovery,
- classification and organization,
- prioritization and negotiation,
- specification.

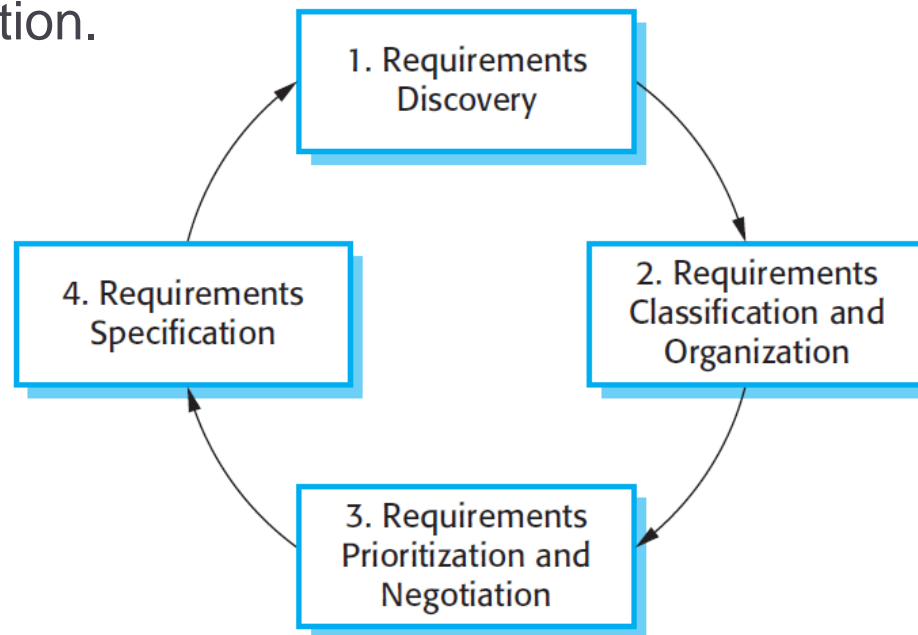

# Process activities

---



## ✧ Requirements discovery

- Interacting with stakeholders to discover their requirements. Domain requirements are also discovered at this stage.

## ✧ Requirements classification and organisation

- Groups related requirements and organises them into coherent clusters.

## ✧ Prioritisation and negotiation

- Prioritising requirements and resolving requirements conflicts.

## ✧ Requirements specification

- Requirements are documented and input into the next round of the spiral.

# Requirements discovery

---



- ✧ The process of gathering information about
  - the required and existing systems
  - And distilling the user and system requirements from this information.
  
- ✧ Systems normally have a range of stakeholders.
  
- ✧ Interaction is with system stakeholders from managers to external regulators.

# Stakeholders in the MHC-PMS

---

- ✧ Patients whose information is recorded in the system.
- ✧ Doctors who are responsible for assessing and treating patients.
- ✧ Nurses who coordinate the consultations with doctors and administer some treatments.
- ✧ Medical receptionists who manage patients' appointments.
- ✧ IT staff who are responsible for installing and maintaining the system.

# Stakeholders in the MHC-PMS

---

- ✧ A medical ethics manager who must ensure that the system meets current ethical guidelines for patient care.
- ✧ Health care managers who obtain management information from the system.
- ✧ Medical records staff who are responsible for ensuring that system information can be maintained and preserved, and that record keeping procedures have been properly implemented.

# Interviewing



- ✧ Formal or informal interviews with stakeholders are part of most RE processes.
- ✧ Types of interview
  - **Closed** interviews based on pre-determined list of questions
  - **Open** interviews where various issues are explored with stakeholders.
- ✧ Effective interviewing
  - Be **open-minded**, **avoid pre-conceived ideas** about the requirements and are **willing to listen** to stakeholders.
  - Prompt the interviewee to get discussions going using a **springboard question**, a **requirements proposal**, or by working together on a **prototype system**.



# Interviews in practice

---



- ✧ Normally a mix of closed and open-ended interviewing.
- ✧ Interviews are good for getting an overall understanding of what stakeholders do and how they might interact with the system.
- ✧ Interviews are not good for understanding domain requirements
  - Requirements engineers cannot understand specific domain terminology;
  - Some domain knowledge is so familiar that people find it hard to articulate or think that it isn't worth articulating.

# Understand the situation

---

- ✧ What problem does the proposed software try to solve?
  - Understand the problem
  - Do not describe the solution, but fully articulate the problem
  
- ✧ What does the solution look like?
  - Potential and high-level solution to the problem

# Scenarios

---



- ✧ Scenarios are real-life examples of how a system can be used.
  
- ✧ They should include
  - A description of the starting situation;
  - A description of the normal flow of events;
  - A description of what can go wrong;
  - Information about other concurrent activities;
  - A description of the state when the scenario finishes.

# Scenario for collecting medical history in MHC-PMS

---



## **INITIAL ASSUMPTION:**

The patient has seen a medical receptionist who has created a record in the system and collected the patient's personal information (name, address, age, etc.). A nurse is logged on to the system and is collecting medical history.

## **NORMAL:**

The nurse searches for the patient by family name. If there is more than one patient with the same surname, the given name (first name in English) and date of birth are used to identify the patient.

The nurse chooses the menu option to add medical history.

The nurse then follows a series of prompts from the system to enter information about consultations elsewhere on mental health problems (free text input), existing medical conditions (nurse selects conditions from menu), medication currently taken (selected from menu), allergies (free text), and home life (form).

# Scenario for collecting medical history in MHC-PMS

---



## **WHAT CAN GO WRONG:**

The patient's record does not exist or cannot be found. The nurse should create a new record and record personal information.

Patient conditions or medication are not entered in the menu. The nurse should choose the 'other' option and enter free text describing the condition/medication.

Patient cannot/will not provide information on medical history. The nurse should enter free text recording the patient's inability/unwillingness to provide information. The system should print the standard exclusion form stating that the lack of information may mean that treatment will be limited or delayed. This should be signed and handed to the patient.

## **OTHER ACTIVITIES:**

Record may be consulted but not edited by other staff while information is being entered.

## **SYSTEM STATE ON COMPLETION:**



User is logged on. The patient record including medical history is entered in the database, a record is added to the system log showing the start and end time of the session and the nurse involved.

# Use cases



- ✧ Use-cases are a **scenario based technique** in the UML which identify the actors in an interaction and which describe the interaction itself.
- ✧ A set of use cases should **describe all possible interactions** with the system.
- ✧ High-level graphical model supplemented by more detailed tabular description (see Chapter 5).
- ✧ **Sequence diagrams** may be used **to add detail** to use-cases by showing the sequence of event processing in the system.

# Use cases for the MHC-PMS

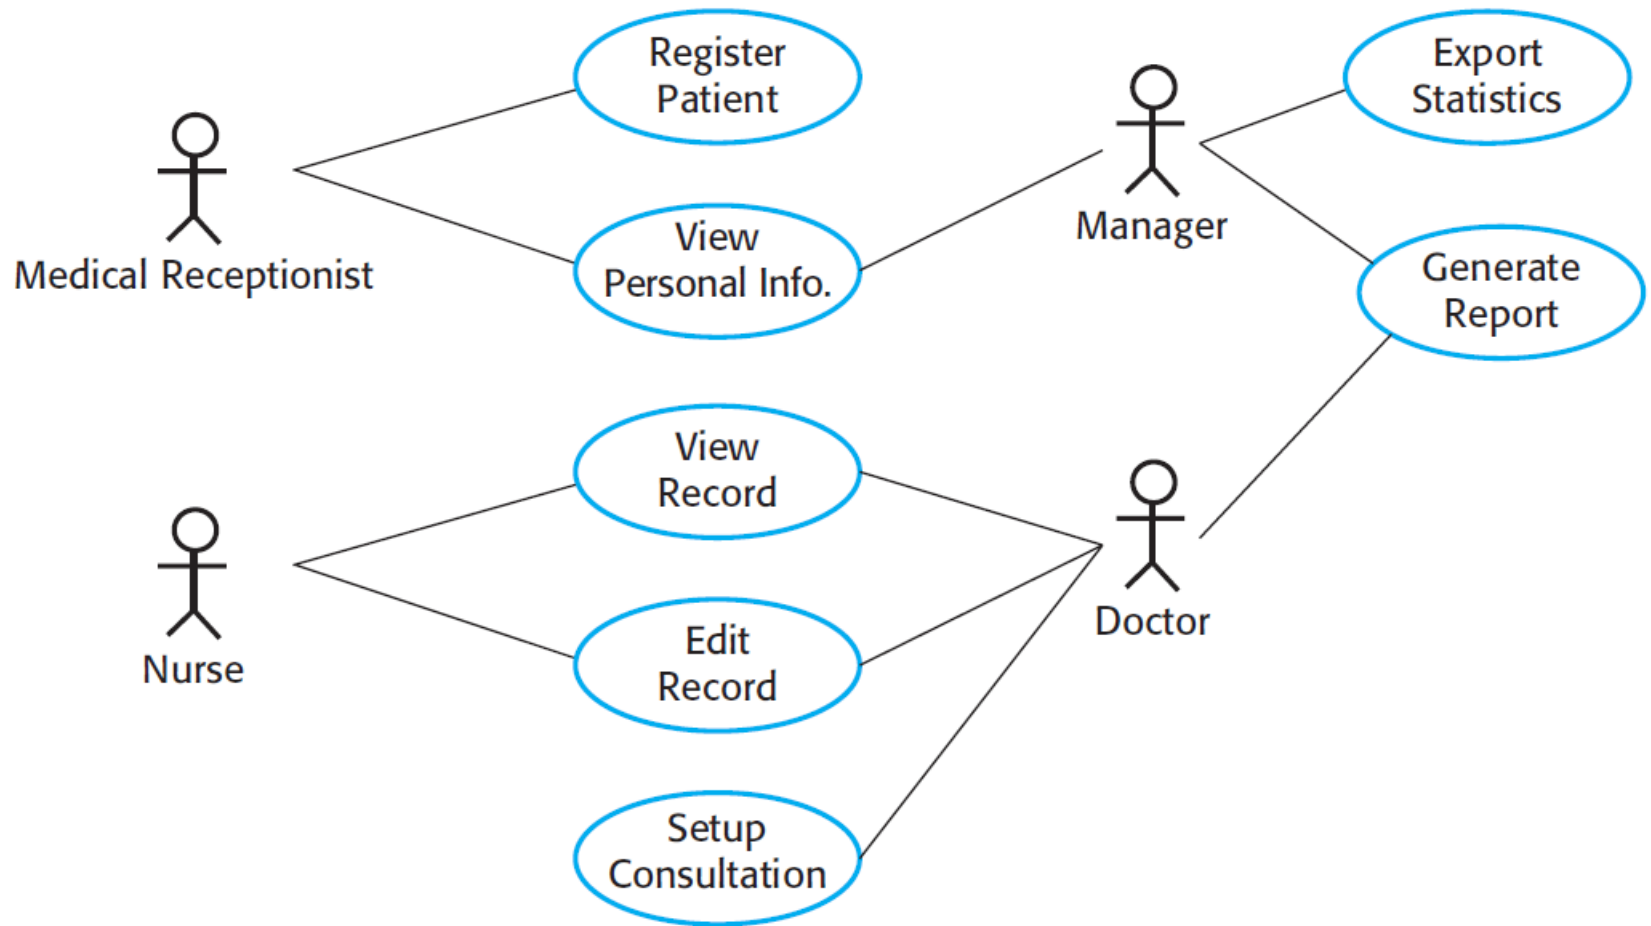

# Let's practice!

---



- ✧ Each group divide into 2 teams
  - Team 1 and Team 2
  
- ✧ Team 1 interviews Team 2 from another group
  - Understand the problem
  - Understand the proposed solution
  - Identify and document the actors
  - Identify and describe use cases/scenarios (high-level)
  - Draw use case diagram
  
- ✧ Team1: prepare some questions that you need to ask



# Let's practice!

---



- ✧ Team 1: give the document to your interviewees (Team 2 from the other group)
- ✧ Second round:
  - Interviewees and interviewers change roles!
- ✧ Team 2: give the document to your interviewees (Team 1 from the other group)
- ✧ Each group should have 2 documents

# Ethnography

---



- ✧ Requirements that are derived from the way that people actually work rather than the way in which process definitions suggest that they ought to work.
- ✧ Requirements that are derived from cooperation and awareness of other people's activities.
  - Awareness of what other people are doing leads to changes in the ways in which we do things.
- ✧ Ethnography is effective for understanding existing processes but cannot identify new features that should be added to a system.

# Requirements validation

---



- ✧ Concerned with demonstrating that the requirements **define the system that the customer really wants.**
- ✧ Requirements **error costs are high** so validation is very important
  - Fixing a requirements error after delivery may cost up to 100 times the cost of fixing an implementation error.

# Requirements checking

---

- ✧ **Validity**. Does the system provide the functions which best support the customer's needs?
- ✧ **Consistency**. Are there any requirements conflicts?
- ✧ **Completeness**. Are all functions required by the customer included?
- ✧ **Realism**. Can the requirements be implemented given available budget and technology

# Requirements checking

---

## ✧ Verifiability

- Is the requirement realistically testable?

## ✧ Comprehensibility

- Is the requirement properly understood?

## ✧ Traceability

- Is the origin of the requirement clearly stated?

## ✧ Adaptability

- Can the requirement be changed without a large impact on other requirements?

# Requirements validation techniques

---

## ✧ Requirements reviews

- Systematic manual analysis of the requirements.

## ✧ Prototyping

- Using an executable model of the system to check requirements.  
Covered in Chapter 2.

## ✧ Test-case generation

- Developing tests for requirements to check testability.

# Requirements reviews

---



- ✧ Regular reviews should be held while the requirements definition is being formulated.
- ✧ Both client and contractor staff should be involved in reviews.
- ✧ Reviews may be formal (with completed documents) or informal. Good communications between developers, customers and users can resolve problems at an early stage.

# Requirements management

---



- ✧ Managing changing requirements during
  - The requirements engineering
  - The system development
  
- ✧ New requirements emerge as a system is being developed and after it has gone into use.



# Changing requirements

---



- ✧ The business and technical environment of the system always changes after installation.
  - New hardware may be introduced
  - It may be necessary to interface the system with other systems
  - Business priorities may change (with consequent changes in the system support required)
  - New legislation and regulations may be introduced that the system must necessarily abide by

# Changing requirements

---



- ✧ The people who pay for a system and the users of that system are rarely the same people.
  - System customers impose requirements because of organizational and budgetary constraints.
  - These may conflict with end-user requirements and, after delivery, new features may have to be added for user support if the system is to meet its goals.


# Changing requirements

---



- ✧ Large systems usually have a diverse user community, with many users having different requirements and priorities that may be conflicting or contradictory.
  - The final system requirements are inevitably a compromise between them and, with experience, it is often discovered that the balance of support given to different users has to be changed.

# Requirements evolution

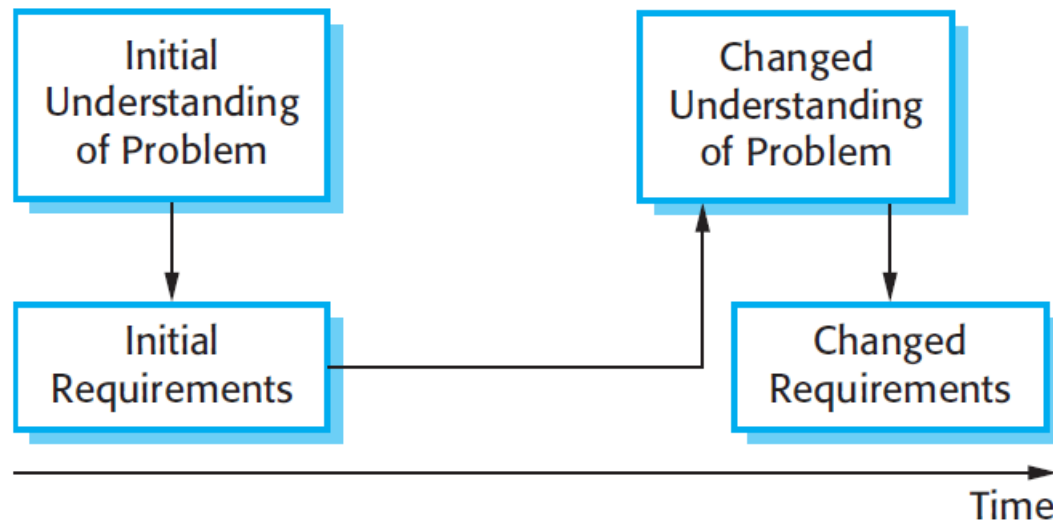


# Requirements management planning

---

- ✧ Establishes the level of requirements management detail that is required.
- ✧ Requirements management decisions:
  - *Requirements identification* Each requirement must be uniquely identified so that it can be cross-referenced with other requirements.
  - *A change management process* This is the set of activities that assess the impact and cost of changes. I discuss this process in more detail in the following section.
  - *Traceability policies* These policies define the relationships between each requirement and between the requirements and the system design that should be recorded.
  - *Tool support* Tools that may be used range from specialist requirements management systems to spreadsheets and simple database systems.

# Requirements change management




## ✧ Deciding if a requirements change should be accepted

- *Problem analysis and change specification*
  - Change is analyzed for validity. This analysis is fed back to the change requestor who may respond with a more specific requirements change proposal, or decide to withdraw the request.
- *Change analysis and costing*
  - The effect of the proposed change is assessed using traceability information and general knowledge of the system requirements. Once this analysis is completed, a decision is made whether or not to proceed with the requirements change.
- *Change implementation*
  - The requirements document and, where necessary, the system design and implementation, are modified. Ideally, the document should be organized so that changes can be easily implemented.

# Requirements change management

---

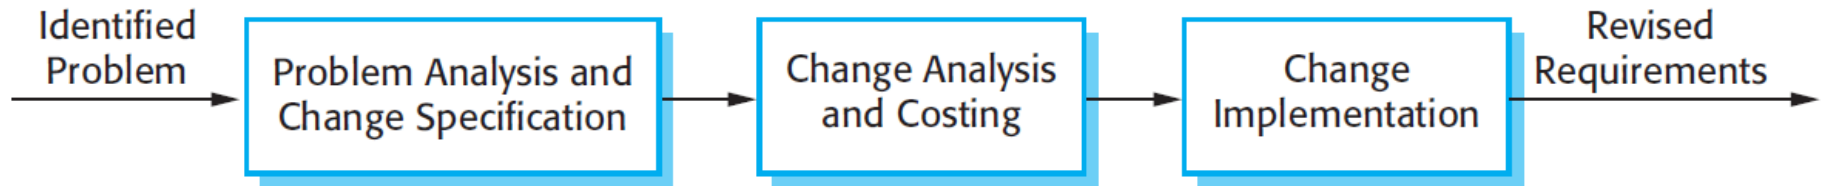

# Key points

---



- ✧ You can use a range of techniques for requirements elicitation including **interviews, scenarios, use-cases and ethnography**.
- ✧ Requirements validation is the process of checking the requirements for validity, consistency, completeness, realism and verifiability.
- ✧ Business, organizational and technical changes inevitably lead to changes to the requirements for a software system. Requirements management is the process of managing and controlling these changes.