



QCOBjects

Welcome to [QCOBjects](#) Main Reference Documentation!

Check the official page of [QCOBjects](#) at <https://qcobjects.dev>

Cross Browser Javascript Framework for MVC Patterns

[QCOBjects](#) is a javascript framework designed to make easier everything about the MVC patterns implementation into the pure javascript scope. You don't need to use typescript nor any transpiler to run [QCOBjects](#). It runs directly on the browser and it uses pure javascript with no extra dependencies of code. You can make your own components expressed in real native javascript objects or extend a native DOM object to use in your own way. You can also use [QCOBjects](#) in conjunction with CSS3 frameworks like [Foundation](#), [Bootstrap](#) and mobile javascript frameworks like [PhoneGap](#) and OnsenUI (<https://onsen.io>)

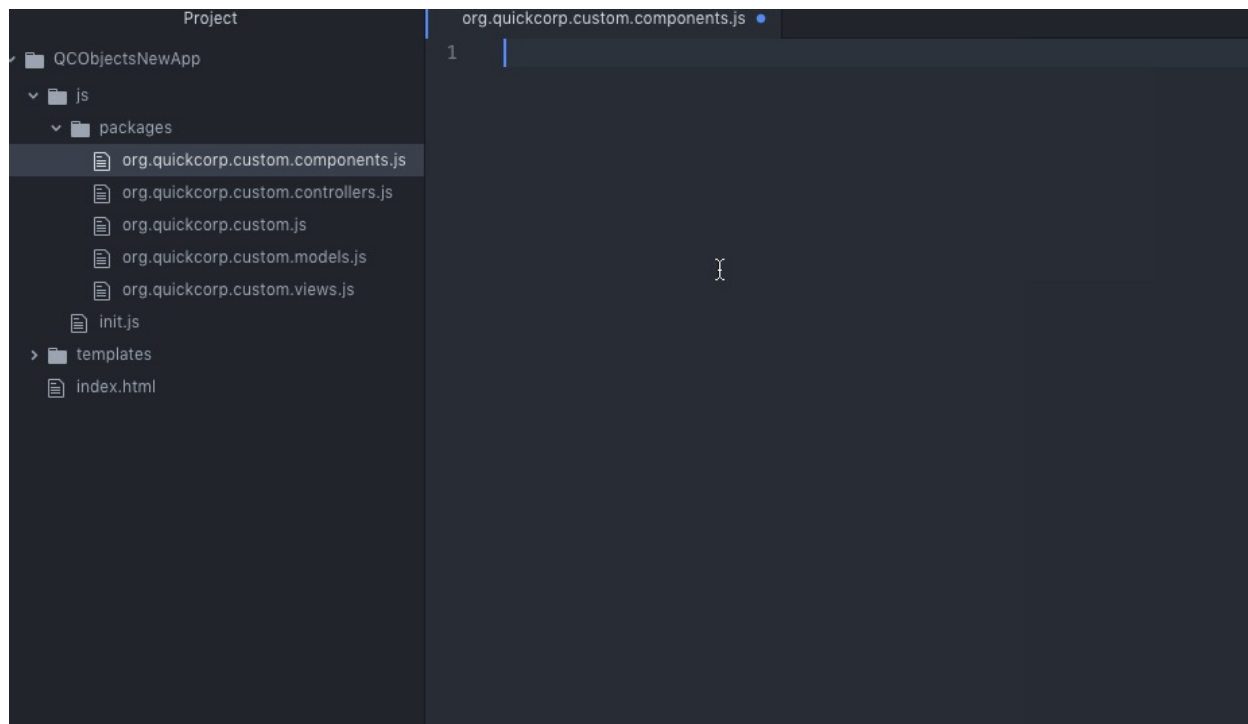


Table of Contents

- [QObjects](#)
 - [Cross Browser Javascript Framework for MVC Patterns](#)
- [Table of Contents](#)
- [ALPHA RISE Startup](#)
- [ECMA-262 Specification](#)
- [Copyright](#)
- [Demo](#)
 - [Demo Using Foundation](#)
 - [Demo Using Materializecss](#)
 - [Demo Using Raw CSS](#)
 - [Another Basic Demo example: The simplest demo example:](#)
- [Fork](#)
- [Become a Sponsor](#)
- [Check out the QObjectjs SDK](#)
- [Donate](#)
- [Installing](#)
 - [Using QObjectjs with Atom:](#)
 - [Using QObjectjs in Visual Studio Code:](#)
 - [Installing with NPM:](#)
 - [Installing the docker playground:](#)

- Using the code in the straight way into HTML5:
- Reference
 - Essentials
 - QC_Object
 - ComplexStorageCache
 - asyncLoad
 - Class
 - QC_Append, append method
 - The _super_ method
 - New
 - InheritClass
 - _Crypt
 - GLOBAL
 - CONFIG
 - waitUntil
 - Package
 - Import
 - Export
 - Cast
 - Tag
 - Ready
 - Component Class
 - Component HTML Tag
 - Controller
 - View
 - VO
 - Service
 - serviceLoader
 - JSONService
 - ConfigService
 - SourceJS
 - SourceCSS
 - ArrayList
 - ArrayCollection
 - Effect
 - Timer
 - SDK
- Quick Start
 - Step 1: Start creating a main import file and name it like: cl.quickcorp.js. Put it into packages/js/ file directory
 - Step 2: Then create some services inhereting classes into the file js/packages/cl.quickcorp.services.js :

- Step 3: Now it's time to create the components (cl.quickcorp.components.js)
- Step 4: Once you have done the above components declaration, you will now want to code your controllers (cl.quickcorp.controller.js)
- Step 5: To use into the HTML5 code you only need to do some settings between script tags:

ALPHA RISE Startup



[QCOBJECTS](#) was invited to exhibit as an ALPHA Startup in the RISE Conf Hong Kong 2019. RISE attracts the most dynamic startups from around the world. We'll be showing how [QCOBJECTS](#) is making a real Global Impact to the JavaScript developers life transforming the way for coding.

If you want to find out more about RISE event check out their website <https://riseconf.com>

ECMA-262 Specification

See

[ECMAScript® 2020 Language Specification](#) for reference

Copyright

Copyright (c) Jean Machuca and [QuickCorp info@quickcorp.cl](mailto:info@quickcorp.cl)

Demo

Demo Using Foundation

Check out a demo using Foundation components here:

[Demo Using Foundation](#)

Demo Using Materializecss

Check out a demo using MaterializeCSS here:

[Demo Using Materializecss](#)

Demo Using Raw CSS

Check out a demo using raw CSS:

[Demo Using Raw CSS](#)

Another Basic Demo example: The simplest demo example:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Demo</title>
    <script type="text/javascript" src="https://qcobjects.dev/QCObjects.js"></script>
    <script type="text/javascript">
      var canvas1,canvas2,canvas3,container;
      CONFIG.set('relativeImportPath','src/');

      /**
       * Main import sentence.
       */
      Import('cl.quickcorp',function (){

        /**
         * Super Container MyOwnBody
```

```

    */
    Class('MyOwnBody', HTMLBodyElement, {
        customAttr: 'custom',
        body: document.body // breakes default body element and replace with th
    });

    /**
     * Another custom class definition
     */
    Class('MyContainer', HTMLElement, {
        width: 400,
        height: 400,
        customAttr: 'custom attr container'
    });

    /**
     * Another custom class definition
     */
    Class('canvas', HTMLCanvasElement, {
        customAttr: 'custom'
    });

    /**
     * Another custom class definition
     */
    Class('MyCanvas2', HTMLCanvasElement, {});

    body = New(MyOwnBody); // binds to body
    body.css({backgroundColor: '#ccc'});

    container = document.getElementsByTagName('container')[0].Cast(MyContainer)
    container.css({backgroundColor: 'red'}); // access binding in two directions

    /**
     * Instance a new custom canvas
     */
    canvas1 = New(canvas, {
        width: 100,
        height: 100,
    });
    canvas2 = New(canvas, {
        width: 200,
        height: 100,
    });
    canvas3 = New(canvas, {
        width: 300,
        height: 50,
    });

    canvas1.css({backgroundColor: '#000000'}); // Like jquery and another style
    canvas1.body.style.backgroundColor = '#000000'; // standard javascript style access
    canvas2.body.style.backgroundColor = '#0044AA'; // standard javascript style
    canvas3.body.style.backgroundColor = 'green'; // standard javascript style ac

    canvas1.append(); //append canvas1 to body

```

```
        canvas2.attachIn('container'); // attach or append to specific tag container
        container.append(canvas3); // append canvas3 to custom tag binding

//        canvas1.body.remove(); // remove canvas1 from dom
        body.append(canvas3); // append canvas3 to body

// using components
var c1 = New(Component,{ 'templateURI': 'templatesample.html', cached: false });
document.body.append(c1); // appends the c1 to the body

    });

</script>
</head>
<body>
    <container id="contentLoader" ></container>
</body>
</html>
```

Fork

Please fork this project or make a link to this project into your README.md file. Read the LICENSE.txt file before you use this code.

Become a Sponsor


If you want to become a sponsor for this wonderful project you can do it [here](#)

Check out the QCOObjects SDK

You can check out the [QCOObjects SDK](#) and follow the examples to make your own featured components

Donate

If you like this code please [DONATE!](#)

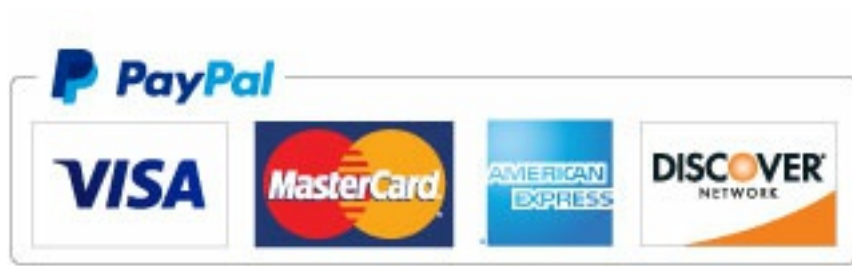

Installing

Using QCOBjects with Atom:

```
> apm install qcobjects-syntax
```

<https://atom.io/packages/qcobjects-syntax>

Using QCOBjects in Visual Studio Code:

<https://marketplace.visualstudio.com/items?itemName=Quickcorp.QCOBjects-vscode>

Installing with NPM:

```
> npm install qcobjects-cli -g && npm install qcobjects --save
```



```
quickcorp@CloudCoreBanking:~$ sudo |
```

Installing the docker playground:

```
docker pull -a quickcorp/qcobjects && docker run -it --name qcobjects-playground --rm -it q
```

```
quickcorp@CloudCoreBanking:~$ docker pull -a quickcorp/qcobjects && docker run -it --name qcobjects-  
playground --rm -it quickcorp|
```

Using the code in the straight way into HTML5:

```
<script type="text/javascript" src="https://qcobjects.dev/QCObjects.js"></script>
```

Reference

Essentials

Here are the essentials symbols and concepts of [QCObjects](#) Reference

QC_Object


Basic Type of all elements

ComplexStorageCache

With CompleStorageCache you can handle a cache for any object and save it in the local storage.

Usage:

```
var cache = new CompleStorageCache({
    index:object.id, // Object Index
    load:(cacheController)=>{}, // A function to execute for the first ti
    alternate: (cacheController)=>{} // The alternate function to execute
});
```



Example:

```
var dataObject = {id:1,
    prop1:1,
    prop2:2
};

var cache = new CompleStorageCache({
    index: dataObject.id,
    load: (cacheController) => {
```

```

    dataObject = {
        id:dataObject.id,
        prop1:dataObject.prop1*2, // changing a property value
        prop2:dataObject.prop2
    };
    return dataObject;
},
alternate: (cacheController) => {
    dataObject = cacheController.cache.getCached(dataObject.id); // setting dataObject wi
    return;
}
});

// Next time you can get the object from the cache
var dataObjectCopyFromCache = cache.getCached(dataObject.id);
console.log(dataObjectCopyFromCache); // will show the very same object value than dataObje

```

asyncLoad

The asyncLoad function loads a code once in async mode. This is useful to assure some initial process don't replicate its execution and aren't loaded after sensitive code.

Usage:

```

asyncLoad(()=>{
    // my code here
},args);
// Where args is an array of arguments, it can be the "arguments" special object

```

Example:

```

let doSomething = (arg1,arg2)=>{
    asyncLoad((arg1,arg2)=>{
        console.log(arg1);
        console.log(arg2);
    },arguments);
};

doSomething(1,2); // the code of doSomething will be executed once after the rest of asyncL

```

Class

This is NOT the class definition of ECMAScript 2015 (see [class ECMAScript 2015](#) for reference).

Class is a special function to help you to declare a class in an easier and compatible way. It works cross-browser, and I hope ECMA could adopt something like that in the future. To let javascript not to be confuse about this, [QCOBJECTS](#) uses "Class" not "class" (note the Camel Case).

Usage:

```
Class('MyClassName',MyClassDefinition);
```

Where MyClassDefinition is an object with a QCOBJECTS prototype

Example:

```
Class('MyClassName',InheritClass,{
  propertyName1:0, // just to declare purpose
  propertyName2:'',
  classMethod1: function (){
    // some code here
    // note you can use "this" object
    return this.propertyName1;
  },
  classMethod2: function () {
    // some code here
    return this.propertyName2;
  }
});

var newObject = New(MyClassName,{
  propertyName1:1, // this initializes the value in 1
  propertyName2:"some value"
});

console.log(newObject.classMethod1()); // this will show number 1
console.log(newObject.classMethod2()); // this will show "some value"
```

QC_Append, append method

This is a special method inserted to make your life easier when you want to dynamically manipulate the DOM. You can insert even a Component, a QCOBJECTS Object or a DOM Element inside another HTMLElement.

Usage:


```
[element].append([object or element]);
```

Example:

```
// This will create a QObjects class named "canvas" extending a HTMLCanvasElement with a c
Class('canvas',HTMLCanvasElement,{
  customAttr:'custom'
});

// This will declare an instance canvas1 from the class canvas
let canvas1 = New(canvas,{
  width:100,
  height:100,
});

// This will append the canvas1 object to the document body
document.body.append(canvas1);
```



The _super_ method

When you extend a QObjects class from another one, you can use `_super_` method to get an instance from the main class definition.

Usage:

```
_super_('MySuperClass','MySuperMethod').call(this,params)
// where this is the current instance and params are method parameters
```

Example:

```
Class('MySuperiorClass',InheritClass,{
  propertyName1:0, // just to declare purpose
  propertyName2:'',
  classMethod1: function (){
    // some code here
    // note you can use "this" object
    return this.propertyName1;
  },
});
```

```

Class('MyClassName',MySuperiorClass,{
  propertyName1:0, // just to declare purpose
  propertyName2:'',
  classMethod2: function () {
    // The next line will execute classMethod1 from MySuperiorClass
    // but using the current instance of MyClassName1
    return _super_('MySuperiorClass','classMethod1').call(this);
  }
});

var newObject = New(MyClassName,{
  propertyName1:1, // this initializes the value in 1
  propertyName2:"some value"
});
console.log(newObject.classMethod2()); // this will show the number 1

```

New

Creates an object instance of a QCOjects class definition.

Usage:

```

let objectInstance = New(QCOjectsClassName, properties);
// where properties is a single object with the property values

```

NOTE: In the properties object you can use single values or getter as well but they will be executed once.

Example:

```

Class('MyCustomClass',Object);
let objectInstance = New(MyCustomClass,{
  prop1:1,
  get randomNumber(){ // this getter will be executed once
    return Math.random();
  }
});

console.log(objectInstance.randomNumber); // it will show console.log(objectInstance.prop1)

```

InheritClass

A single common used QCOjects class definition.

_Crypt

With _Crypt you can encode serializable objects by a passphrase

Example (1):

```
var _string = New(_Crypt,{string:'hello world',key:'some encryption md5 key'});  
console.log(_string._encrypt());  
console.log(_string._decrypt()); // decodes encrypted string to the source
```

Example (2):

```
_Crypt.encrypt('hola mundo','12345678866');  
_Crypt.decrypt('nqCelFSiq6Wcpw==','12345678866');
```

GLOBAL

GLOBAL is a special QCOjects class to reach the global scope. It has a set and a get method to help you to manage the internal GLOBAL properties.

Example:

```
GLOBAL.set('globalProperty1','some value in global scope');  
var globalProperty1 = GLOBAL.get('globalProperty1');
```

CONFIG

CONFIG is a smart class that manages the global settings of your application. You can get the properties either from a config.json or from the memory previously saved by a set() call.

Usage from memory:

1.- In your initial code set the CONFIG initial values:

```
CONFIG.set('someSettingProperty','some initial value');
```

2.- Then you can access it from anywhere in your code by using the get method:

```
var someSettingProperty = CONFIG.get('someSettingProperty');
```

Usage from config.json:

1.- You need to indicate first that you are using a config.json file by setting the "useConfigService" value to true

```
CONFIG.set('useConfigService',true); // using config.json for custom settings config
```

2.- Once you have set the value above QCOBJECTS will know and look to the next CONFIG settings into the file config.json in the basePath folder of your application.

Usage from an encrypted config.json:

There is also a way to use an encrypted config.json file in order to protect your settings robots that can steal unprotected data from your web application (like API keys web crawlers).

To encrypt your json file go to <https://config.qcobjects.dev>, put your domain and the config.json content. The tool will encrypt your json and you can copy the encrypted content to insert it in your config.json file. QCOBJECTS will know the data is encrypted and the process to decode the data will be transparent for you.

waitUntil

waitUntil is a helper just in case you are in trouble trying to run a code before a condition is true. The code inside waitUntil will be executed once.

NOTE: This is useful in some cases but an excessive use is not recommended.

Usage:

```
waitUntil(()=>{  
  // the code that will be executed after the condition is true  
},()=>{return condition;});  
// where condition is what I want to wait for
```


Example:

```
let someVar = 0;
waitUntil(=>{
  console.log('someVar is present');
},()=>{return typeof someVar != 'undefined';});
// where condition is what I want to wait for
```

Package

Defines a QCOjects package and returns it.

Usage:

```
Package('packageName',[packageContent]);
```


Where packageContent is an array of QCOjects Classes. If you only pass the packageName param you will get the previously declared package content.

Example (1):

```
'use strict';
Package('org.quickcorp.main',[
  Class('Main',InheritClass,{
    propertyName1:'propertyValue1',
  }),
  Class('MyCustomClass',InheritClass,{
    propertyName2:'propertyValue2',
  }),
]);
```

Example (2):

```
let mainPackage = Package('org.quickcorp.main'); // this will return the previously declare
// mainPackage[0] will be the Main class definition.
// This is useful for code introspection
```



Import

Imports a package from another JS file

Usage:

```
Import (packagename,[ready],[external]);
```

Where packagename is the name of the package, ready is a function that will be executed after the package is loaded, and external is a boolean value that indicates if the JS file is in the same origin or it is from another external resource.

Example (1):

```
Import('org.quickcorp.main');
```

The above code will try to import a JS file named 'org.quickcorp.main.js' from the path specified in the `relativeImportPath` settings value present in your CONFIG. Inside the JS file you have to define a package by using `Package('org.quickcorp.main',[Class1, Class2...])`

Example (2):

```
Import('org.quickcorp.main',function (){  
    console.log('remote import is loaded');  
},true);
```

The above code this time is trying to load the same package but using an external path defined by the `remoteImportsPath` setting present in your CONFIG

NOTE: In both examples above you have not use or specify the ".js" extension. This it's used by default and can't be changed by security reasons.

Export

Put a symbol (var or function) in the global scope.

Usage:

```
Export('name of symbol');
```

Example:

```
(()=>{  
  // this is local scope  
  let someFunction = (someLocalParam)=>{  
    console.log(someLocalParam);  
  };  
  Export(someFunction); // now, someFunction is in the top level scope.  
})();  
  
// this is the top level scope  
someFunction('this works');
```

Cast

Use the Cast method of any DOM element to get the properties of another type of object. This is useful to transform an object type to another giving more flexibility in your code.

Usage:

```
let resultObject = [element or QCOjects type].Cast(objectToCastFrom);
```

Where objectToCastFrom is an object to get the properties from and put it into the result object returned by Cast.

Example:

```
Class('MyOwnClass',{  
  prop1:'1',  
  prop2:2  
});  
  
let obj = document.createElement('div').Cast(MyOwnClass);
```

The above code will create a DOM object and Cast it to MyOwnClass. Because of MyOwnClass is a QCOjects type class, obj will now have a prop1 and prop2 properties, and

will now be a QCOBJECTS object instance with a body property that is a div element.

Tag

Tag is a useful function to select any DOM element using selectors. Tag will always return a list of elements, that you can map, sort, and filter as any other list.

Usage:

```
var listOfElements = Tag(selector);
```

Where selector is a DOM query selector.

Example:

```
<!DOCTYPE html>
<html>
  <head>
    <title>Demo</title>
    <script type="text/javascript" src="https://qcoobjects.dev/QCOobjects.js"></script>
  </head>
  <body>
    <div class="myselector">
      <p>Hello world</p>
    </div>
    <script>
      Ready(()=>{
        Tag('.myselector > p').map((element)=>{
          element.innerHTML = 'Hello world! How are you?';
        });
      });
    </script>
  </body>
</html>
```

In the above code, a paragraph element was created inside a div with a css class named myselector by html, and then is modified dynamically using the QCOBJECTS Tag function. If you are familiar with query selector frameworks like JQuery, you will love this one.

Ready

Assign a function to run after everything is done by QCOBJECTS and after the window.onload

event. Use it to prevent 'undefined' DOM objects error.

Usage:

```
Ready(()=>{  
    // My init code here!  
});
```

Note that if you define dynamic components by using a HTML "component" tag, the dynamic content load will not trigger Ready events. To catch code everytime a dynamic component is loaded, use a Controller done method instead.

You will use Ready implementation mostly when you want to implement QCOjects in conjunction with another framework that needs it.

Component Class

A QCOjects class type for components.

Properties

[Component].domain

Returns a string with the domain of your application. It is automatically set by QCOjects at the load time.

[Component].basePath

Returns a string with the base path url of your application. It is automatically set by QCOjects at the load time.

NOTE: If you want to change the components base path, you have to use

CONFIG.set('componentsBasePath', 'new path relative to the domain') in your init code.

[Component].templateURI

Is a string representing the component template URI relative to the domain. When is set, the component will load a template and append the inner content into the body childs as a part of the DOM. To set this property, it is recommended to use the ComponentURI helper function.

[Component].tplsource

Is a string representing the source where the template will be loaded. It can be "default" or "none". A value of "default" will tell QCOjects to load the template from the templateURI content. A value of "none" will tell QCOjects not to load a template from anywhere.

[Component].url

Is a string representing the entire url of the component. It is automatically set by QCOBjects when the component is instantiated.

[Component].name

Is a string representing the name of a component. The name of a component can be any alphanumeric value that identifies the component type. It will be internally used by ComponentURI to build a normalised component template URI.

[Component].method

Is a string representing a HTTP or HTTPS method. By default, every component is set to use the "GET" method. In the most of cases, you don't need to change this property.

[Component].data

Is an object representing the data of the component. When QCOBjects loads a template, it will get every property of data object and bind it to a template label representing the same property inside the template content between double brackets (example: {{prop1}} in the template content will represent data.prop1 in the component instance).

NOTE: To refresh the data bindings it is needed to rebuild the component (see the use of [Component].rebuild() method for more details).

[Component].reload

Is a boolean value that tells QCOBjects when to force reload the content of a component from the template or not. If its value is true, the template content will be replacing the current DOM childs of the component body element. If its value is false, the template content will be added after the las component body child.

[Component].cached

Is a boolean value that tells QCOBjects if the component needs to be cached or not. When a component is cached, the template content loaded from templateURI will be loaded once. You can set this property either as a static property of the Component Class to set the default value for every next component object instance, or setting the individual value of the property in every component definition. In a world where the performance matters, to give more flexibility to the cache behaviour is needed more than ever.

[Component].routingWay

Returns a string representing the routing way. Its value can be "hash", "pathname" or "search".

NOTE: To change the routingWay of every component it is recommended to use CONFIG.set('routingWay','value of a valid routing way') in your init code.

[Component].validRoutingWays

Returns a list representing the valid routing ways. QCOBjects uses this to internally validate

the routingWay which was used to build the component routings.

[Component].routingNodes

Returns a NodeList object representing the list of nodes that were loaded by the component routing builder.

[Component].routings

Returns a list with the component routings built when the component was instantiated.

[Component].routingPath

Returns a string representing the current routing path

[Component].routingSelected

Returns an object representing the current routing of the component

[Component].subcomponents

Returns a list of components that are childs of the component instance.

[Component].body

Is a DOM element representing the body of the component.

NOTE: Every time a component body is set, it will trigger the routings builder for this component.

Methods

[Component].set('prop',value)

Sets a value for a component property.

[Component].get('prop')

Returns the value of a component property

[Component].rebuild()

Rebuilds the component. It will force a call for the componentLoader with this component when it's needed.

[Component].Cast(ClassName or ComponentClassName)

Returns the cast of a component definition into another one. This is useful to dynamically merge components definitions.

[Component].route()

Forces the component routings builder to reload the routings of the component. This will result in a rebuild call when it's needed.

[Component].fullscreen()

Puts the component in fullscreen mode.

[Component].closefullscreen()

Closes the fullscreen mode.

[Component].css(css object)

Sets the css properties for the component.

[Component].append(component or QObjects object)

Appends a component as a child of the current component body

[Component].attachIn(selector)

Attaches a current component body to any element in the given selector.

Component HTML Tag

Is a HTML tag representation of a component instance. Every declaration of a `<component>` `</component>` tag will generate a related instance of a QObjects component. While a component tag is not an instance itself, you can even define some instance properties by setting the related tag attribute when it is available.

Available attributes

Below is a list of the available attributes for a component tag

The name Attribute

`<component name>`

Sets the name of the related component instance built by QObjects.

Usage:

```
<component name="name_of_component"></component>
```

Example:

```
<!-- index.html -->
<!DOCTYPE html>
<html>
  <head>
    <title>Demo</title>
```



```
<script type="text/javascript" src="https://qcoobjects.dev/QCObjects.js"></script>
</head>
<body>
  <!-- this will load the contents of ./templates/main[.tplextension] file -->
  <component name="main"></component>
</body>
</html>
```

The cached Attribute

```
<component cached>
```

Sets the cached property if the related instance of a component.

NOTE: Only a value of "true" can be set in order to tell QCObjects that the component template content has to be cached. Any other value will be interpreted as false.

Usage:

```
<component name="name_of_component" cached="true"></component>
```

The data property tag declaration

```
<component data-property1 data-property2 ...>
```

Sets a static value of a property for the data object in the component instance.

NOTE: Data property tag declaration was thought with the purpose to give some simple way to mocking a dynamic component with template assignments. Don't use it thinking it is a bidirectional way data binding. While you can get a bidirectional way behaviour accessing a data object from a component instance, it is not the same for the component tag. Data property declaration in component tags is only one way data binding because of components tree architecture.

The controllerClass Attribute

```
<component controllerClass>
```

Defines a custom Controller Class for the component instance

Usage:

```
<component name="name_of_component" controllerClass="ControllerClassName"></component>
```

The viewClass Attribute

```
<component viewClass>
```

Defines a custom View Class for the component instance

Usage:

```
<component name="name_of_component" viewClass="ViewClassName"></component>
```

The componentClass Attribute

```
<component componentClass>
```

Defines a custom Component Class for the component instance

Usage:

```
<component name="name_of_component" componentClass="ComponentClassName"></component>
```

The effecClass Attribute

```
<component effectClass>
```

Defines a custom Effect Class for the component instance

Usage:

```
<component name="name_of_component" effectClass="EffectClassName"></component>
```

The template-source Attribute

```
<component template-source>
```

Sets the tplsource property of the related instance of a component. Possible values are "none" or "default".

Usage:

```
<component name="name_of_component" template-source="none"></component>
```

The tplexension Attribute

`<component tplexension>`

Sets the tplexension property of the related instance of a component. Possible values are any file extension. Default value is "html"

Usage:

```
<component name="name_of_component" tplexension="tpl.html"></component>
```


ComponentURI

Is a helper function to let you define the templateURI for a component in a normalised way.

Example:

```
var templateURI = ComponentURI({
  'COMPONENTS_BASE_PATH':CONFIG.get('componentsBasePath'),
  'COMPONENT_NAME': 'main',
  'TPLEXTENSION': "tpl.html",
  'TPL_SOURCE': "default"
});

console.log(templateURI); // this will show something like "templates/components/main.tpl.h
```



componentLoader

Loads a component instance in a low level, and appends the component template content to the component body. In the most of cases you won't need to call componentLoader in order to load a component. This is automatically called by QCOjects when it's needed.


componentLoader returns a promise that is resolved when the component load is done and rejected when the component load was failed.

Usage:

```
[Promise] componentLoader(componentInstance,load_async)
```

Where componentInstance is a component instance created by `New(ComponentDefinitionClass)`

Example:



```

componentLoader(componentInstance,load_async).then(
  (successStandardResponse)=>{
    // component Load successful
    var request = successStandardResponse.request;
    var component = successStandardResponse.component;
  },(failStandardResponse)=>{
    // component Load failed
    var component = failStandardResponse.component;
  });

```

buildComponents

Rebuilds every component that is a child element of the DOM element who owns the method. In the most of cases, you won't need to call buildComponents in order to build or rebuild every component in the DOM. This is automatically called by QCOjects when it's needed.

Usage:

```
[element].buildComponents()
```

Example:

```
document.buildComponents()
```

Controller

A built-in QCOjects Class to define a controller

View

A built-in QCOjects View to define a view

VO

A built-in QCOjects Class to define a value object

Service

A QCOjects class type for services.

Properties

[Service].domain

Returns a string with the domain of your application. It is automatically set by QCOBjects at the load time.

[Service].basePath

Returns a string with the base path url of your application. It is automatically set by QCOBjects at the load time.

[Service].url

Is a string representing the entire url of the service. It can be absolute or relative to the basePath when it applies. It can be also an external url.

NOTE: To load a service of an external resource you need to specify the external parameter to true using serviceLoader.

[Service].name

Is a string representing the name of a component. The name of a service can be any alphanumeric value that identifies the service instance. It isn't a unique ID but only a descriptive name.

[Service].method

Is a string representing a HTTP or HTTPS method. Possible values are: "GET", "POST", "PUT", ... any other that is accepted by REST services calls.

[Service].data

Is an object representing the data of the service. When QCOBjects loads a service. It receives the response and interpretes it as a template. So once a service response is obtained, it will get every property of data object and bind it to a template label representing the same property inside the template content between double brackets (example: {{prop1}} in the template content will represent data.prop1 in the service instance).

[Service].cached

Is a boolean value that tells QCOBjects if the service response needs to be cached or not. When a service is cached, the template content loaded from the service url will be loaded only once. You have to set this value to false for every Service instance you define in order to assure the service is loaded from the resource but not the storage cache.

Methods

[Service].set('prop',value)

Sets a value for a service property.

[Service].get('prop')

Returns the value of a service property

serviceLoader

Loads a service instance and returns a promise that is resolved when the service has a successful response load and is rejected when it fails loading the response.

Usage:

```
[Promise] serviceLoader(serviceInstance)
```

Example:

```
Class('MyTestService',Service,{
  name:'myservice',
  external:true,
  cached:false,
  method:'GET',
  headers:{'Content-Type':'application/json'},
  url:'https://api.github.com/orgs/QuickCorp/repos',
  withCredentials:false,
  _new_:()=>{
    // service instantiated
  },
  done:()=>{
    // service loaded
  }
});
var service = serviceLoader(New(MyTestService,{
  data:{param1:1}
})).then(
  (successfulResponse)=>{
    // This will show the service response as a plain text
    console.log(successfulResponse.service.template);
  },
  (failedResponse)=>{

});
```

JSONService

Is a built-in definition for a JSON Service Class

Properties

[JSONService].domain

Returns a string with the domain of your application. It is automatically set by QCOjects at the load time.

[JSONService].basePath

Returns a string with the base path url of your application. It is automatically set by QCOjects at the load time.

[JSONService].url

Is a string representing the entire url of the service. It can be absolute or relative to the basePath when it applies. It can be also an external url.

NOTE: To load a service of an external resource you need to specify the external parameter to true using serviceLoader.

[JSONService].name

Is a string representing the name of a component. The name of a service can be any alphanumeric value that identifies the service instance. It isn't a unique ID but only a descriptive name.

[JSONService].method

Is a string representing a HTTP or HTTPS method. Possible values are: "GET", "POST", "PUT", ... any other that is accepted by REST services calls.

[JSONService].data

Is an object representing the data of the service. When QCOjects loads a service. It receives the response and interpretes it as a template. So once a service response is obtained, it will get every property of data object and bind it to a template label representing the same property inside the template content between double brakets (example: {{prop1}} in the template content will represent data.prop1 in the service instance).

[JSONService].cached

Is a boolean value that tells QCOjects if the service response needs to be cached or not. When a service is cached, the template content loaded from the service url will be loaded only once. You have to set this value to false for every Service instance you define in order to assure the service is loaded from the resource but not the storage cache.

Methods

[JSONService].set('prop',value)

Sets a value for a service property.

[JSONService].get('prop')

Returns the value of a service property

Example:

```
Class( 'MyTestJSONService', JSONService, {
  name: 'myJSONservice',
  external: true,
  cached: false,
  method: 'GET',
  withCredentials: false,
  url: 'https://api.github.com/orgs/QuickCorp/repos',
  _new_: function () {
    // service instantiated
    delete this.headers.charset; // do not send the charset header
  },
  done: function (result) {
    _super_( 'JSONService', 'done' ).call( this, result );
  }
});
var service = serviceLoader( New( MyTestJSONService, {
  data: { param1: 1 }
} ) ).then(
  (successfulResponse) => {
    // This will show the service response as a JSON object
    console.log( successfulResponse.service.JSONresponse );
  },
  (failedResponse) => {

  }
);
```

ConfigService

Is a built-in Class definition to load the CONFIG settings from a config.json file

Example:

```
// To set the config.json file relative url
ConfigService.configFileName = 'config.json'; // it is done by default
CONFIG.set( 'useConfigService', true ); // using config.json for custom settings config
```

SourceJS

SourceCSS

ArrayList

ArrayCollection

Effect

Timer

SDK

Quick Start

Step 1: Start creating a main import file and name it like: cl.quickcorp.js. Put it into packages/js/ file directory

```
"use strict";
/*
 * QuickCorp/QCObjects is licensed under the
 * GNU Lesser General Public License v3.0
 * [LICENSE] (https://github.com/QuickCorp/QCObjects/blob/master/LICENSE.txt)
 *
 * Permissions of this copyleft license are conditioned on making available
 * complete source code of licensed works and modifications under the same
 * license or the GNU GPLv3. Copyright and license notices must be preserved.
 * Contributors provide an express grant of patent rights. However, a larger
 * work using the licensed work through interfaces provided by the licensed
 * work may be distributed under different terms and without source code for
 * the larger work.
 *
 * Copyright (C) 2015 Jean Machuca,<correojean@gmail.com>
 *
 * Everyone is permitted to copy and distribute verbatim copies of this
 * license document, but changing it is not allowed.
 */

import ('external/libs');
import ('cl.quickcorp.model');
import ('cl.quickcorp.components');
import ('cl.quickcorp.controller');
import ('cl.quickcorp.view');
```

```

Package('cl.quickcorp',[
  Class('FormValidator',Object,{

  })),
]);

```

Step 2: Then create some services inhereting classes into the file js/packages/cl.quickcorp.services.js :

```

"use strict";
/*
 * QuickCorp/QCObjects is licensed under the
 * GNU Lesser General Public License v3.0
 * [LICENSE] (https://github.com/QuickCorp/QCObjects/blob/master/LICENSE.txt)
 *
 * Permissions of this copyleft license are conditioned on making available
 * complete source code of licensed works and modifications under the same
 * license or the GNU GPLv3. Copyright and license notices must be preserved.
 * Contributors provide an express grant of patent rights. However, a larger
 * work using the licensed work through interfaces provided by the licensed
 * work may be distributed under different terms and without source code for
 * the larger work.
 *
 * Copyright (C) 2015 Jean Machuca,<correojean@gmail.com>
 *
 * Everyone is permitted to copy and distribute verbatim copies of this
 * license document, but changing it is not allowed.
 */

Package('cl.quickcorp.service',[
  Class('JsonService',{
    method:"GET",
    cached:false,
    headers: {
      "Content-Type":"application/json",
      "charset":"utf-8"
    },
    JSONresponse: null,
    done:function(result){
      console.log("***** RECEIVED RESPONSE:");
      console.log(result.service.template);
      this.JSONresponse = JSON.parse(result.service.template);
      alert(this.template);
    }
  })),
  Class('FormSubmitService',{
    method:"POST",
    cached:false,

```

```

headers: {
  "Content-Type": "application/json"
},
JSONresponse: null,
done: function(result) {
  console.log("***** CALLED FormSubmitService");
  this.JSONresponse = JSON.parse(result.service.template);
  //TODO success case
  console.log("***** SUCCESS!")
  console.log(this.JSONresponse);
},
fail: function(result) {
  //TODO negative case
  console.log("***** ERROR");
}
})

])

```

Step 3: Now it's time to create the components (cl.quickcorp.components.js)

```

"use strict";
/*
 * QuickCorp/QCObjects is licensed under the
 * GNU Lesser General Public License v3.0
 * [LICENSE] (https://github.com/QuickCorp/QCObjects/blob/master/LICENSE.txt)
 *
 * Permissions of this copyleft license are conditioned on making available
 * complete source code of licensed works and modifications under the same
 * license or the GNU GPLv3. Copyright and license notices must be preserved.
 * Contributors provide an express grant of patent rights. However, a larger
 * work using the licensed work through interfaces provided by the licensed
 * work may be distributed under different terms and without source code for
 * the larger work.
 *
 * Copyright (C) 2015 Jean Machuca,<correojean@gmail.com>
 *
 * Everyone is permitted to copy and distribute verbatim copies of this
 * license document, but changing it is not allowed.
 */
Package('cl.quickcorp.components',[
  Class('FormField',Component,{
    cached:false,
    reload:true,
    createBindingEvents:function (){
      var _executeBinding = this.executeBinding;
      var thisobj = this;
      var _objList = this.body.querySelectorAll(this.fieldType);
    }
  })
])

```

```

        for (var _datak=0;_datak<_objList.length;_datak++){
            var _obj = _objList[_datak];
            _obj.addEventListener('change',function(e){
                logger.debug('Executing change event binding');
                thisobj.executeBindings();
            });
            _obj.addEventListener('keydown',function(e){
                logger.debug('Executing keydown event binding');
                thisobj.executeBindings();
            });
        }
    },
    executeBinding:function (_obj){
        var _datamodel = _obj.getAttribute('data-field');
        logger.debug('Binding '+_datamodel+' for '+this.name);
        this.data[_datamodel]=_obj.value;
    },
    executeBindings:function (){
        var _objList = this.body.querySelectorAll(this.fieldType);
        for (var _datak=0;_datak<_objList.length;_datak++){
            var _obj = _objList[_datak];
            var _datamodel = _obj.getAttribute('data-field');
            logger.debug('Binding '+_datamodel+' for '+this.name);
            this.data[_datamodel]=_obj.value;
        }
    },
    done:function (){
        var thisobj = this;
        thisobj.executeBindings();
        thisobj.createBindingEvents();
        logger.debug('Field loaded: '+thisobj.fieldType+'[name='+thisobj.name+']');
    }
}),
Class('ButtonField',FormField,{
    fieldType:'button'
}),
Class('InputField',FormField,{
    fieldType:'input'
}),
Class('TextField',FormField,{
    fieldType:'textarea'
}),
Class('EmailField',FormField,{
    fieldType:'input'
})
]);

```

Step 4: Once you have done the above components declaration, you will now want to code your controllers (cl.quickcorp.controller.js)

```

"use strict";
/*
 * QuickCorp/QCObjects is licensed under the
 * GNU Lesser General Public License v3.0
 * [LICENSE] (https://github.com/QuickCorp/QCObjects/blob/master/LICENSE.txt)
 *
 * Permissions of this copyleft license are conditioned on making available
 * complete source code of licensed works and modifications under the same
 * license or the GNU GPLv3. Copyright and license notices must be preserved.
 * Contributors provide an express grant of patent rights. However, a larger
 * work using the licensed work through interfaces provided by the licensed
 * work may be distributed under different terms and without source code for
 * the larger work.
 *
 * Copyright (C) 2015 Jean Machuca,<correojean@gmail.com>
 *
 * Everyone is permitted to copy and distribute verbatim copies of this
 * license document, but changing it is not allowed.
 */
"use strict";
Package('cl.quickcorp.controller',[
  Class('MainController',Object,{
    _new_:function (){
      //TODO: Implement
      logger.debug('MainController Element Initialized');
    }
  }),
  Class('MyAccountController',Object,{
    component: null,
    done:function (){
      var controller = this;

      logger.debug('MyAccountController Element Initialized');
      this.component.body.setAttribute('loaded',true);

    },
    _new_:function (o){
      //TODO: Implement
      this.component = o.component;
    }
  })
]);

```

Step 5: To use into the HTML5 code you only need to do some settings between script tags:

```
<script>
CONFIG.set('relativeImportPath','js/packages/');
CONFIG.set('componentsBasePath','templates/components/');
CONFIG.set('delayForReady',1); // delay to wait before executing the first ready event, it
CONFIG.set('preserveComponentBodyTag',false); // don't use <componentBody></componentBody>

Import('cl.quickcorp'); # this will import your main file: cl.quickcorp.js into js/packages
</script>
```

