


Xerafy XSKIN-THETA

Xerafy XSKIN-THETA is an industrial RFID tag with read range Up to 29.53 ft (9 m), IP68 protection.

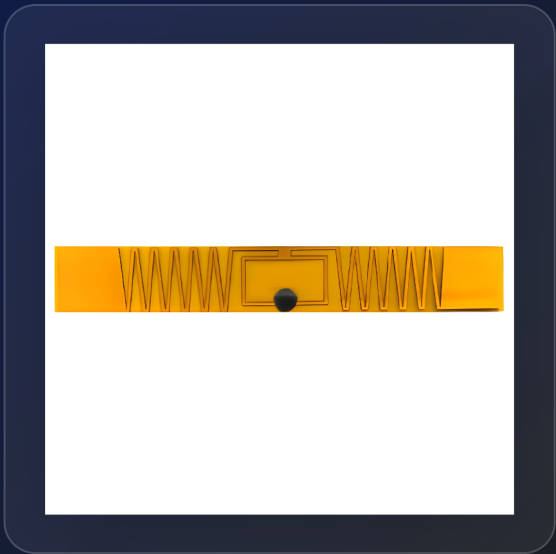

RFID SPECIFICATION

Protocol	EPC global Class 1 Gen 2
Operating Frequency	860-960 MHz (Global)
Chip	Alien Higgs 3
Memory	96/480 bits EPC; 96 bits TID; 512 bits user memory
Read Range (Fixed)	Up to 29.53 ft (9 m)
Read Range (Handheld)	Up to 16.40 ft (5 m)
Polarization	Linear
Radiation Pattern	off metal

PHYSICAL SPECIFICATION

Material	FPC
Dimensions (mm)	71 x 11 x 0.13
Dimensions (in)	2.80 x 0.43 x 0.005
Weight	0.20 g
Format	Dry inlay

ENVIRONMENTAL RESISTANCE

Operating Temperature	-40°C to +100°C -40°F to +212°F
Survival Temperature	-40°C to +230°C (24 hours) -40°F to +446°F
IP Rating	IP68
Compression Strength	142 psi (980 kPa)
Shock	3 ft (1 m) to concrete/granite
Vibration	MIL-STD-810G
Warranty	1 year

FEATURE HIGHLIGHTS

- Up to 29.53 ft (9 m)
- IP68
- -40°C to +100°C -40°F to +212°F

PRODUCT GROUP

Category	UHF RFID On-Metal Tag
Product Group	RFID Label / Tag