

Starter Guide

How to get started

When energizing the device, the system will boot and the first thing to do is to log in, the user is "National Polytechnic School" and the password is "epn".

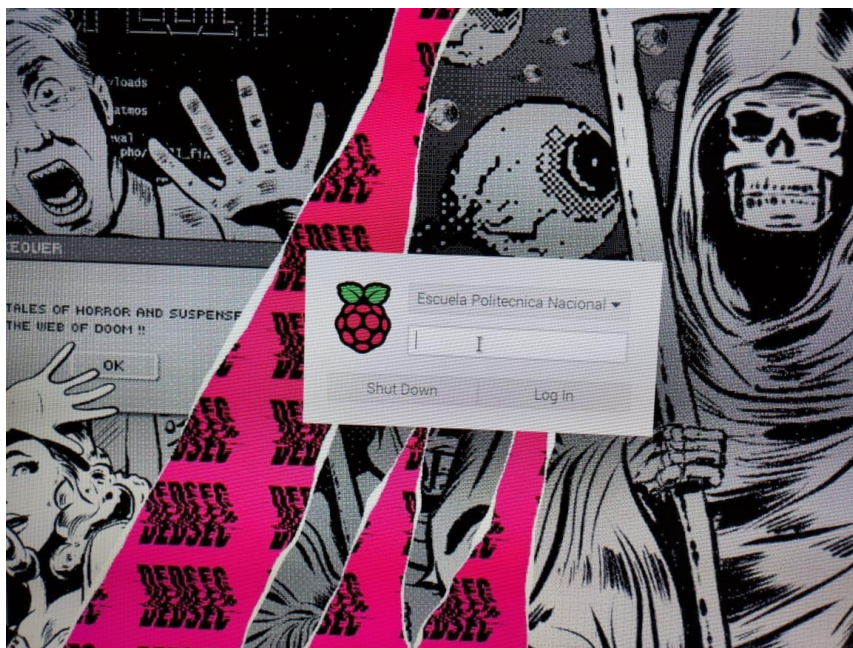


Image 1. Login screen.

Internet connection

First you must check the mode in which the wireless network adapter is, for this you must use the reserved command `vcom`, it must be as shown in **Image 2**.

```
epn@raspberrypi:~ $ vcom
# interfaces(5) file used by ifup(8) and ifdown(8)
# Include files from /etc/network/interfaces.d:
source /etc/network/interfaces.d/*

#allow-hotplug wlan0
auto wlan0
iface wlan0 inet static
address 10.0.1.1
netmask 255.255.255.0
network 10.0.1.0
broadcast 10.0.1.255
```

Image 2. Wireless network adapter mode display.

If the adapter is in hotplug mode, the reserved `com` command must be used to change mode automatically.

```

epn@raspberrypi:~ $ vcom
# interfaces(5) file used by ifup(8) and ifdown(8)
# Include files from /etc/network/interfaces.d:
source /etc/network/interfaces.d/*

allow-hotplug wlan0
#auto wlan0
iface wlan0 inet static
address 10.0.1.1
netmask 255.255.255.0
network 10.0.1.0
broadcast 10.0.1.255
epn@raspberrypi:~ $ com
Line allow-hotplug wlan0 commented out on /etc/network/interfaces
epn@raspberrypi:~ $ vcom
# interfaces(5) file used by ifup(8) and ifdown(8)
# Include files from /etc/network/interfaces.d:
source /etc/network/interfaces.d/*

#allow-hotplug wlan0
auto wlan0
iface wlan0 inet static
address 10.0.1.1
netmask 255.255.255.0
network 10.0.1.0
broadcast 10.0.1.255

```

Image 3. Wireless network adapter mode switching.

Once the change is made, the system must be restarted, it can be done with the [reboot](#) command, when the system boots you can use the adapter without problems, now the networks will be identifiable and we can connect to the one of our preference, you can also use the ethernet adapter to have an internet connection.

Update

Before starting any task, it is advisable to perform the system update, for this action there are two possible scenarios.

1. You can start the system update using the system updater found on the taskbar, the icon will appear only when there is a critical update.


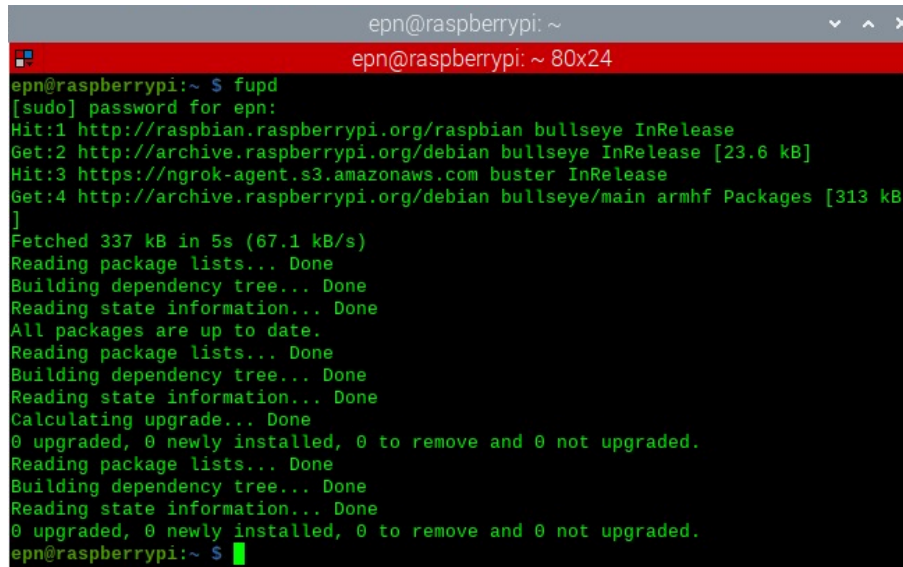


Image 4. Updater icon on taskbar.

The other way to update the system is through the terminal, using the reserved word [fupd](#) or [fullupdate](#) to have an automated update.

A terminal window titled 'epn@raspberrypi: ~' with a red title bar. The window shows the execution of the 'fupdp' command. The output indicates that the system is up to date, with no packages to be upgraded, removed, or newly installed. The terminal text is as follows:

```
epn@raspberrypi:~ $ fupdp
[sudo] password for epn:
Hit:1 http://raspbian.raspberrypi.org/raspbian bullseye InRelease
Get:2 http://archive.raspberrypi.org/debian bullseye InRelease [23.6 kB]
Hit:3 https://ngrok-agent.s3.amazonaws.com buster InRelease
Get:4 http://archive.raspberrypi.org/debian bullseye/main armhf Packages [313 kB]
]
Fetched 337 kB in 5s (67.1 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
All packages are up to date.
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
Calculating upgrade... Done
0 upgraded, 0 newly installed, 0 to remove and 0 not upgraded.
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
0 upgraded, 0 newly installed, 0 to remove and 0 not upgraded.
epn@raspberrypi:~ $
```

Image 5. Use of fupdp command.

It is recommended to make use of both ways of updating when available, to ensure stability and decrease the likelihood of corrupted updates.

At this point, the device can be used normally.

Prepared by JS.