

SRNN Model Parameter Table

This document describes the equations, state variables, derived quantities, and parameters used to generate Figure 2.

System Equations

$$\frac{dx_i}{dt} = \frac{-x_i + u_i + \sum_{j=1}^N w_{ij} \left(\prod_{m=1}^M b_{jm} \right) r_j}{\tau_d}$$

$$r_i = \phi \left(x_i - a_{0_i} - c \sum_{k=1}^K a_{ik} \right)$$

$$\frac{da_{ik}}{dt} = \frac{-a_{ik} + r_i}{\tau_{a_k}}$$

$$\frac{db_{im}}{dt} = \frac{1 - b_{im}}{\tau_{rec_m}} - \frac{b_{im} r_i}{\tau_{rel}}, \quad m = 1, \dots, M$$

Abbreviations: - **SRNN**: Stable Recurrent Nonlinear Network - **SFA**: Spike frequency adaptation - **STD**: Short-term synaptic depression

Table 1: Model Parameters

Symbol	Name	Value	Units	Description
State Variables				
x_i	Membrane potential	$(-\infty, \infty)$	arbitrary	Dendritic potential of neuron i
a_{ik}	Adaptation variable	$[0, 1]$	—	SFA state for neuron i , timescale k
b_{im}	Synaptic resource	$[0, 1]$	—	STD variable for neuron i , timescale m (available resources)
Dependent Variables				
r_i	Firing rate	$[0, 1]$	—	Instantaneous firing rate, $r_i = \phi(\cdot)$
$\left(\prod_m b_{im} \right) r_i$	Synaptic output	$[0, 1]$	—	Effective synaptic output with multi-timescale STD
u_i	External input	$[0, \infty)$	arbitrary	External drive to neuron i
Connection Weight parameters				
W	Connection matrix	—	—	$N \times N$ sparse weight matrix
N	Network size	300	—	Total number of neurons
f	Fraction excitatory	$\frac{1}{2}$ or (0.4–0.6)	—	Fraction of excitatory neurons, remainder are inhibitory; systematically varied from 0.4 to 0.6 to produce Figure 2G
S	Sparsity mask	—	—	Binary mask, $S_{ij} \sim \text{Bernoulli}(\alpha)$
α	Connection probability	$\frac{1}{3}$	—	$\alpha = \text{indegree}/N = 100/300$
F	Default scaling factor	$\frac{1}{\sqrt{N\alpha(2-\alpha)}}$	—	Scaling factor which yields $R = 1$ if $\tilde{\mu}_E, \tilde{\mu}_I, \tilde{\sigma}_E$, and $\tilde{\sigma}_I$ are equal (see derivation below).
$\tilde{\mu}_E$	Mean excitatory weight	$3F$	—	Normalized mean of non-zero E weights

Symbol	Name	Value	Units	Description
$\tilde{\mu}_I$	Mean inhibitory weight	$-4F$	—	Normalized mean of non-zero I weights. If $f = \frac{1}{2}$, then inhibition exceeds excitation ($-4F$ vs. $+3F$), creating a negative global outlier eigenvalue
$\tilde{\sigma}_E$	Std dev excitatory	F	—	Normalized std dev of non-zero E weights
$\tilde{\sigma}_I$	Std dev inhibitory	F	—	Normalized std dev of non-zero I weights
Time Constants				
τ_d	Dendritic time constant	100	ms	Membrane integration time constant
τ_{a_k}	SFA time constants	$[0.1, 1, 10]$	s	Logspaced, $K = 3$ timescales
τ_{rec_m}	STD recovery timescales	vector, M timescales	s	Synaptic vesicle recovery time constant, one per STD timescale m
τ_{rel}	STD release	$\frac{1}{2}$	s	Synaptic vesicle release time constant, shared across all M STD timescales
M	Number of STD timescales	—	—	Count of STD timescales, $M = n_{b_E}$ (analogous to $K = n_{a_E}$ for SFA)
Adaptation Strength				
c_E	SFA coupling	$\frac{1}{12}$	—	SFA strength per timescale
Activation Function				
ϕ	Piecewise sigmoid	$(-\infty, \infty) \rightarrow [0, 1]$	—	Hard sigmoid with rounded corners (see definition below)
q_ϕ	Linear fraction	0.9	—	Fraction of the range $[0, 1]$ that is linear (slope 1)
a_0	Sigmoid center	0.4	—	Horizontal shift; $\phi(a_0) = \frac{1}{2}$
Stimulus Configuration				
n_{steps}	Number of periods	3	—	Total number of no-stim and stim periods
ρ_E	E input density	0.15	—	Fraction of E neurons receiving external input
ρ_I	I input density	0	—	Fraction of I neurons receiving external input
A	Input amplitude	$\frac{1}{2}$	—	Amplitude scale for Gaussian random step input
Simulation Settings				
f_s	Sampling frequency	400	Hz	ODE solver sampling rate
T	Simulation interval	$[-15, 45]$	s	Start and end time
ODE Integration				
—	Solver	RK45	—	MATLAB ode45 (Dormand-Prince)
—	Relative tolerance	10^{-9}	—	ODE solver RelTol
—	Absolute tolerance	10^{-9}	—	ODE solver AbsTol
—	Maximum step	2.5	ms	ODE solver MaxStep ($1/f_s$)
Lyapunov Settings				
—	LLE method	—	—	Benettin rescaling shadow trace method
Δt_{lya}	Rescaling period	20	ms	Shadow trace rescaling interval

Symbol	Name	Value	Units	Description
d_0	Perturbation norm	10^{-3}	—	Initial and rescaled perturbation magnitude
f_{corner}	LLE filter corner	0.25	Hz	corner frequency for lowpass filter of local LLE for plotting, 4th order bidirectional Butterworth

Definition of the Activation Function $\phi(x)$

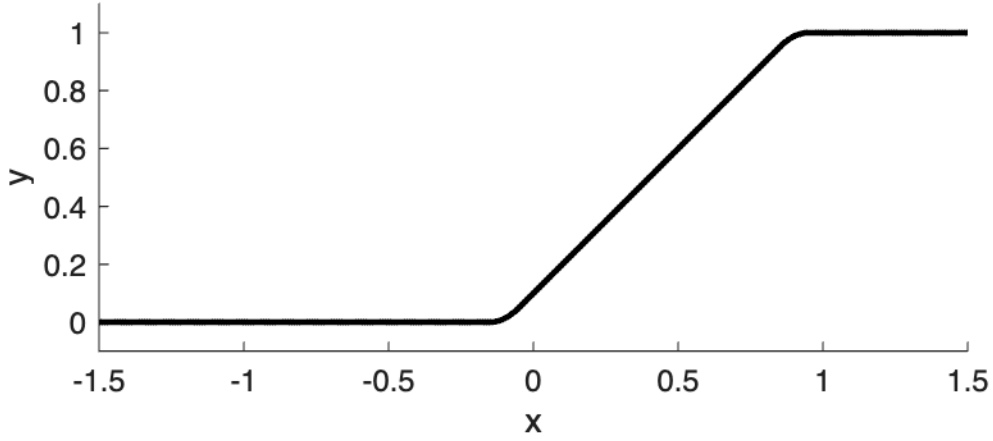


Figure 1: Hard sigmoid with rounded corners

The activation function $\phi(x)$ is a **hard sigmoid with rounded corners**—a piecewise function composed of five regions that smoothly transitions between saturation at 0 and 1.

Domain: $(-\infty, \infty)$

Range: $[0, 1]$

Auxiliary quantities:

Let the half-width of the linear segment be $q = \frac{q_\phi}{2}$, and define the scaling constant for the quadratic regions:

$$k = \frac{1}{2(1 - 2q)}$$

The four breakpoints dividing the five regions are:

$$x_1 = a_0 + q - 1, \quad x_2 = a_0 - q, \quad x_3 = a_0 + q, \quad x_4 = a_0 + 1 - q$$

Piecewise definition:

$$\phi(x) = \begin{cases} 0 & \text{if } x < x_1 \quad (\text{left saturation}) \\ k(x - x_1)^2 & \text{if } x_1 \leq x < x_2 \quad (\text{left quadratic}) \\ (x - a_0) + \frac{1}{2} & \text{if } x_2 \leq x \leq x_3 \quad (\text{linear segment}) \\ 1 - k(x - x_4)^2 & \text{if } x_3 < x \leq x_4 \quad (\text{right quadratic}) \\ 1 & \text{if } x > x_4 \quad (\text{right saturation}) \end{cases}$$

Parameter interpretation:

- $q_\phi \in [0, 1]$: Controls the width of the central linear region. When $q_\phi = 1$, the function reduces to a standard hard sigmoid (pure piecewise linear with corners). When $q_\phi = 0$, the function becomes purely quadratic transitions with no linear segment.
- a_0 : The horizontal center of the sigmoid. At $x = a_0$, the function outputs $\phi(a_0) = \frac{1}{2}$. This parameter shifts the entire function along the x -axis, allowing the resting point of the firing rate to be tuned.

Note: The quadratic segments ensure C^1 continuity (smooth corners) at the transitions between the linear and saturated regions, avoiding the discontinuous derivatives of a standard hard sigmoid.

Derivation of the Default Scaling Factor F

The scaling factor F is derived from Harris (2023), Equations 16 and 18.

Equation 16 — Sparse variance for population $k \in \{e, i\}$:

$$\sigma_{sk}^2 = \alpha(1 - \alpha)\tilde{\mu}_k^2 + \alpha\tilde{\sigma}_k^2$$

Equation 18 — Spectral radius:

$$\mathcal{R} = \sqrt{N[f\sigma_{se}^2 + (1 - f)\sigma_{si}^2]}$$

Derivation: To find the scaling factor F that yields a unit spectral radius ($\mathcal{R} = 1$) when all normalized parameters are equal, set $|\tilde{\mu}_E| = |\tilde{\mu}_I| = \tilde{\sigma}_E = \tilde{\sigma}_I = F$.

Substituting into Eq. 16:

$$\sigma_{se}^2 = \sigma_{si}^2 = \alpha(1 - \alpha)F^2 + \alpha F^2 = F^2[\alpha - \alpha^2 + \alpha] = F^2 \cdot \alpha(2 - \alpha)$$

Substituting into Eq. 18, noting that $f + (1 - f) = 1$:

$$\mathcal{R} = \sqrt{N \cdot F^2 \cdot \alpha(2 - \alpha)} = 1$$

Solving for F :

$$F = \frac{1}{\sqrt{N\alpha(2 - \alpha)}}$$

Note on Zero Row Sum (ZRS): Harris (2023) describes a Zero Row Sum condition (ZRS/SZRS) that controls “local” eigenvalue outliers escaping the spectral disc. In these simulations, we deliberately did not apply the ZRS condition in order to test whether adaptation mechanisms (SFA and STD) could fulfill a similar stabilizing role—effectively examining if adaptation can substitute for ZRS in constraining network dynamics.

Table 2: Adaptation Conditions

The four conditions are defined by enabling/disabling SFA and STD via the number of timescales ($K = n_{a_E}$ for SFA, $M = n_{b_E}$ for STD in the equations):

Condition	n_{a_E} (K)	n_{a_I}	n_{b_E}	n_{b_I}	Description
No Adaptation	0	0	0	0	Baseline
SFA Only	3	0	0	0	Spike-frequency adaptation enabled
STD Only	0	0	1	0	Short-term depression enabled
SFA + STD	3	0	1	0	Both mechanisms enabled

Effect on parameters:

- When $n_{a_E} = 0$: No SFA variables a_{ik} ; the $c_E \sum_k a_{ik}$ term is zero.
- When $n_{a_E} = 3$: Three SFA timescales with $\tau_{a_k} \in \{0.1, 1, 10\}$ s and coupling $c_E = \frac{1}{12}$.
- When $n_{b_E} = 0$: No STD variables b_{im} ; synaptic output equals r_i (equivalent to $\prod_m b_{im} = 1$).
- When $n_{b_E} = M \geq 1$: STD enabled with M timescales, each with its own recovery constant τ_{rec_m} and a shared release constant $\tau_{rel} = \frac{1}{2}$ s; the per-timescale resources enter the recurrent term as the product $\prod_m b_{im}$. The single-timescale case $M = 1$ (with $\tau_{rec} = 1$ s) recovers the original single- b STD.

Inhibitory neurons have no adaptation mechanisms ($n_{a_I} = n_{b_I} = 0$).

Implementation note: When any of n_{a_E} , n_{a_I} , n_{b_E} , or n_{b_I} is set to zero, the corresponding state variables (a_{ik} or b_{im}) are excluded from the system state vector and the Jacobian matrix. This prevents spurious zero eigenvalues that would otherwise arise from including disabled adaptation dynamics.