


Django project 5 : Dynamic Template Language


Step 1 : create new project

```
python -m django startproject project5
```

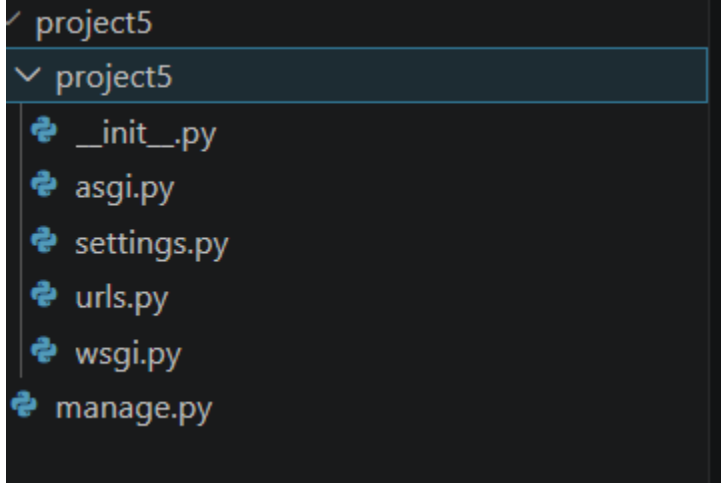

Step 2 : create new app

```
python manage.py startapp app1
```

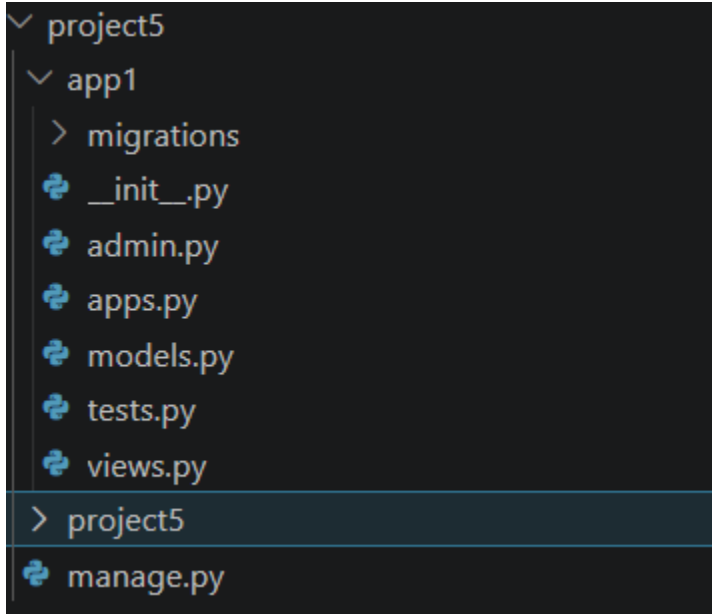

Step 3 : Installed app1

```
settings.py X
project5 > project5 > settings.py > ...
32
33 INSTALLED_APPS = [
34     'django.contrib.admin',
35     'django.contrib.auth',
36     'django.contrib.contenttypes',
37     'django.contrib.sessions',
38     'django.contrib.messages',
39     'django.contrib.staticfiles',
40     'app1',
41 ]
42
```

Step 4 : Run server

python [manage.py](#) runserver

```
System check identified no issues (0 silenced).
May 28, 2026 - 23:18:56
Django version 5.2.14, using settings 'project5.settings'
Starting development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production environment.
```

Step 5 : Create folder Templates and include html files

```

└─ app1
   ├── __pycache__
   ├── migrations
   └─ templates
      ├── about.html
      ├── course.html
      ├── home.html
      └─ __init__.py
```

Step 6: Render 3 HTML files in [views.py](#)

```
views.py X
project5 > app1 > views.py > about
1  from django.shortcuts import render
2
3  # Create your views here.
4  def home(request):
5      return render(request,"home.html")
6
7  def course(request):
8      return render(request,"course.html")
9
10 def about(request):
11     return render(request,"about.html")
```

Step 7: Create individual [urls.py](#) for app1 and include app1 urls into main [urls.py](#) of project5

```
project5
└─ app1
   ├── __pycache__
   ├── migrations
   ├── templates
   ├── __init__.py
   ├── admin.py
   ├── apps.py
   ├── models.py
   ├── tests.py
   └── urls.py

urls.py ...\app1  urls.py ...\project5 X
project5 > project5 > urls.py > ...
10
17 from django.contrib import admin
18 from django.urls import path,include
19
20 urlpatterns = [
21     path('admin/', admin.site.urls),
22     path('app1/',include('app1.urls'))
23 ]
24
```


Step 8: connect all views function to the urls of app1

```
urls.py ...\app1 X  urls.py ...\project5
project5 > app1 > urls.py > ...
1  from django.urls import path
2  from app1.views import home,about,course
3
4  urlpatterns = [
5      path('',home),
6      path('about/',about),
7      path('course/',course),
8  ]
```

Step 9 include html content all html file

home.html


```
<> home.html X
project5 > app1 > templates > <> home.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>home</title>
7  </head>
8  <body>
9      <h1>HOME PAGE</h1>
10 </body>
11 </html>
```

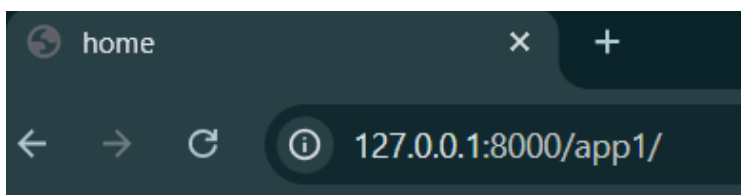

HOME PAGE

course.html


```
<> course.html X
project5 > app1 > templates > <> course.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10 </body>
11 </html>
```

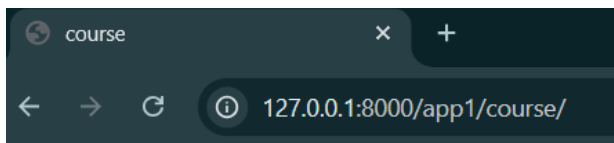

OUR COURSES

about.html


```
<> about.html X
project5 > app1 > templates > <> about.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>about</title>
7  </head>
8  <body>
9      <h1>ABOUT PAGE</h1>
10 </body>
11 </html>
```

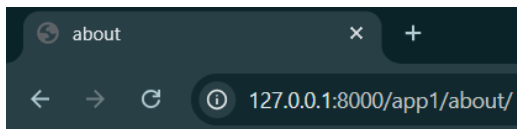


ABOUT PAGE

Step 10 : Include css and image on home page



create folder static -> and then create folder css in static folder -> and then create style.css file in css folder

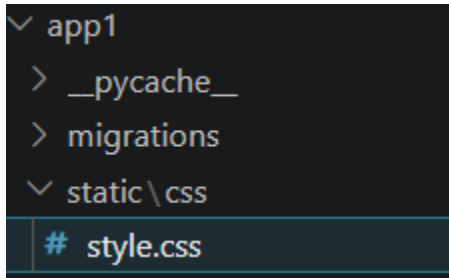

style.css

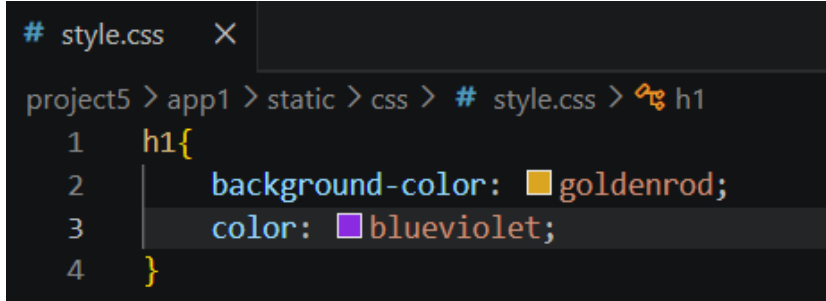


home.html

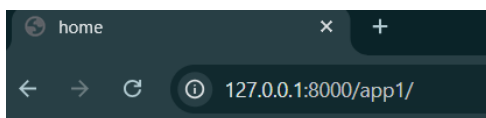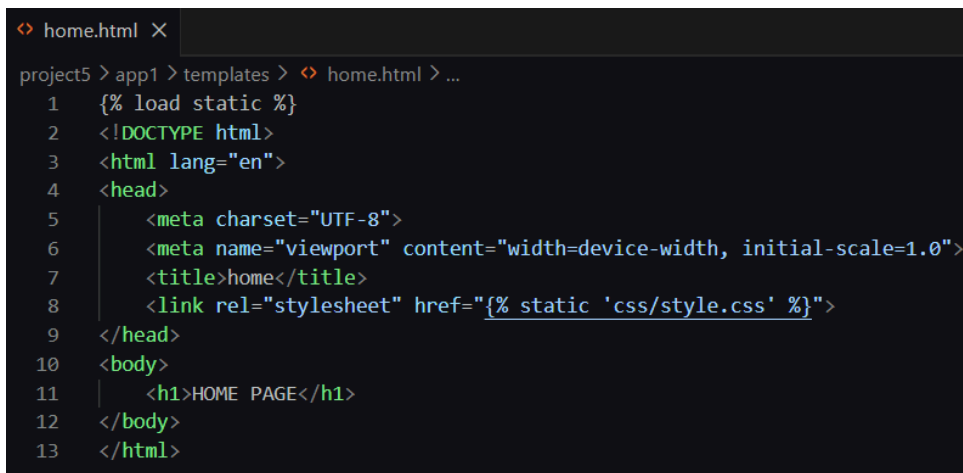


HOME PAGE

create folder images in static folder -> and then create include image in images folder

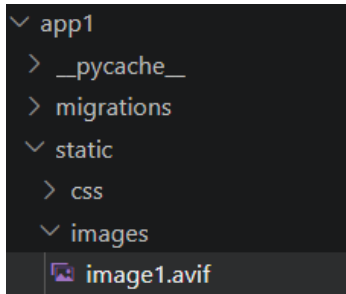

home.html

```
home.html x image1.avif
project5 > app1 > templates > home.html > ...
1  {% load static %}
2  <!DOCTYPE html>
3  <html lang="en">
4  <head>
5      <meta charset="UTF-8">
6      <meta name="viewport" content="width=device-width, initial-scale=1.0">
7      <title>home</title>
8      <link rel="stylesheet" href="{% static 'css/style.css' %}">
9  </head>
10 <body>
11     <h1>HOME PAGE</h1>
12     
13 </body>
14 </html>
15
```

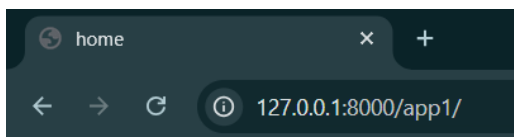

HOME PAGE




Step 11 : Include Data Dynamically on about page

[views.py](#)

```
views.py X
project5 > app1 > views.py > about
1  from django.shortcuts import render
2
3  # Create your views here.
4  def home(request):
5      return render(request, "home.html")
6
7  def course(request):
8      return render(request, "course.html")
9
10 def about(request):
11     name = 'PAP'
12     id = 6
13     return render(request, "about.html", {'name': name, 'id': id})
```

about.html

```
<> about.html X
project5 > app1 > templates > <> about.html > ...
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>about</title>
7  </head>
8  <body>
9      <h1>ABOUT PAGE</h1>
10     <h3>Name : {{name}}</h3>
11     <h3>Id : {{id}}</h3>
12 </body>
13 </html>
```

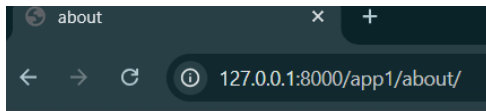



ABOUT PAGE

Name : PAP

Id : 6

```
views.py X
project5 > app1 > views.py > ...
1  from django.shortcuts import render
2
3  # Create your views here.
4  def home(request):
5      return render(request,"home.html")
6
7  def course(request):
8      return render(request,"course.html")
9
10 def about(request):
11     cname = "python"
12     duration = "2 months"
13     fees = 5000
14     result = 90
15     data = {'nm':cname,'du':duration,'fe':fees,'re':result}
16     return render(request,"about.html",data)
```

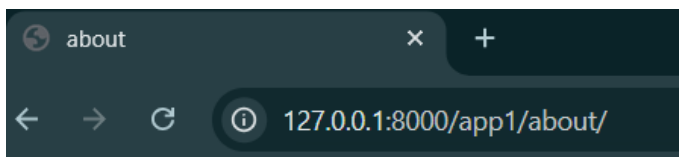

ABOUT PAGE

- Course name : python
- Course duration : 2 months
- Course fees : 5000
- Result : 90

```


views.py  X
project5 > app1 > views.py > ...
2
3 # Create your views here.
4 def home(request):
5     return render(request,"home.html")
6
7 def course(request):
8     return render(request,"course.html")
9
10 def about(request):
11
12     std_id =[1,2,3,4,5,6]
13     std_name=['A','B','C','D','E','F']
14     data={'std_id':std_id,'std_nm':std_name}
15     return render(request,"about.html",data)
16

```

```

about.html  X
project5 > app1 > templates > about.html > html > body
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>about</title>
7 </head>
8 <body>
9     <h1>ABOUT PAGE</h1>
10    <h3>Std_id : {{std_id}}</h3>
11    <h3>Std_name : {{std_nm}}</h3>

```

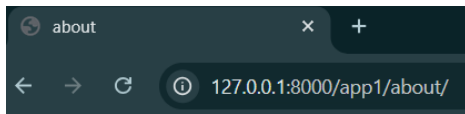


ABOUT PAGE

Std_id : [1, 2, 3, 4, 5, 6]

Std_name : ['A', 'B', 'C', 'D', 'E', 'F']

```
views.py X
project5 > app1 > views.py > ...
4 def home(request):
5     return render(request,"home.html")
6
7 def course(request):
8     return render(request,"course.html")
9
10 def about(request):
11
12     data = {
13         'std_id' : [1,2,3,4,5,6],
14         'std_nm' : ['A','B','C','D','E','F']
15     }
16     return render(request,"about.html',{'data':data})
17
```

```
about.html X
project5 > app1 > templates > about.html > html > body
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4     <meta charset="UTF-8">
5     <meta name="viewport" content="width=device-width, initial-scale=1.0">
6     <title>about</title>
7 </head>
8 <body>
9     <h1>ABOUT PAGE</h1>
10     <h3>Data : {{data}}</h3>
11     <h5>Std_id : {{data.std_id}}</h5>
12     <h5>Std_name : {{data.std_nm}}</h5>
13
```



ABOUT PAGE

Data : {'std_id': [1, 2, 3, 4, 5, 6], 'std_nm': ['A', 'B', 'C', 'D', 'E', 'F']}

Std_id : [1, 2, 3, 4, 5, 6]

Std_name : ['A', 'B', 'C', 'D', 'E', 'F']

Step 12 : If - elif - elseif on coursepage

If statement :


```
views.py  X  course.html
project5 > app1 > views.py > ...
1  from django.shortcuts import render
2
3  # Create your views here.
4  def home(request):
5      return render(request,"home.html")
6
7  def course(request):
8
9      fees = 5000
10     return render(request,"course.html',{'fe':fees})
```

```
views.py  X  course.html  X
project5 > app1 > templates > course.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10
11     {% if fe == 5000 %}
12         <h3>{{fe}} : Enroll course python</h3>
13     {% endif %}
```

If -else statement:

```
views.py  course.html X
project5 > app1 > templates > course.html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10     {% if fe >= 5000 %}
11     <h3>{{fe}} : Enroll course python</h3>
12     {% else %}
13     <h3>{{fe}} : Not Enroll Course python </h3>
14     {% endif %}
```


```
def course(request):
    fees = 3000
    return render(request, "course.html", {'fe':fees})
```



OUR COURSES

3000 : Not Enroll Course python

```
def course(request):
    fees = 6000
    return render(request, "course.html", {'fe':fees})
```



OUR COURSES


6000 : Enroll course python

If -elif - else statement:

```
views.py  course.html X
project5 > app1 > templates > course.html
1  <!-- ... -->
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10     {% if fe >= 6000 %}
11     |     <h3>{{fe}} : Enroll course Advance python</h3>
12     {% elif fe >= 4000 %}
13     |     <h3>{{fe}} : Enroll course python</h3>
14     {% else %}
15     |     <h3>{{fe}} : Not Enroll Course python </h3>
16     {% endif %}
```

```
def course(request):

    fees = 6000
    return render(request, "course.html", {'fe':fees})
```




OUR COURSES

6000 : Enroll course Advance python

```
def course(request):

    fees = 4500
    return render(request, "course.html", {'fe':fees})
```



OUR COURSES

4500 : Enroll course python

```
def course(request):  
    fees = 3000  
    return render(request, "course.html", {'fe':fees})
```

← → ↺ 127.0.0.1:8000/app1/course/


OUR COURSES

3000 : Not Enroll Course python

Step 12 : for loop on coursepage

```
views.py  X  course.html  
project5 > app1 > views.py > ...  
1  from django.shortcuts import render  
2  
3  # Create your views here.  
4  def home(request):  
5      return render(request, "home.html")  
6  
7  def course(request):  
8  
9      data = {  
10         'cfees': [5000, 7000, 3000, 4000, 2000],  
11         'cname': ['python', 'java', 'css', 'html', 'php']  
12     }  
13     return render(request, "course.html", {'data':data})
```

```
views.py  course.html X
project5 > app1 > templates > course.html > html > body > h3
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10
11     <h3>{{data}}</h3>
12     <h3>{{data.cname}}</h3>
13     <h3>{{data.cfees}}</h3>
14
```




OUR COURSES

```
{'cfees': [5000, 7000, 3000, 4000, 2000], 'cname': ['python', 'java', 'css', 'html', 'php']}
```

```
['python', 'java', 'css', 'html', 'php']
```

```
[5000, 7000, 3000, 4000, 2000]
```

```
views.py  course.html X
project5 > app1 > templates > course.html > html > body
2  <html lang="en">
3  <head>
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10
11     <h3>course name : </h3>
12     {% for i in data.cname%}
13         <ul>
14             <li>{{i}}</li>
15         </ul>
16     {% endfor %}
```





OUR COURSES

course name :

- python
- java
- css
- html
- php

```
views.py  course.html X
project5 > app1 > templates > course.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10
11     <h3>course fees : </h3>
12     {% for i in data.cfees %}
13         <ul>
14             <li>{{i}}</li>
15         </ul>
16     {% endfor %}
```




OUR COURSES

course fees :

- 5000
- 7000
- 3000
- 4000
- 2000

```
views.py  course.html X
project5 > app1 > templates > course.html > html > body
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>course</title>
7  </head>
8  <body>
9      <h1>OUR COURSES</h1>
10     <h3>course Details : </h3>
11     {% for i,j in data.items %}
12         <ul>
13             <li>{{i}} : {{j}}</li>
14         </ul>
15     {% endfor %}
```



OUR COURSES

course Details :

- cfees:[5000, 7000, 3000, 4000, 2000]
- cname:['python', 'java', 'css', 'html', 'php']

Step 13 : Create navbar using extends (single html file content extends to multiple html file)

```
app1
├── __pycache__
├── migrations
├── static
└── templates
    ├── about.html
    ├── course.html
    ├── home.html
    └── nav.html
```

nav.html


```
nav.html x
project5 > app1 > templates > nav.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      {% block title %}
7      <title>nav</title>
8      {% endblock title %}
9  </head>
10 <body>
11     <nav>
12         <a href="/app1">home</a>
13         <a href="/app1/course">course</a>
14         <a href="/app1/about">about</a>
15     </nav>
16     {% block body %}
17
18     {% endblock body %}
19 </body>
20 </html>
```

home.html

```

home.html X
project5 > app1 > templates > home.html > ...
1  {% extends 'nav.html' %}
2  {% block body %}
3  {% load static %}
4  <!DOCTYPE html>
5  <html lang="en">
6  <head>
7      <meta charset="UTF-8">
8      <meta name="viewport" content="width=device-width, initial-scale=1.0">
9      <title>home</title>
10     <link rel="stylesheet" href="{% static 'css/style.css' %}">
11 </head>
12 <body>
13     <h1>HOME PAGE</h1>
14     
15 </body>
16 </html>
17 {% endblock body %}

```



[home](#) [course](#) [about](#)

HOME PAGE




course.html

```

course.html X
project5 > app1 > templates > course.html > html
1  {% extends 'nav.html' %}
2  {% block body %}
3  <!DOCTYPE html>
4  <html lang="en">
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>course</title>
9  </head>
10 <body>
11     <h1>OUR COURSES</h1>
12     <h3>course Details : </h3>
13     {% for i,j in data.items %}
14         <ul>
15             <li>{{i}}: {{j}}</li>
16         </ul>
17     {% endfor %}
18 </body>
19 </html>
20 {% endblock body %}

```

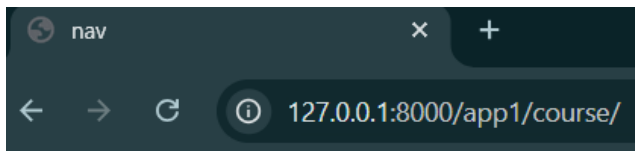

[home](#) [course](#) [about](#)

OUR COURSES

course Details :


- cfees: [5000, 7000, 3000, 4000, 2000]
- cname: ['python', 'java', 'css', 'html', 'php']

about.html

```

about.html X
project5 > app1 > templates > about.html > ...
1  {% extends 'nav.html' %}
2  {% block body %}
3  <!DOCTYPE html>
4  <html lang="en">
5  <head>
6      <meta charset="UTF-8">
7      <meta name="viewport" content="width=device-width, initial-scale=1.0">
8      <title>about</title>
9  </head>
10 <body>
11     <h1>ABOUT PAGE</h1>
12     <h3>Data : {{data}}</h3>
13     <h5>Std_id : {{data.std_id}}</h5>
14     <h5>Std_name : {{data.std_nm}}</h5>
15 </body>
16 </html>
17 {% endblock body %}

```

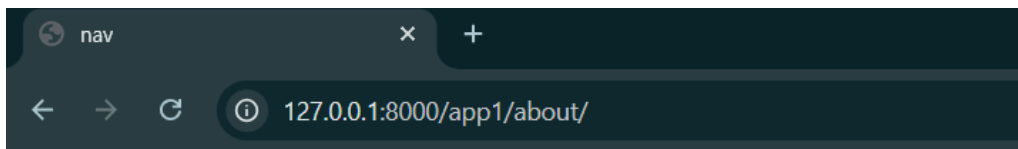

[home](#) [course](#) [about](#)

ABOUT PAGE

Data : {'std_id': [1, 2, 3, 4, 5, 6], 'std_nm': ['A', 'B', 'C', 'D', 'E', 'F']}

Std_id : [1, 2, 3, 4, 5, 6]

Std_name : ['A', 'B', 'C', 'D', 'E', 'F']

Step 14 : URL with name without path

app1 -> views -> [urls.py](#)


```

urls.py X
project5 > app1 > urls.py > ...
1  from django.urls import path
2  from app1.views import home, about, course
3
4  urlpatterns = [
5      path('', home),
6      path('about/', about, name='abouts'),
7      path('course/', course),
8  ]

```

nav.html

```
<nav>
  <a href="/app1">home</a>
  <a href="/app1/course">course</a>
  <a href="{% url 'abouts' %}">about</a>
</nav>
```

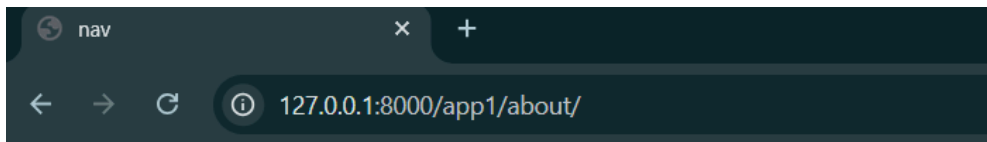

[home](#) [course](#) [about](#)

ABOUT PAGE

Data : {'std_id': [1, 2, 3, 4, 5, 6], 'std_nm': ['A', 'B', 'C', 'D', 'E', 'F']}

Std_id : [1, 2, 3, 4, 5, 6]

Std_name : ['A', 'B', 'C', 'D', 'E', 'F']