PAGE 1: Meta-learning across sessions — 3-session rolling mean (chronological order)
Benefit = P(correct | common) − P(correct | neutral); Cost = P(correct | rare) − P(correct | neutral)

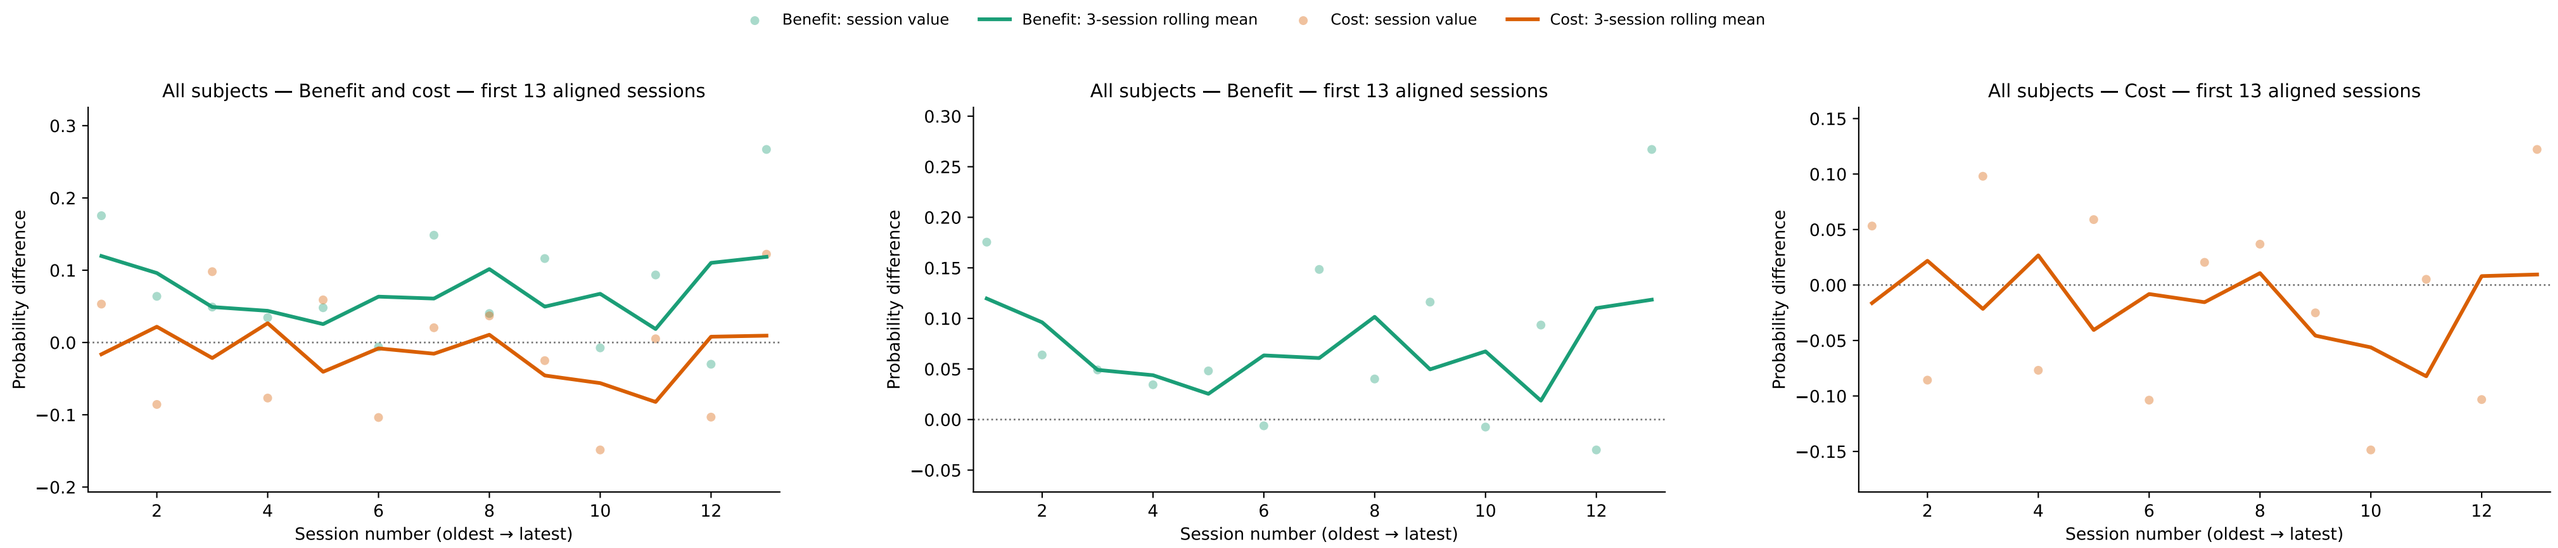

PAGE 2: Meta-learning across sessions — 5-session rolling mean (chronological order)
Benefit = P(correct | common) − P(correct | neutral); Cost = P(correct | rare) − P(correct | neutral)

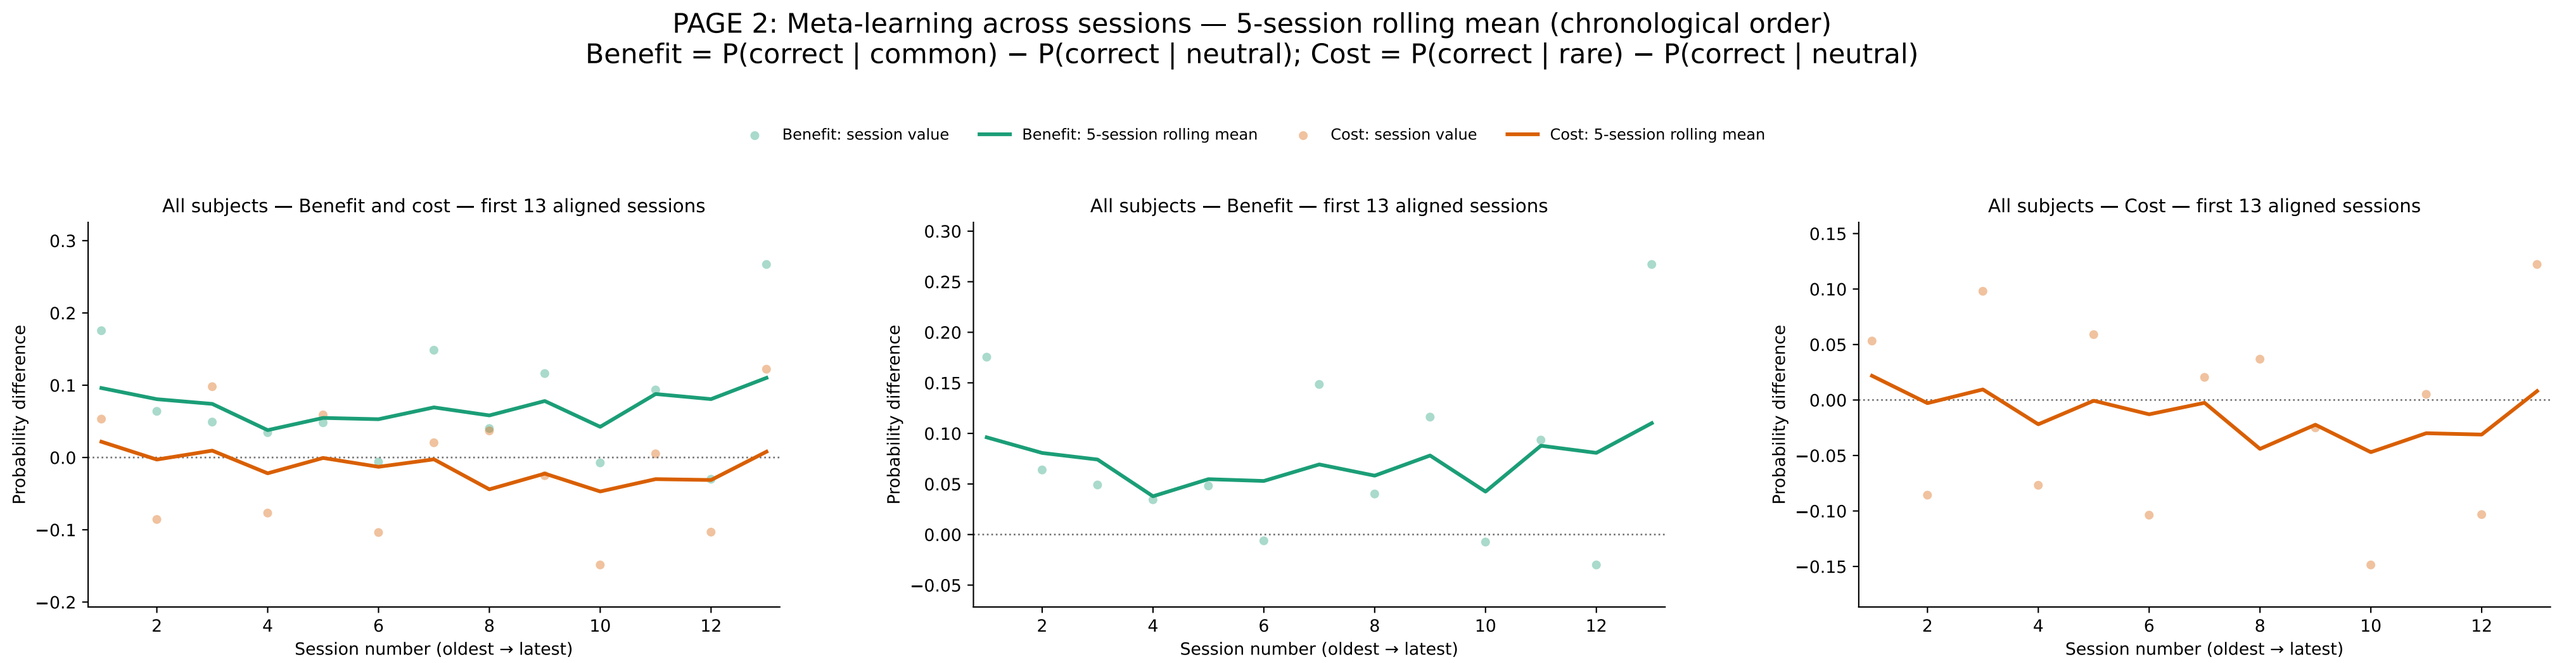
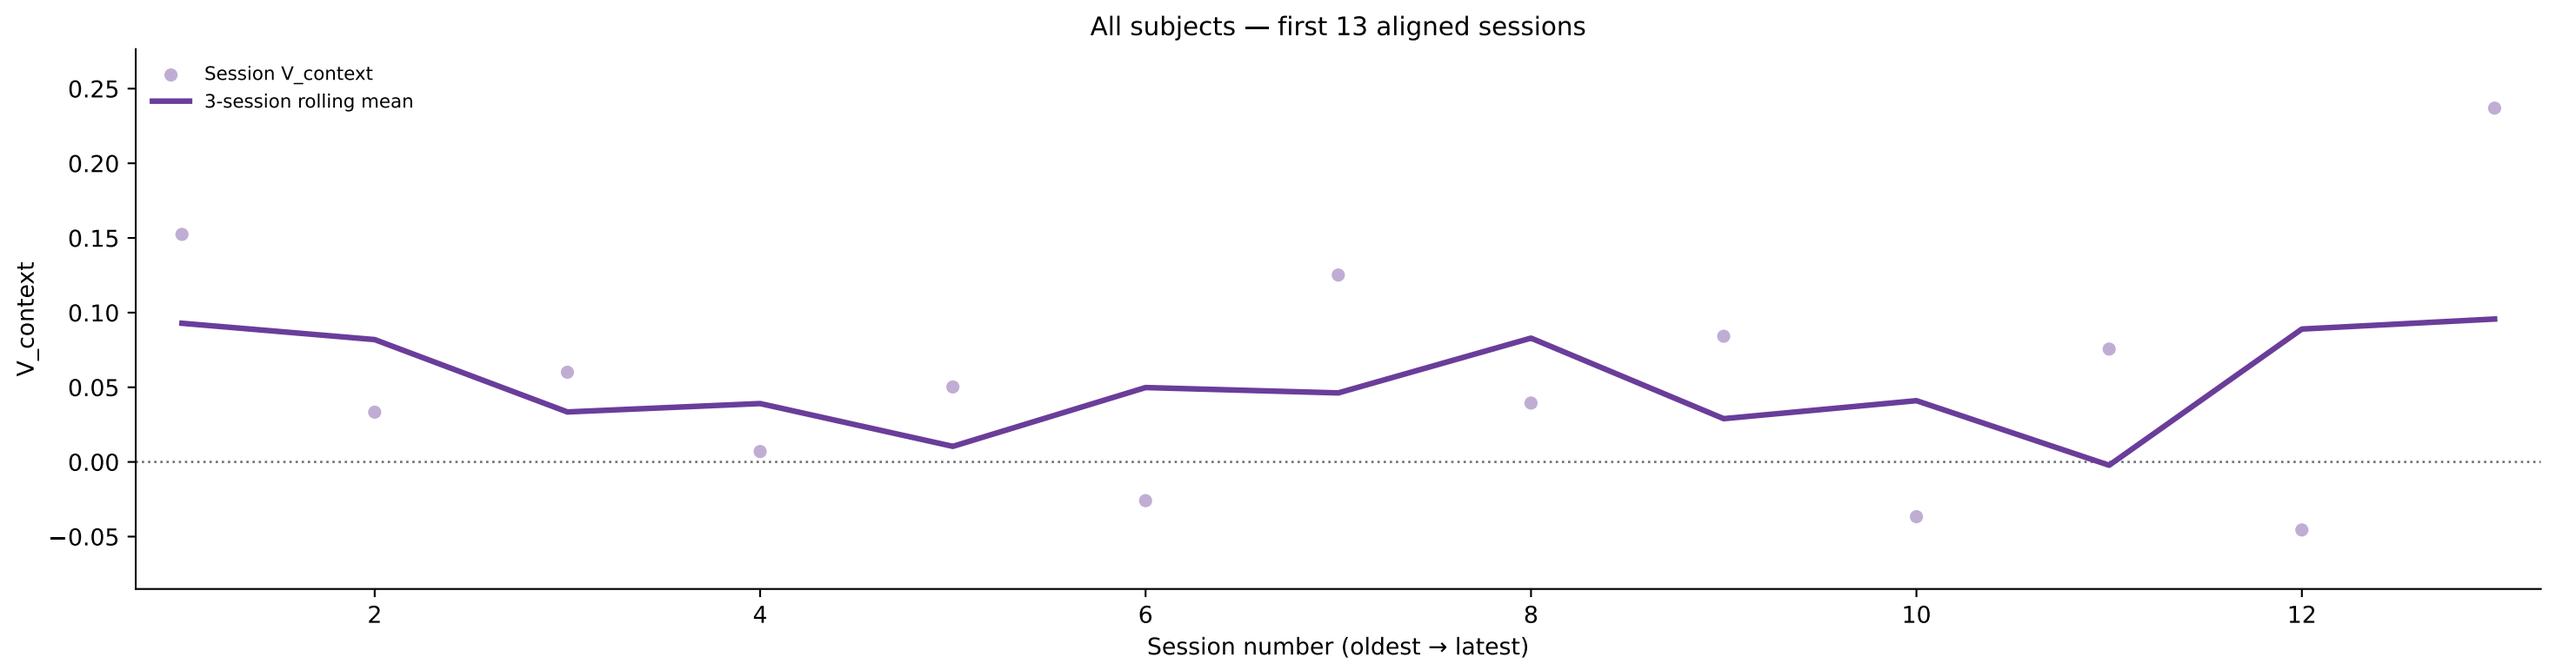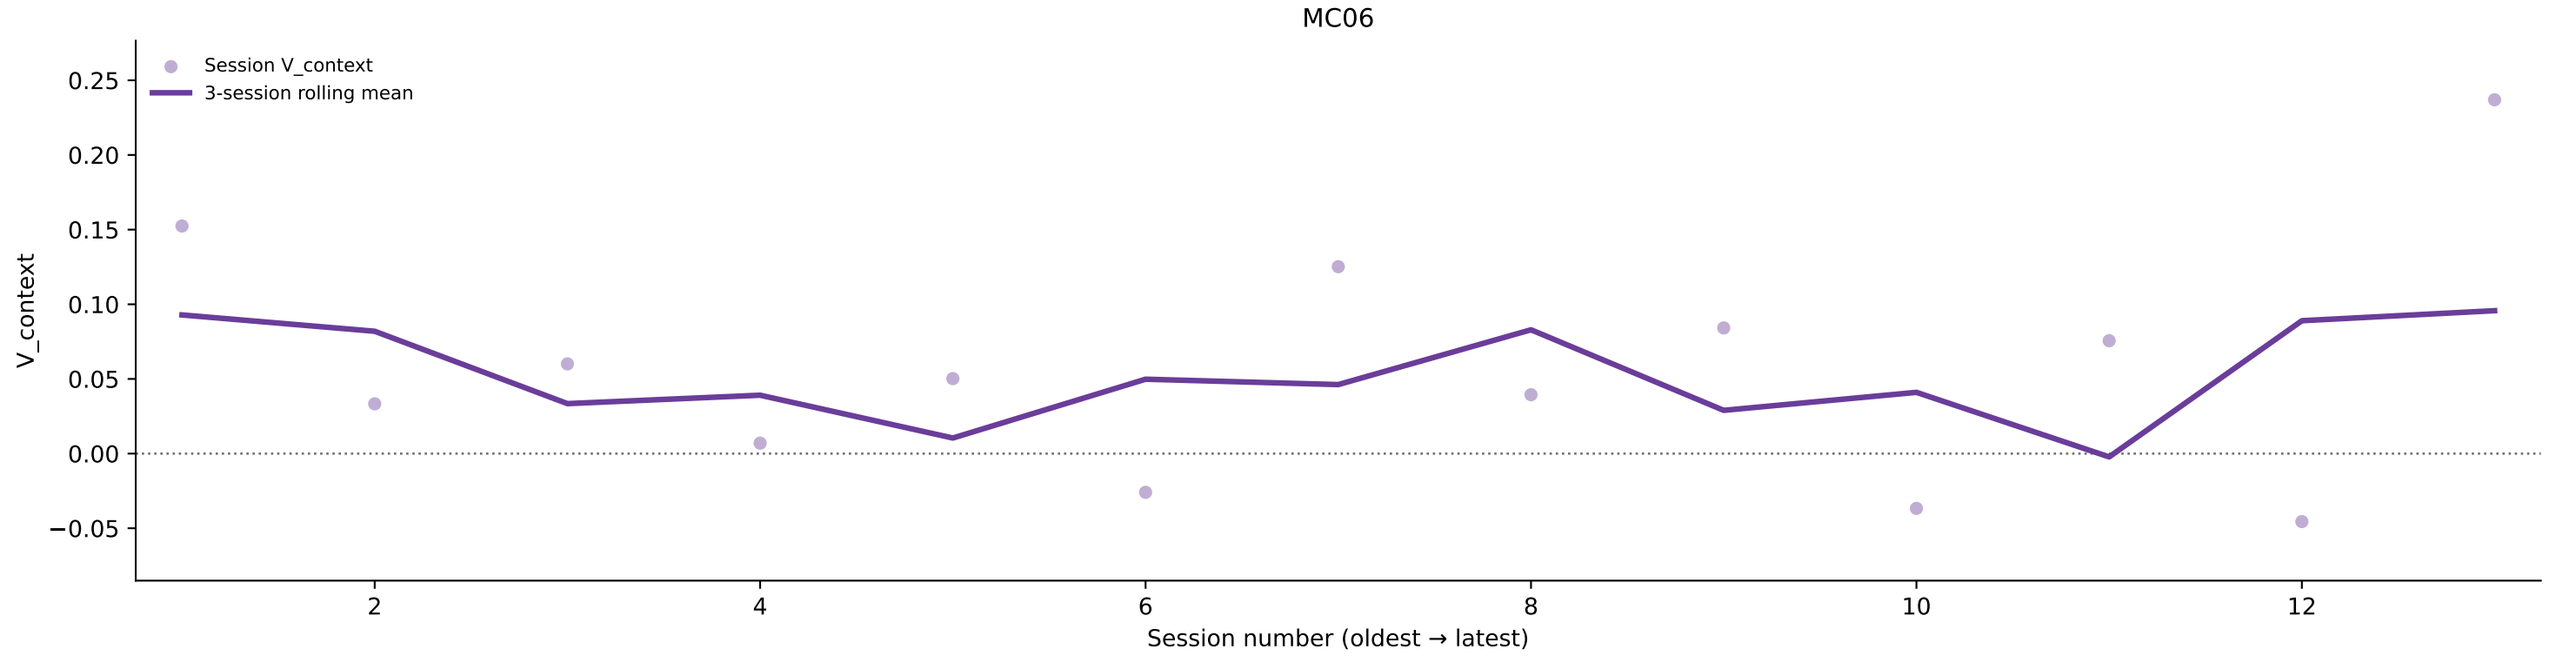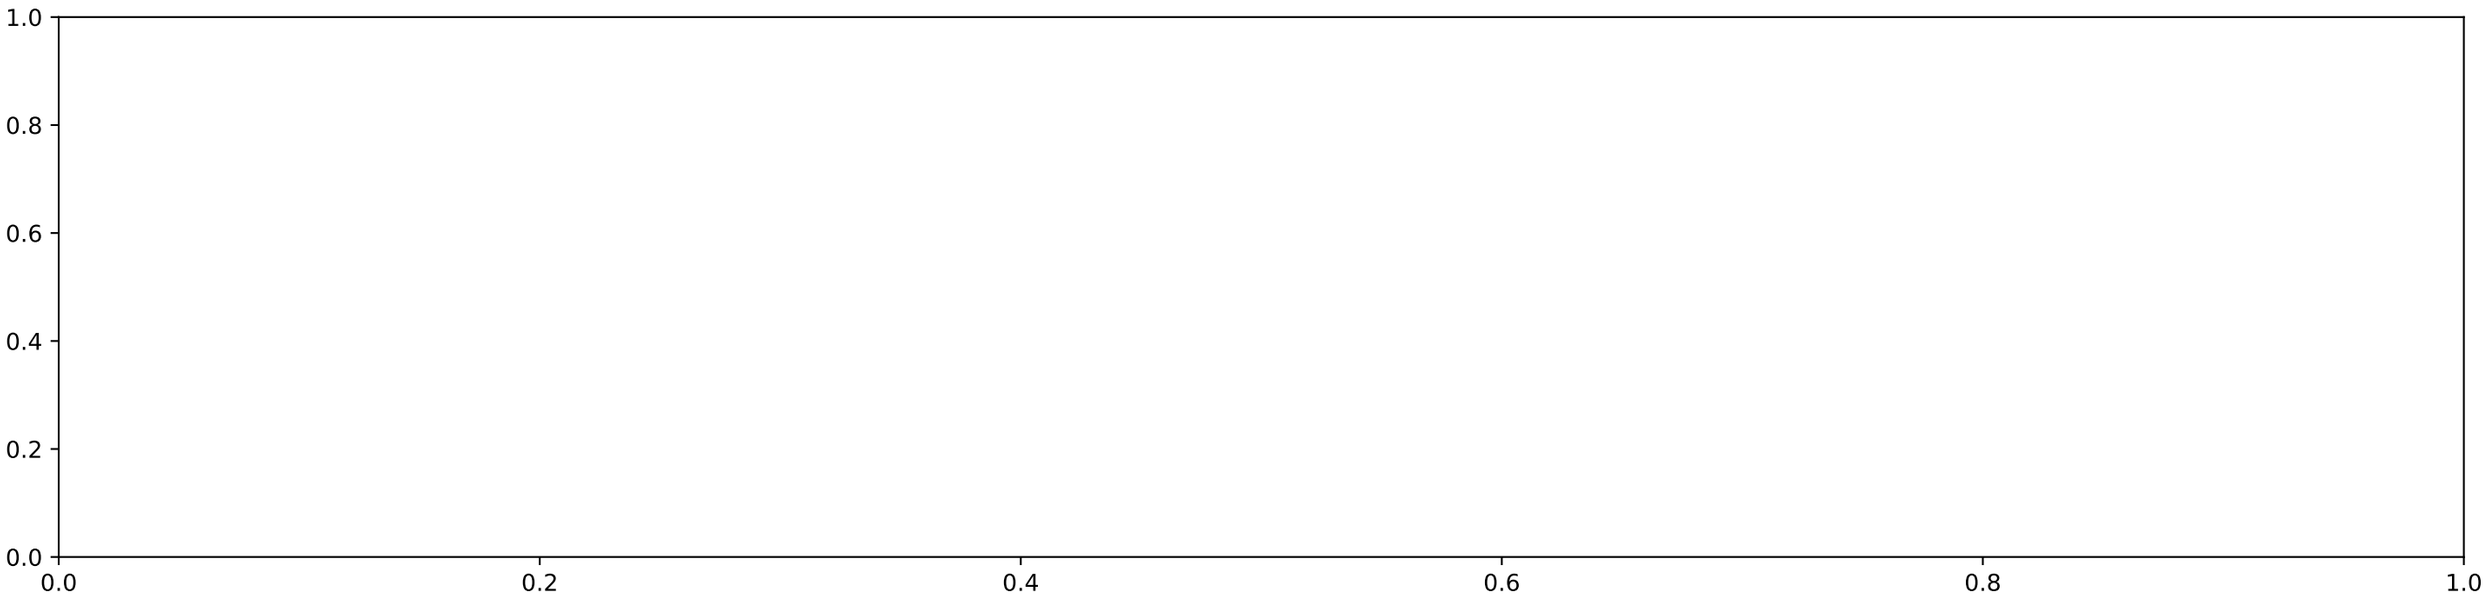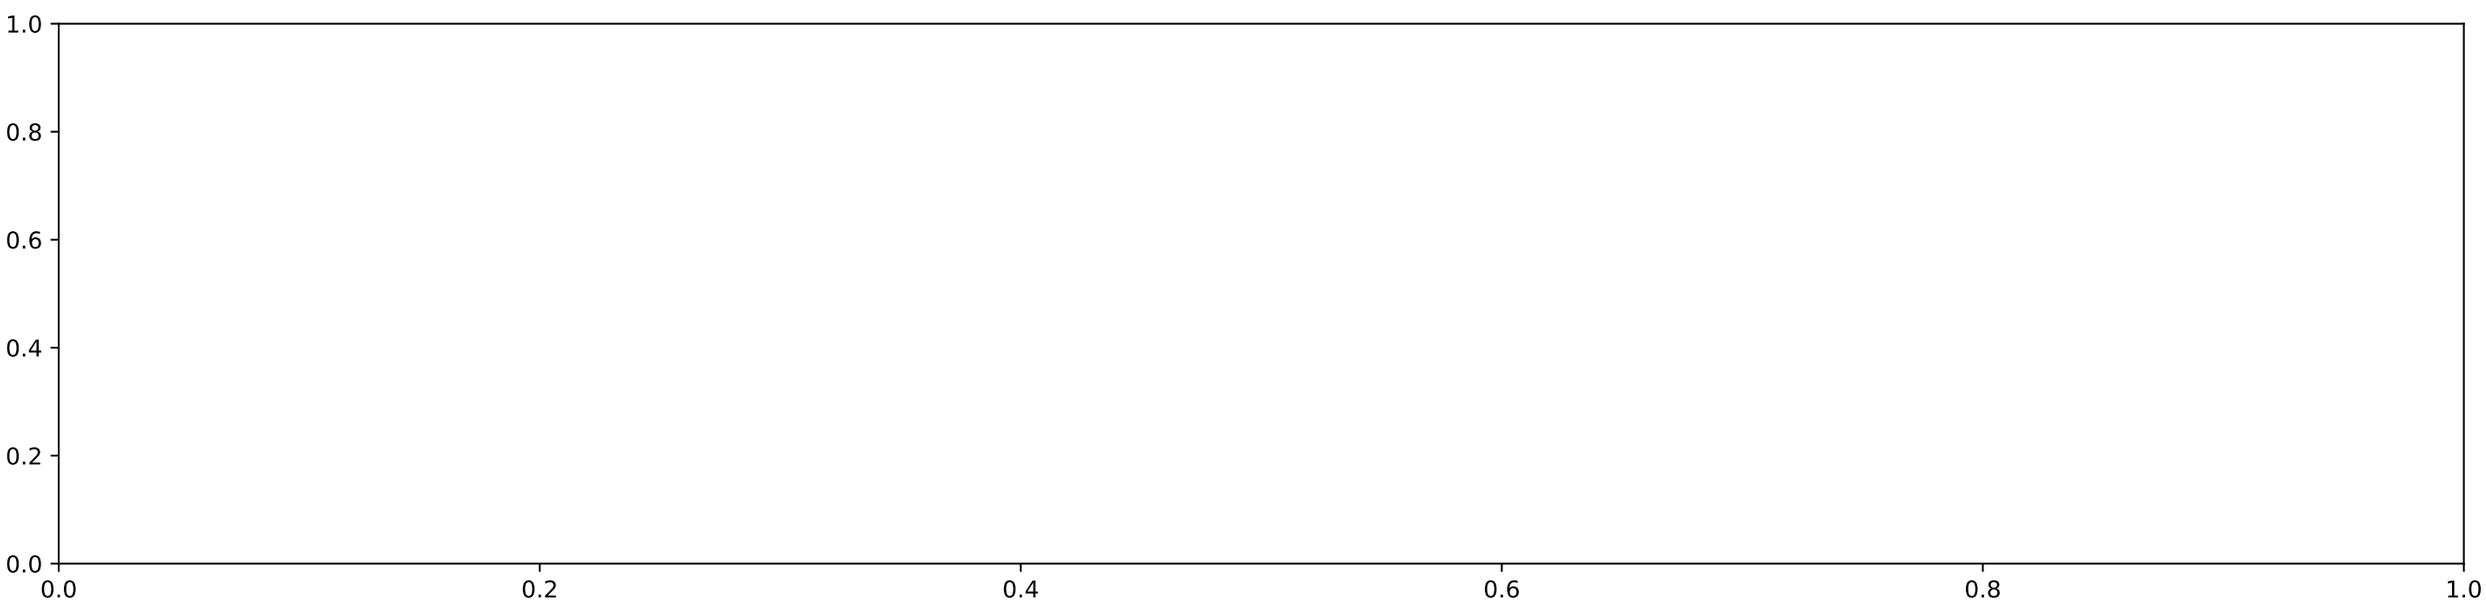
PAGE 3: Session-level context value (chronological order)
V_context = p_common × Benefit + p_rare × Rare penalty; Rare penalty = Cost = P(correct | rare) − P(correct | neutral)