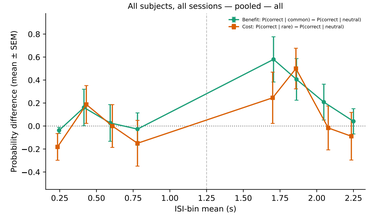
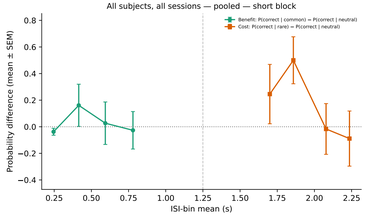
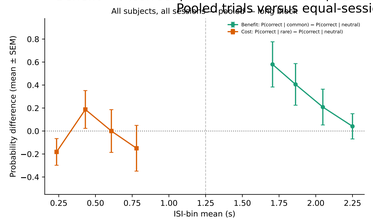
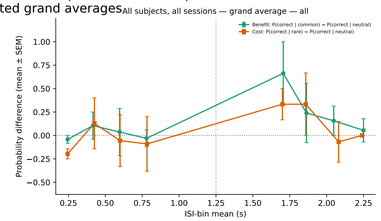
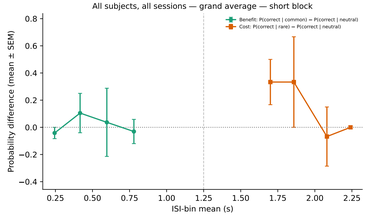
Context benefit and cost across four-bin ISI psychometrics
Benefit = P(correct | common) − P(correct | neutral); Cost = P(correct | rare) − P(correct | neutral)
Pooled trials versus equal-session-weighted grand averages

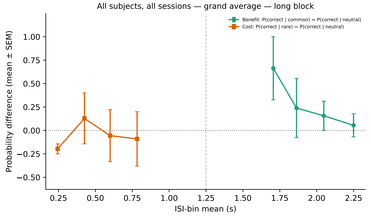


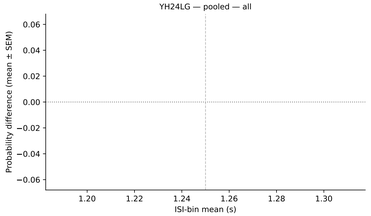



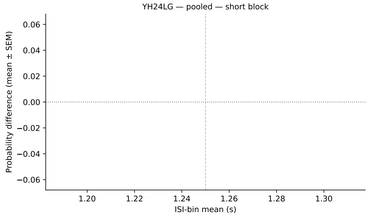



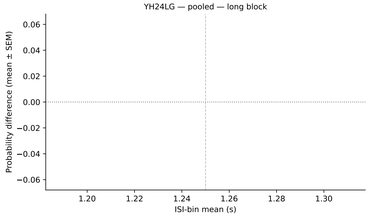



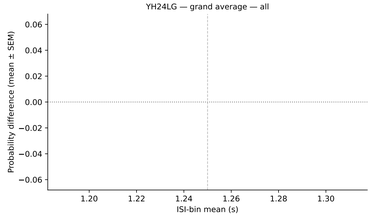



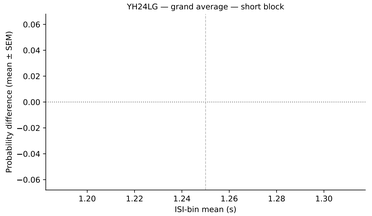



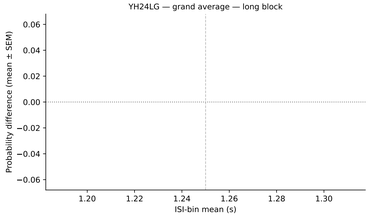



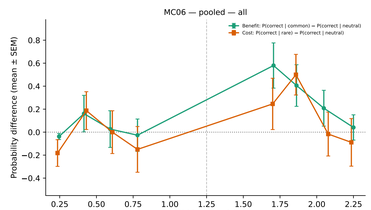



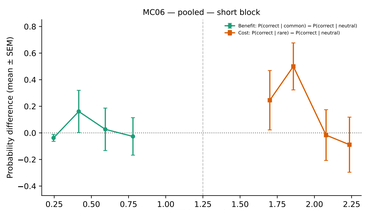



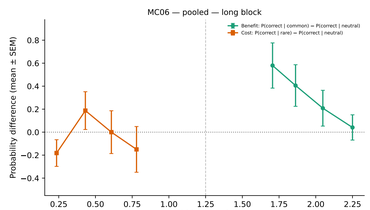



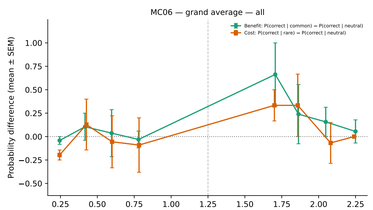



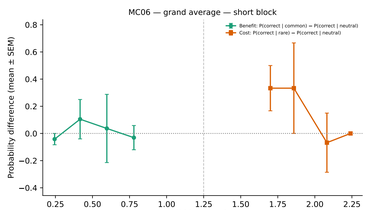



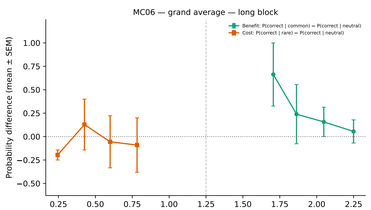



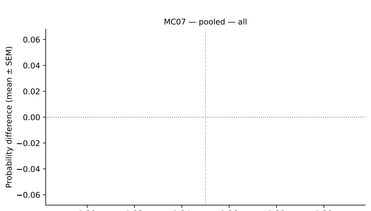



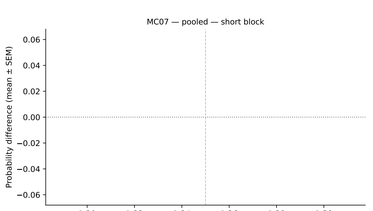



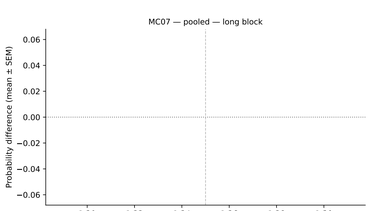



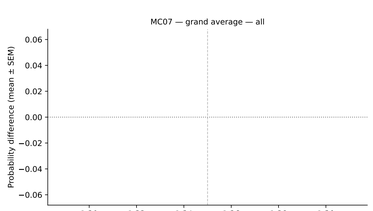



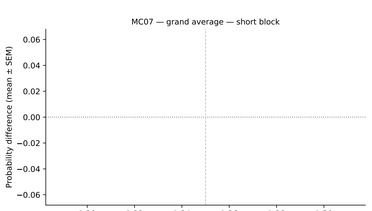



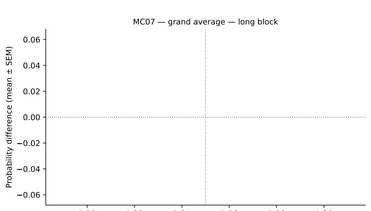



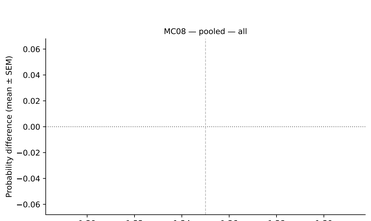



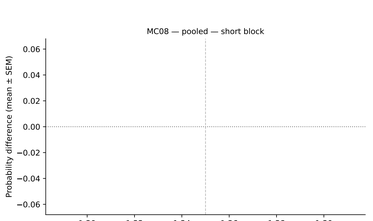



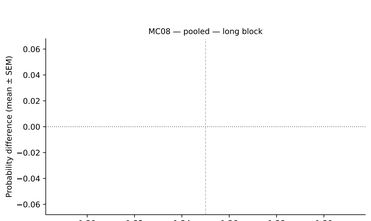



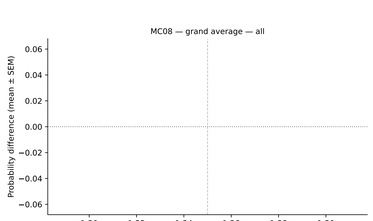



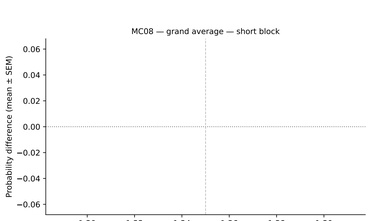



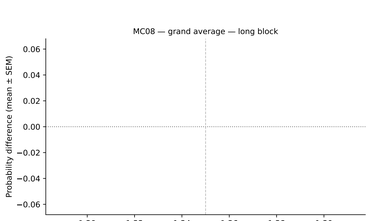



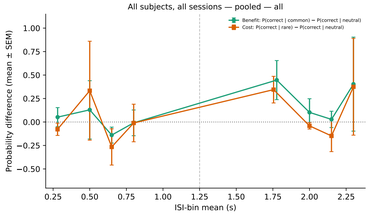



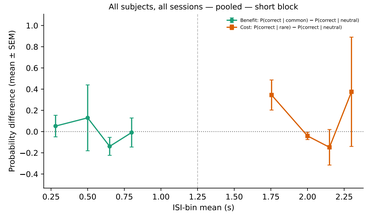



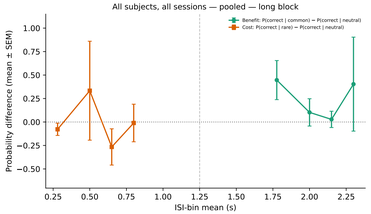



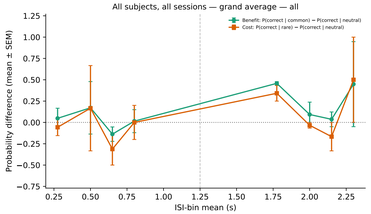



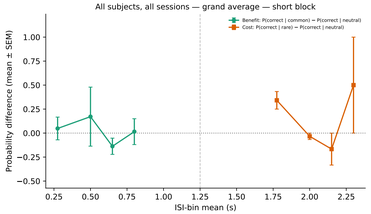
ORDER: benefit/cost calculated at each exact ISI FIRST, then the calculated contrasts are grouped into four ISI bins
Benefit = P(correct | common) − P(correct | neutral); Cost = P(correct | rare) − P(correct | neutral)
Pooled: trial-count-weighted exact-ISI contrasts; grand average: equal-session-weighted contrasts

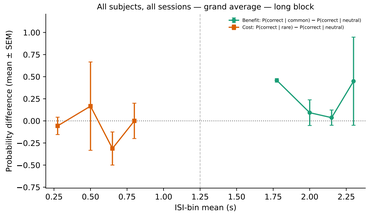


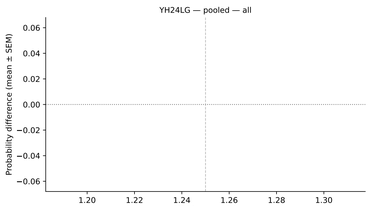



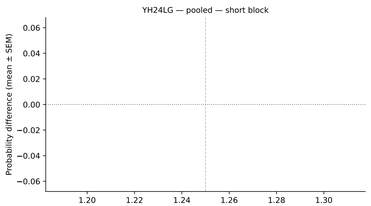



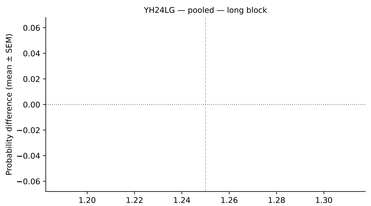



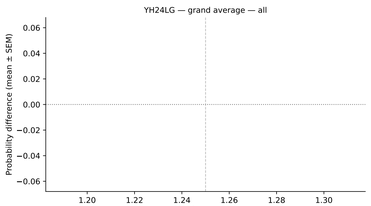



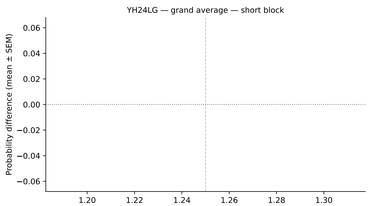



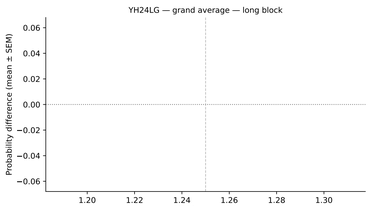



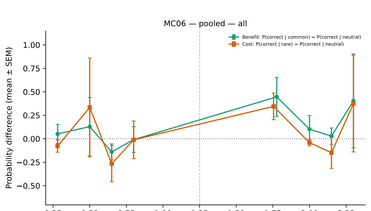



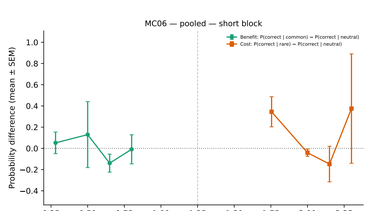



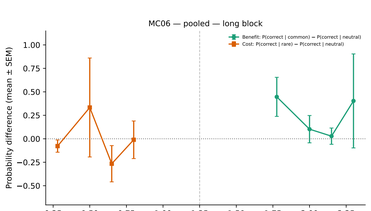



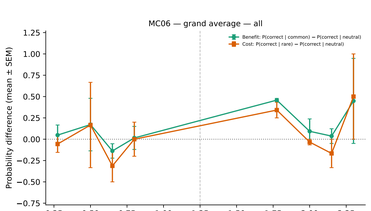



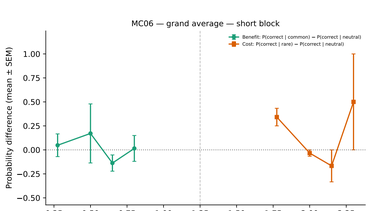



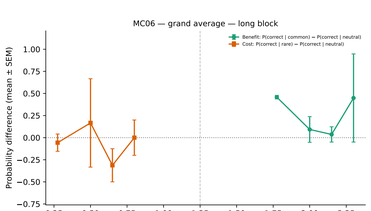



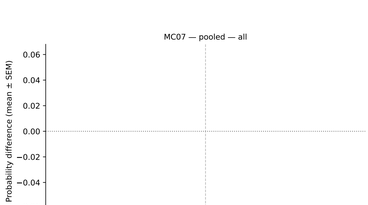



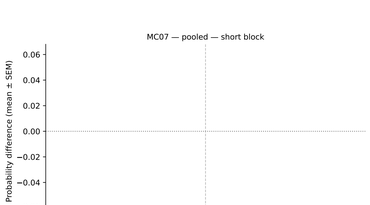



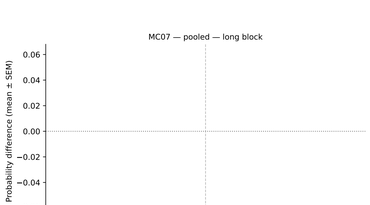



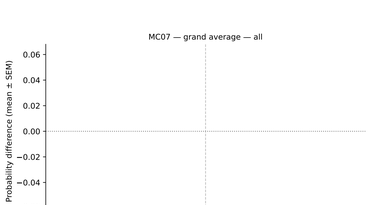



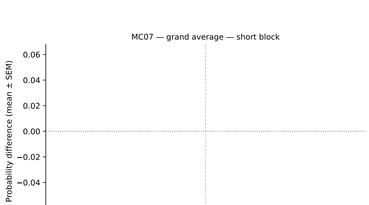



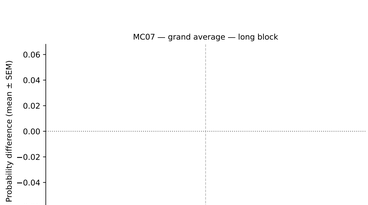



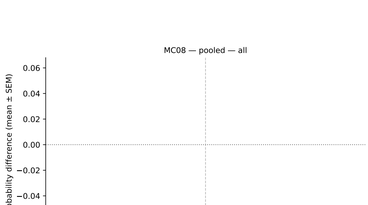



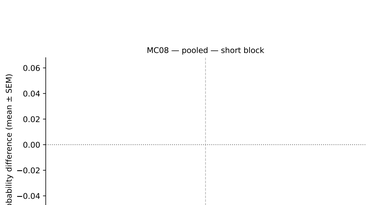



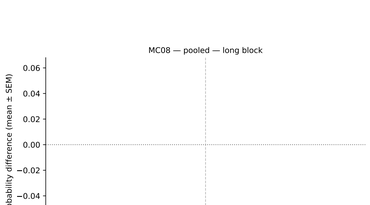



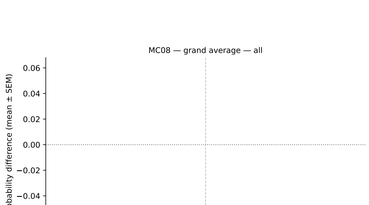



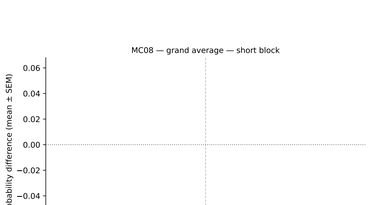



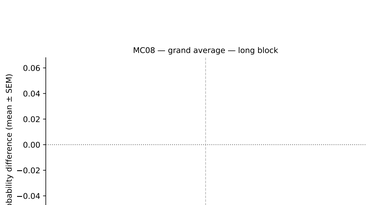



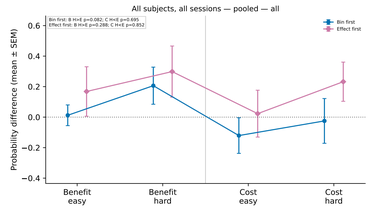



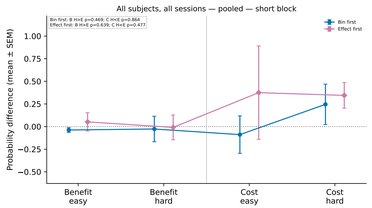



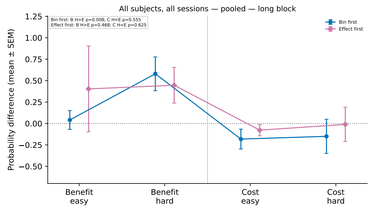



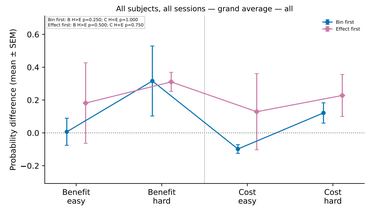



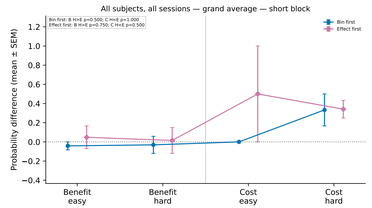
PAGE 3 SUMMARY OF BOTH METHODS — Bin first: trials binned before contrasts; Effect first: exact-ISI contrasts calculated before binning
DEFINITIONS: Benefit = P(correct | common) − P(correct | neutral); Cost = P(correct | rare) − P(correct | neutral)
PREDICTIONS: Benefit_hard > Benefit_easy; Cost_hard < Cost_easy
STATISTICS: pooled = one-sided z-test; grand average = paired one-sided Wilcoxon test across sessions

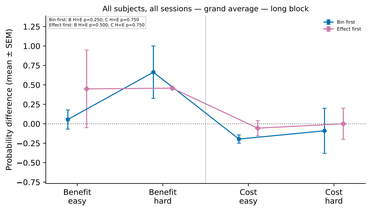


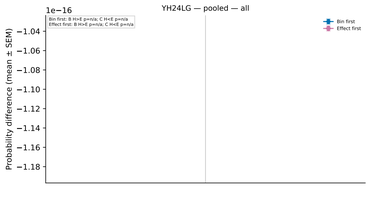



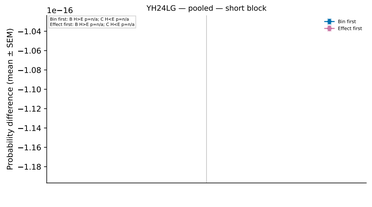



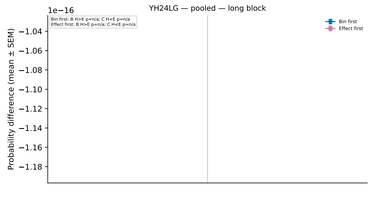



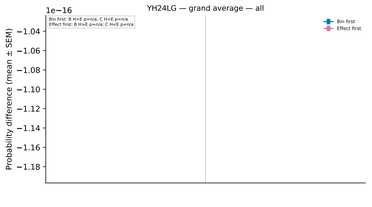



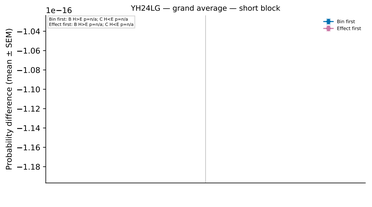



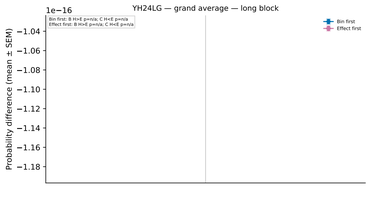



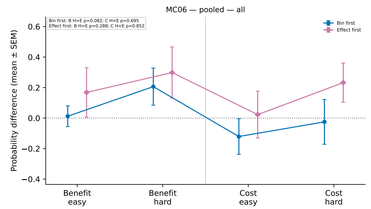



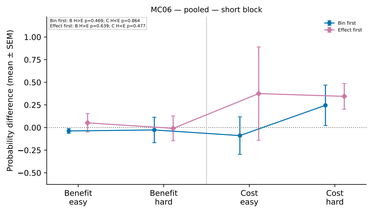



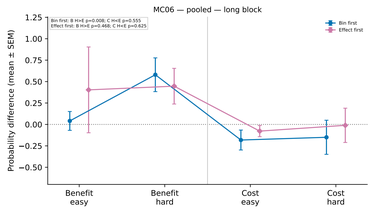



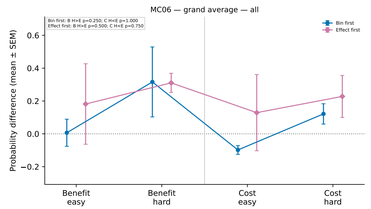



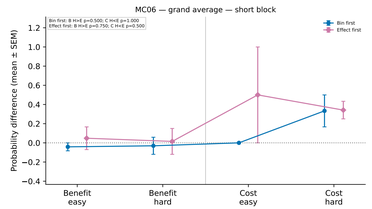



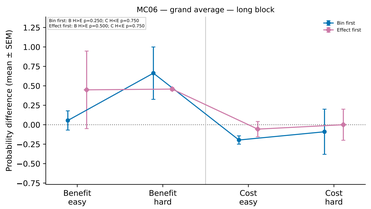



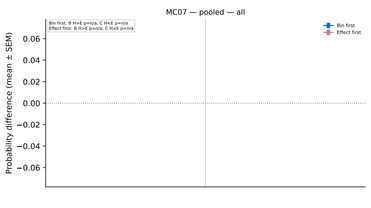



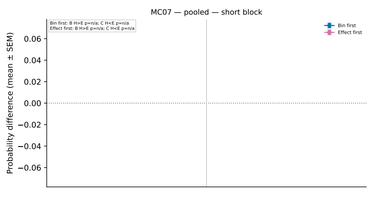



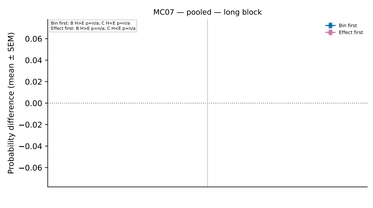



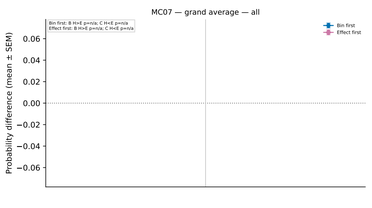



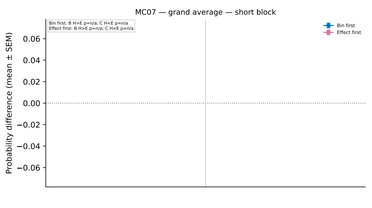



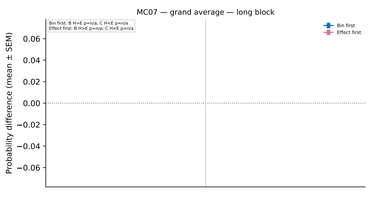



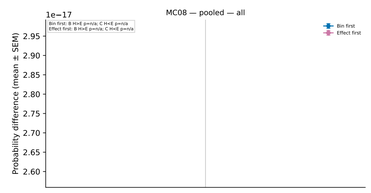



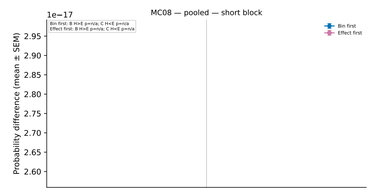



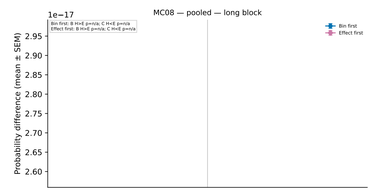



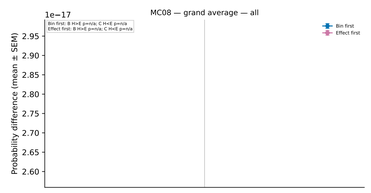



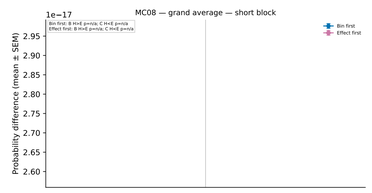



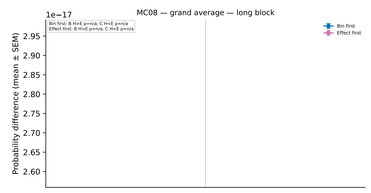



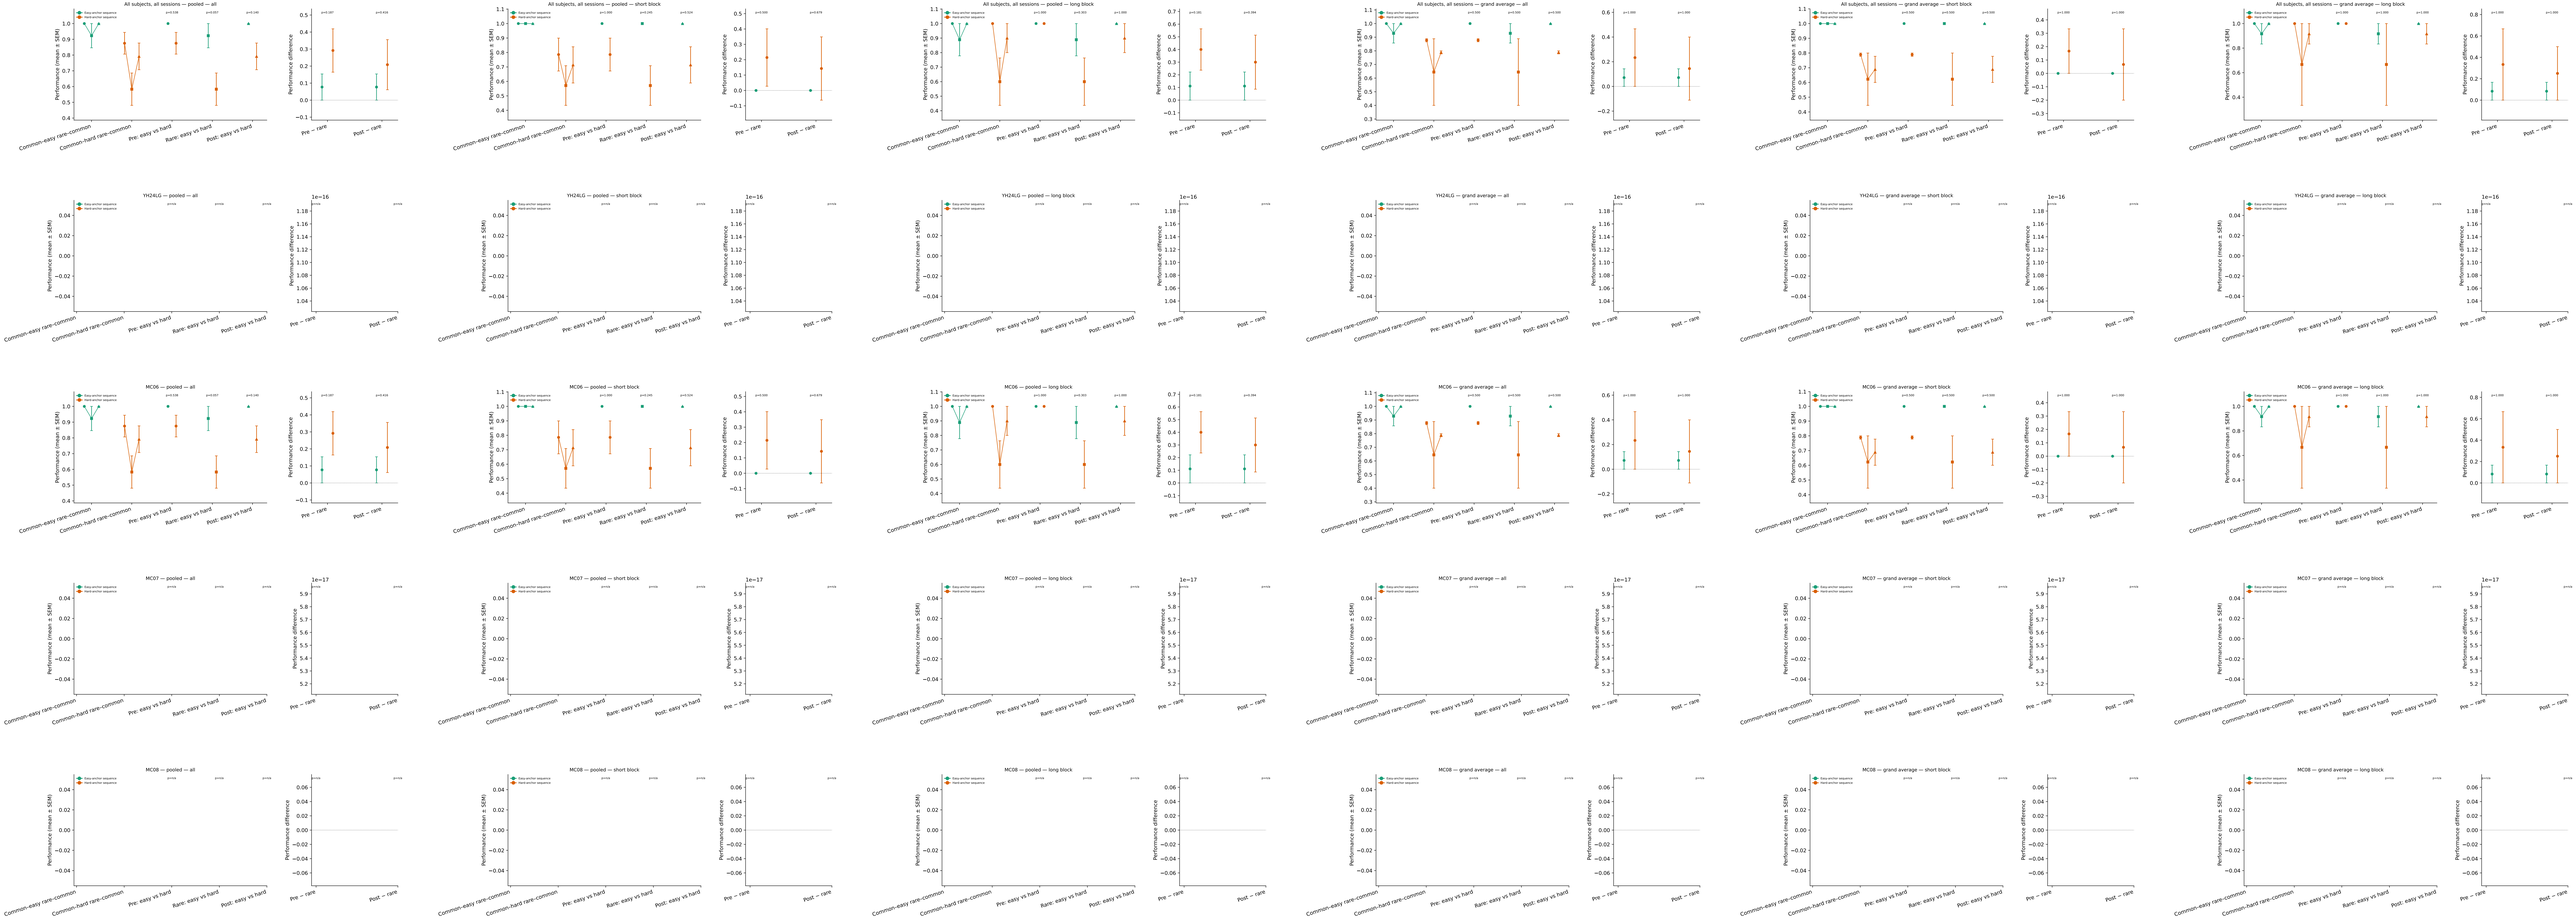



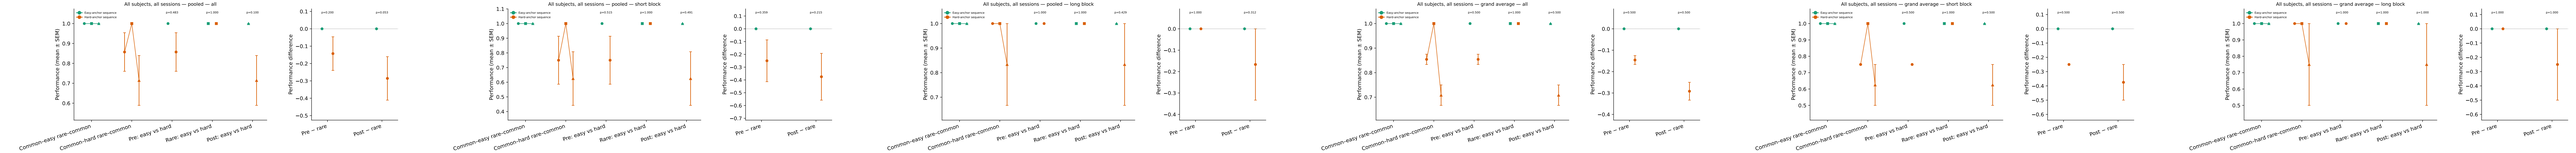



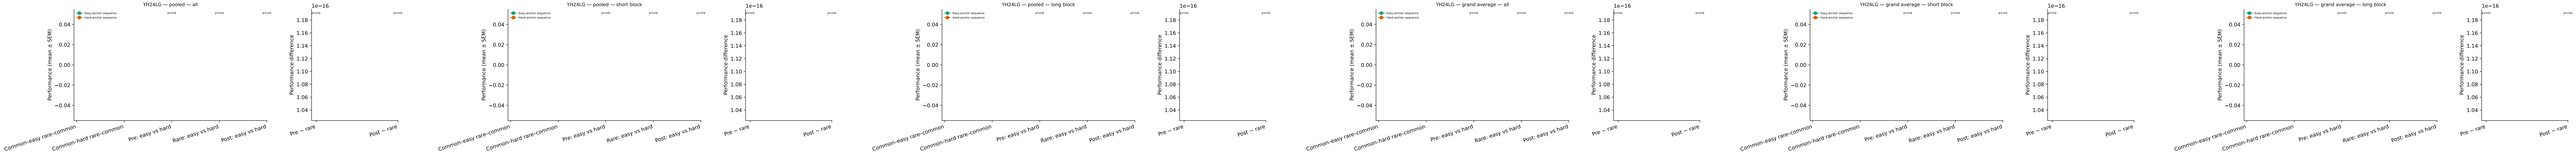



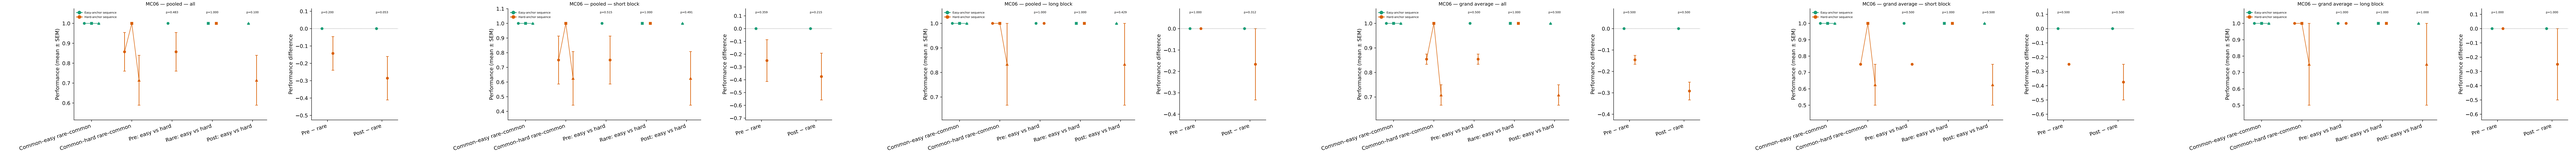
PAGE 4: All qualifying rare anchors — adjacent common–easy/hard rare–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.

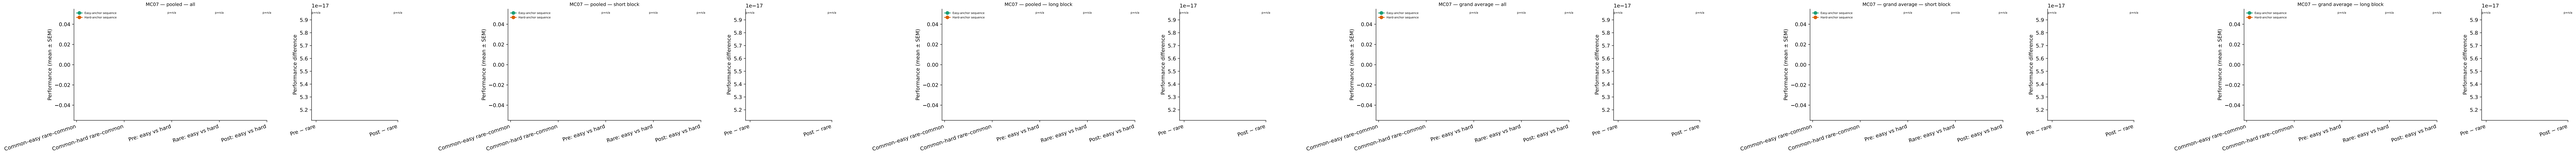


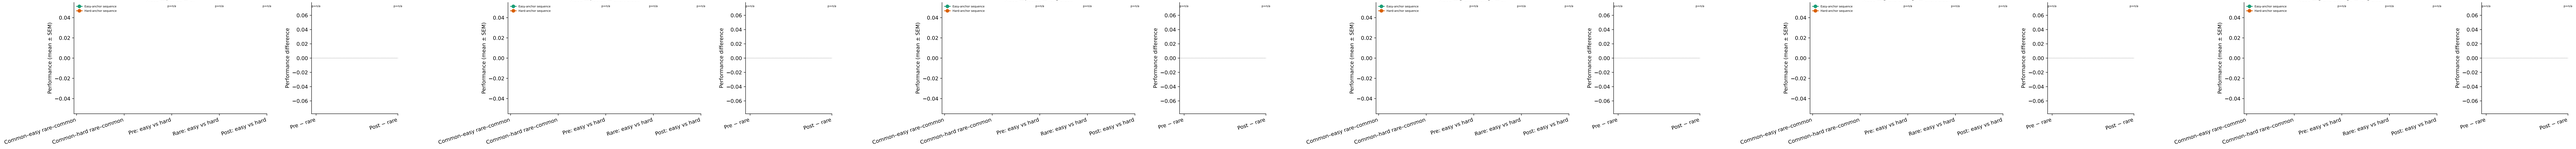
PAGE 5: Rewarded rare anchors only — adjacent common–easy/hard rare–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.



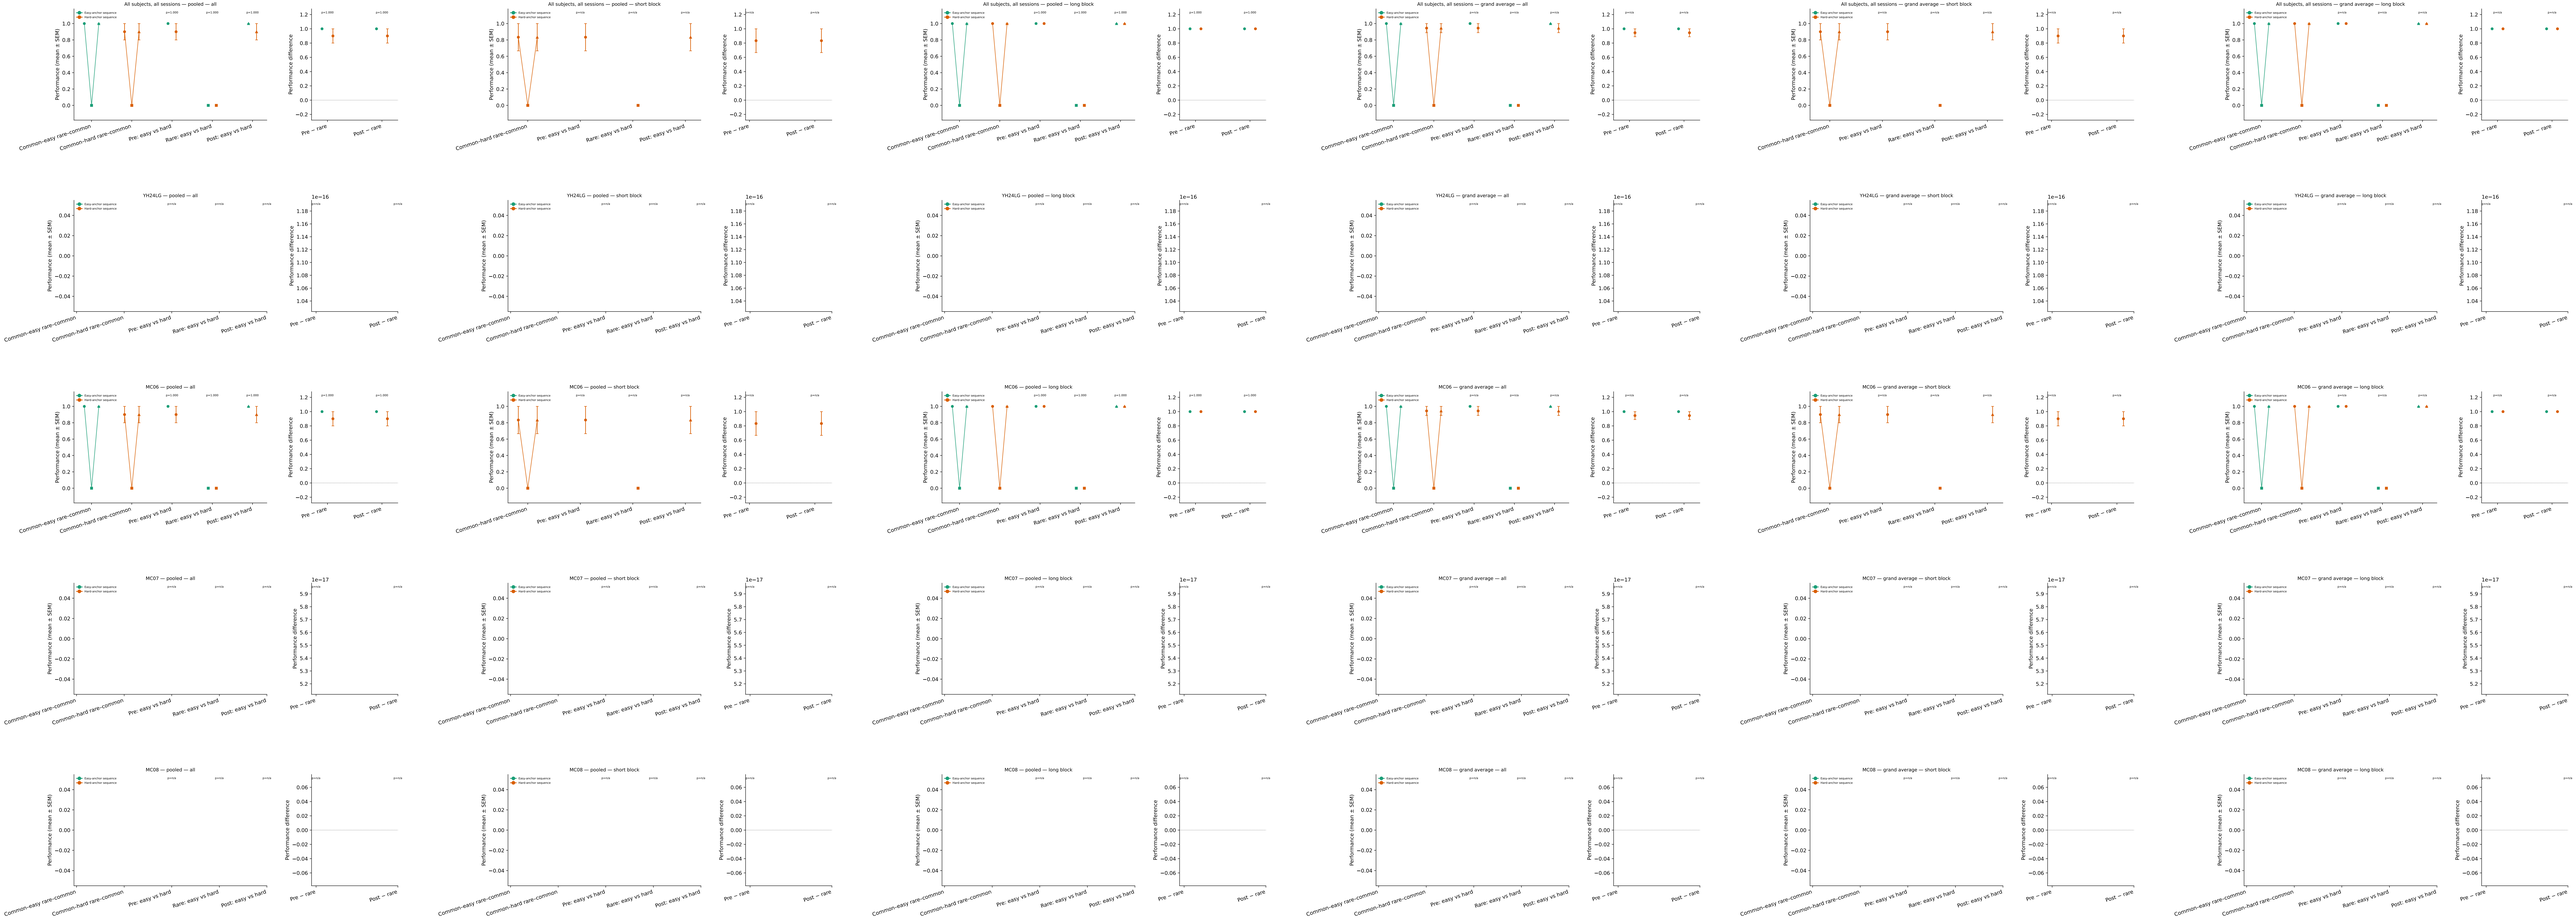



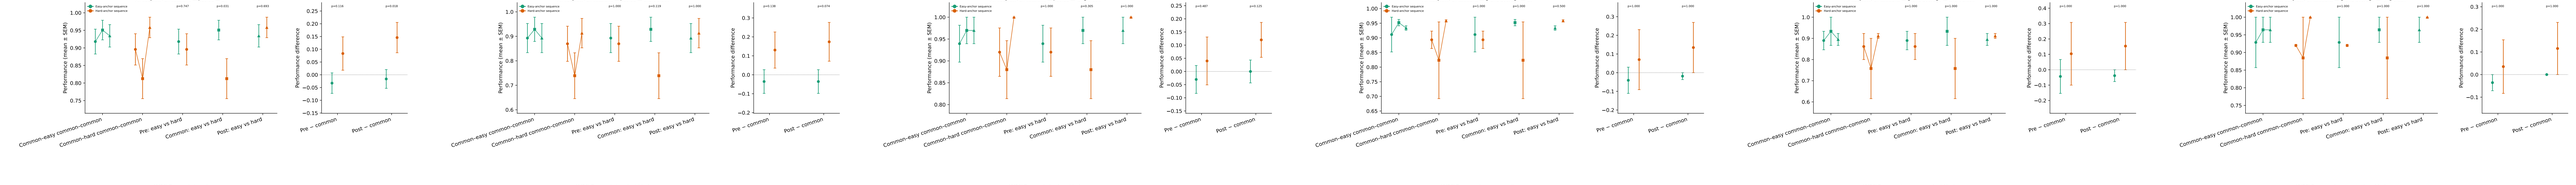



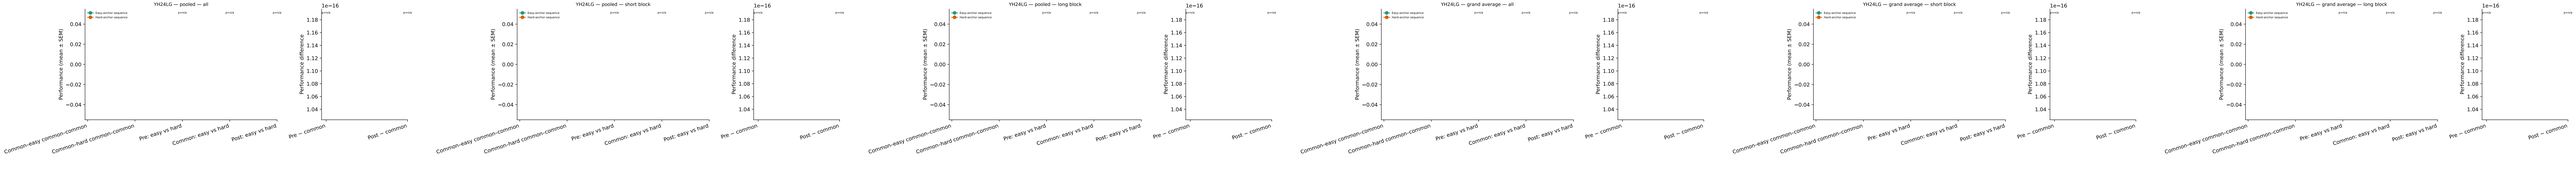



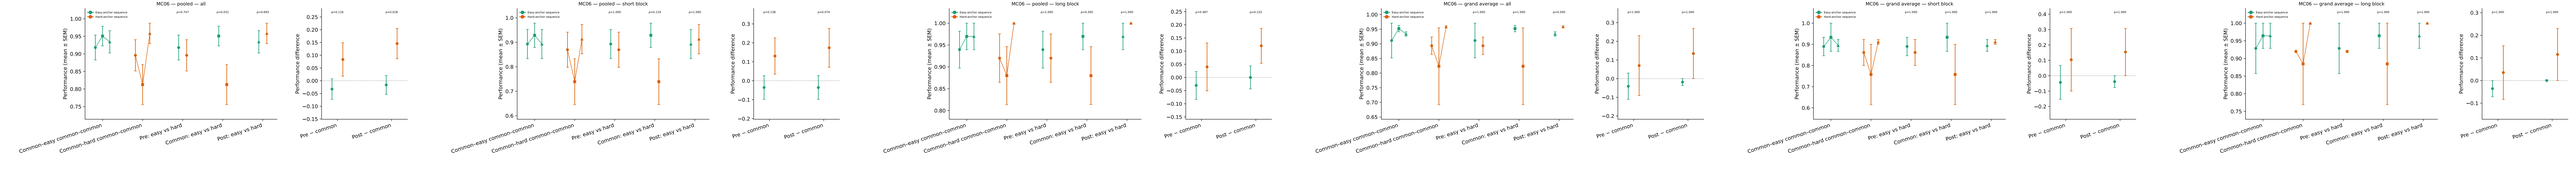
PAGE 6: Punished rare anchors only — adjacent common–easy/hard rare–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.

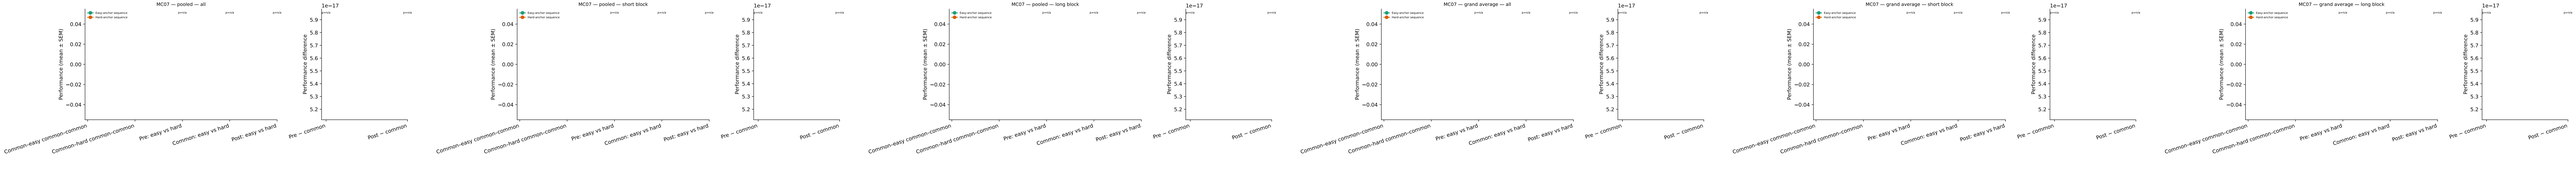


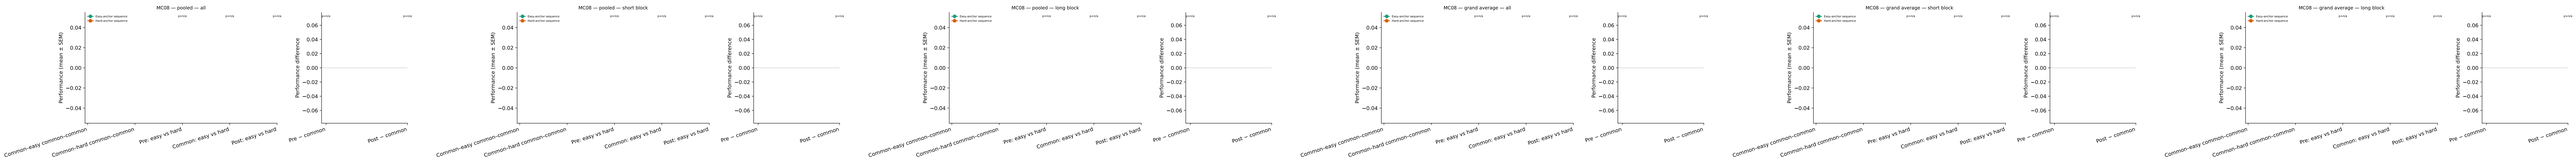
PAGE 7: All qualifying common anchors — adjacent common–easy/hard common–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.



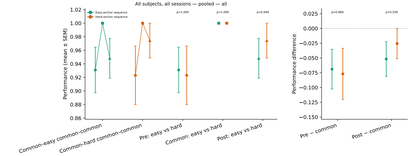



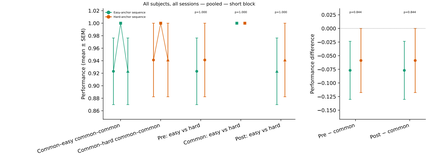



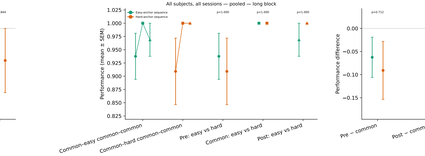



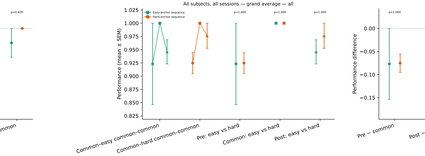



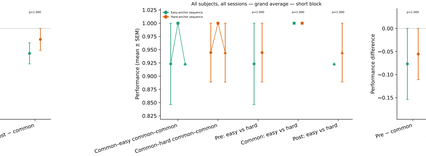
PAGE 8: Rewarded common anchors only — adjacent common–easy/hard common–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.

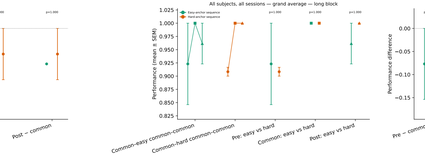


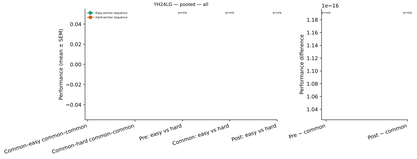



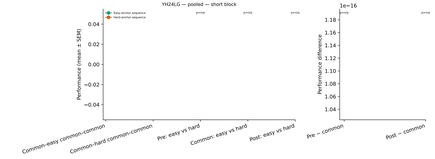



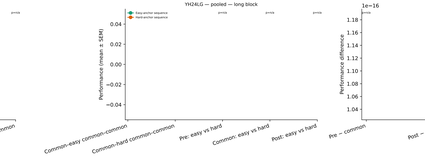



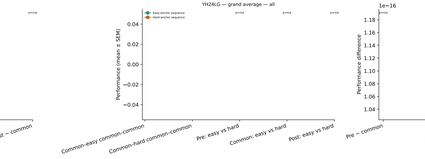



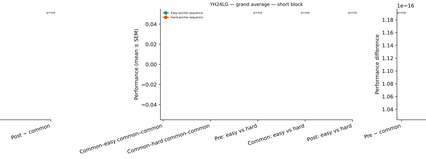



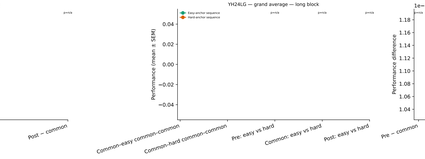



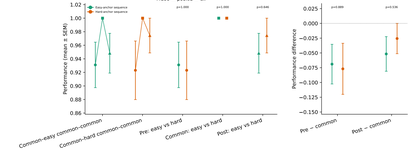



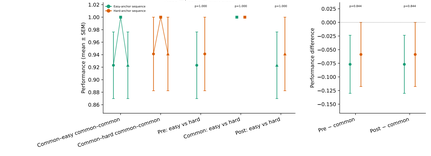



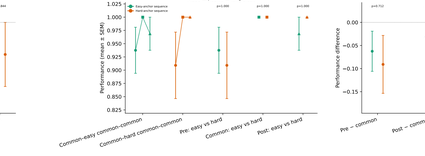



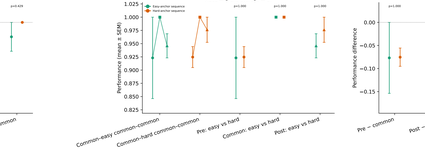



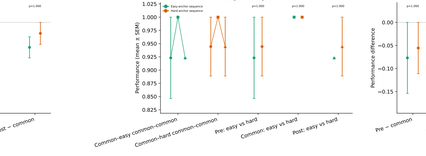



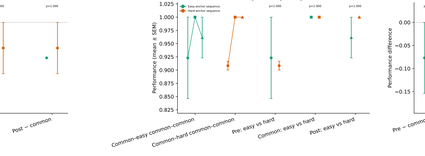



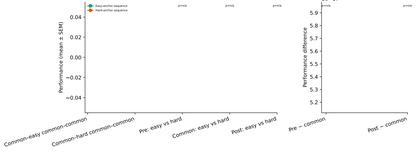



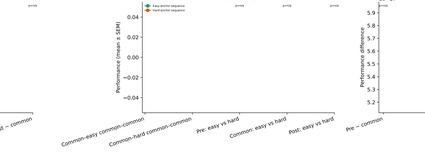



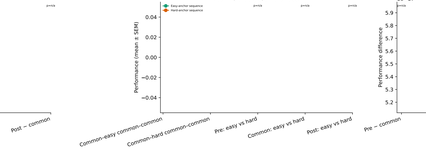



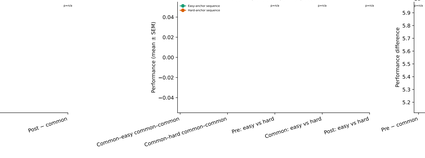


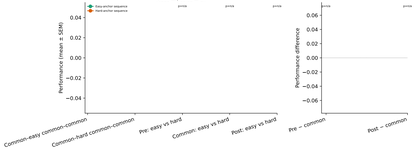


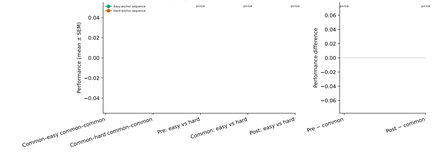


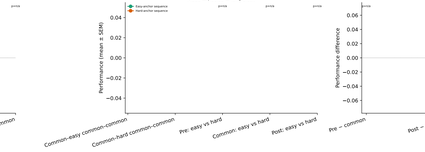



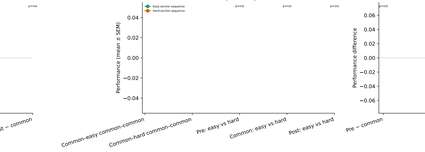



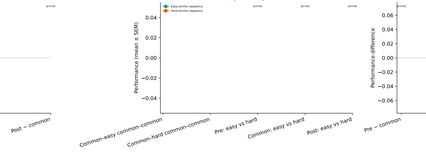



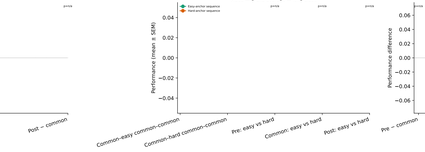



PAGE 9: Punished common anchors only — adjacent common-easy/hard common–common sequences
Points are mean ± SEM; no fixed y limits. Tests: pooled binary performance = two-sided Fisher exact; pooled differences = two-sided Mann–Whitney U; grand average = paired two-sided Wilcoxon across sessions.

