P(stay | rewarded side) aligned to adjusted block transitions
Window: 20 trials before through 19 trials after alignment; rel_trial=0 follows the terminal-rare adjustment used above.
Anchor is outcome trial i; stay/switch is measured on i+1. Short/long sides pool contingency-corrected physical choices; gray = P(rare trial); windows stop before the following transition.

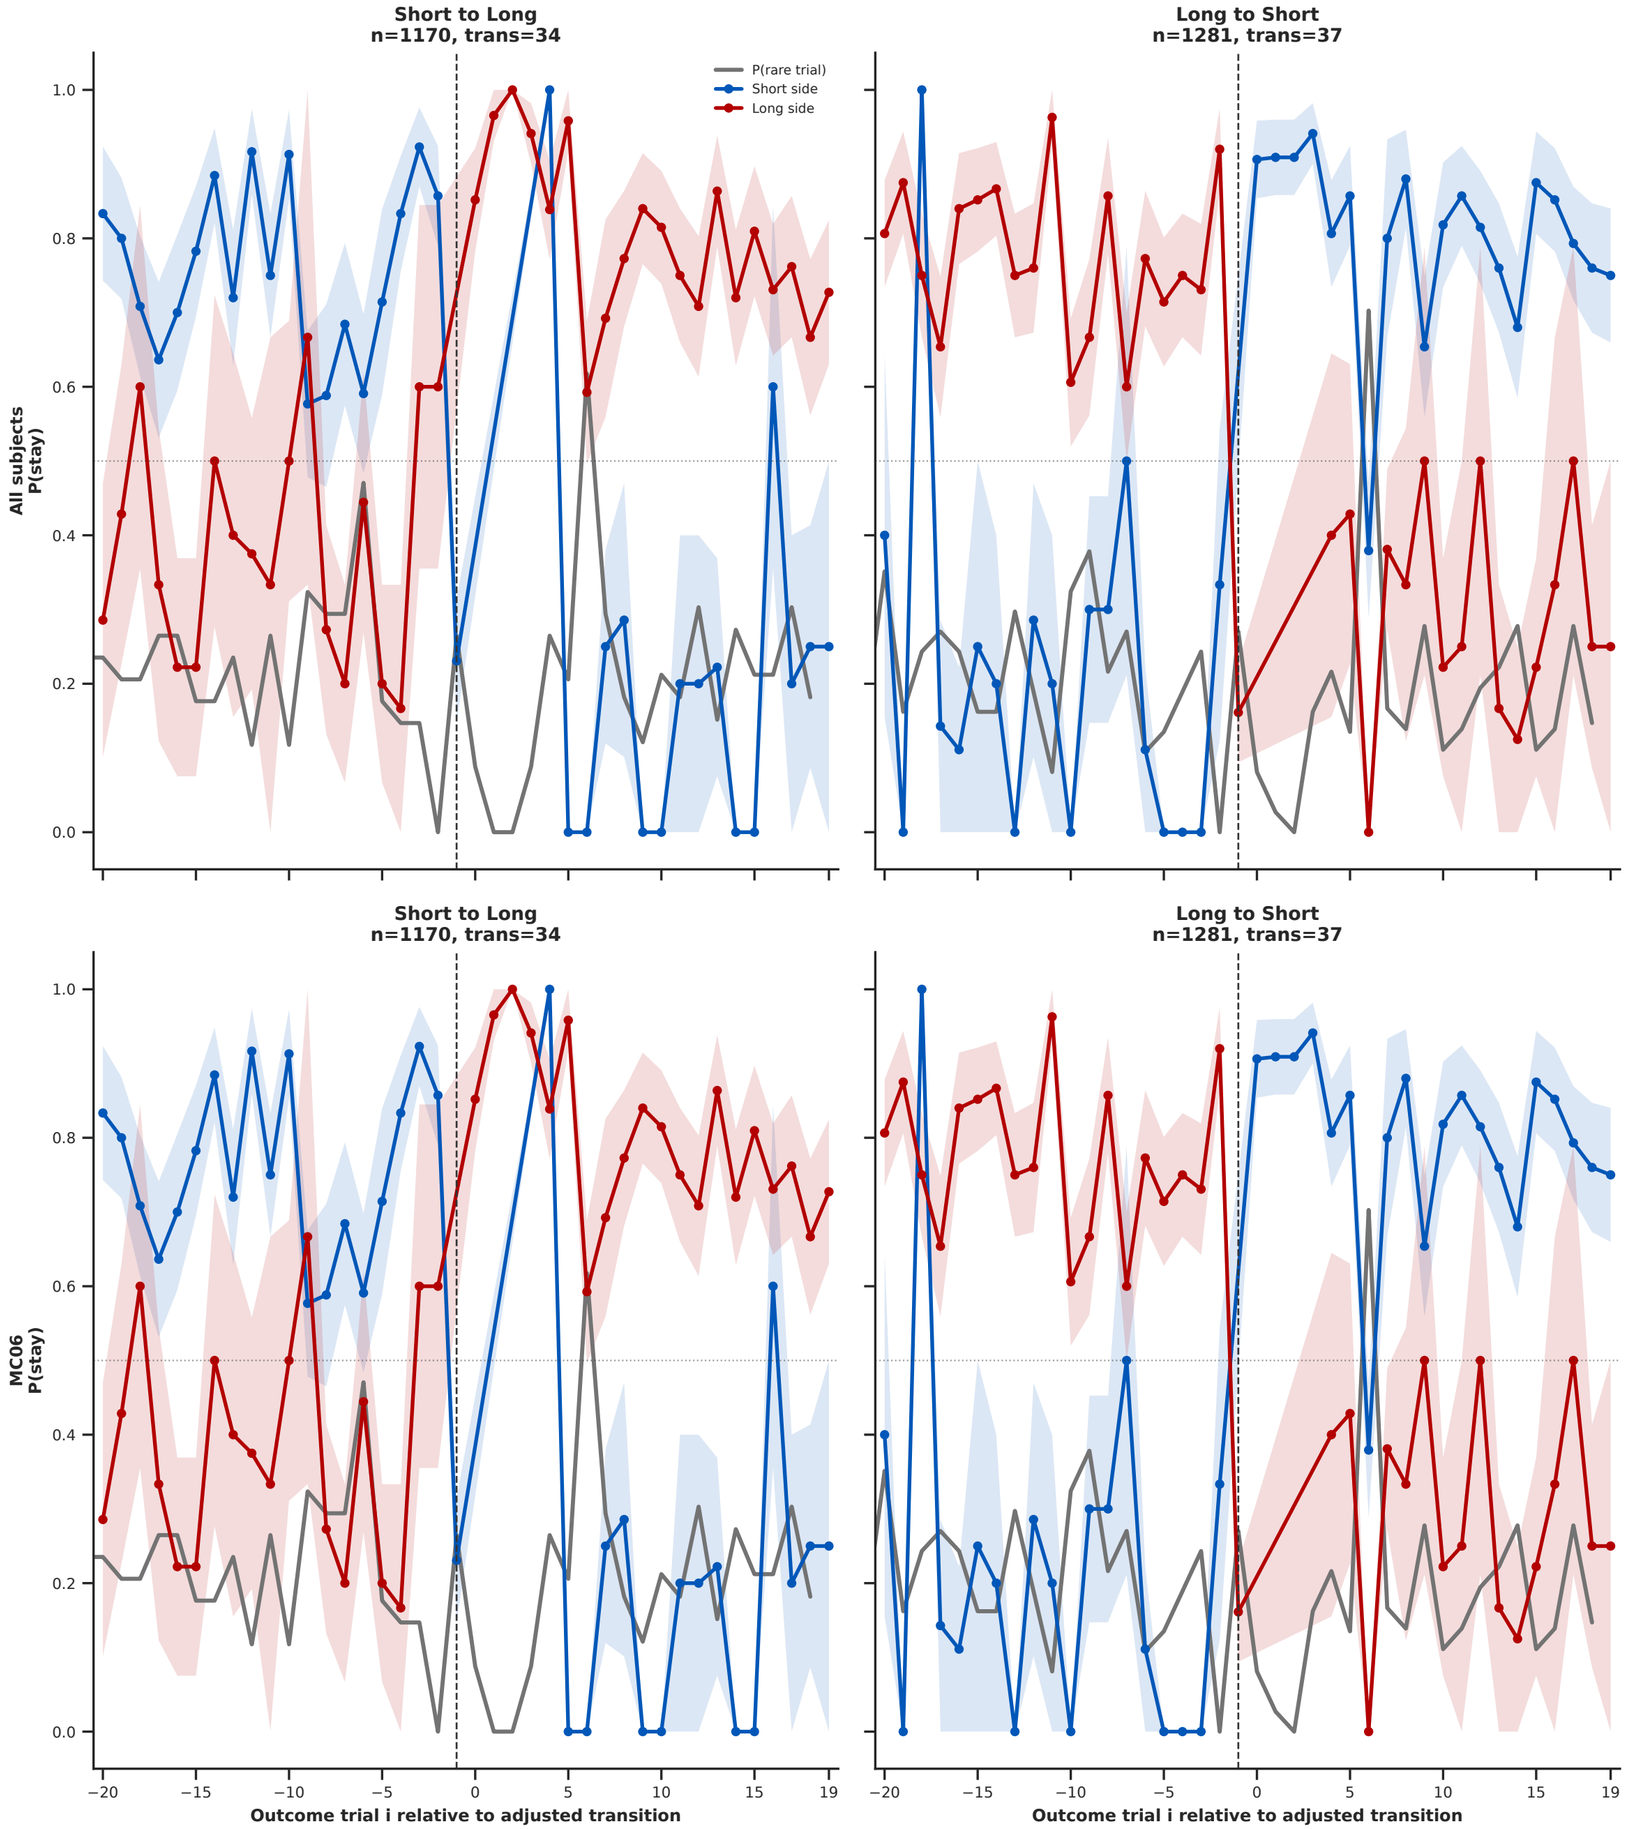
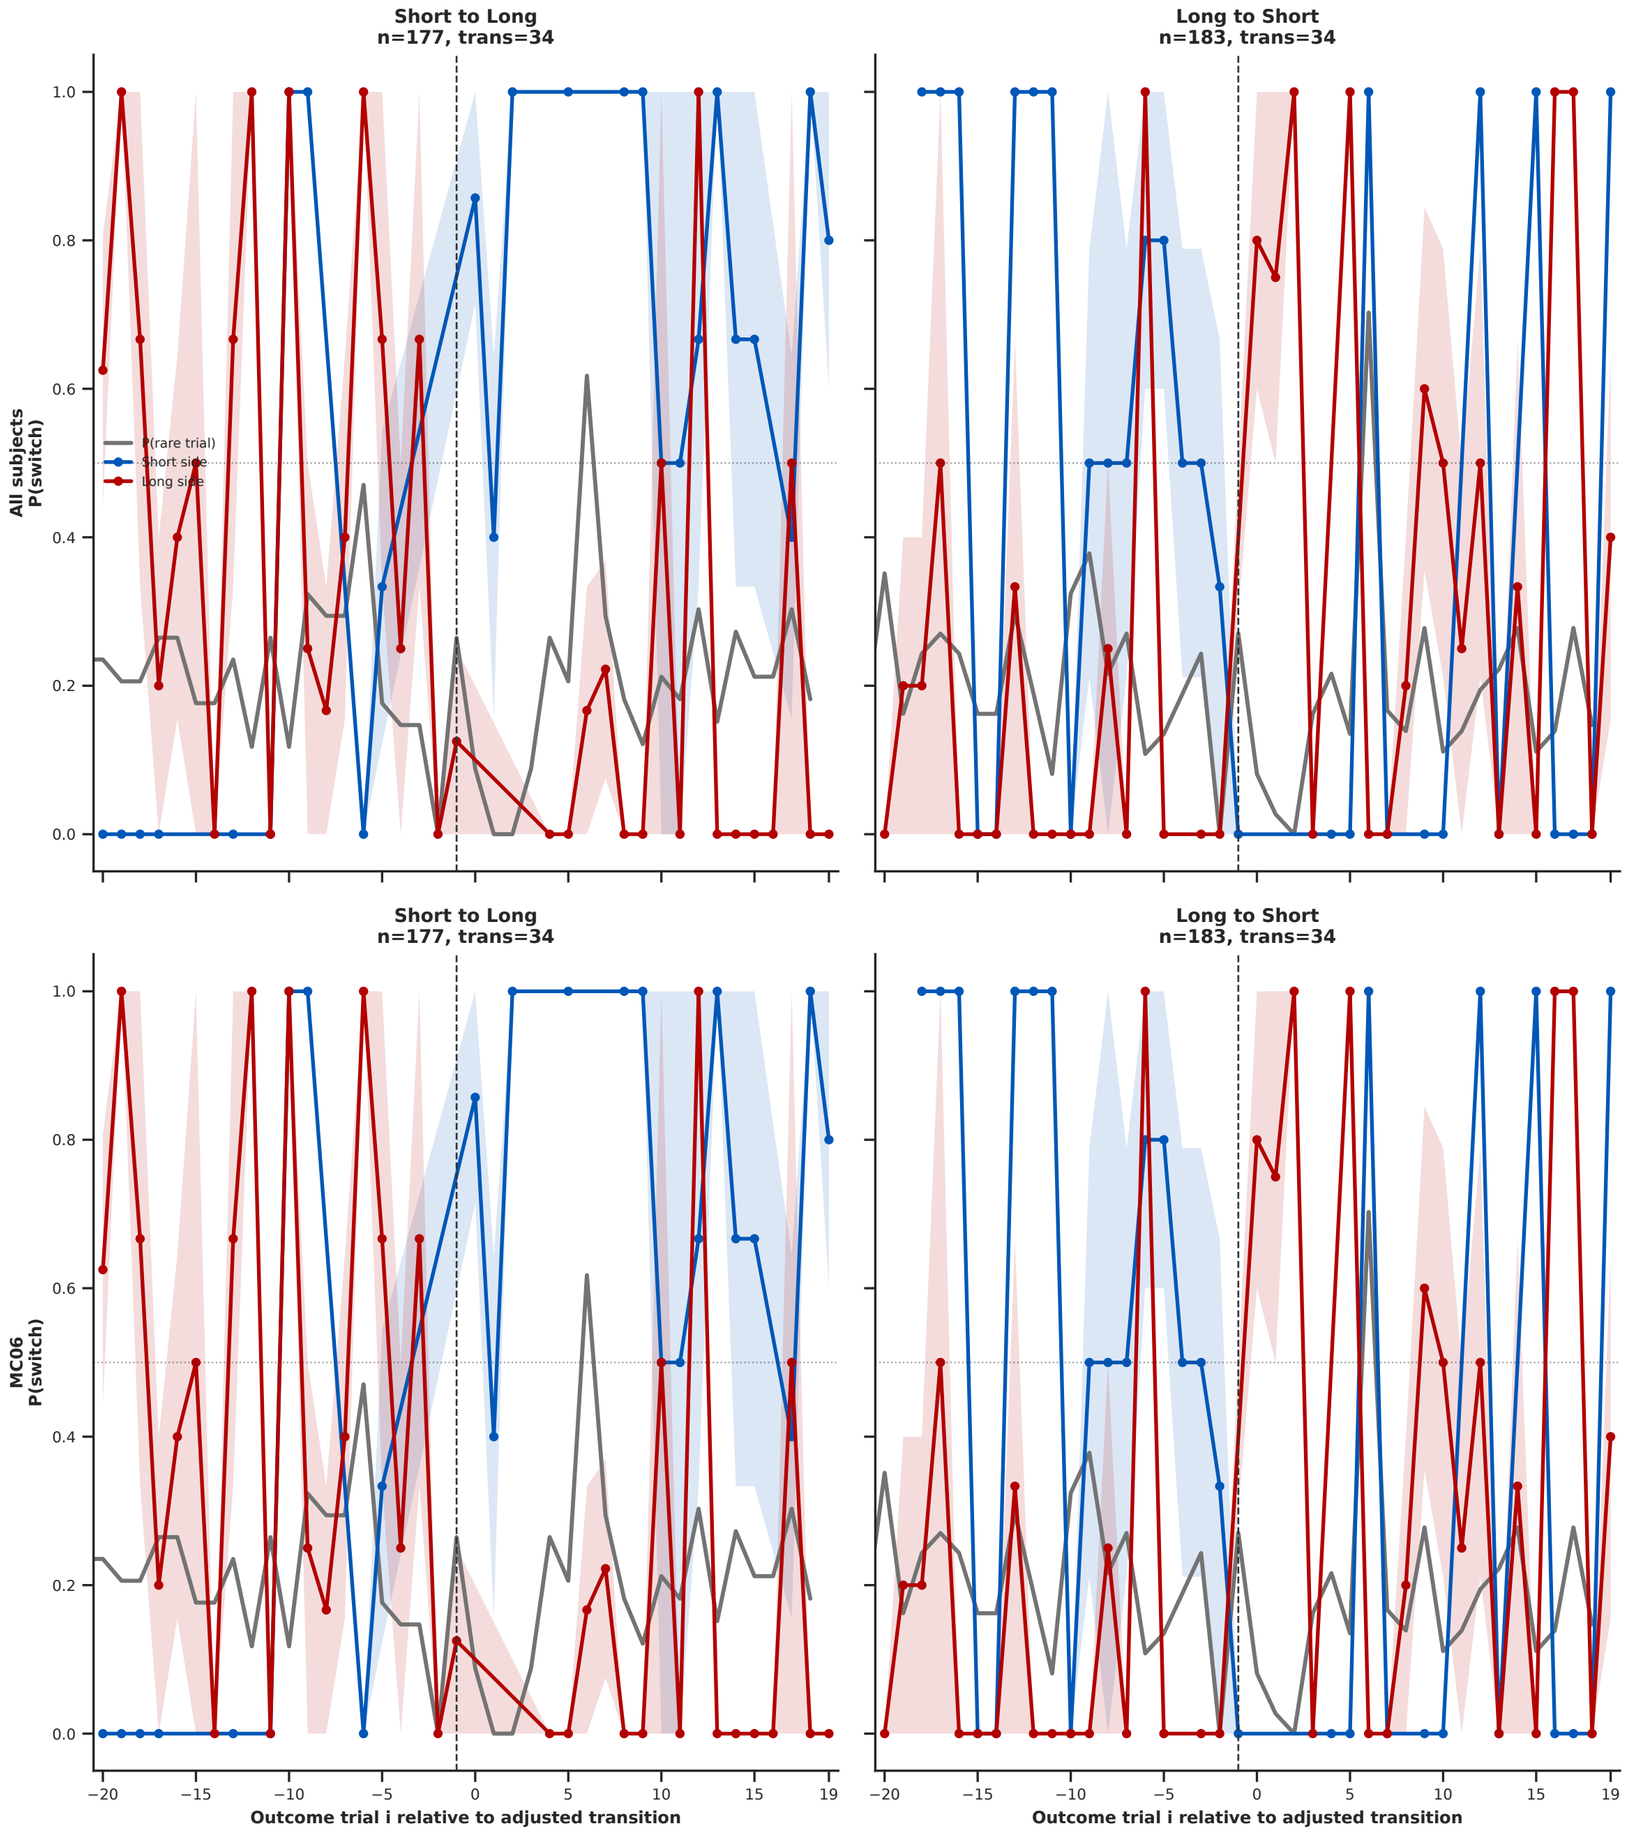
P(switch | punished side) aligned to adjusted block transitions
Window: 20 trials before through 19 trials after alignment; rel_trial=0 follows the terminal-rare adjustment used above.
Anchor is outcome trial i; stay/switch is measured on i+1. Short/long sides pool contingency-corrected physical choices; gray = P(rare trial); windows stop before the following transition.