

NetZoom Feature Reference

The NetZoom application has role-based security. Depending on your user access, you may not see all of these menus.

- **Home** – The Home features show information about the entire enterprise.
- **DC** – The **Data Center** menu is the most commonly used menu in NetZoom. It is used to view and manage your data center assets. All features in the Data Center menu are non-editable.
- **Cabling** – The **Cabling** menu is used to review existing cabling. All features in the Cabling menu are non-editable.
- **Plan** – The **Plan** menu is used for planned change in the data center.
- **Rack and Stack** – The **Rack and Stack** menu is used for editing data center assets and connectivity. All features in the Rack and Stack menu are editable.
- **Power** – The **Power** menu is used to manage real-time power and thermal monitoring using the DCM integration. The DCM integration must be configured and enabled before these features can be used.
- **Store** – The **Store** menu is used to manage the inventory items for the data centers including cables, spare devices and devices deployed to the data center.
- **Compute** – The **Compute** menu is used to manage the computing resources available to the data center.
- **IT** – The **IT** menu is used to manage the relationship between the data center's computing resources and the business processes that they support.
- **Audit** – The **Audit** menu is used to record the results of physically auditing the data center.
- **Settings** – The Settings menu is used primarily by the administrator to control the behavior of the application from Alerts to Watermarks. The NetZoom Administrator should review these settings when configuring the application.

Home

The Home features show information about the entire enterprise.

Dashboard

Use Dashboard to view the data center's dashboards

All Data Centers

Use All Data Centers to see the location of each data center on the map and view the inter-site connectivity

Analytics and Charts

The **Analytics and Charts** feature shows pre-defined dashboards showing metrics about the data center, the racks and other assets

Power BI

The **Power BI** feature allows you to view custom Power BI reports

DC

The **Data Center** menu is the most commonly used menu in NetZoom. It is used to view and manage your data center assets. All features in the Data Center menu are non-editable.

Asset Management

Use the **Asset Management** feature to view and manage your entire Data Center Infrastructure for a site including rooms, floors, locations and devices.

Asset Configuration

Use the **Asset Configuration** feature to see the detailed configuration of data center assets to the port-level.

Cabling

The **Cabling** menu is used to review existing cabling. All features in the Cabling menu are non-editable.

Power Cabling

Use the **Power Cabling** feature to review power connectivity between devices.

Network Cabling

Use the **Network Cabling** feature to review network connectivity between devices.

Power Trace

Use the **Power Trace** feature to show a graphical representation of the power chain

Network Trace

Use the **Network Trace** feature to show a graphical representation of the network connectivity

Power Navigate

Use the **Power Navigate** feature to hop between nodes

Network Navigate

Use the **Network Navigate** feature to hop between nodes

Plan

The **Plan** menu is used for planned change in the data center.

Create Tray

Create Tray for creating a tray container to hold one or more devices to position or move in Find Placement, Replacement or Transfer

Find Placement

Use **Find Placement** to find possible destination racks where the devices in the tray could be placed

Replacement

Use **Replacement** to replace installed rack-mountable devices with ones in the selected tray

Transfer

Transfer for transferring assets between data centers

Workorder

Workorder for reviewing and executing work orders

Floor Layout

The **Floor Layout** Feature for designing floors and positioning floor-mounted devices

Rack and Stack

The **Rack and Stack** menu is used for editing data center assets and connectivity. All features in the Rack and Stack menu are editable.

Move Add Change

The **Move Add Change** feature for performing MAC operations at the device level

Configure Device

The **Configure Device** feature for performing MAC operations to the card level

Edit Power Cabling

The **Edit Power Cabling** feature to creating power connectivity between devices.

Edit Network Cabling

The **Edit Network Cabling** feature to creating network connectivity between devices.

Power

The **Power** menu is used to manage real-time power and thermal monitoring. The DCM integration must be configured and enabled before these features can be used.

DCM Console

The **DCM Console** feature for launching the DCM Console

Discover

The **Discover** Feature for discovering devices according to different profiles

Monitor

The **Monitor** feature to real-time monitoring of devices

Configure

The **Configure** feature for creating discovery profiles

Store

The **Store** menu is used to manage the inventory items for the data centers including cables, spare devices and devices deployed to the data center.

The Store menu contains:

- The **Inventory Management** feature for managing assets in the inventory stores
- The **Inventory Configuration** feature for changing the configuration of inventory devices

Inventory Management

By using the **Inventory Management** feature, NetZoom lets you manage assets in the inventory stores.

- Use the Keyword Search to easily locate an asset by Name, AssetID, Service Tag or another attribute.
- Use the Filter feature to filter the Data Center Explorer tree by Tenant, Team or user-defined filters.
- Move assets between stores
- View each asset and its properties.
- Generate reports by node.

Inventory Explorer

The left pane shows the inventory nodes displayed in a tree format by **Inventory Store**. Expand the tree find the node you would like to manage.

The screenshot displays the NetZoom interface for Inventory Management. The left pane shows a tree view of inventory nodes for the 'Chicago' site, including 'Inventory', 'All Cables', 'Network Cables', 'Power Cables', 'In-use Devices', 'In-use Devices', 'Spare Devices', 'Disposable', 'New', 'Other', and 'Used'. The main pane shows a table of network cables with columns: Location Name, Device Name, Description, Node Type, EQID, Slots Needed, and Width. The table lists 25 items, all of which are 'Default Copper Cable - Red...' with 'Device' as the node type and 'NZ002' as the EQID. The right pane shows the 'Network Cables' properties, including fields for Site Name (Chicago), Inventory Name (Inventory), Store Name (All Cables), Parent Entity Name (Store), Bin Name (Network Cables), Description (Network Cables All Cables in Data Cen), Bin Type (Network Cables), Width (100 ft), and Length (US).

Location Name	Device Name	Description	Node Type	EQID	Slots Needed	Width
1	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
2	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
3	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
4	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
5	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
6	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
7	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
8	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
9	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
10	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
11	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
12	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
13	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
14	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
15	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
16	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
17	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
18	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
19	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
20	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
21	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
22	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
23	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
24	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2
25	Network Cables	Copper Ethernet...	Device	NZ002	0	0.2

Inventory Stores

Each Inventory Store has a different purpose and different **Bins**.

The following are the pre-defined Stores and each ones associated Bins:

- **All Cables** is the store to hold all cable assets. It contains the bins **Network Cables** and **Power Cables**, which are used to distinguish the type of cables. Cable instances are within the bins organized by manufacturer.

- **In-use Devices** is the store to reference all the devices in the data center site associated with this inventory. It contains only the In-use Devices store with device instances organized by manufacturer and product line.
- **Spare Devices** is the store to hold all the excess inventory devices organized by bin, manufacturer and product line. It contains these default bins that follow the device life-cycle.
 - **New** – all inventory items that have not been deployed in the data center site
 - **Used** – all inventory items that have been removed from the data center site
 - **Disposable** – all inventory items that have been deleted from Used inventory
 - **Other** – all inventory items that have been imported

By selecting a Store or Bin in the explorer pane, you can see a summary of the devices/cables in the node in grid format. You may filter or download this data as needed.


To transfer devices between bins, you may use Cut/Copy/Paste on a checked node.

Kebab Menus

The content of kebab menus depends upon the feature and selected node. Many of the kebab commands are standard throughout the application. See [Standard Kebab](#) commands, if needed.

Commands that are specific to inventory include:

- Add Bin – fill in the form to create a new bin. You may need to close the Sidebar to see the save button. Be sure to set the correct Bin Type.
- Delete Bin – Only non-system bins can be removed. Use care as devices are removed along with the bin.
- Import Network Cables / Import Power Cables – use an Excel sheet to populate the cables. _Cables sheet is required. Note: The cable type should match the bin.
- Export Network Cables / Export Power Cables – use this command to export an Excel worksheet with information on the network or power cables
- Delete Node and all its children – this command deletes the node and children from Inventory
- Empty Bin – empties the contents of the Bin
- Empty Store – empties the contents of the Store and all its Bins
- Import Devices – use an Excel sheet to populate inventory devices
- Export Devices – use this command to export an Excel worksheet with information on the devices
- Set Properties – used to bulk update the value of a property for an entire entity

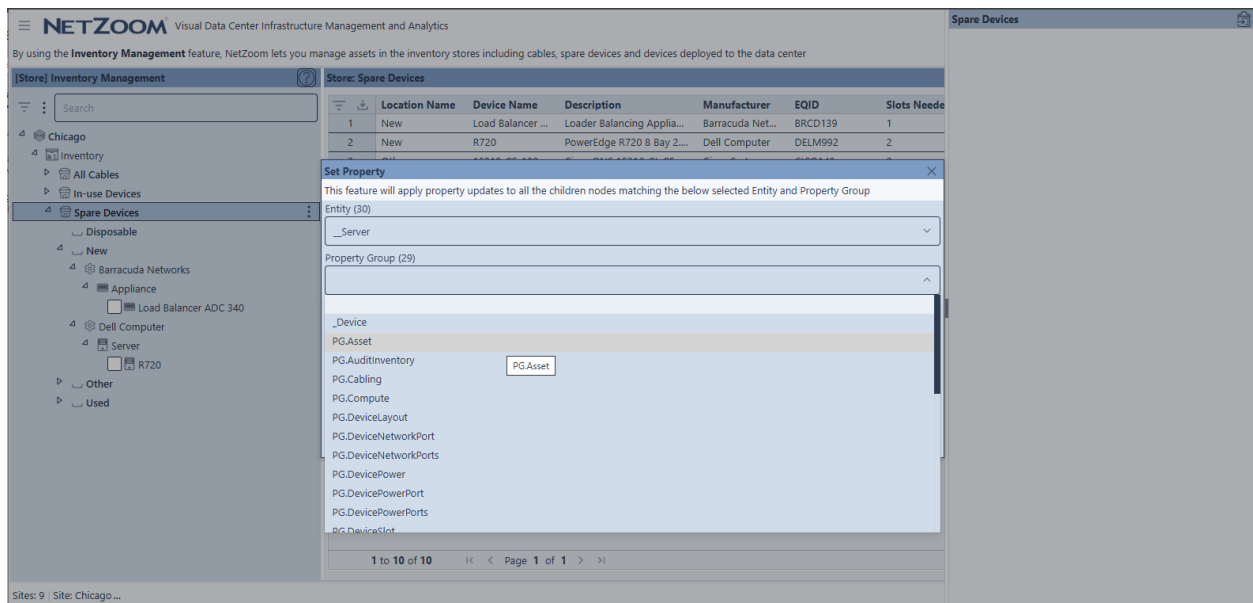

Display Pane

The second pane will show a graphical representation of the selected node. If the node is a device or a rack, the pane will show a preview. You may see Front, Rear or 3D views depending on the device.



The Sidebar

Use the Open Sidebar button to show the Sidebar pane for the selected node. The Sidebar is used to show information about the selected node, including: properties, alerts, notes, and forensic log. You may also use the sidebar to access the NetZoom Device Library.

Quick Actions



- Property
- Alerts
- Notes
- Forensic Log
- Device Models

Property

By using the drop-down menu from the QA: Property at the top of the Sidebar, you may select other property groups to display in the property pane. Available property groups depend on the equipment type.




Some property groups include:

- Details – this is the default property group and it contains basic information about the device, like name, description and installed location, will be displayed.
- MAC Log – a list of all changes to the device
- Device – includes lifecycle information


Alerts

The alerts screen shows current and past alerts for the selected device which are relevant to the current user, including severity, status, and assignment.

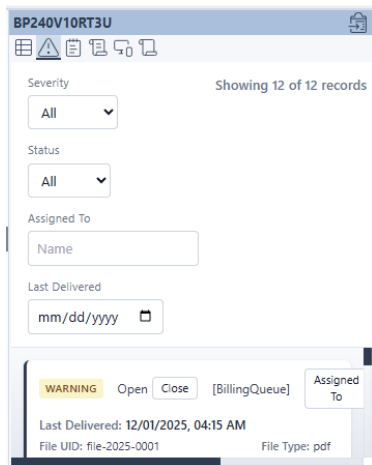

Notes

Using the Notes interface, you may add or review text, file-based, audio or video notes for the selected device.

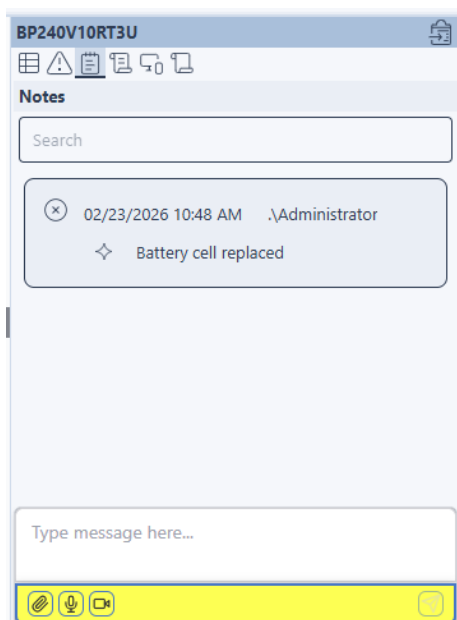

Forensic Log

The forensic log shows all logged messages for the current device.

Device Models

The Device Models button provides access to devices in the NetZoom Device Library and other sources.

Select Search Source

To search, begin by selecting the search source:

A screenshot of a web interface showing four radio button options for search criteria. The first option, 'NetZoom Device library', is selected with a filled blue circle. The other three options, 'Inventory', 'Current Site', and 'All Sites', are unselected with empty circles. The options are listed vertically in a light blue box.

☒ NetZoom Device library
☐ Inventory
☐ Current Site
☐ All Sites

Using the **NetZoom Device Library** option, you can search the library for devices to add to your inventory or data center site.

Using the **Inventory** option, you can install devices from Inventory Stores into the data center site.


Using **Current Site**, you can search all of the device models in the current site.

Using **All Sites**, you can search all of the device models in all sites.

Select Search Criteria

Next, select the rest of the search criteria.

Are you going to search by keyword? Type one or more keywords in the search box and choose the appropriate AND/OR criteria from the kebab menu.

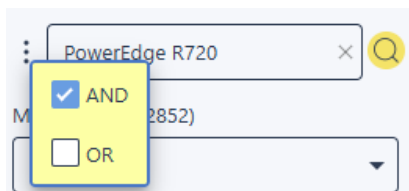A screenshot of a web interface showing a search box with the text 'PowerEdge R720' and a yellow search button. Below the search box is a dropdown menu with two options: 'AND' (selected with a blue checkmark) and 'OR' (unselected with an empty checkbox). The dropdown menu is highlighted with a yellow background.


PowerEdge R720
M 2852)
AND
OR

Are you going to search by manufacturer and equipment type? Fill in the drop-down boxes to make your selection.

Or are you going to do a combination of both to narrow down the device results?



Search

Once you have selected your search criteria, click the search button to get the results and related devices.

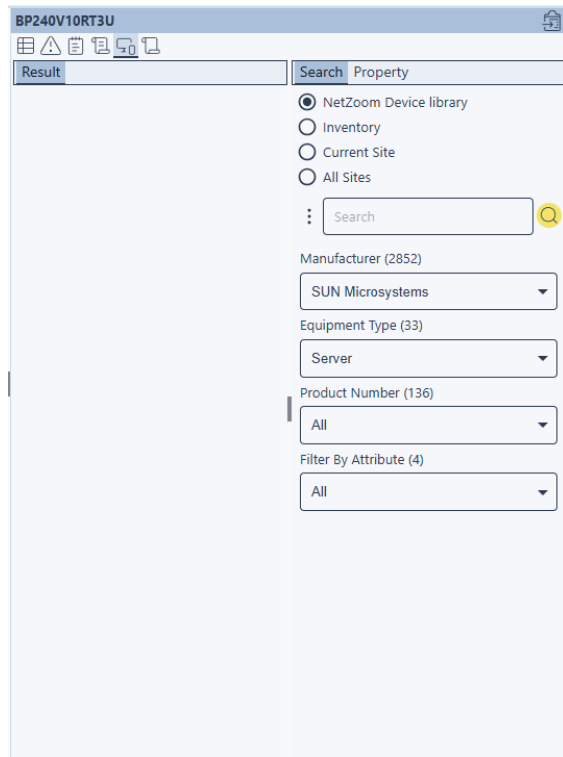

Results and Related

The Result tab shows all devices that meet the search criteria. The related tab shows all cards and modules for the selected chassis in the Result tab.

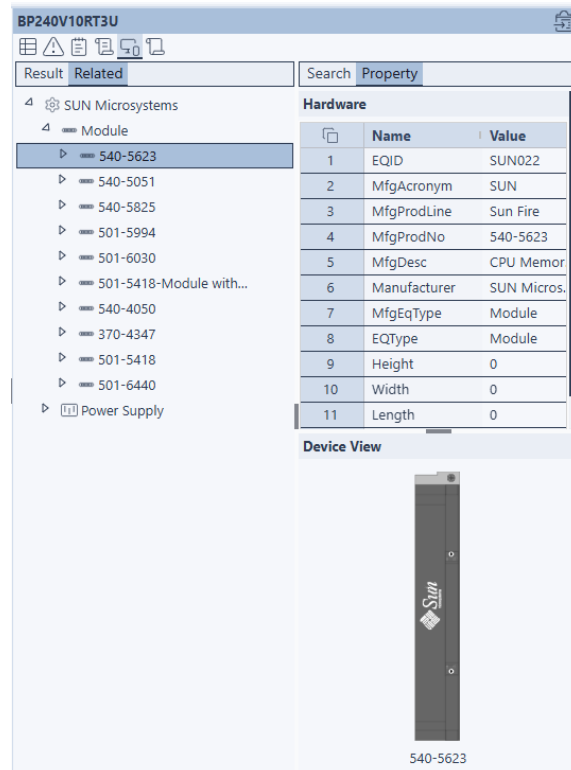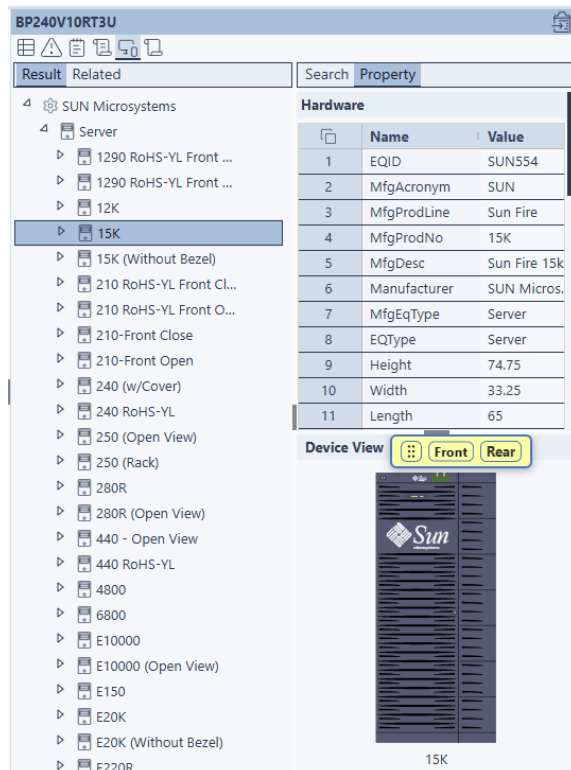

Once you have found the results and related devices, you may drag the device models into the data center explorer.

If your result is a device, you may drag it to New or Other bins in the Inventory tree or to a data center floor or location. You may not drop devices in the Used or Disposable bins, In-use Devices or any of the cable bins.

If your result is a cable, you may drag network cables either to the Network Cables bin or Power Cables bin in the Inventory tree depending on the cable type. The bin type must match the cable type.

Inventory Configuration

Use the **Inventory Configuration** feature to manage the detailed configuration of inventory assets in the inventory stores.

For racks, cabinets and enclosures, review or change the usage of each rack unit (RU).

- What devices are mounted?
- Which RUs are available for use?
- What is the available capacity in terms of space, ports, power and weight?
- Can a rack-mounted device be moved?

For device assets, view or change the configuration:

- Review the chassis vs. module relationship for each slot
- See the port configuration

The Inventory Configuration feature does allow you to modify the configuration of inventory assets.

The Inventory Configuration feature has all of the functionality of Inventory Management with the additional ability to configure the devices. Refer to [Inventory Management](#) for basic functionality.

Compute

NetZoom provides Data Center Visibility into all physical, virtual and cloud IT assets and software directly from your desk including location, physical and logical relationships, connectivity, asset lifecycle, contracts and soft resources.

The **Compute** menu is used to manage the computing resources available to the data center.

Physical Compute

The **Physical Compute** feature for managing physical servers in the data center

Virtual Compute

The **Virtual Compute** feature for managing virtualized servers

Cloud Compute

The **Cloud Compute** feature for displaying metrics on cloud resources

IT

The **IT** menu is used to manage the relationship between the data center's computing resources and the business processes that they support.

Model Business Service

The **Model Business Service** feature for creating the relationship between services and devices

Manage Business Service

The **Manage Business Service** feature for using or reviewing the defined business services

Audit

The Audit menu is used to perform periodic audits of the data center.

Audit Sessions

The **Audit Sessions** feature allows you to create and manage audit sessions.

Inventory Collection

The **Inventory Collection** feature shows the inventory collected in any audit session

Inventory Reconciliation

The **Inventory Reconciliation** feature allows you to reconcile the inventory that was collected against the inventory stored in NetZoom

Settings

The Settings menu has only one feature with many components.


Application Settings

Application Settings control the behavior of the application from Alerts to Watermarks. The NetZoom Administrator should review these settings when configuring the application.

Exploring the NetZoom User Interface

This a brief introduction to the application interface in order to allow you to begin using NetZoom. For more detailed information, refer to the appropriate section in the User Reference Guide.


The NetZoom user interface is made up of many different regions (panes, bars and panels) on the screen.

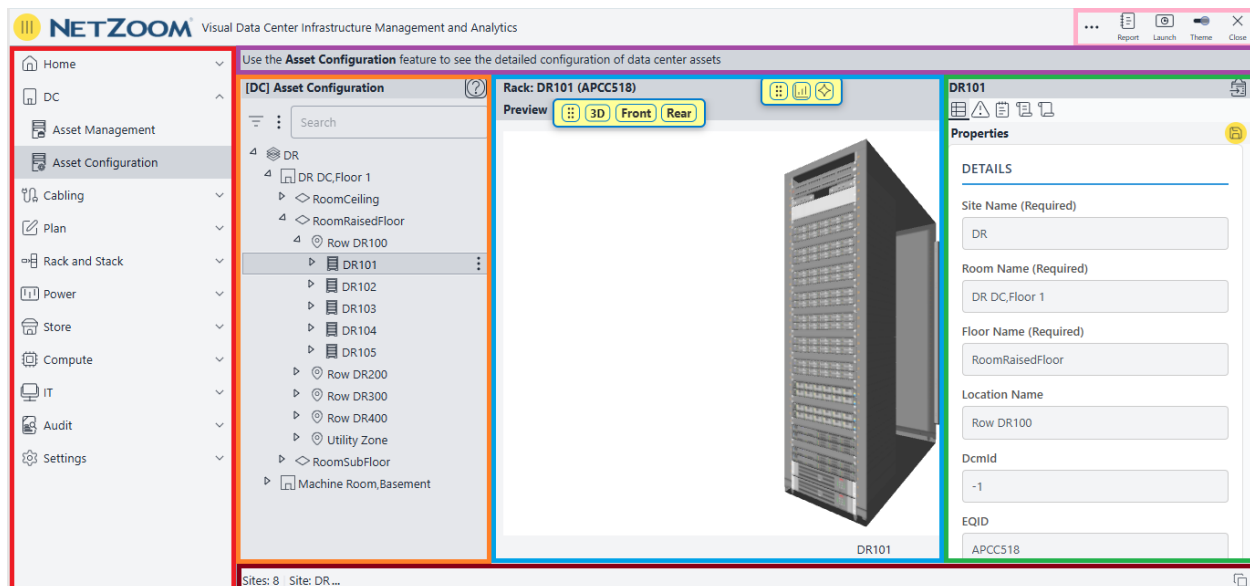

Bars

The **Title Bar** is at the top of the screen. It contains the **Menu/Burger** icon, the application name and description and the **Application Quick Actions** bar (Pink area).

By default, the Application Quick Actions bar is shown collapsed.




To expanded the Application Quick Actions bar to show all buttons, click on the three dots.



The Dark Red area at the bottom of the screen is the **Status Bar**. As its name indicates, it shows the status for the application. Click the '...' to expand the status message. The Status Bar is also used for delivering messages. If the system encounters an error or an alert or message are to be delivered to you, a red notification icon will appear in the right corner of the Status Bar to

prompt you to expand the bar to show the Notification pane. Click the Open icon  to open the **Notification pane**.




Panes

The retractable Menu (Red area) is on the left of the screen. You may expand the **Menu** items to display the **Features** available for the selected menu by clicking the down arrow. The selected Feature determines what will be displayed in the other panes.

The Orange area is the first or left pane. It is usually called the **Data Center Explorer** pane.

The next pane, the Blue one, is the **Feature** pane. The contents of this pane change depending on the selected feature.

The **Notification pane** at the bottom of the screen contains the errors, alerts and messages.

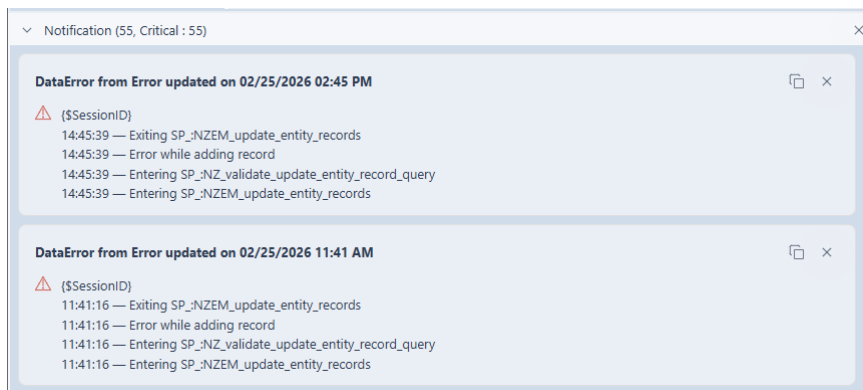

Each notification is listed in its own card. You may copy the notification using the Copy button or dismiss it using the Close button.

After reviewing the notifications, you may choose to close them individually by clicking the  on the card, or close them all at once by clicking the  on the notification bar.

Panels

The Green panel on the right is the **Sidebar**. The Sidebar contains useful information about the selected node including Properties, Notes, Alerts and other context sensitive information.

The yellow **Overlay** panels  are used to display additional information such as Charts, AI engine, or different views of the device. Move and position the Overlay panels by grabbing and dragging the first icon in the panel.

Application Quick Actions

The Application Quick Actions bar makes it easy to access commonly used features. Most buttons are toggles.

Message	Use the Message interface to send messages to other users.
Reminder	Use the Reminder button to set reminders for different users. Reminders may include attached files, audio or video.
Task	The Task button displays information on Background Tasks, Active Sessions, NetZoom Windows Services, and SQL Jobs.
User	Click the User button to manage your user settings and contact information. You can also see a list of the users that you can impersonate today.
Report	The Report button shows the available reports. To run a report, click on the desired report to generate the report data then click the PDF button to save the output.
Launch	The Launch button starts another instance of NetZoom in a new tab with the same feature and node selected.
Theme	Click the Theme button to cycle through the available themes (light, dark, or colored)

Close Use the **Close** button to close and sign out of the application.

Message

NetZoom allows users to send messages to other application users. Use the **Application QA: Message** to create a message and send it to another user. Messages can include file attachments, audio or video clips.

Reminder

Task

User

Occasionally users may not be available to work in NetZoom for specified period. In such situations, users can optionally delegate their NetZoom authorization and responsibilities to another NetZoom user for a given time period without sharing login credentials.

How to Impersonate Another User?

If another user has delegated their NetZoom authorization to you, when you click the **QA: Impersonate User**, you will be able to select their user to impersonate them for the current session until you cancel the impersonation. While you are impersonating someone else, you will have access to all features as authorized to the other user. Any action taken by you while you are impersonating, will be logged noting that you were acting as/impersonating the other user.

How to Setup User Delegation?

Using **QA: Settings** and selecting Users and Authorization/Delegate to Another User, you can enable a delegated Login User to impersonate you and perform your role for a predefined period of time. The other user stays logged in with his own credentials and uses **QA: Impersonate User** to activate the impersonation.

A Login user can delegate to another user (a Delegated user) subject to, the Delegated user must be in the same team as the Login user or should belong to the same Basic role as the Login user.

Report

NetZoom provides built-in reports on many different topics. Use the **Application QA: Report** to see a list of application-wide reports and launch the required report. Reports include:

- User reports
- Subscription reports

- Available capacity by site
- Number of installed devices by site

Launch

A NetZoom user can use multiple sessions simultaneously. The **Launch** Feature allows a user to manage multiple NetZoom tasks without leaving the current task.

How to Create a New Session?

Use the **Application QA: Launch** to launch a new instance of NetZoom in a new browser tab that inherits the settings of current session and starts on the same feature.



(Application QA: Launch)

How to Close one or more Sessions?

To close the new instance of NetZoom, simply close the new browser tab.

A user can also close abandoned sessions by using the **Application QA: Tasks** to see his other Active Sessions. The list will include all sessions other than the current NetZoom window's session.

To easily close multiple sessions, use **Application QA: Tasks**



(Application QA: Task)

Using the NetZoom Task Pane:

1. In the Active Sessions section, locate the sessions belonging to the user that should be closed
2. For each session to close, select the line and use the kebab menu on the row number. Select the Close command to Close the session
3. Repeat as needed for additional sessions that need to be closed

**

(Task pane showing Active Session commands)


Theme

Use the **Application QA: Theme** to choose your color theme.




(Application QA: Theme)

Toggle the **Application QA: Theme** button to select whether to view the NetZoom application in dark theme

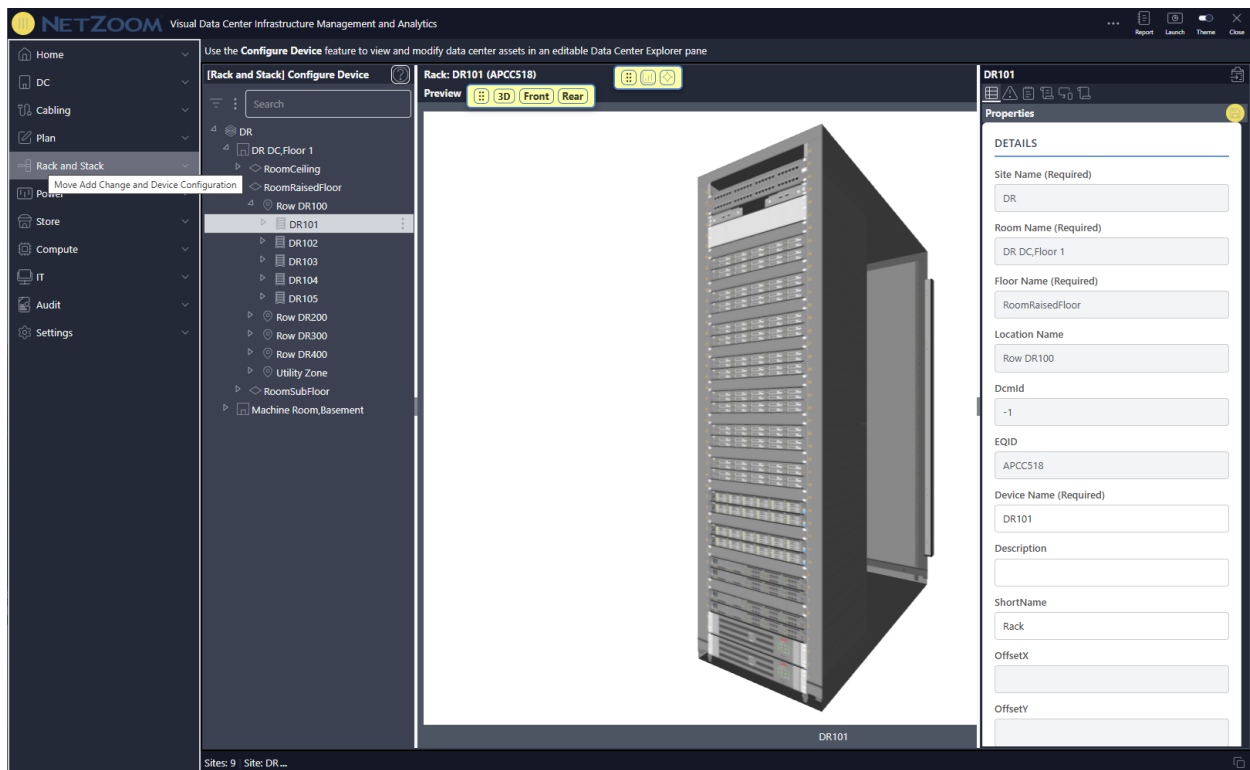


(NetZoom in Dark Theme)

or light theme

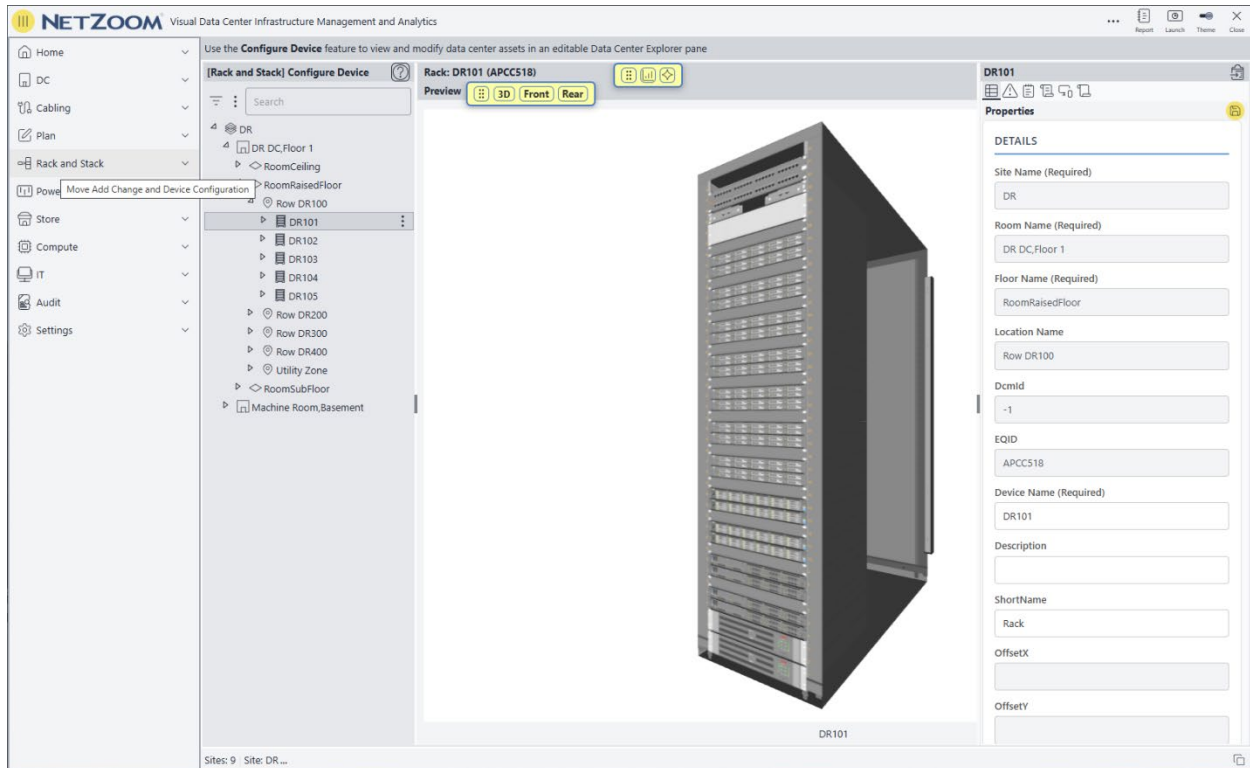

(NetZoom in Light Theme)

or colored theme.

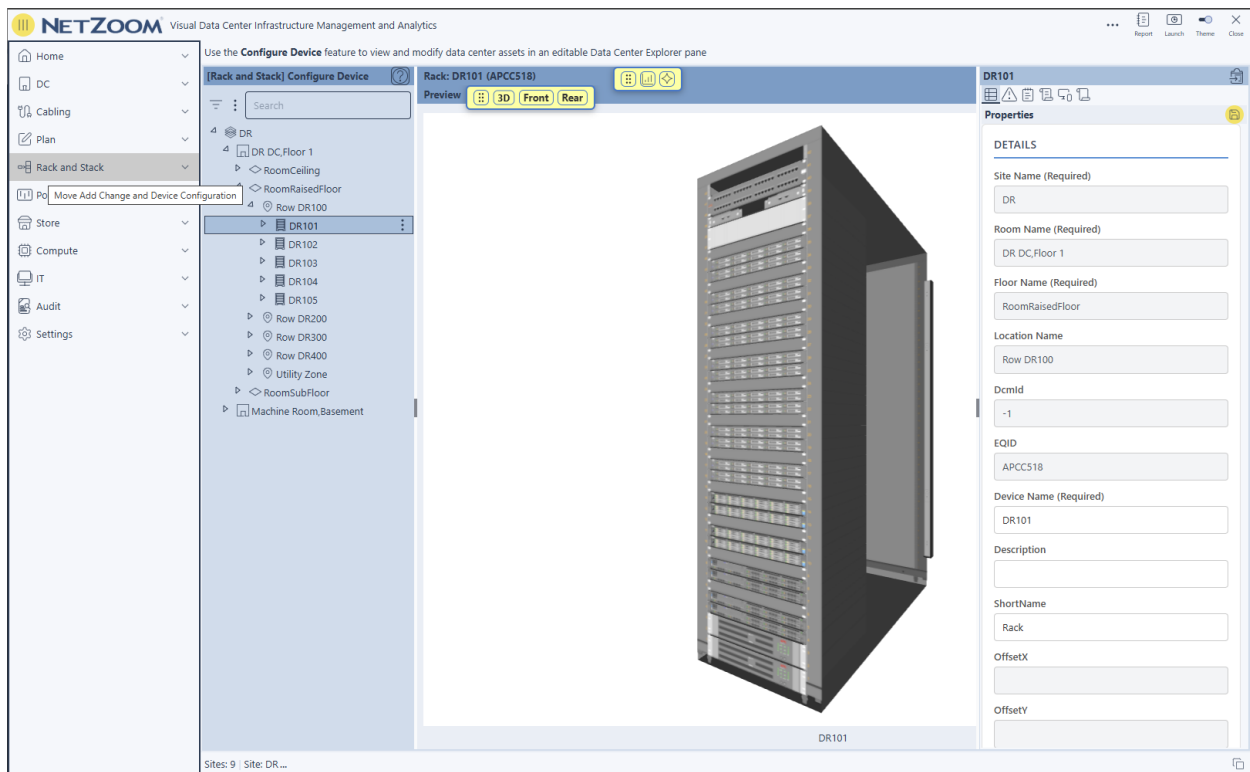

(NetZoom in Colored Theme)

Close

NetZoom users can create multiple sessions using the **Application QA: Launch**. Use the **Application QA: Close** to easily close all of your open sessions at once.



(Application QA: Close)

When you click the **Application QA: Close** button, you will be prompted to confirm that you want to close all of your sessions.

 Close Sessions
Are you sure you want to close all open sessions? If you select 'Yes', all open Sessions will be closed.
NoYes

(Close confirmation)

If you choose [**No**] then your sessions will remain open.

If you choose [**Yes**] then all of your open sessions will close. You must close the browser to complete the logoff process.

 Information
You must close the browser to complete the Signout process.
Ok

(Close browser prompt)

Common Icons

Burger (Menu)



The **Burger (Menu)** icon, found in the top-left corner, displays NetZoom's retractable menu on the left side of the screen. Click the menu a second time or select a feature to dismiss the menu.

Kebab



This symbol is the kebab. It shows context sensitive menu items.

Open Sidebar



When the **Open Sidebar** icon is clicked, the sidebar, which is a pane on the right side of the screen, is displayed to show Properties, Notes, Alerts and other context sensitive information based on the selected node.

Close the sidebar using the Close Sidebar  button.

Filter



The **Filter** icon is used to filter the current content. You use the filter on the Data Center Explorer to change the Data Center Site or view the site by Tenant/Team or Tag.

Copy



The **Copy** icon is used throughout the application to copy the current item to the clipboard.

Help



The **Help** icon is used to launch context sensitive quick help about the current feature.