

# Chapter 7: Deadlocks

---



# Chapter 7: Deadlocks

---

- ❑ The Deadlock Problem
- ❑ System Model
- ❑ Deadlock Characterization
- ❑ Methods for Handling Deadlocks
- ❑ Deadlock Prevention
- ❑ Deadlock Avoidance
- ❑ Deadlock Detection
- ❑ Recovery from Deadlock



# Chapter Objectives

---

- ❑ To develop a description of deadlocks, which **prevent sets of concurrent processes** from completing their tasks
- ❑ To present a number **of different methods** for **preventing** or **avoiding** deadlocks in a computer system.



# The Deadlock Problem


- ❑ A set of blocked processes each holding a resource and waiting to acquire a resource held by **another process** in the set.
- ❑ Example
  - System has 2 disk drives.
  - $P_1$  and  $P_2$  each hold one disk drive and each needs another one.
- ❑ Example
  - semaphores  $A$  and  $B$ , **initialized to 1**

$P_0$   
wait (A);  
wait (B);

$P_1$   
wait(B)  
wait(A)



# Bridge Crossing Example

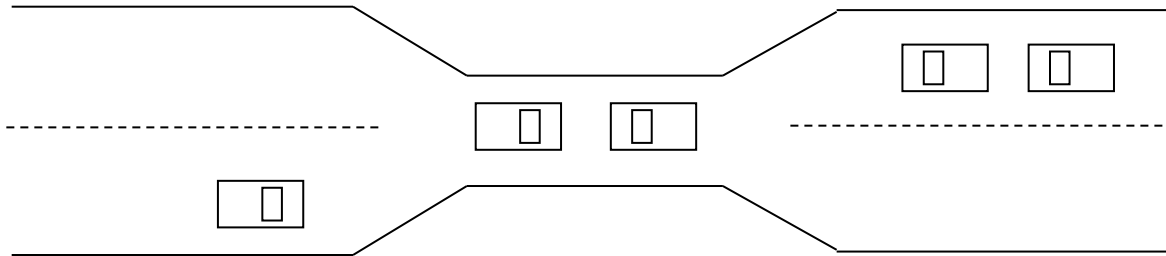


- ❑ Traffic only **in one direction**.
- ❑ Each section of a bridge can be **viewed as a resource**.
- ❑ If a deadlock occurs, it can be resolved if one car backs up (**preempt resources and rollback**).
- ❑ Several cars may have to be backed up if a deadlock occurs.
- ❑ **Starvation** is possible.



# System Model

---

- Resource types  $R_1, R_2, \dots, R_m$   
*CPU cycles, memory space, I/O devices*
- Each resource type  $R_i$  has  $W_i$  instances.
- Each process utilizes a resource as follows:
  - request
  - use
  - release



# Deadlock Characterization

Deadlock can arise if four conditions **hold simultaneously**.

- ❑ **Mutual exclusion:** only one process at a time can use a resource.
- ❑ **Hold and wait:** a process holding at least one resource is waiting to acquire additional resources held by other processes.
- ❑ **No preemption:** a resource can be released only voluntarily by the process holding it, after that process has completed its task.
- ❑ **Circular wait:** there exists a set  $\{P_0, P_1, \dots, P_0\}$  of waiting processes such that  $P_0$  is waiting for a resource that is held by  $P_1$ ,  $P_1$  is waiting for a resource that is held by  $P_2$ , ...,  $P_{n-1}$  is waiting for a resource that is held by  $P_n$ , and  $P_n$  is waiting for a resource that is held by  $P_0$ .



# Resource-Allocation Graph

---

A set of vertices  $V$  and a set of edges  $E$ .

- $V$  is partitioned into two types:
  - $P = \{P_1, P_2, \dots, P_n\}$ , the set consisting of all the **processes** in the system.
  - $R = \{R_1, R_2, \dots, R_m\}$ , the set consisting of all **resource** types in the system.
- **request edge** – directed edge  $P_i \rightarrow R_j$
- **assignment edge** – directed edge  $R_j \rightarrow P_i$





# Resource-Allocation Graph (Cont.)

- Process




- Resource Type **with 4 instances**




- $P_i$  requests instance of  $R_j$

- **申请边**




- $P_i$  is holding an instance of  $R_j$

- **分配边**




# Resource-Allocation Graph (Cont.)

资源分配图是**有向图**，阐述了系统资源和进程状态情况，每个资源和进程用节点表示。

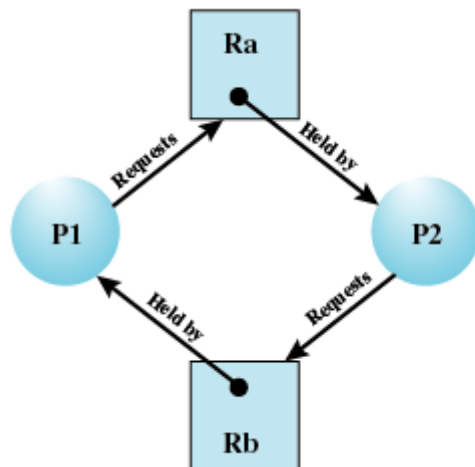




循环等待

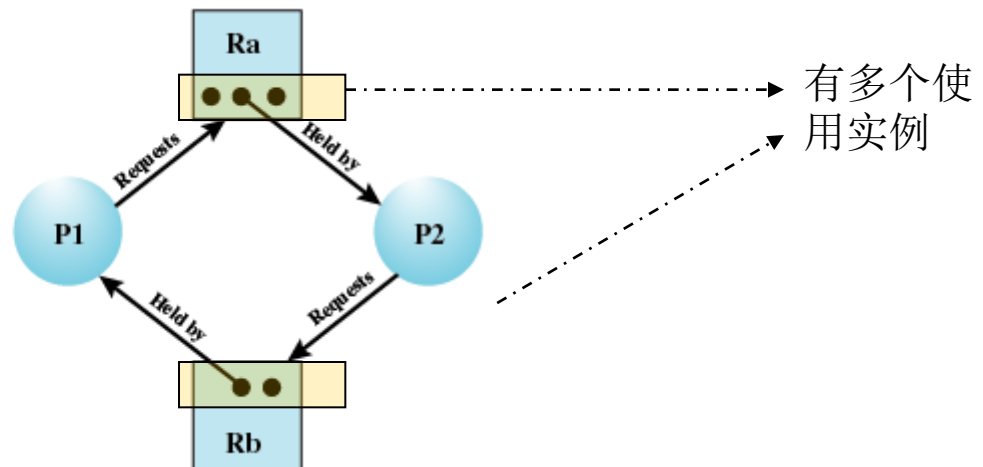

没有死锁



# Example of a Resource Allocation Graph

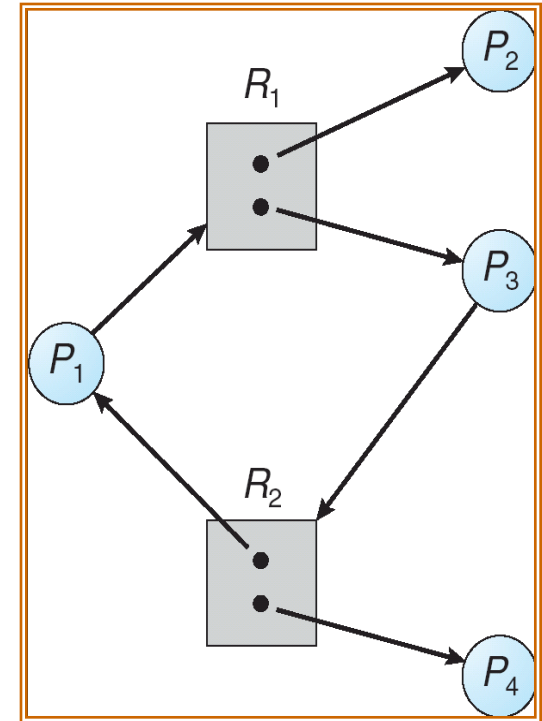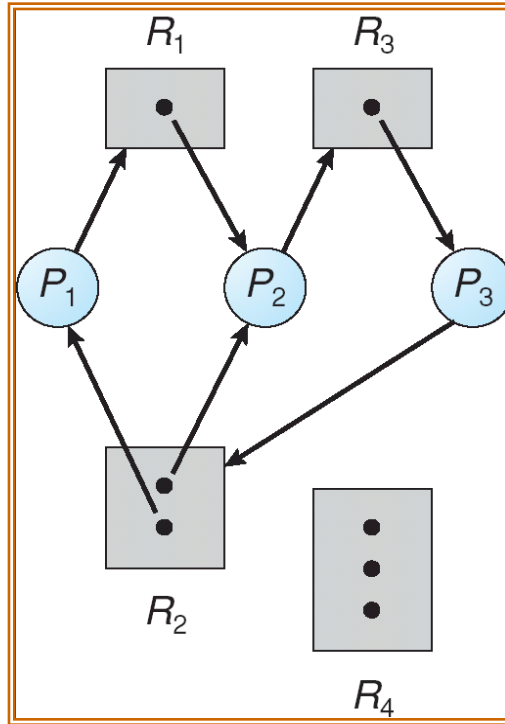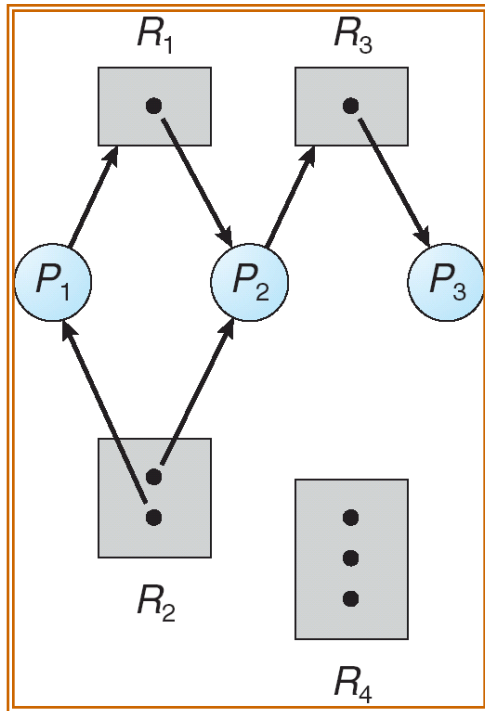

# Basic Facts

---

- If graph contains **no cycles**  $\Rightarrow$  **no deadlock**.
- If graph contains a cycle  $\Rightarrow$ 
  - if only **one instance per resource** type, then **deadlock**.
  - if **several instances per resource** type, **possibility of deadlock**.



# Methods for Handling Deadlocks

---

- ❑ Ensure that the system will *never* enter a deadlock state.
- ❑ Allow the system to enter a deadlock state and then *recover*.
- ❑ *Ignore* the problem and pretend that deadlocks never occur in the system; used by most operating systems, including UNIX.



# Deadlock Prevention

---

**Restrain** the ways request can be made.

- ❑ **Mutual Exclusion** – not required for sharable resources; must hold for **nonsharable** resources.
- ❑ **Hold and Wait** – must guarantee **that whenever a process requests a resource, it does not hold any other resources.**
  - Require process to request and be allocated **all its resources** before it begins execution, or allow process to request resources only when **the process has none.**
  - Low resource utilization; starvation possible.



# Deadlock Prevention (Cont.)

---

## □ No Preemption –

- If a process that is holding some resources requests another resource that **cannot be immediately allocated** to it, then all resources currently being held **are released**.
- Preempted resources are added to the list of resources for which the process is waiting.
- Process will **be restarted** only when it can **regain its old resources**, as well as the new ones that it is requesting.

- ## □ Circular Wait – impose a **total ordering** of all resource types, and require that each process requests resources in an increasing order of enumeration.



# Deadlock Avoidance

---

Requires that the system has some additional *a priori* information available.

- ❑ Simplest and most useful model requires that each process **declare the *maximum number of resources*** of each type that it may need.
- ❑ The deadlock-avoidance algorithm dynamically **examines** the resource-allocation state to ensure that there can never be a circular-wait condition.
- ❑ **Resource-allocation** *state* is defined by the number of available and allocated resources, and the maximum demands of the processes.





# Safe State


---

- ❑ When a process requests an available resource, system must decide if immediate allocation leaves the system **in a safe state**.
- ❑ System is in **safe state** if there **exists** a **sequence**  $\langle P_1, P_2, \dots, P_n \rangle$  of ALL the processes is the systems such that for each  $P_i$ , the resources that  $P_i$  can still request can be satisfied by currently available **resources + resources held by all the  $P_j$ , with  $j < i$** .
- ❑ That is:
  - If  $P_i$  resource needs are not immediately available, then  $P_i$  can wait until all  $P_j$  have finished.
  - When  $P_j$  is finished,  $P_i$  can obtain needed resources, execute, return allocated resources, and terminate.
  - **When  $P_i$  terminates**,  $P_{i+1}$  can obtain its needed resources, and so on.



# Basic Facts

- If a system is in safe state  $\Rightarrow$  no deadlocks.
- If a system is in unsafe state  $\Rightarrow$  **possibility** of deadlock.
- **Avoidance**  $\Rightarrow$  ensure that a system will **never** enter an unsafe state.

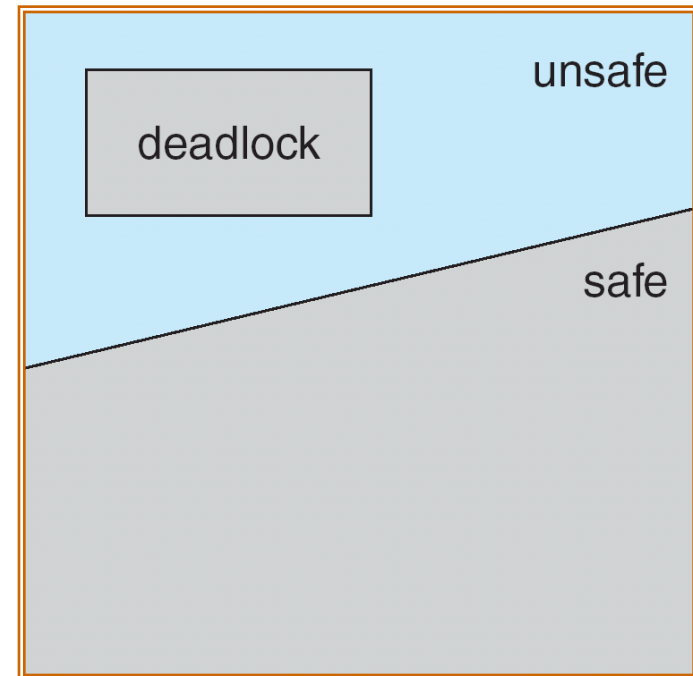

# Avoidance algorithms

---

- ❑ **Single** instance of a resource type. **Use a resource-allocation graph**
- ❑ **Multiple** instances of a resource type. **Use the banker's algorithm**






# Resource-Allocation Graph Scheme

---

- ❑ Claim edge  $P_i \rightarrow R_j$  indicated that process  $P_j$  **may request resource**  $R_j$ ; represented by a dashed line.
- ❑ Claim edge converts to request edge when a process requests a resource.
- ❑ Request edge converted to an assignment edge when the resource is allocated to the process.
- ❑ When a resource is released by a process, assignment edge reconverts to a claim edge.
- ❑ Resources must be claimed *a priori* in the system.



# Resource-Allocation Graph

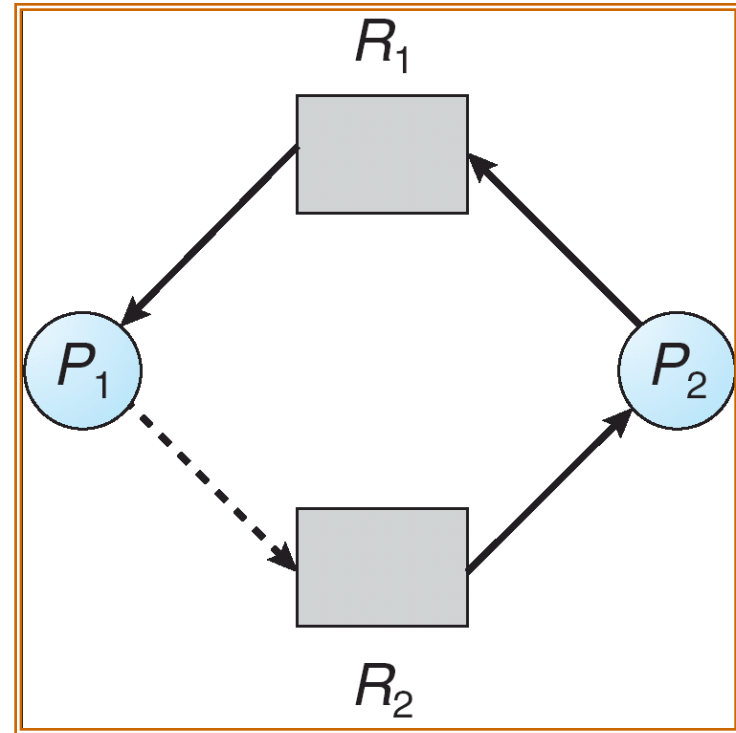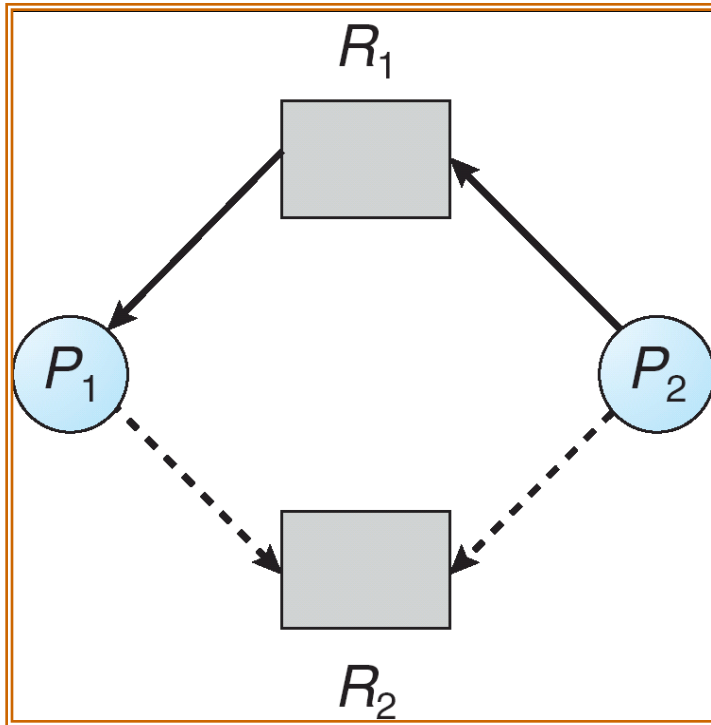

# Resource-Allocation Graph Algorithm

---

- Suppose that process  $P_i$  requests a resource  $R_j$
- The request can be granted only if converting the request edge to an assignment edge **does not result** in the formation of a **cycle** in the resource allocation graph



# Banker's Algorithm

---

- ❑ Multiple instances.
- ❑ Each process must a priori claim maximum use.
- ❑ When a process requests a resource it may have to wait.
- ❑ When a process gets all its resources it must return them in a finite amount of time.



# Data Structures for the Banker's Algorithm

Let  $n$  = number of processes, and  $m$  = number of resources types.

- **Available:** Vector of length  $m$ . If available  $[j] = k$ , there are  $k$  instances of resource type  $R_j$  available.
- **Max:**  $n \times m$  matrix. If  $Max[i,j] = k$ , then process  $P_i$  may request at most  $k$  instances of resource type  $R_j$ .
- **Allocation:**  $n \times m$  matrix. If  $Allocation[i,j] = k$  then  $P_i$  is currently allocated  $k$  instances of  $R_j$ .
- **Need:**  $n \times m$  matrix. If  $Need[i,j] = k$ , then  $P_i$  may need  $k$  more instances of  $R_j$  to complete its task.

$$Need[i,j] = Max[i,j] - Allocation[i,j].$$





# Safety Algorithm

1. Let **Work** and **Finish** be vectors of length  $m$  and  $n$ , respectively. Initialize:

**Work** = **Available** (现有资源数量)

**Finish** [ $i$ ] = **false** for  $i = 0, 1, \dots, n-1$ . (n个进程)

2. Find a process  $i$  such that **both**:

(a) **Finish** [ $i$ ] = **false**

(b)  $Need_i \leq Work$  (需要的小于现有的)

If no such  $i$  exists, go to step 4.

3. **Work** = **Work** + **Allocation** <sub>$i$</sub>  (释放)

**Finish** [ $i$ ] = **true**

go to step 2.

4. If **Finish** [ $i$ ] == **true** for **all**  $i$ , then the system is in a safe state.



## Resource-Request Algorithm for Process $P_i$

$Request$  = request vector for process  $P_i$ . If  $Request_i[j] = k$  then process  $P_i$  wants  $k$  instances of resource type  $R_j$ .

1. If  $Request_i \leq Need_i$  go to step 2. Otherwise, raise error condition, since process has **exceeded its maximum claim**.
2. If  $Request_i \leq Available$ , go to step 3. Otherwise  $P_i$  must wait, **since resources are not available**. (没有可用资源)
3. Pretend to allocate requested resources to  $P_i$  by modifying the state as follows:

$Available = Available - Request_i$ ; (满足需求)

$Allocation_i = Allocation_i + Request_i$ ; (分配资源)

$Need_i = Need_i - Request_i$ ; (进程剩余所需)

- If safe  $\Rightarrow$  the resources are allocated to  $P_i$ .
- If unsafe  $\Rightarrow P_i$  must wait, and the old resource-allocation state is restored

# Example of Banker's Algorithm

- 5 processes  $P_0$  through  $P_4$ ;  
3 resource types:  
A (10 instances), B (5 instances), and C (7 instances).
- Snapshot at time  $T_0$ :

	<u>Allocation</u>	<u>Max</u>	<u>Available</u>
	A B C	A B C	A B C
$P_0$	0 1 0	7 5 3	3 3 2
$P_1$	2 0 0	3 2 2	
$P_2$	3 0 2	9 0 2	
$P_3$	2 1 1	2 2 2	
$P_4$	0 0 2	4 3 3	



## Example (Cont.)

- The content of the matrix *Need* is defined to be *Max – Allocation*.

	<u>Need</u>		
	A	B	C
$P_0$	7	4	3
$P_1$	1	2	2
$P_2$	6	0	0
$P_3$	0	1	1
$P_4$	4	3	1

The system **is in a safe state** since the sequence  $\langle P_1, P_3, P_4, P_2, P_0 \rangle$  satisfies safety criteria.



# Example: $P_1$ Request (1,0,2)

- Check that Request  $\leq$  Available (that is,  $(1,0,2) \leq (3,3,2) \Rightarrow$  true.

	<u>Allocation</u>	<u>Need</u>	<u>Available</u>
	A B C	A B C	A B C
$P_0$	0 1 0	7 4 3	2 3 0
$P_1$	3 0 2	0 2 0	
$P_2$	3 0 2	6 0 0	
$P_3$	2 1 1	0 1 1	
$P_4$	0 0 2	4 3 1	

- Executing safety algorithm shows that sequence  $\langle P_1, P_3, P_4, P_0, P_2 \rangle$  satisfies safety requirement.
- Can request for (3,3,0) by  $P_4$  be granted?
- Can request for (0,2,0) by  $P_0$  be granted?



# Deadlock Detection

---

- ❑ Allow system to enter deadlock state
- ❑ Detection algorithm
- ❑ Recovery scheme




# Single Instance of Each Resource Type

---

- ❑ Maintain *wait-for* graph
  - Nodes are processes.
  - $P_i \rightarrow P_j$  if  $P_i$  is waiting for  $P_j$ .
- ❑ Periodically invoke an algorithm that searches for a cycle in the graph. If there is a cycle, there exists a deadlock.
- ❑ An algorithm to detect a cycle in a graph requires an order of  $n^2$  operations, where  $n$  is the number of vertices in the graph.



# Resource-Allocation Graph and Wait-for Graph

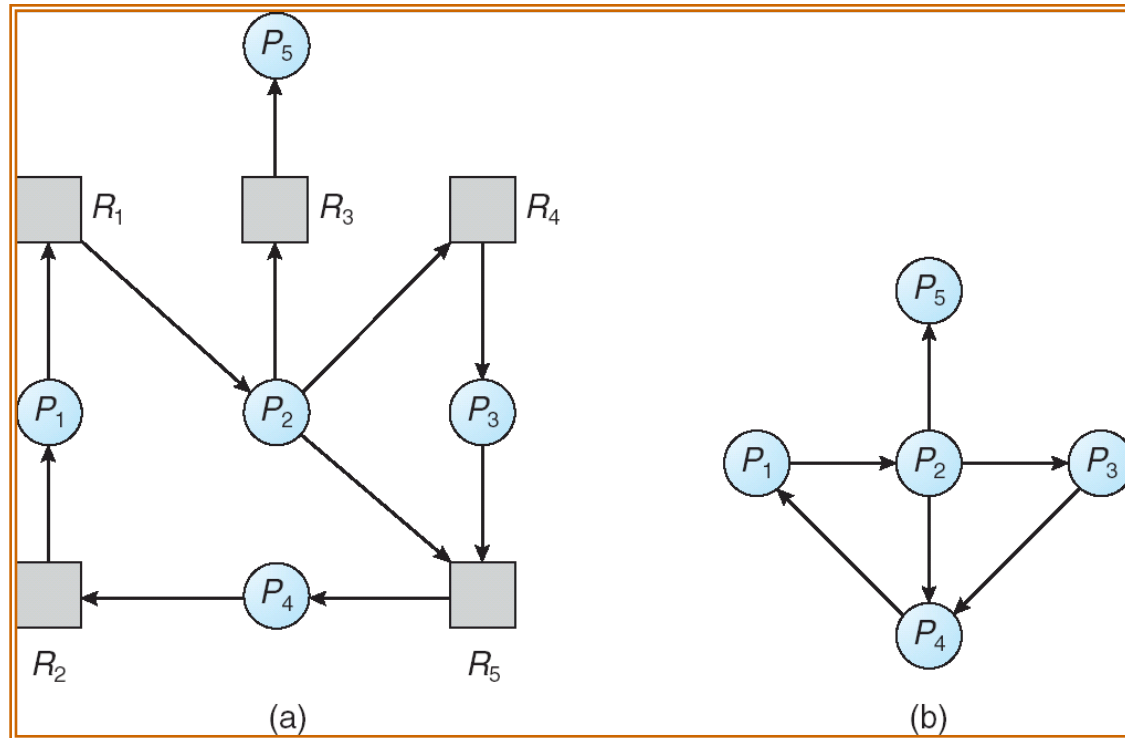

Resource-Allocation Graph

Corresponding wait-for graph





# Several Instances of a Resource Type

- **Available:** A vector of length  $m$  indicates the number of available resources of each type.
- **Allocation:** An  $n \times m$  matrix defines the number of resources of each type currently allocated to each process.
- **Request:** An  $n \times m$  matrix indicates the current request of each process. If  $Request[i_j] = k$ , then process  $P_i$  is requesting  $k$  more instances of resource type  $R_j$ .



# Detection Algorithm

---

1. Let *Work* and *Finish* be vectors of length  $m$  and  $n$ , respectively Initialize:
  - (a) *Work* = *Available*
  - (b) For  $i = 1, 2, \dots, n$ , if  $Allocation_i \neq 0$ , then  $Finish[i] = false$ ; otherwise,  $Finish[i] = true$ . (是否完成)
2. Find an index  $i$  such that both:
  - (a)  $Finish[i] == false$
  - (b)  $Request_i \leq Work$If no such  $i$  exists, go to step 4.



# Detection Algorithm (Cont.)

---

3. *Work = Work + Allocation<sub>i</sub>*;  
*Finish[i] = true*  
go to step 2.
4. If *Finish[i] == false*, for some  $i$ ,  $1 \leq i \leq n$ , then the system is in deadlock state. Moreover, if *Finish[i] == false*, then  $P_i$  is deadlocked.

Algorithm requires an order of  $O(m \times n^2)$  operations to detect whether the system is in deadlocked state.



# Example of Detection Algorithm

- Five processes  $P_0$  through  $P_4$ ; three resource types A (7 instances), B (2 instances), and C (6 instances).
- Snapshot at time  $T_0$ :

	<u>Allocation</u>	<u>Request</u>	<u>Available</u> <u>work</u>
	A B C	A B C	A B C
$P_0$	0 1 0	0 0 0	0 0 0
$P_1$	2 0 0	2 0 2	
$P_2$	3 0 3	0 0 0/1	
$P_3$	2 1 1	1 0 0	
$P_4$	0 0 2	0 0 2	

- Sequence  $\langle P_0, P_2, P_3, P_1, P_4 \rangle$  will result in  $Finish[i] = \text{true}$  for all  $i$ .



# Example (Cont.)

- $P_2$  requests an additional instance of type C.

	<u>Request</u>		
	A	B	C
$P_0$	0	0	0
$P_1$	2	0	1
$P_2$	0	0	1
$P_3$	1	0	0
$P_4$	0	0	2

- State of system?
  - Can reclaim resources held by process  $P_0$ , but **insufficient** resources to fulfill other processes; requests.
  - Deadlock exists, consisting of processes  $P_1$ ,  $P_2$ ,  $P_3$ , and  $P_4$ .



# Detection-Algorithm Usage

---

- ❑ When, and how often, to invoke depends on:
  - How often a deadlock is likely to occur?
  - How many processes will need to be rolled back?
    - ❑ one for each disjoint cycle
- ❑ If detection algorithm is invoked arbitrarily, there may be many cycles in the resource graph and so we would not be able to tell which of the many deadlocked processes “caused” the deadlock.



# Recovery from Deadlock: Process Termination

---

- ❑ **Abort all** deadlocked processes.
- ❑ **Abort one** process at a time **until** the deadlock cycle is **eliminated**.
- ❑ **In which order** should we choose to abort?
  - **Priority** of the process.
  - **How long** process has computed, and how much longer to completion.
  - Resources the process has used.
  - Resources process needs to complete.
  - How many processes will need to be terminated.
  - Is process interactive or batch?



# Recovery from Deadlock: Resource Preemption

---

- ❑ Selecting a victim – **minimize cost**.
- ❑ Rollback – return to some safe state, restart process for that state.
- ❑ Starvation – same process may always be picked as victim, include number of rollback in cost factor.





# End of Chapter 7

---

