


include/muonEventAction.hh

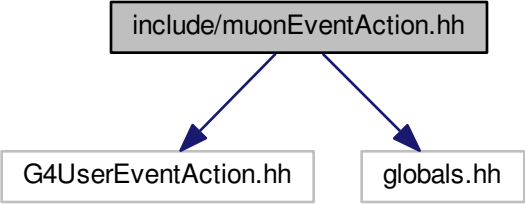

```
graph TD; A[include/muonEventAction.hh] --> B[G4UserEventAction.hh]; A --> C[globals.hh];
```

The diagram illustrates a C++ header file inclusion structure. At the top, a grey rectangular box contains the text 'include/muonEventAction.hh'. Two blue arrows originate from the bottom of this box and point downwards to two separate white rectangular boxes. The left box contains the text 'G4UserEventAction.hh' and the right box contains the text 'globals.hh'. This represents the 'include/muonEventAction.hh' file including both 'G4UserEventAction.hh' and 'globals.hh'.

G4UserEventAction.hh

globals.hh