Fig 1: Investigational mode: FNIR(N, 1, 0) vs. most accurate (yitu_4)

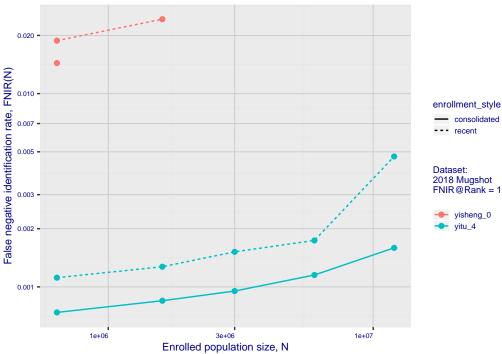


Fig 3: Identification mode: FNIR(N, L+1, T) vs. most accurate (nec_3)

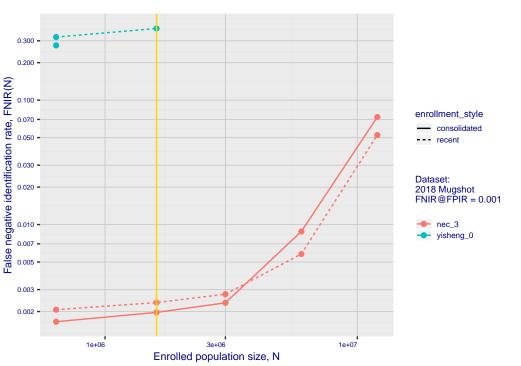


Fig 2: DETs by enrollment type

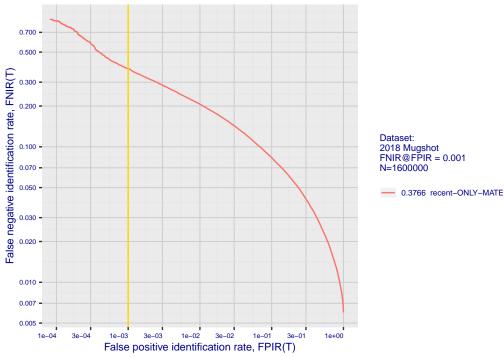


Fig 4: DET for various N. Links connect points of equal threshold.


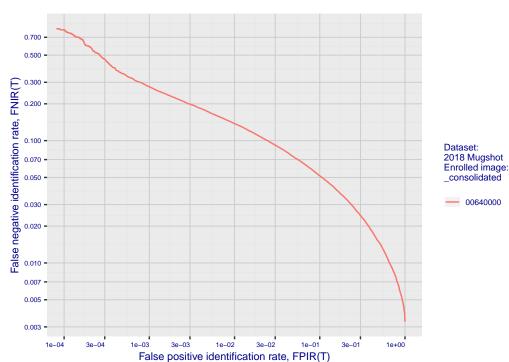


Fig 5: Dependence on T by number enrolled identities

Fig 6: FPIR dependence on T by probe type

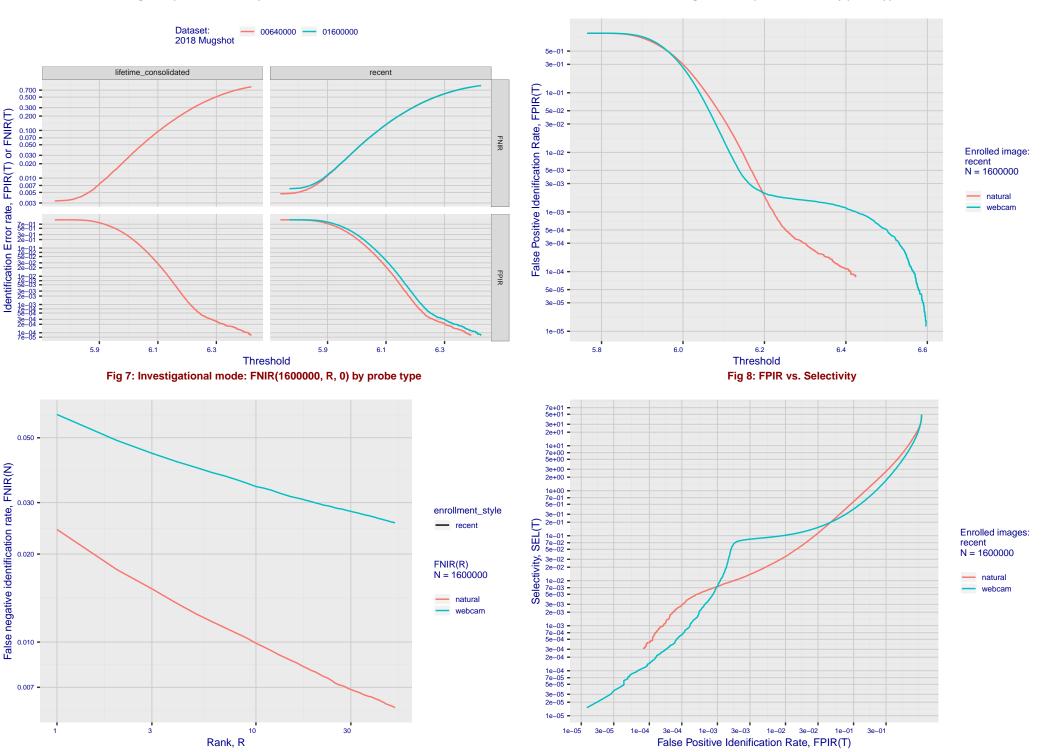

3. Report for algorithm yisheng_0 2020-03-20 13:30:40

Fig 10: Template duration; search duration vs. N

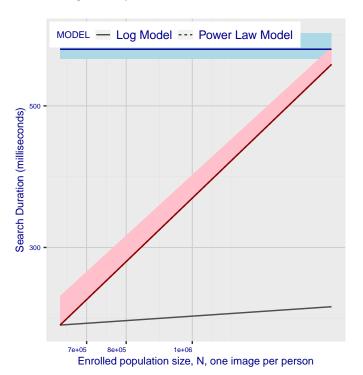


Fig 11: Datasheet

Algorithm: yisheng_0
Developer: Zhuhai Yisheng Electronics Technology
Submission Date: 2018_02_14
Template size: 2108 bytes
Template time (2.5 percentile): 593 msec
Template time (median): 613 msec
Template time (97.5 percentile): 650 msec
Investigation rank 146 — FNIR(1600000, 0, 1) = 0.0243 vs. lowest 0.0010 from sen
Identification rank 176 — FNIR(1600000, T, L+1) = 0.3766
FPIR = 0.001 vs. lowest 0.0018 from sensetime_003