



Content of Website-Template folder

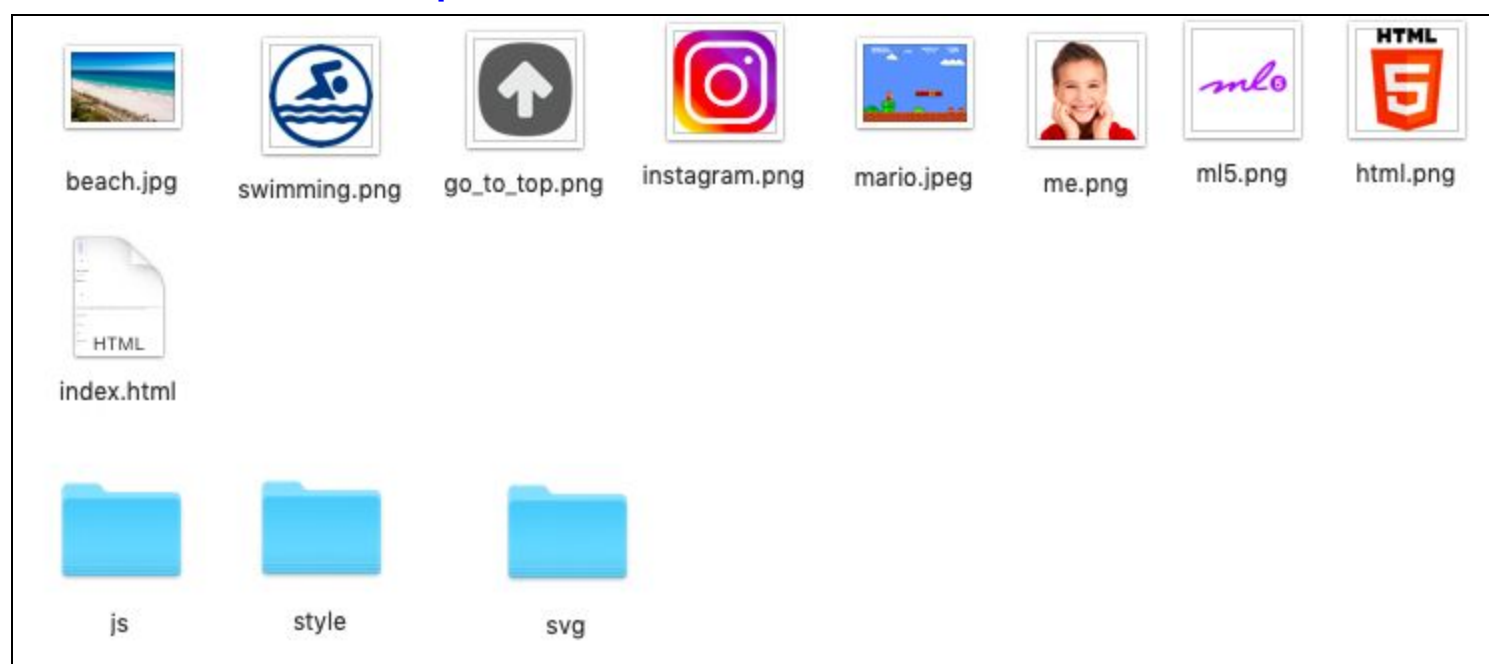

Victor Cardoz

1. First task is to change the name on the navigation bar -

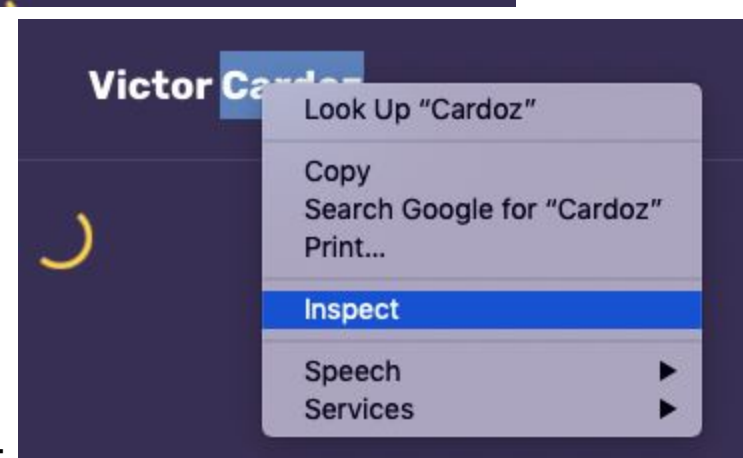

- Right click on that element and select inspect element

- Then this element(on which we right clicked and selected inspect) will open and be marked on element screen like this -

```
<!DOCTYPE html>
<html class="js-focus-visible" data-js-focus-visible>
  <head>...</head>
  <body data-gr-c-s-loaded="true" class>
    <!-- desktop header -->
    <header class="desktop-header-3 fixed-top">
      <div class="container">
        <nav class="navbar navbar-expand-lg navbar-dark">
          <b class="navbar-brand">Victor Cardoz</b> => $0
          <button aria-controls="navbarNavDropdown" aria-
            expanded="false" aria-label="Toggle navigation" class=
              "navbar-toggler" data-target="#navbarNavDropdown" data-
              toggle="collapse" type="button">...</button>
          <div class="collapse navbar-collapse" id=
```

- Now double click on the class of the marked element and copy it -

```
<!DOCTYPE html>
<html class="js-focus-visible" data-js-focus-visible>
  <head>...</head>
  <body data-gr-c-s-loaded="true">
    <!-- desktop header -->
    <header class="desktop-header-3 fixed-top">
      <div class="container">
        <nav class="navbar navbar-expand-lg navbar-dark">
          <b class="navbar-brand">Victor Cardoz</b> => $0
          <button aria-controls="navbarNavDropdown" aria-
            expanded="false" aria-label="Toggle navigation" class=
              "navbar-toggler" data-target="#navbarNavDropdown" data-
              toggle="collapse" type="button">...</button>
          <div class="collapse navbar-collapse" id=
```

- Now search this class name in the index.html file

```
> navbar-brand

<!-- desktop header -->
<header class="desktop-header-3 fixed-top">

  <div class="container">


    <nav class="navbar navbar-expand-lg navbar-dark">

      <b class="navbar-brand">Victor Cardoz</b>
```

Then update the text from Victor Cardoz to yours


```
<b class="navbar-brand">Student Name</b>
```

Output -

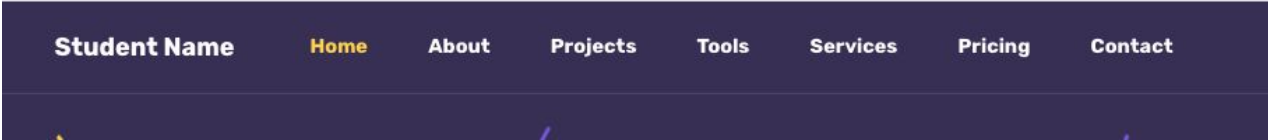


2. To change the -

- Skill text Web Development
- Skill percentage 85%
- Skill progress bar percentage
- Skill progress bar color

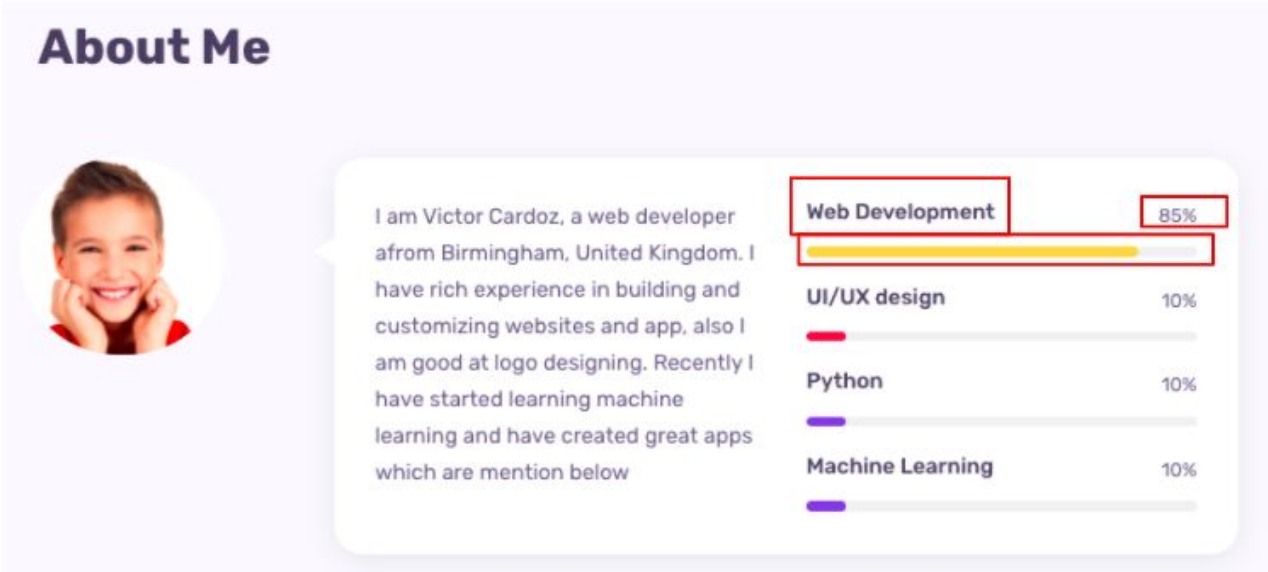

- Changing skill text Web Development

First we have to search where is the code written for this

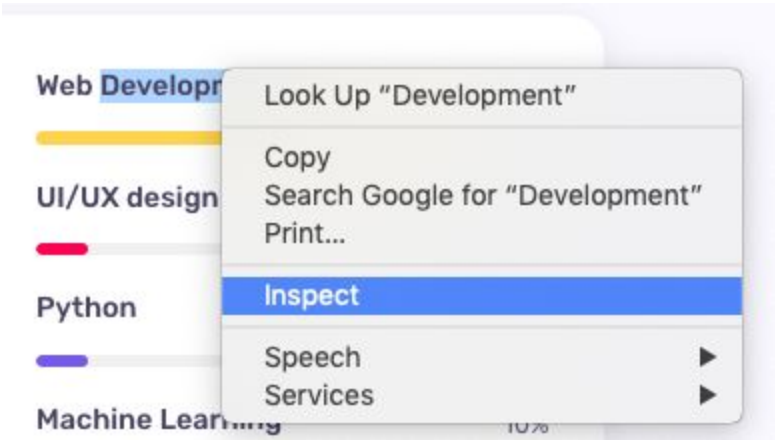

```
▼ <div class="row">
  ▶ <div class="col-md-6">_</div>
  ▼ <div class="col-md-6">
    <!-- skill item -->
    ▼ <div class="skill-item">
      ▼ <div class="skill-info clearfix">
        <h4 class="float-left mb-3 mt-0">Web
        Development</h4> == $0
        <span class="float-right">85%</span>
        ::after
      </div>
      ▶ <div class="progress">_</div>
      <div class="spacer" data-height="20"
      style="height: 20px;"></div>
```

```
▼ <div class="row">
  ▶ <div class="col-md-6">_</div>
  ▼ <div class="col-md-6">
    <!-- skill item -->
    ▼ <div class="skill-item">
      ▼ <div class="skill-info clearfix">
        <h4 class="float-left mb-3 mt-0">Web
        Development</h4> == $0
        <span class="float-right">85%</span>
        ::after
      </div>
      ▶ <div class="progress">_</div>
      <div class="spacer" data-height="20"
      style="height: 20px;"></div>
```

- Search this class name in the index.html file


```
> float-left mb-3 mt-0 Aa AbI .* 1 of 4 ↑ ↓ ≡ ×
```

```
div.container > div.row > div.col-md-9.triangle-left-md.triangle-top-sm > div.rounded
<div class="spacer">
</div>
<div class="col-md-6">
  <!-- skill item -->
  <div class="skill-item">
    <div class="skill-info clearfix">
      <h4 class="float-left mb-3 mt-0">Web Development</h4>
      <span class="float-right">85%</span>
    </div>
    <div class="progress">
      <div class="progress-bar data-background" role="progressbar" aria-val
      </div>
    </div>
    <div class="spacer" data-height="20" style="height: 20px;"></div>
  </div>
```

Changing the text to “App Development”

```
<!-- skill item -->
<div class="skill-item">
  <div class="skill-info clearfix">
    <h4 class="float-left mb-3 mt-0">App Development</h4>
    <span class="float-right">85%</span>
  </div>
  <div class="progress">
    <div class="progress-bar data-background" role="progressbar" aria-value
    </div>
  </div>
  <div class="spacer" data-height="20" style="height: 20px;"></div>
</div>
```

Output -

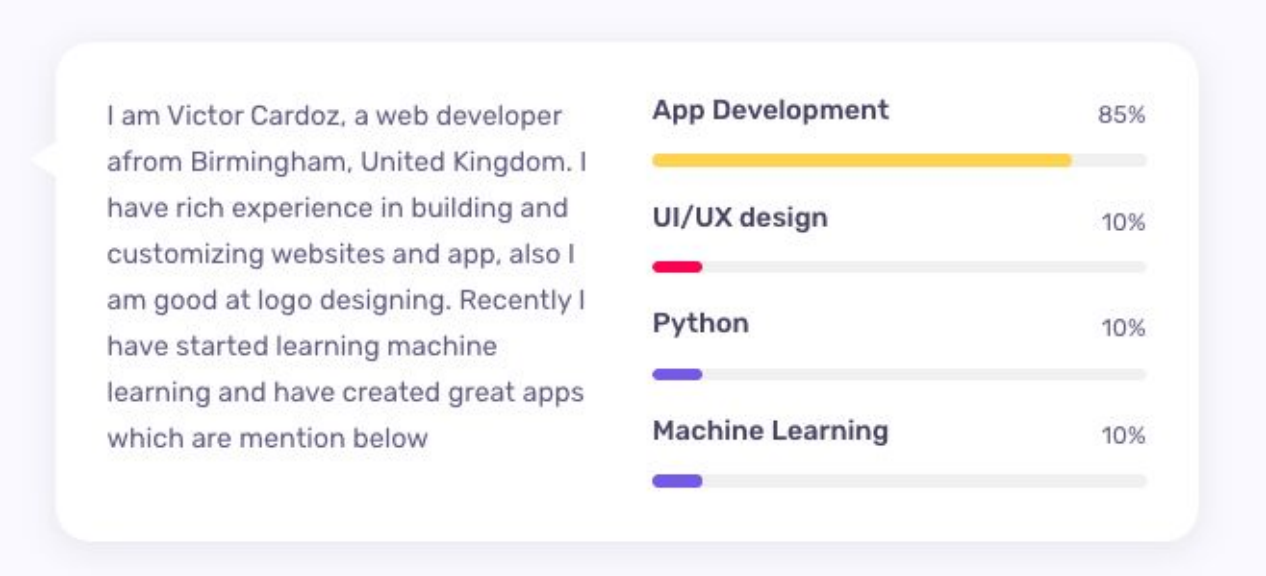

- Changing skill percentage 85%

```
<!-- skill item -->
<div class="skill-item">
  <div class="skill-info clearfix">
    <h4 class="float-left mb-3 mt-0">App Development</h4>
    <span class="float-right">85%</span>
  </div>
  <div class="progress">
    <div class="progress-bar data-background" role="progressbar" aria-val
    </div>
  </div>
  <div class="spacer" data-height="20" style="height: 20px;"></div>
</div>
```



Changing the text to “20”

```
<!-- skill item -->
<div class="skill-item">
  <div class="skill-info clearfix">
    <h4 class="float-left mb-3 mt-0">App Development</h4>
    <span class="float-right">20%</span>
  </div>
  <div class="progress">
    <div class="progress-bar data-background" role="progressbar" aria-valuemin="0"
    </div>
  </div>
  <div class="spacer" data-height="20" style="height: 20px;"></div>
</div>
```



Output -



- Changing skill progress bar percentage
- Changing color of skill progress bar

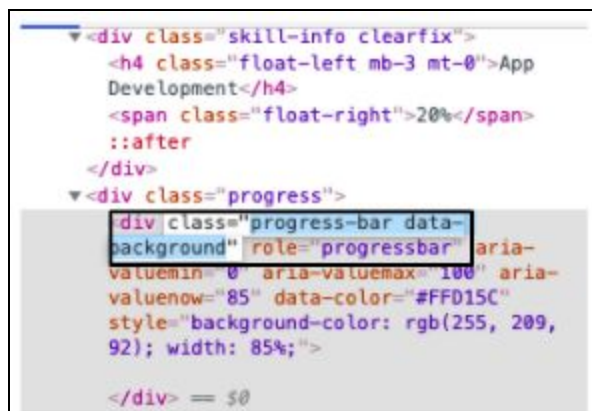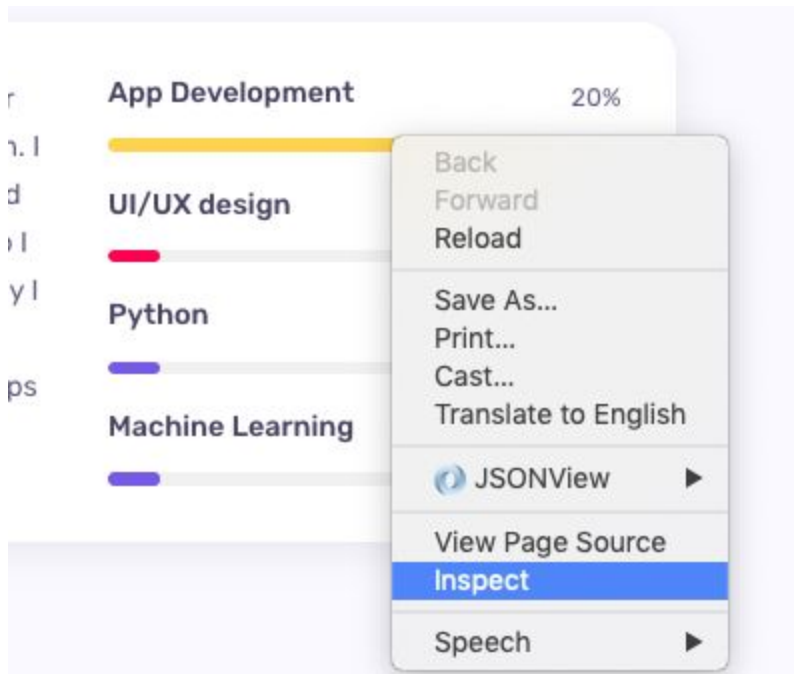

- Now search this class name in the index.html file

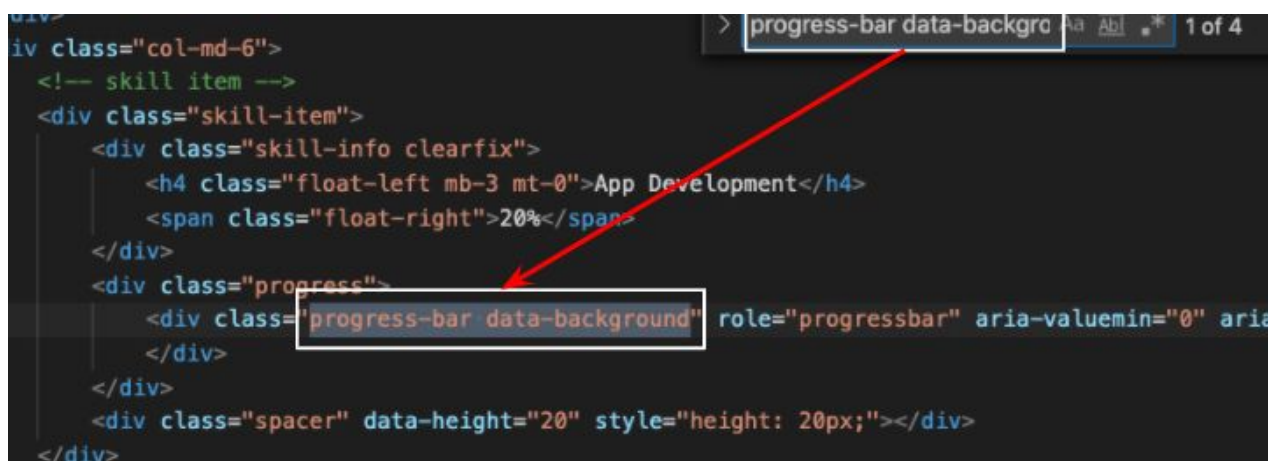

- Then scroll right in this HTML element there will be aria-valuenow attribute which is 85

`aria-valuenow="85"`. Changing the value of this attribute will change the percentage of the skill.

So change it to "20" - `aria-valuenow="20"`

Then if we scroll right more there will be data-color attribute

`data-color="orange"`. Changing the value of this attribute will change the color of the skill.

So change it to “black” - `data-color="black"`

Then if we scroll right more there will be style attribute `style="width: 85%;"`. Changing the width of style attribute will change the percentage of the skill.

Change it to same as the value of aria-valuenow attribute- `style="width: 20%;"`

Output -



If you see we have changed the skill name, percentage text, style of progress bar, all this HTML is inside a div.

```
<!-- skill item -->
<div class="skill-item">
  <div class="skill-info clearfix">
    <h4 class="float-left mb-3 mt-0">App Development</h4>
    <span class="float-right">85%</span>
  </div>
  <div class="progress">
    <div class="progress-bar data-background" role="progressbar" aria-valuenow="20" style="width: 20%; background-color: black;"></div>
  </div>
  <div class="spacer" data-height="20" style="height: 20px;"></div>
</div>
```

3. Now we will add 1 project

- Scroll to project part, and copy the heading of project which is -

My Projects

- Then search “My Projects” in the index.html file

> My Projects Aa Abi * 1 of 1

```
<!-- section title -->
<h2 class="section-title wow fadeInUp" style="visibility: visible; animation-name: fadeInUp;">My Projects</h2>
```

So there are two comments 1 - project item and 2 - end project item.


```

<!-- section title -->
<h2 class="section-title wow fadeInUp" style="visibility: visible; animation-name: fadeInUp;">My Projects</h2>

<div class="spacer" data-height="60" style="height: 60px;"></div>

<div class="row blog-wrapper">
  <!-- projects item -->
  <div class="col-md-4">
    <div class="blog-item rounded bg-white shadow-dark wow fadeIn" data-wow-delay="200ms" style="visibility: visible; animation-name: fadeIn;">
      <div class="thumb">
        <a href="https://mahdihat791.github.io/AI-Mario-Game/">
          
        </a>
      </div>
      <div class="details">
        <h4 class="my-0 title">
          <a href="https://mahdihat791.github.io/AI-Mario-Game/">AI Mario Game</a>
        </h4>
        <ul class="list-inline meta mb-0 mt-2">
          <li class="list-inline-item">01 August, 2020</li>
        </ul>
      </div>
    </div>
  </div>
  <!-- end project item -->

```

So for creating 1 more project we will copy all the code from the first comment till the second comment, and paste it after the second comment.

```

<!-- projects item -->
<div class="col-md-4">
  <div class="blog-item rounded bg-white shadow-dark wow fadeIn" data-wow-delay="200ms" style="visibility: visible; animation-name: fadeIn;">
    <div class="thumb">
      <a href="https://mahdihat791.github.io/AI-Mario-Game/">
        
      </a>
    </div>
    <div class="details">
      <h4 class="my-0 title">
        <a href="https://mahdihat791.github.io/AI-Mario-Game/">AI Mario Game</a>
      </h4>
      <ul class="list-inline meta mb-0 mt-2">
        <li class="list-inline-item">01 August, 2020</li>
      </ul>
    </div>
  </div>
</div>
<!-- end project item -->

<!-- projects item -->
<div class="col-md-4">
  <div class="blog-item rounded bg-white shadow-dark wow fadeIn" data-wow-delay="200ms" style="visibility: visible; animation-name: fadeIn;">
    <div class="thumb">
      <a href="https://mahdihat791.github.io/AI-Mario-Game/">
        
      </a>
    </div>
    <div class="details">
      <h4 class="my-0 title">
        <a href="https://mahdihat791.github.io/AI-Mario-Game/">AI Mario Game</a>
      </h4>
      <ul class="list-inline meta mb-0 mt-2">
        <li class="list-inline-item">01 August, 2020</li>
      </ul>
    </div>
  </div>
</div>
<!-- end project item -->


```

Output -



Now we have to change few details in this code of project like -

- Link of the project
- Image of the project
- Name of the project
- Date of when project was created

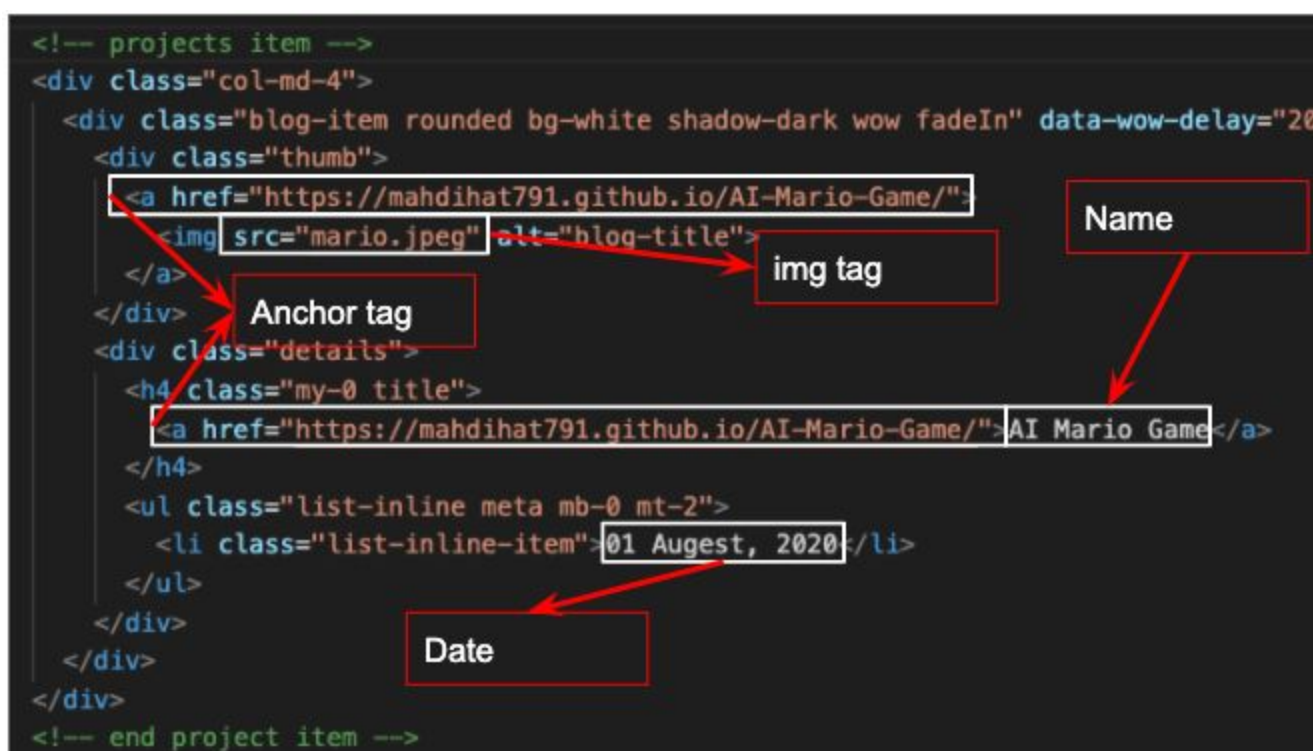



4. Now we will add 1 tool OR language

- Scroll to tool and language part, and copy the heading of tool and language which is -




- Then search “Tools And Language” in the index.html file




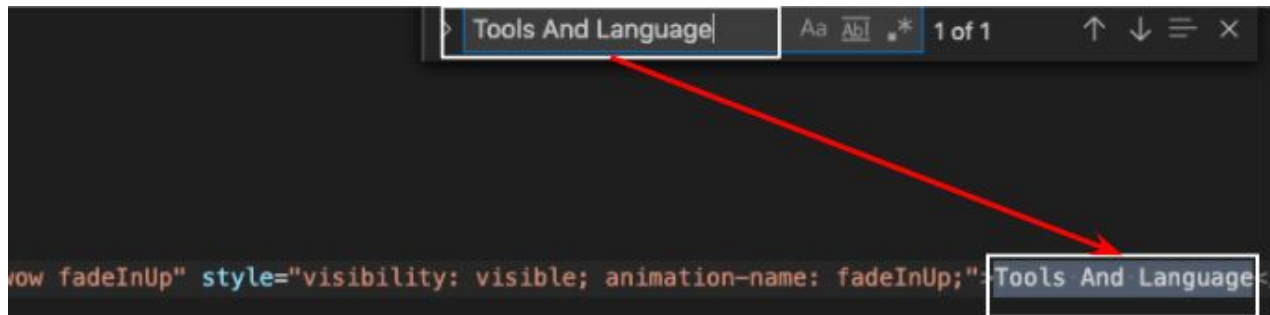

There are two comments -

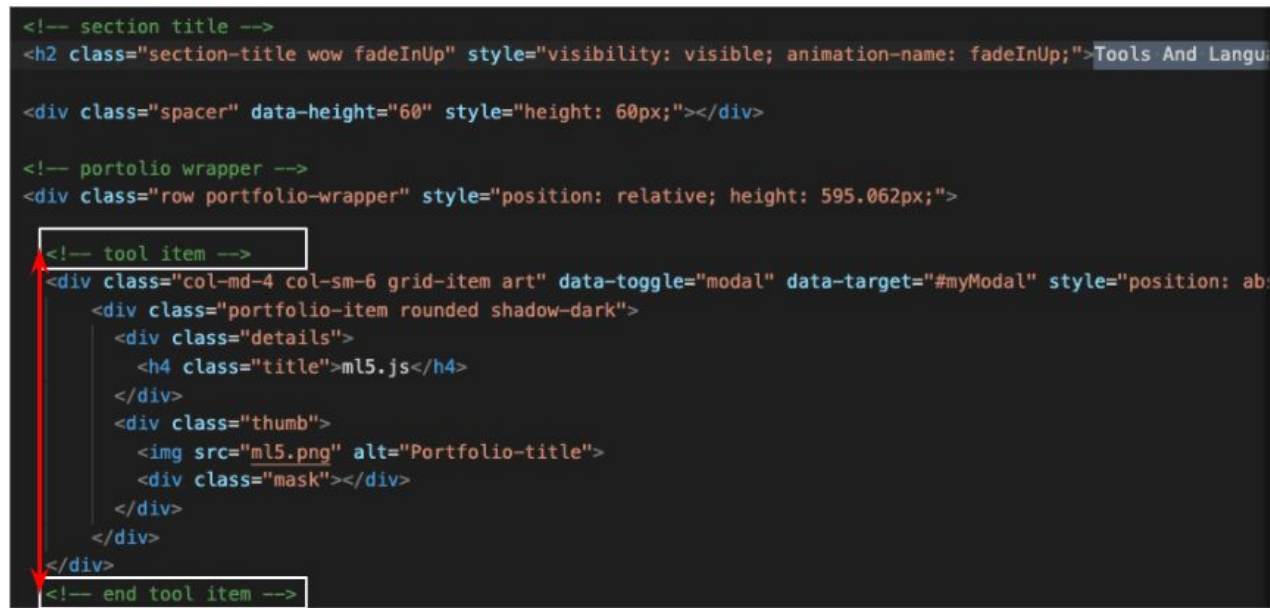

So for creating 1 more tool or language we will copy all the code from the first comment till the second comment, and paste it after the second comment.

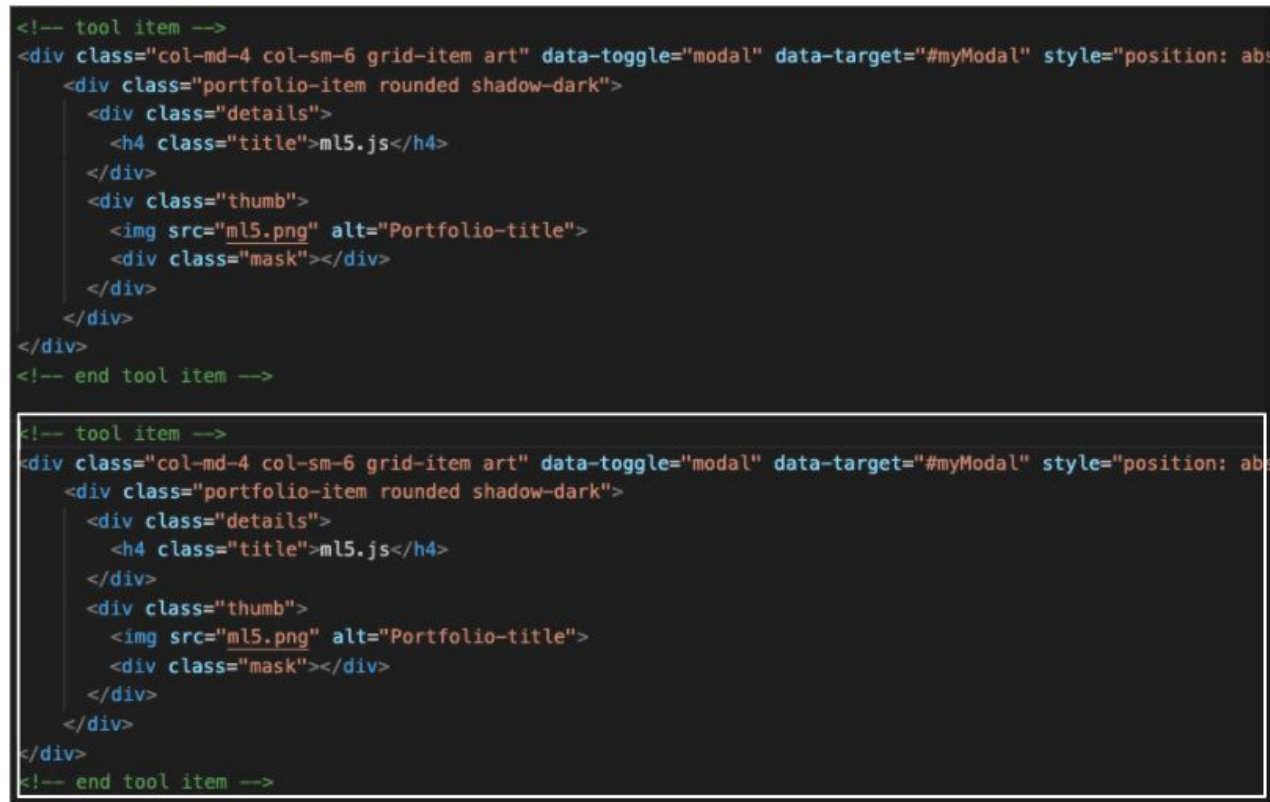

Output -



Now we have to change few details in this code like -

```
<!-- tool item -->
<div class="col-md-4 col-sm-6 grid-item art" data-toggle="modal" data-target="#myModal" style="position: relative; height: 150px; width: 100%; background-color: #f0f0f0; border-radius: 10px; box-shadow: 0px 5px 5px #ccc; text-align: center; display: flex; align-items: center; justify-content: center; flex-direction: column; margin-bottom: 10px;">
  <div class="portfolio-item rounded shadow-dark">
    <div class="details">
      <h4 class="title">ml5.js</h4>
    </div>
    <div class="thumb">
      
      <div class="mask"></div>
    </div>
  </div>
</div>
<!-- end tool item -->
```

After changing -

```
<!-- tool item -->
<div class="col-md-4 col-sm-6 grid-item art" data-toggle="modal" data-target="#htmlModal" style="position: relative; height: 150px; width: 100%; background-color: #f0f0f0; border-radius: 10px; box-shadow: 0px 5px 5px #ccc; text-align: center; display: flex; align-items: center; justify-content: center; flex-direction: column; margin-bottom: 10px;">
  <div class="portfolio-item rounded shadow-dark">
    <div class="details">
      <h4 class="title">HTML</h4>
    </div>
    <div class="thumb">
      
      <div class="mask"></div>
    </div>
  </div>
</div>
<!-- end tool item -->
```

Output -



Now we need to create a bootstrap modal also for this language.

```
<!-- tool item -->
<div class="col-md-4 col-sm-6 grid-item art" data-toggle="modal" data-target="#myModal" style="posit
  <div class="portfolio-item rounded shadow-dark">
    <div class="details">
      <h4 class="title">ml5.js</h4>
    </div>
    <div class="thumb">
      
      <div class="mask"></div>
    </div>
  </div>
</div>
<!-- end tool item -->
```

- Search this ID. The second result will be this -

```
<!-- Go to top button -->
<a href="javascript:" id="return-to-top" style="display: none;">
  
</a>

<!-- modal -->
<div id="myModal" class="modal fade ">
  <div class="modal-dialog" >
    <!-- Modal content-->
    <div class="modal-content">

      <button class="close" data-dismiss="modal" style="text-align: right; padding: 10px;">&times;</button>
      <hr>
      <div class="modal-body">
        <p>Welcome to the ml5 project! Developing ml5 is not just about developing machine learning</p>
      </div>
    </div>
  </div>
</div>
<!-- end modal -->
```

Creating 1 more bootstrap modal

```
<!-- modal -->
<div id="myModal" class="modal fade ">
  <div class="modal-dialog" >
    <!-- Modal content-->
    <div class="modal-content">

      <button class="close" data-dismiss="modal" style="text-align: right; padding: 10px;">&times;</button>
      <hr>
      <div class="modal-body">
        <p>Welcome to the ml5 project! Developing ml5 is not just about developing machine learning</p>
      </div>
    </div>
  </div>
</div>
<!-- end modal -->
```

```
<!-- modal -->
<div id="myModal" class="modal fade ">
  <div class="modal-dialog" >
    <!-- Modal content-->
    <div class="modal-content">

      <button class="close" data-dismiss="modal" style="text-align: right; padding: 10px;">&times;</button>
      <hr>
      <div class="modal-body">
        <p>Welcome to the ml5 project! Developing ml5 is not just about developing machine learning</p>
      </div>
    </div>
  </div>
</div>
<!-- end modal -->
```

Change the ID


```
<!-- modal -->
<div id="htmlModal" class="modal fade ">
  <div class="modal-dialog" >
    <!-- Modal content-->
    <div class="modal-content">

      <button class="close" data-dismiss="modal" style="text-align: right;padding: 10px;">&
      <hr>
      <div class="modal-body">
        <p>HTML</p>
      </div>
    </div>
  </div>
</div>
<!-- end modal -->
```

Now when I will click on HTML language, a modal will open like this -

