


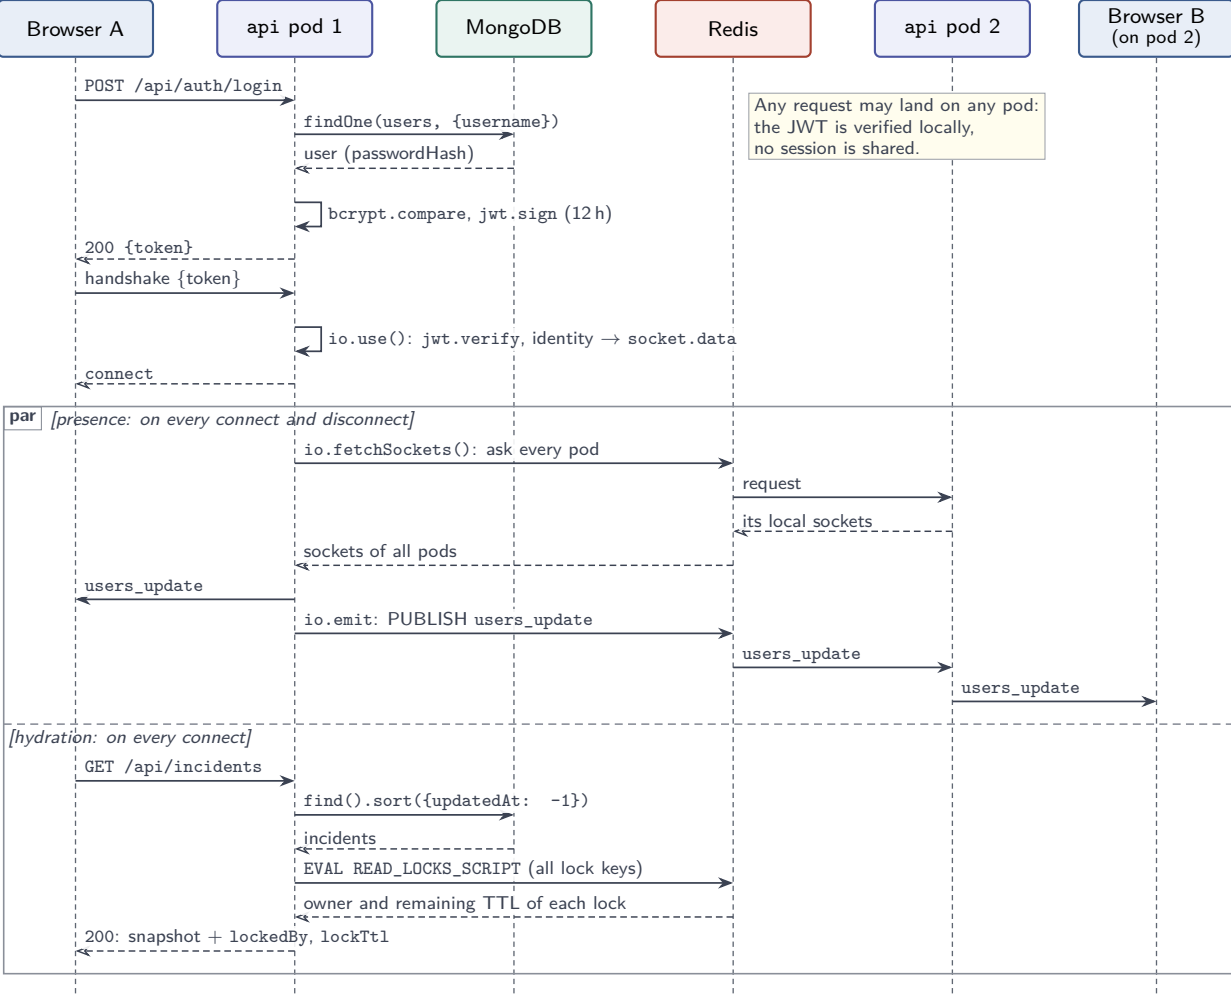

Browser A

api pod 1

MongoDB

Redis

api pod 2

Browser B
(on pod 2)

POST .../:id/claim

countDocuments({_id})

1: the incident exists

SET lock:incident:id A NX PX 60000

OK or nil

alt [OK: lock acquired]

incident_locked

io.emit: PUBLISH incident_locked

incident_locked

{id, A, ttl}

200 {lockedBy, ttl}

[nil: the key already exists]

EVAL RENEW_LOCK_SCRIPT (A, 60000)

1 or 0

alt [1: the lock is already A's]

incident_locked

PUBLISH incident_locked (TTL realigned)

incident_locked

{id, A, ttl}


200 (idempotent)


[0: held by another operator]

GET lock:incident:id

owner

409 {lockedBy}

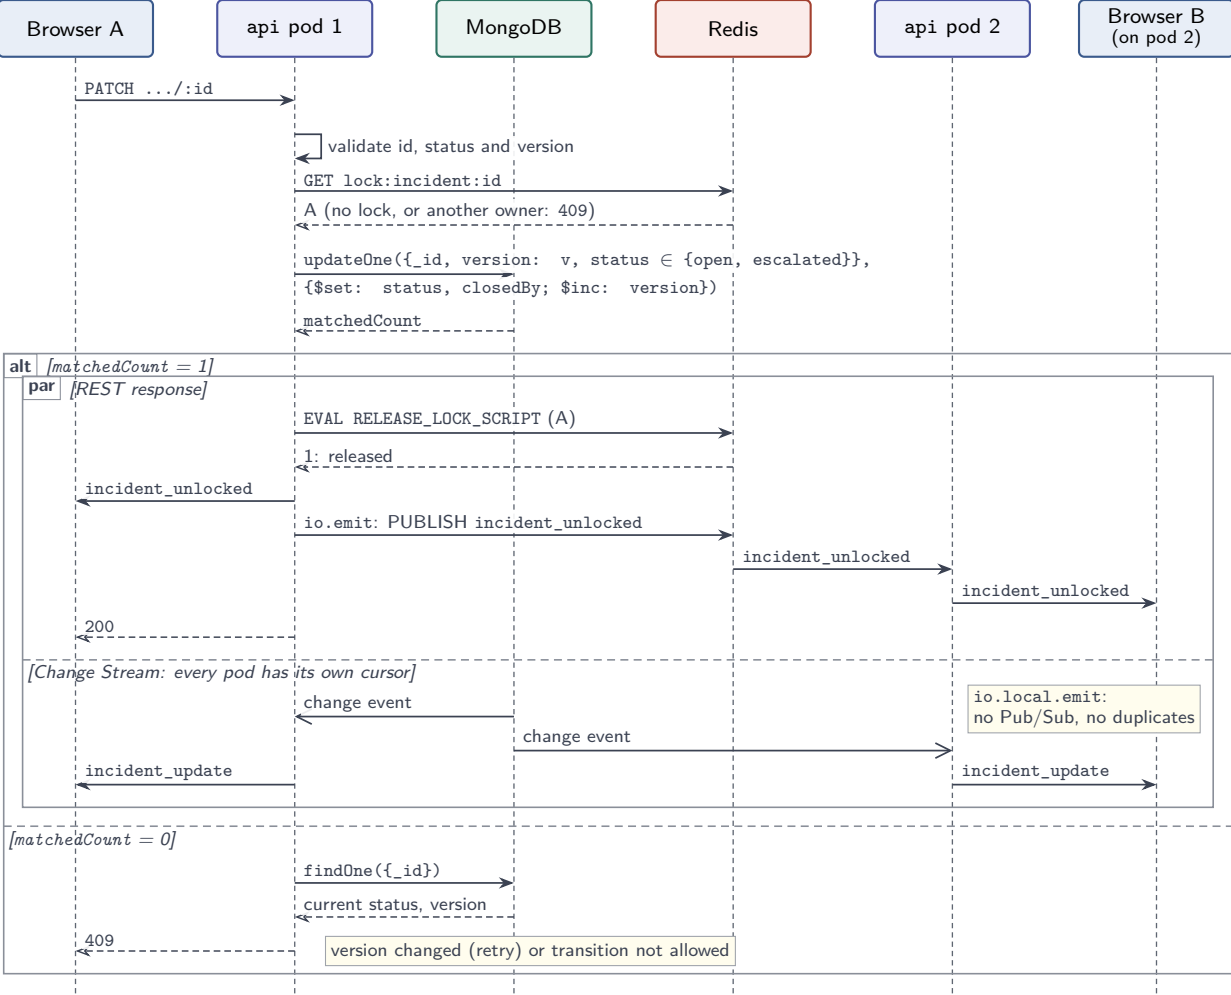

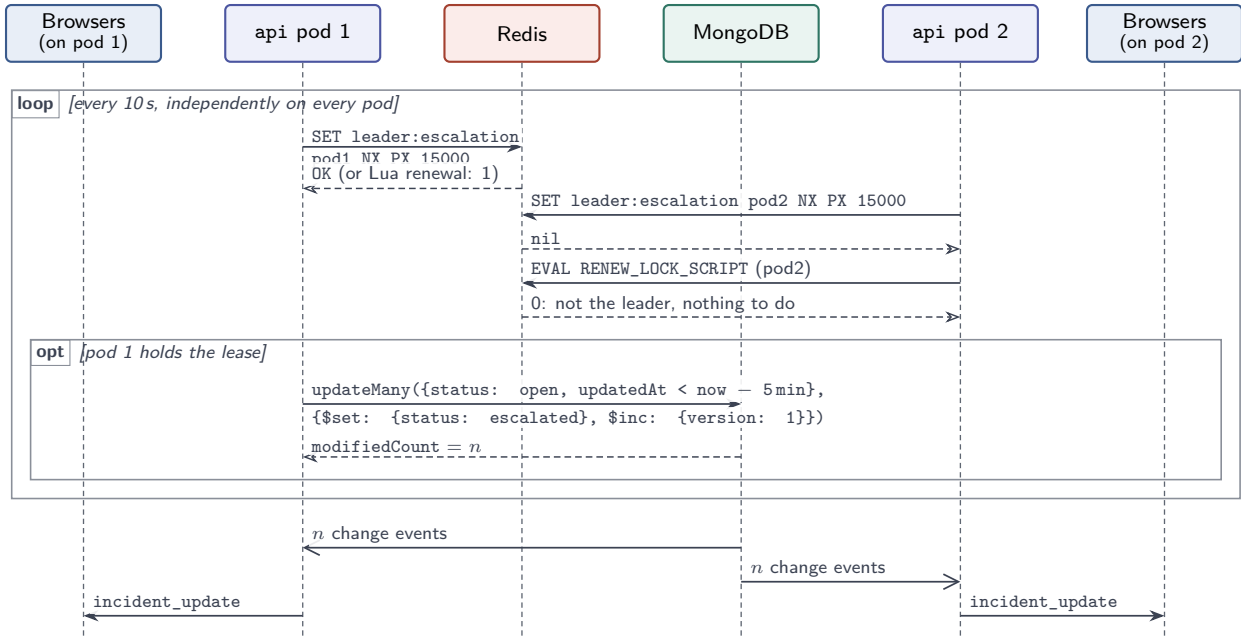

The leader emits no event itself: every pod learns of the escalation from its own Change Stream.