


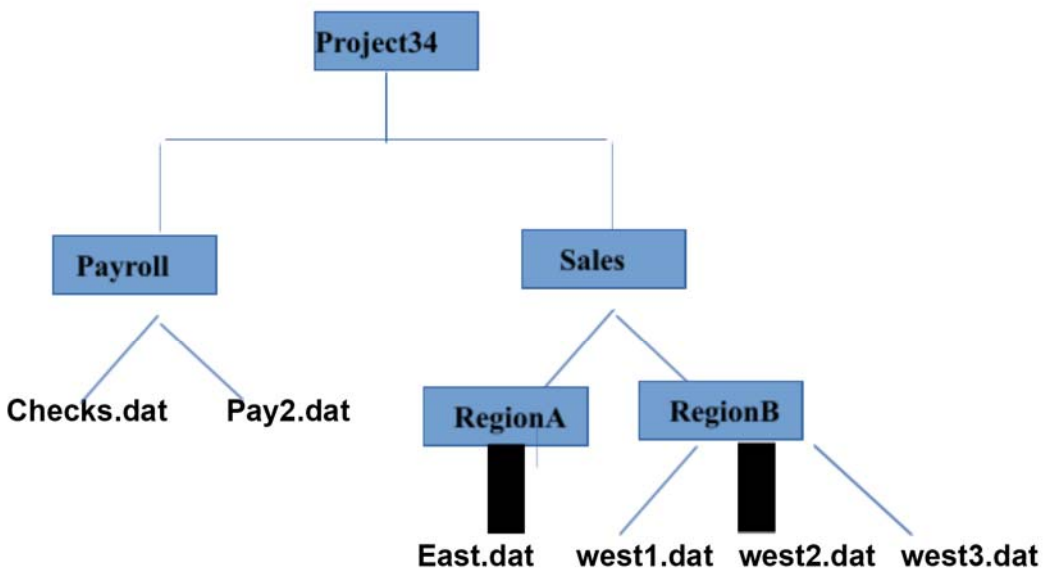

Exercise 1

1. Create the above directory tree and enter necessary data into the files. Then perform the following operations using linux utilities.

- Copy **pay2.dat** to directories **RegionA** and **RegionB**.
- Save the file **west3.dat** to **RegionA** under the name **East1.dat**
- Combine the contents of **Checks.dat** and **pay2.dat** into a **new file payment.dat** under payroll.
- Get the count of the number of ordinary files in **Sales** directory.
- Find the list all ***.dat** files in **Project34** directory
- Sort **pay2.dat** in the *descending order* of payment amount.
- Display the list of all files in the **Sales** directory in *uppercase*.
- Remove **RegionB** directory and its contents in one shot.

Exercise 2

- Sort an employee file containing employee name, salary, designation in the descending order of salary.
- Find the largest file in the current directory. The final output should contain only the filenames and the respective file sizes
- From the output of a long directory listing display only the file permissions. Then pipe this output to filter out any double lines & count the different permission types in this directory.
- Use Find with **-exec** option to rename all **.htm** files to **.html**
- Use **tr** filter to encrypt using ROT13. (Every character should be replaced with the 13th chr in the alphabetical order)
- Use Find command to print the list of all files in the current directory containing the word **linux** inside them.

7. Use `grep` filter and `wc` filter to get the count of ordinary files in the current directory.