STUDENT REPORT

DETAILS

Name

THANGADIPALLY ANVITHA

Roll Number

20R01A6753

EXPERIMENT

Title

WEEK 8A

Description

8. a) Write R program to find R-Mean, Median & Mode with the sample data.

Procedure and Overvation:

01A6753
6753 20R01A6753
753 20R01A6753
01A6753

20R01A6753

It is calculated by taking the sum of the values and dividing with the no.of values in a dataseries.

MEAN

The mean() function is used to calculate this in R.

syntax: mean(x, trim=0,na.rm=FALSE)

x is a input vector.

trim is used to drop some observations from both end of the sorted vector.

na.rm is used to remove the missing values from the input vector.

MEDIAN

syntax: median(x,na.rm=FALSE)

MODE

The mode is the value that has the highest no.of occurances in a set of data .Unlike mean and median, mode can have both numeric and character data

MEAN

```
# Create a vector.

x <- c(12,7,3,4.2,18,2,54,-21,8,-5)


# Find Mean.

result.mean <-  mean(x,trim = 0.3)

print(result.mean)
```

MEAN EXAMPLE 2

```
# Create a vector.

x <- c(12,7,3,4.2,18,2,54,-21,8,-5,NA)


# Find mean.

result.mean <-  mean(x)

print(result.mean)


# Find mean dropping NA values.

result.mean <-  mean(x,na.rm = TRUE)

print(result.mean)
```

MEDIAN

```
y=c(4,5,4.5,6.7,-2,-4,5,6)

print(median(y))
```

```
x=c(4,5,3,2,1,NA,NA)

print(median(x,na.rm=TRUE))


MODE

getmode<-function(v){

  uniqv <- unique(v)

  uniqv[which.max(tabulate(match(v,uniqv)))]

}

sale<-c(10,14,5,60,61,60,20,3)

result<-getmode(sale)

print(result)


MODE EXAMPLE2


getmode <- function(v){

  uniqv <- unique(v)

  uniqv[which.max(tabulate(match(v,uniqv)))]

}

v <- c(2,1,2,3,1,2,3,4,1,5,5,3,2,3)

result<-getmode(v)

print(result)

charv <- c("o","it","the","it","it")

result <- getmode(charv)

print(result)
```

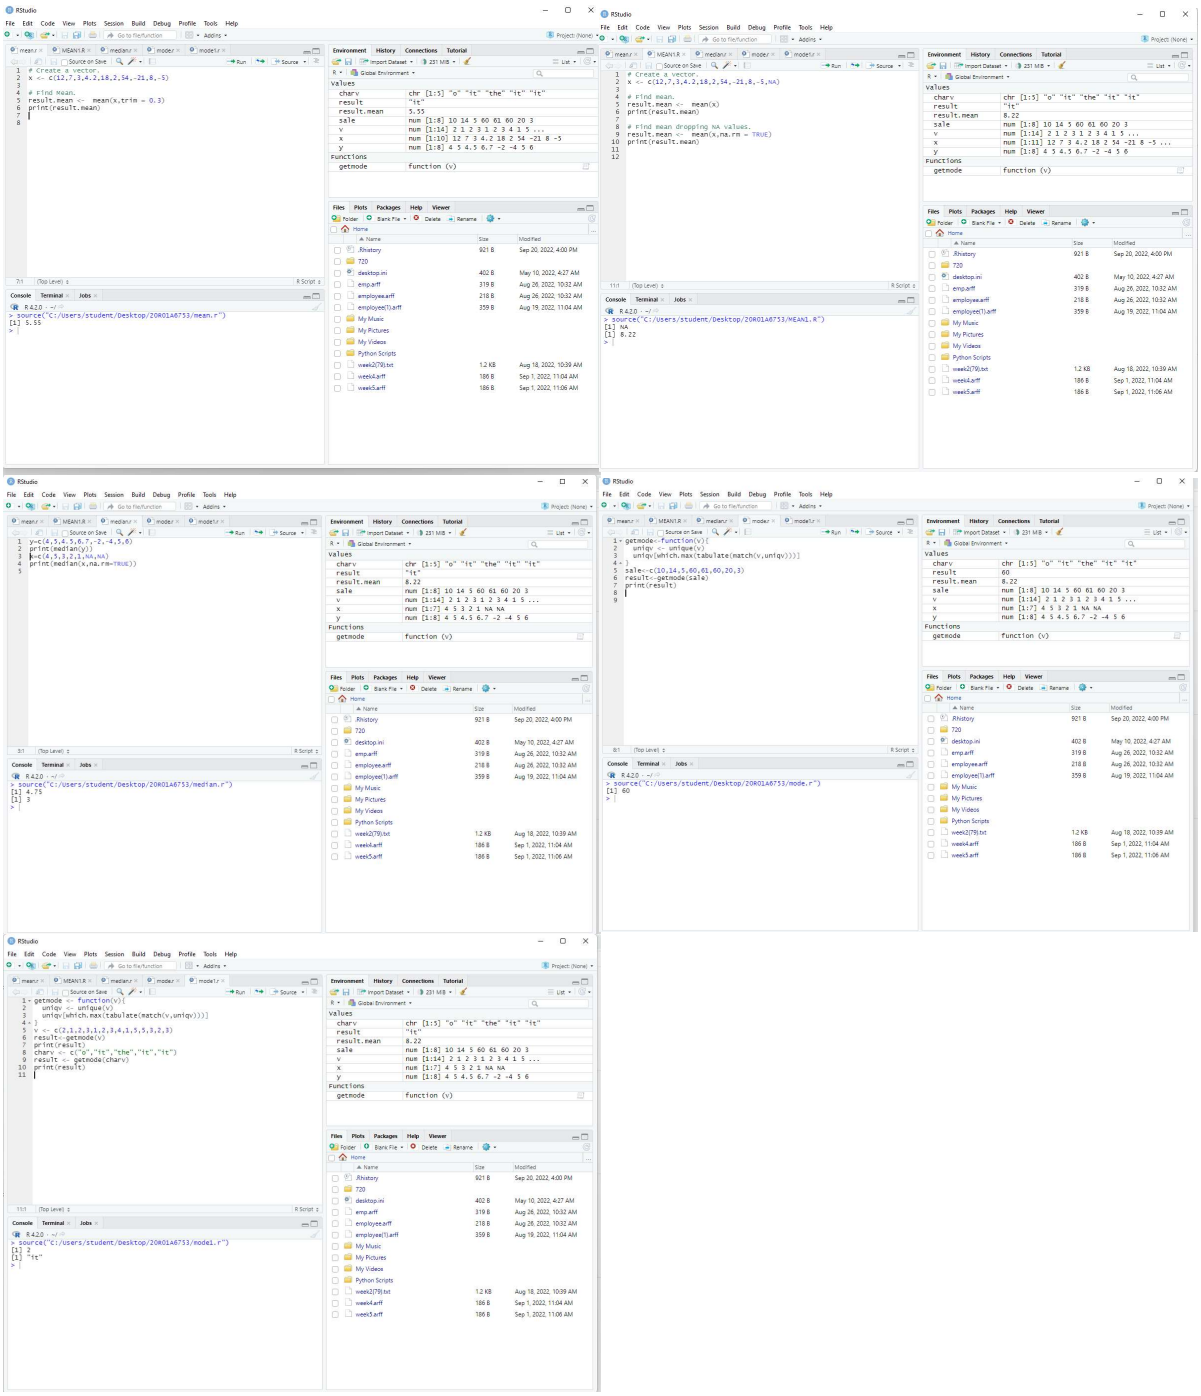

VIVA RESPONSES

Q)

Q)

Q)

Q)

Q)