

PAULEE GROUP · CENTER FOR QUANTUM TECHNOLOGY, KIST

# Convolution Operation and Quantum Signal Processing

---

**Donghun Jung**

2026-09-23 · Journal Meeting

# Outline

---

1. Introduction to Quantum Information
2. Convolution Operation
3. Quantum Signal Processing

INTRO METHOD STRATEGY RESULTS ONGOING

01

# Introduction to Quantum Information

# Everything we do is three steps

Quantum information is an enormous field, but what we actually run in the lab generally has the same three steps.

## STEP ONE

### Prepare a state

The system is initialised into one known starting state.



## STEP TWO

### Apply a unitary

A quantum operation, which is to say an algorithm, evolves the state the way we want.



## STEP THREE

### Measure

One number comes back, and every conclusion has to be extracted from it.

$$|\psi_0\rangle \xrightarrow{U} U|\psi_0\rangle,$$

$$\text{what we read out} = \langle\psi_0|U^\dagger O U|\psi_0\rangle.$$

Each box has a long story behind it, and each is a field of its own. On the theory side the main interest sits in the unitary  $U$ : it is the part we choose, and we design it on purpose so that the number produced by the third box answers the question we asked.

# State preparation

A state of a  $d$ -level system is a ket, a column of complex amplitudes in a basis  $\{|j\rangle\}$ :

$$|\psi\rangle = \sum_{j=0}^{d-1} c_j |j\rangle = \begin{pmatrix} c_0 \\ c_1 \\ \vdots \\ c_{d-1} \end{pmatrix} \quad c_j \in \mathbb{C}.$$

The bra is its Hermitian conjugate, the row vector of conjugated amplitudes  $\langle\psi| = (c_0^*, \dots, c_{d-1}^*)$ , and the norm is the bra taken against the ket,

$$\langle\psi|\psi\rangle = \sum_j |c_j|^2 = 1,$$

which is the normalization condition.

Every quantity we can actually observe is a bra times a ket: an expectation value  $\langle\psi|O|\psi\rangle$ , or an overlap  $|\langle\phi|\psi\rangle|^2$ .

Multiply the ket by a phase,  $|\psi\rangle \rightarrow e^{i\alpha}|\psi\rangle$ , and the bra picks up the conjugate,  $\langle\psi| \rightarrow e^{-i\alpha}\langle\psi|$ , so every such product is unchanged:

$$\langle\psi|e^{-i\alpha} O e^{i\alpha}|\psi\rangle = \langle\psi|O|\psi\rangle, \quad |\langle\phi|e^{i\alpha}|\psi\rangle|^2 = |\langle\phi|\psi\rangle|^2.$$

Therefore we lose no generality by taking the first amplitude  $c_0$  to be real and non-negative.

So a  $d$ -level state needs  $2d - 2$  real numbers,  $2d$  from the amplitudes minus the norm and the phase. A qubit is left with **two**, which is why the next slides draw it as a point on a sphere.

## Expectation value

An observable is a Hermitian matrix  $O = O^\dagger$ , and the number the experiment reports is  $\langle O \rangle_\psi = \langle \psi | O | \psi \rangle = \sum_{j,k} c_j^* O_{jk} c_k$ , a row vector times a matrix times a column vector, which Hermiticity makes real.

For a single qubit the observables of interest are the Pauli matrices

$$X = \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix}, \quad Y = \begin{pmatrix} 0 & -i \\ i & 0 \end{pmatrix}, \quad Z = \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix},$$

and we write the row, the matrix and the column, then multiply.

With  $|+\rangle = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 1 \end{pmatrix}$  this gives

$$\langle + | X | + \rangle = \frac{1}{2} (1, 1) \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 1 \\ 1 \end{pmatrix} = 1.$$

# One shot gives an eigenvalue, many shots give the average

The trace is cyclic, so the same number can be written with the state moved to the outside:

$$\langle \psi | O | \psi \rangle = \text{Tr} (| \psi \rangle \langle \psi | O) = \text{Tr}(\rho O), \quad \rho = | \psi \rangle \langle \psi |.$$

The object  $\rho$  is the **density matrix**, which is what one half of an entangled pair becomes later in this chapter.

A single shot does not return the average.

Diagonalise the observable,  $O = \sum_k \lambda_k |k\rangle \langle k|$ . One shot returns **one eigenvalue**  $\lambda_k$  with the Born probability  $p_k = | \langle k | \psi \rangle |^2$ , and it leaves the system in the corresponding eigenvector  $|k\rangle$ , which is the collapse.

Averaging those outcomes gives

$\sum_k \lambda_k p_k = \langle \psi | O | \psi \rangle$ : the expectation value **is** the shot-averaged outcome, reached with an error of order  $1/\sqrt{N}$  after  $N$  shots. For  $Z$  the eigenvalues are  $\pm 1$  and  $\langle Z \rangle = p_0 - p_1$ .

## INTRO Bloch sphere

A qubit state is a vector in a two-dimensional complex space,

$$|\psi\rangle = c_0|0\rangle + c_1|1\rangle \text{ with } |c_0|^2 + |c_1|^2 = 1.$$

Take expectation value of pauli matrix,  $\langle\sigma_i\rangle = \langle\psi|\sigma_i|\psi\rangle$ , so the three form the

**Bloch vector:**

$$\vec{r} = (\langle X\rangle, \langle Y\rangle, \langle Z\rangle).$$


For example,  $|+\rangle$ ,

$$\langle X\rangle = \frac{1}{2}(1 \quad 1) \begin{pmatrix} 0 & 1 \\ 1 & 0 \end{pmatrix} \begin{pmatrix} 1 \\ 1 \end{pmatrix} = 1,$$

with  $\langle Y\rangle = \langle Z\rangle = 0$ , so  $|+\rangle$  sits at  $\vec{r} = (1, 0, 0)$ .

$$|+\rangle = \frac{1}{\sqrt{2}}(|0\rangle + |1\rangle) = \frac{1}{\sqrt{2}} \begin{pmatrix} 1 \\ 1 \end{pmatrix}$$

$$\vec{r} = (\langle X\rangle, \langle Y\rangle, \langle Z\rangle) = (1, 0, 0)$$

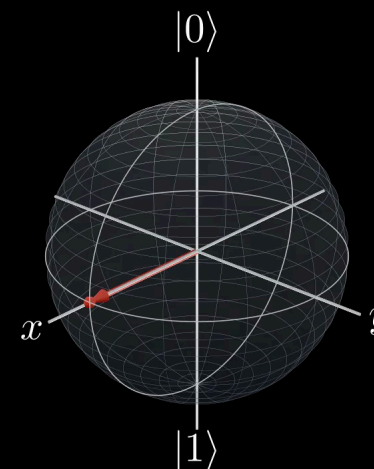

# The two angles are the sphere's own coordinates

A ket has four real numbers. Normalisation removes one, and the global phase, which no expectation value can see, removes another. Only two real parameters are left, so by convention we write

$$|\psi\rangle = \cos \frac{\theta}{2} |0\rangle + e^{i\phi} \sin \frac{\theta}{2} |1\rangle.$$


With  $\langle X \rangle = 2 \operatorname{Re}(c_0^* c_1)$ ,  $\langle Y \rangle = 2 \operatorname{Im}(c_0^* c_1)$  and  $\langle Z \rangle = |c_0|^2 - |c_1|^2$  this gives

$$\vec{r} = (\sin \theta \cos \phi, \sin \theta \sin \phi, \cos \theta),$$

the spherical coordinates of a unit vector.  $\theta$  is the polar angle from  $|0\rangle$ ,  $\phi$  the azimuth about  $z$ , and the half angle inside the ket is what makes the full angle  $\theta$  appear on the sphere. Since  $|\vec{r}| = 1$ , **every ket sits on the surface**; the radius is the purity,  $|\vec{r}|^2 = 2 \operatorname{Tr} \rho^2 - 1$ .

$$|\psi\rangle = \cos \frac{\theta}{2} |0\rangle + e^{i\phi} \sin \frac{\theta}{2} |1\rangle = \begin{pmatrix} \cos \frac{\theta}{2} \\ e^{i\phi} \sin \frac{\theta}{2} \end{pmatrix}$$


$$\vec{r} = (\sin \theta \cos \phi, \sin \theta \sin \phi, \cos \theta)$$

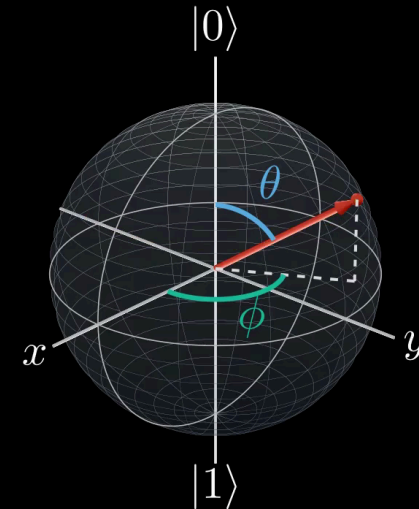

$$\theta = 58^\circ$$

$$\phi = 120^\circ$$

# Our case: prepare $|0\rangle$ , read out along $z$

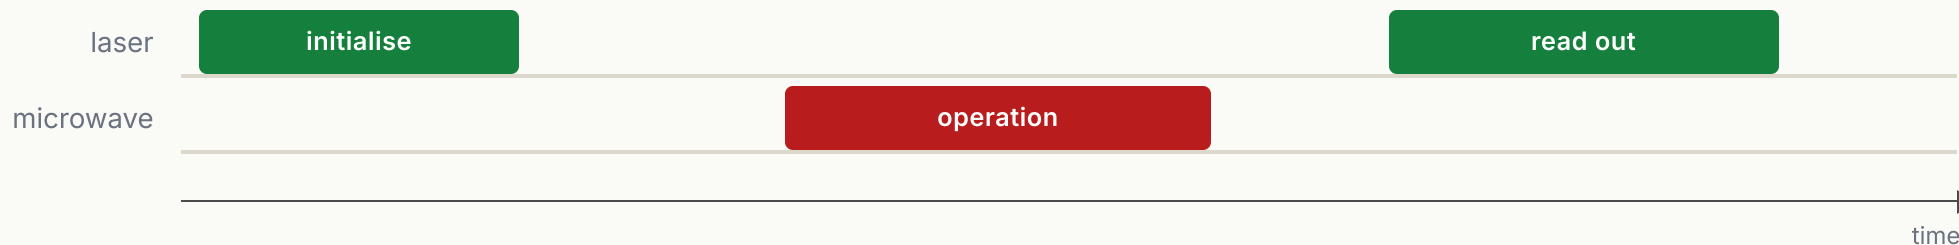

Strictly, the last step is a projective measurement on  $|0\rangle$  rather than a measurement of  $Z$ , because a photon count is intrinsically positive. The observable is the projector  $\Pi_0 = |0\rangle\langle 0|$ , not an operator with eigenvalues  $\pm 1$ . The two are one affine step apart, since  $\Pi_0 = \frac{1}{2}(I + Z)$ :

$$P(0) = \langle \psi | \Pi_0 | \psi \rangle = \frac{1 + \langle Z \rangle}{2}, \quad \langle Z \rangle = 2P(0) - 1.$$

The mean count is linear in  $P(0)$  between a bright and a dark reference level, so dividing by that contrast turns photons into  $P(0)$ . **After contrast normalisation the readout is effectively a  $Z$  measurement**, and  $\langle Z \rangle$  is what every curve in this talk plots.

# Schrodinger equation

The state obeys the Schrodinger equation (with  $\hbar = 1$ ),

$$\frac{d}{dt}|\psi(t)\rangle = -i H |\psi(t)\rangle,$$

where  $H$  is the Hamiltonian, the matrix whose expectation value is the energy, and it is Hermitian,  $H^\dagger = H$ , because energies are real. If  $H$  does not depend on time this is a linear equation with constant coefficients, so an exponential solves it,

$$|\psi(t)\rangle = U(t)|\psi(0)\rangle, \quad U(t) = e^{-iHt} = \sum_{n=0}^{\infty} \frac{(-iHt)^n}{n!}.$$

It is easy to see that  $U^\dagger U = e^{+iH^\dagger t} e^{-iHt} = e^{+iHt} e^{-iHt} = I$ , and the same in the other order. So the Schrodinger equation generates a unitary operation, and the norm of the state is preserved.

## Hamiltonian and unitary operation

To implement the gate operation we need, we have to engineer the Hamiltonian. The Hamiltonian is always drift plus control,  $H(t) = H_0 + H_c(t)$ : what the system does on its own, plus the pulse we add.

For example, the NV centre has its own Hamiltonian, and we can apply a microwave pulse to it, which is effectively an oscillating magnetic field:

$$\begin{aligned} H_0 &= D S_z^2 + \gamma B_{\parallel} S_z, \\ H_c(t) &= \Omega(t) \cos(\omega t + \varphi) S_x. \end{aligned}$$

Here  $D$  is the zero-field splitting,  $\gamma B_{\parallel}$  the Zeeman shift,  $\Omega(t)$  the drive amplitude,  $\omega$  its carrier and  $\varphi$  its phase, which in the rotating frame selects the rotation axis; the sequences later use  $\varphi = \pi/2$ , a  $y$  drive.

Now  $H(t_1)$  and  $H(t_2)$  no longer commute, and the time-dependent Schrodinger equation has no closed form in general; solving it efficiently is a challenge of its own and out of scope for today. Briefly, one can step it forward like the Euler method,

$$|\psi(t + dt)\rangle = |\psi(t)\rangle - i H(t) |\psi(t)\rangle dt,$$

and the product of many such small steps is the unitary  $U$ .

# Hamiltonian on Bloch Sphere


A  $2 \times 2$  Hermitian matrix has four real parameters, so it is always a combination of Pauli matrices,

$$H = c_0 I + \frac{\omega}{2} \hat{n} \cdot \vec{\sigma}, \quad \hat{n} = \frac{\vec{c}}{|\vec{c}|}, \quad \omega = 2|\vec{c}|,$$

with  $\vec{c} = (c_x, c_y, c_z)$  the Pauli coefficients and  $c_0 I$  a global phase. Then

$$e^{-i\frac{\theta}{2}\hat{n}\cdot\vec{\sigma}} = \cos \frac{\theta}{2} I - i \sin \frac{\theta}{2} \hat{n} \cdot \vec{\sigma}, \quad \theta = \omega t,$$

**rotates the Bloch vector about  $\hat{n}$  by  $\theta$ :** the Pauli coefficients give the axis, their magnitude times the duration gives the angle. A resonant pulse  $H = \frac{\Omega}{2} Y$  turns the state about  $y$  by  $\Omega t$ ; free precession  $H = \frac{\delta}{2} Z$  about  $z$  by  $\delta t$ .

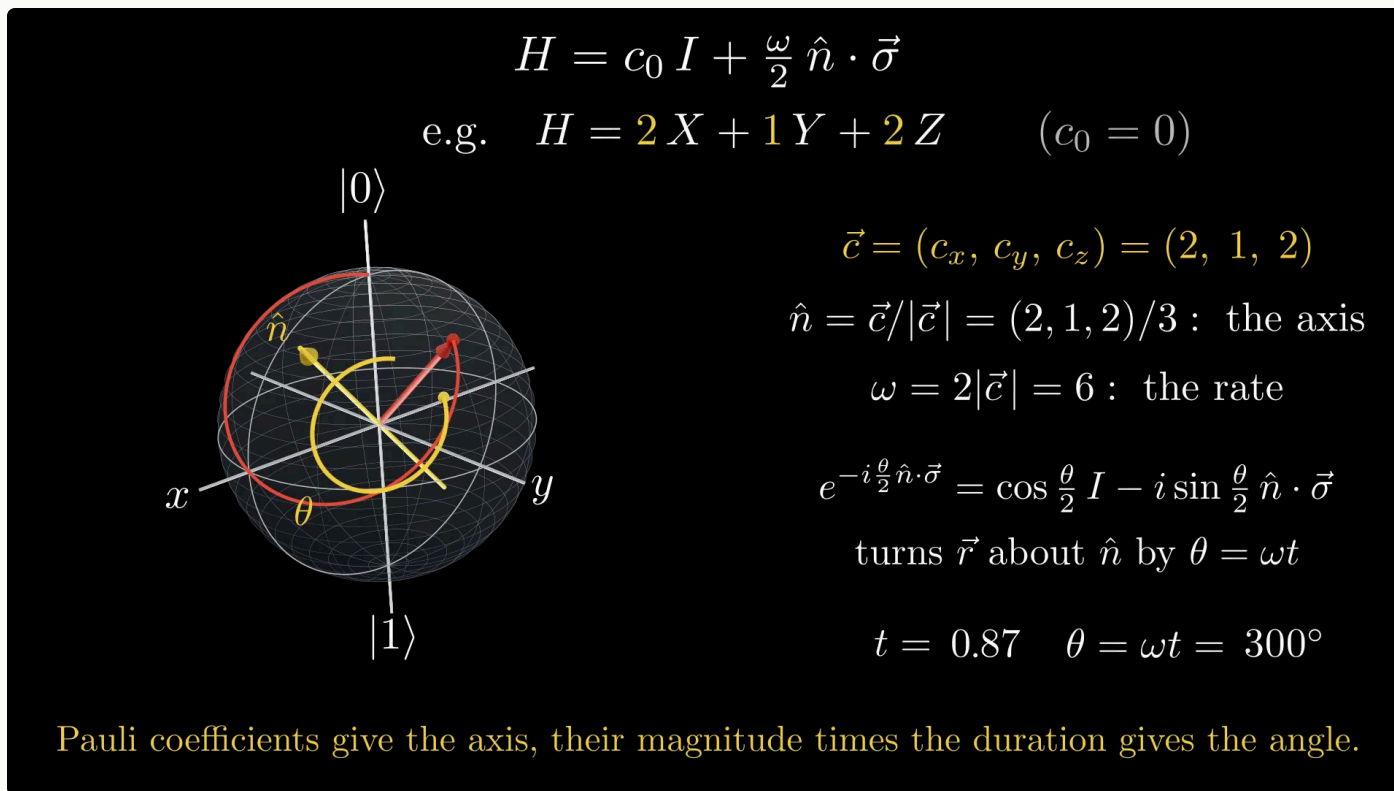


## INTRO Examples

So, prepare  $|0\rangle$ , apply a pulse  $U$ , and read  $P(0)$ .

Take one spin-1 transition as the qubit. In the rotating frame, after the rotating-wave approximation and with the drive phase along  $y$ , the Hamiltonian is constant:

$$H = \frac{\delta}{2} Z + \frac{\Omega}{2} Y.$$

The detuning  $\delta$  is where the field enters and  $\Omega = \gamma B_1$  is the drive strength.

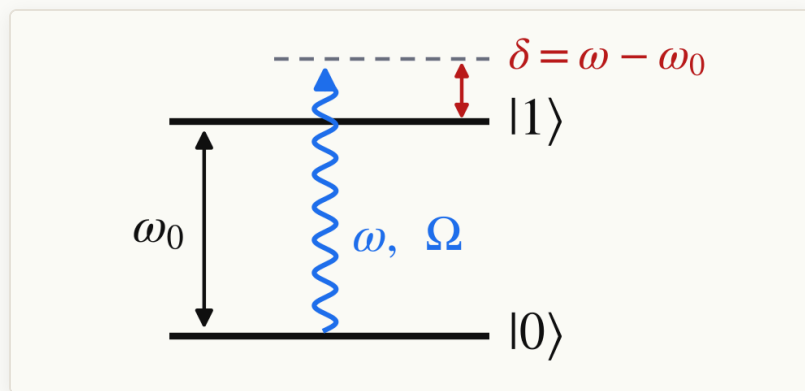

The exponent is written in the Pauli basis, so the time evolution is a rotation and both of its parts are read off the coefficients:

$$U = e^{-iHt} = \exp\left(-\frac{i}{2}\Omega_R t \hat{n} \cdot \vec{\sigma}\right), \quad \hat{n} = \frac{(0, \Omega, \delta)}{\Omega_R}.$$

The **axis** is the coefficient vector, the **angle** is its length  $\Omega_R = \sqrt{\Omega^2 + \delta^2}$  times the time. Drive off means precession about  $z$ .



# Rabi: calibrating the rotation angle

Set the pulse on resonance,  $\delta = 0$ , so

$H = \frac{\Omega}{2}Y$  and the pulse is a rotation about  $y$  by the angle  $\Omega t$ :

$$P(0) = |\langle 0 | e^{-i\Omega Y t/2} | 0 \rangle|^2 = \cos^2\left(\frac{\Omega t}{2}\right).$$

Sweep the pulse length and the fluorescence oscillates at  $\Omega$ .

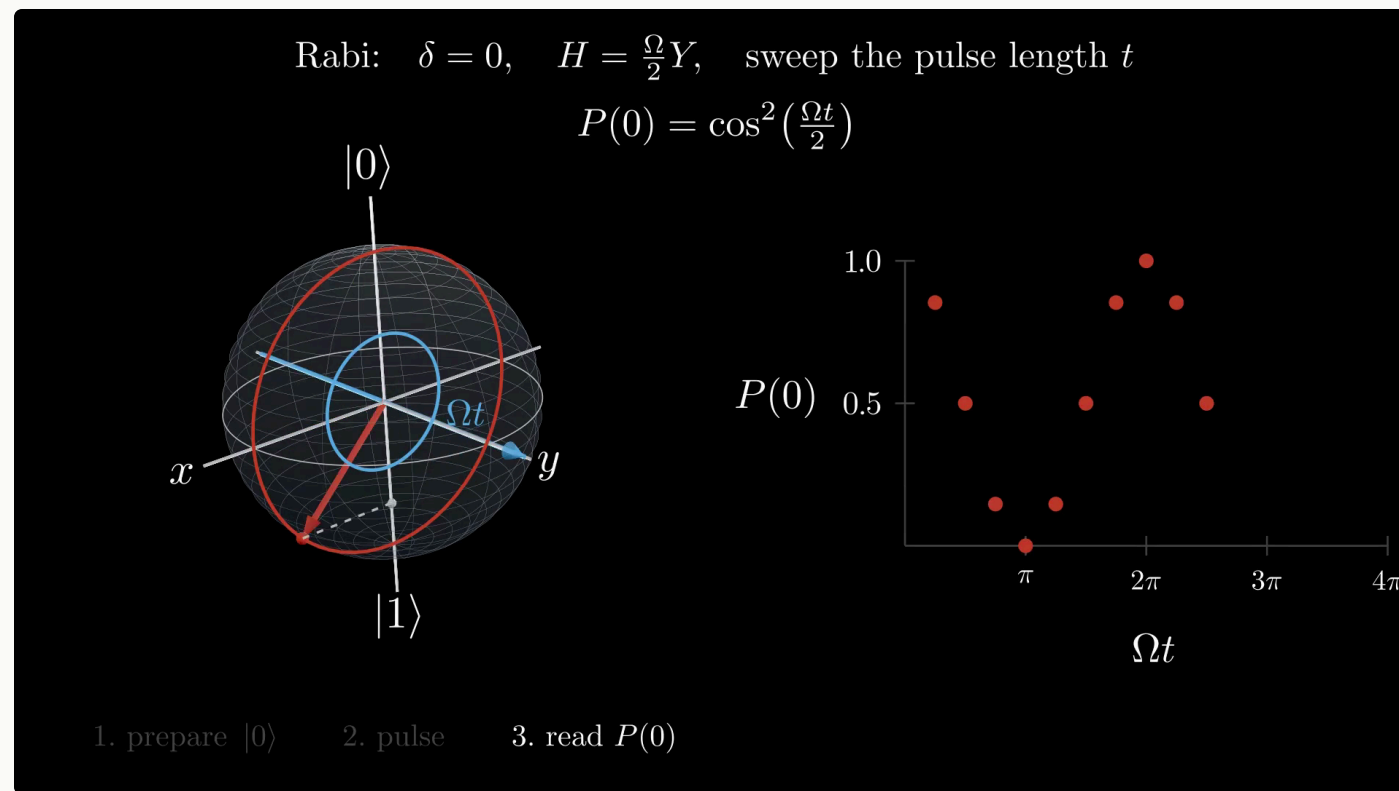
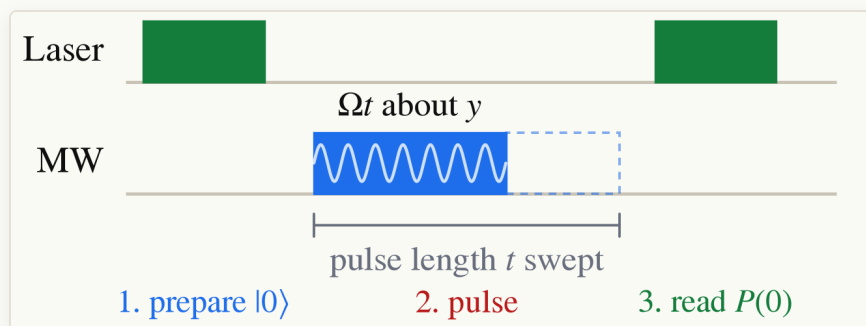


# Ramsey

A  $\pi/2$  pulse about the  $y$  axis gives the  $|+\rangle$  state. Then, with the drive off,  $\Omega = 0$ , only  $H = \frac{\delta}{2}Z$  acts, so the state precesses about  $z$  by  $\delta\tau$ . Finally apply a second  $\pi/2$  pulse, about  $-y$ ; the resulting population depends on that phase:

$$P(0) = \frac{1}{2} [1 + \cos(\delta\tau)].$$



The frequency is the detuning itself. A field shift moves  $\delta$ , and the fringe counts it.


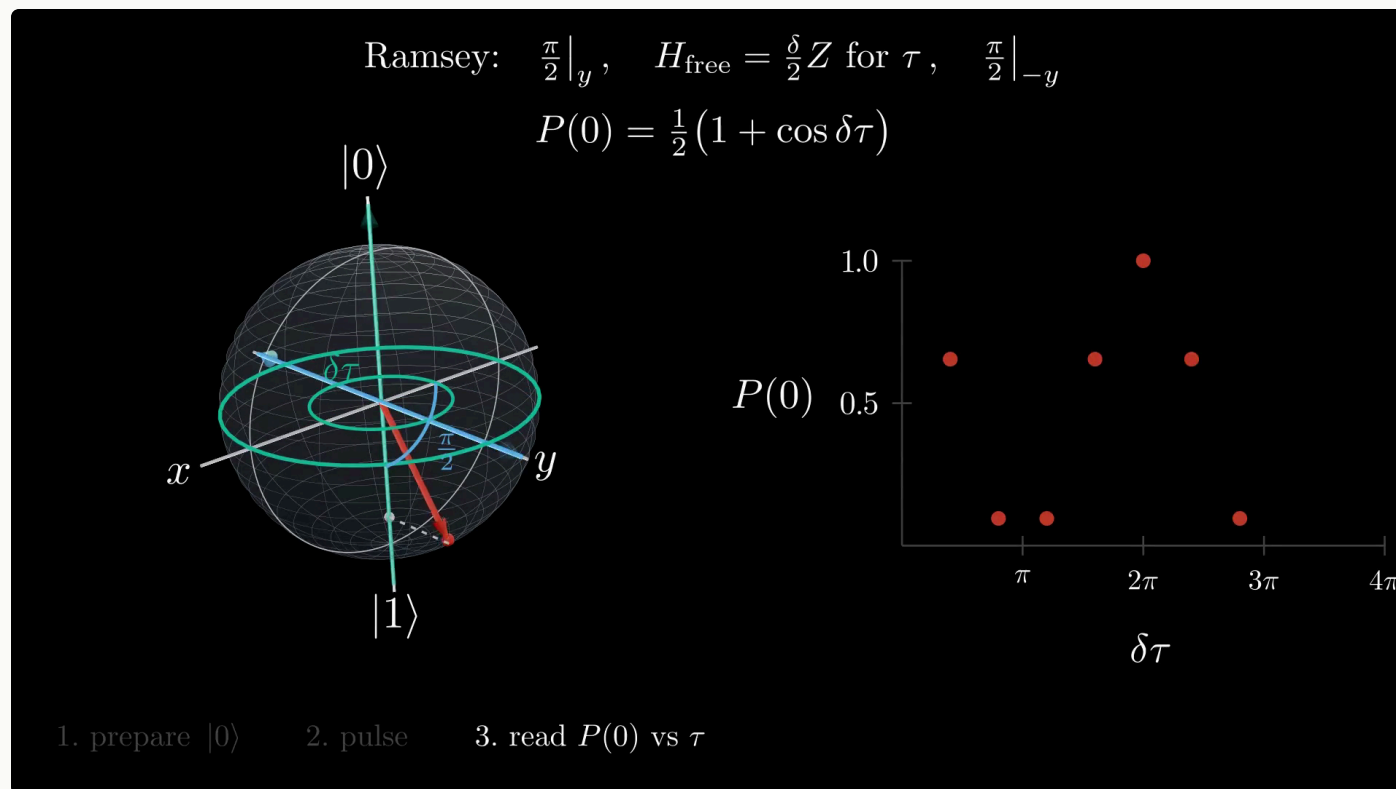
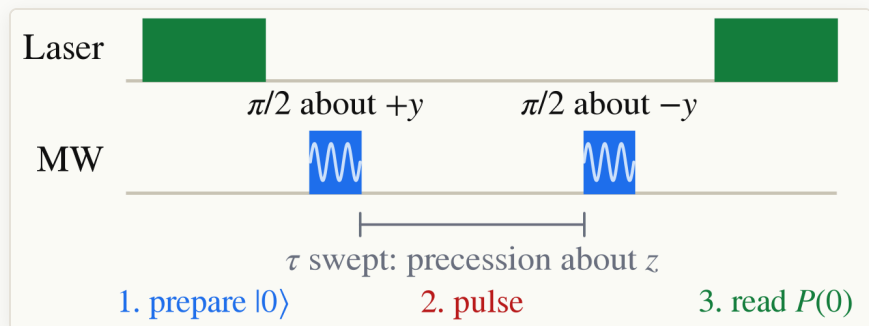


Fix the pulse at the calibrated length  $t = \pi/\Omega$  and sweep the carrier instead. So on resonance,  $\delta = 0$ , we have  $\Omega t = \pi$ , a  $\pi$  pulse. Off resonance, the rotation axis  $\hat{n} = (0, \Omega, \delta)/\Omega_R$  tilts toward  $z$  and the rotation is faster:

$$P(0) = 1 - \frac{\Omega^2}{\Omega^2 + \delta^2} \sin^2\left(\frac{\Omega_R t}{2}\right).$$

The resulting signal is approximately a sinc function.

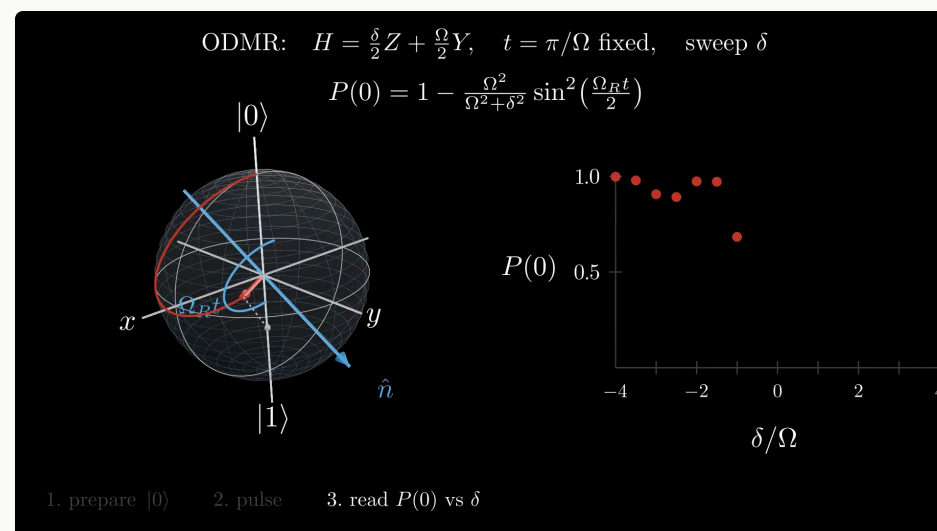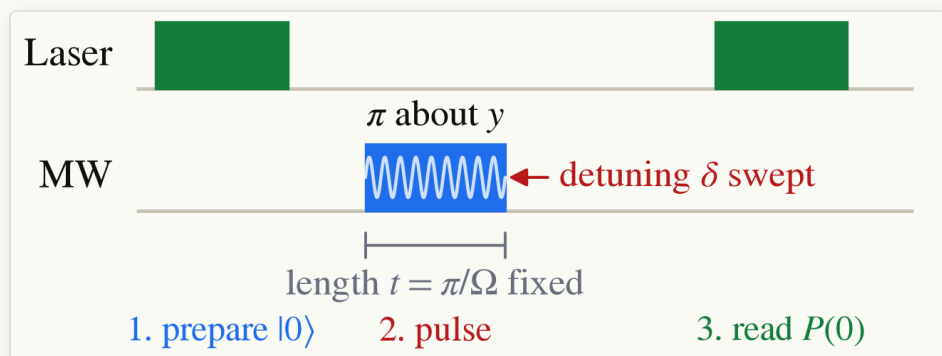

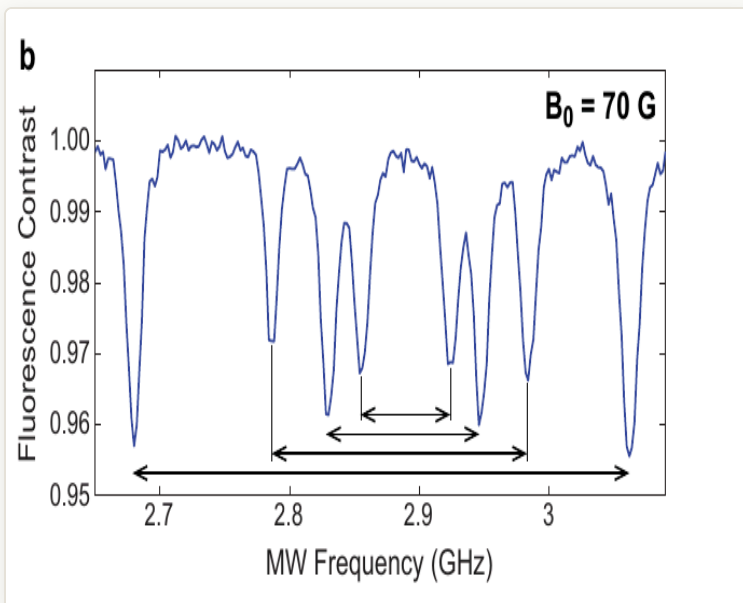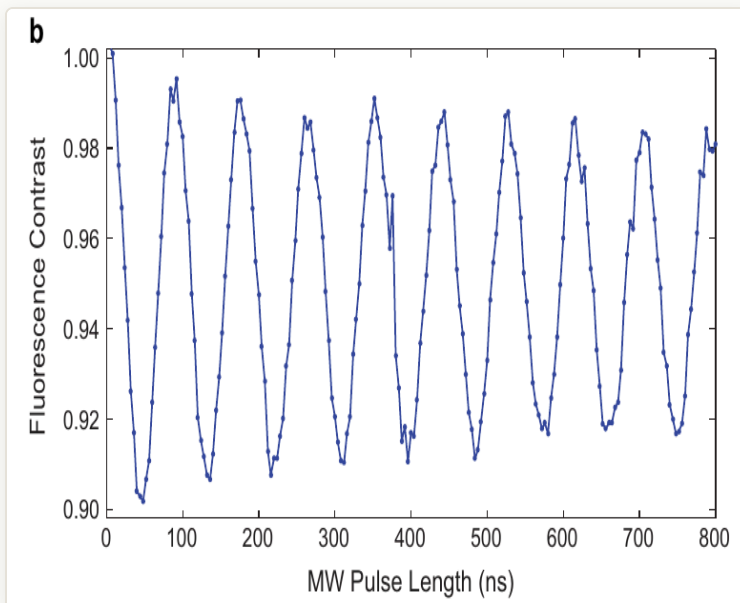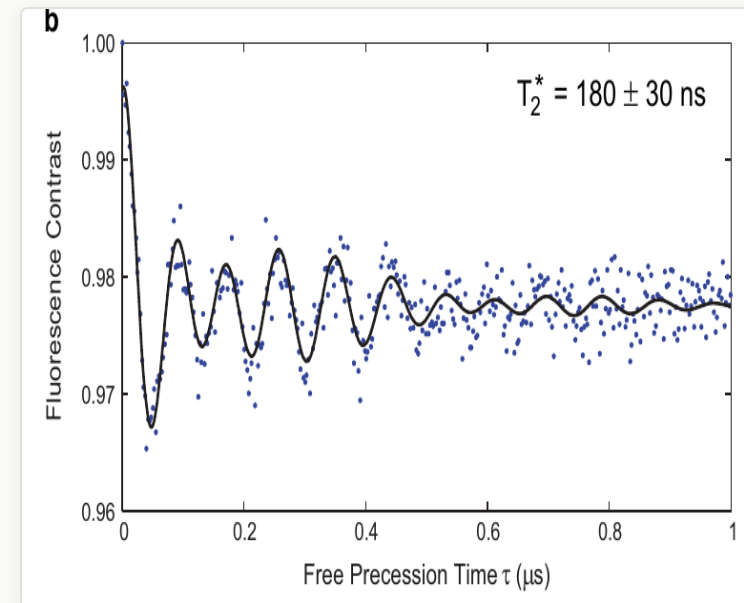*ODMR**Rabi**Ramsey*

Measured on an NV ensemble (Pham thesis, Ch. 1, Figs. 1.4, 1.5, 1.7). Two things remain to discuss. One is how the response is lost as time goes on, and the other is the source of the response.


# Entanglement

We start from a product state,  $|\psi_0\rangle = |0\rangle|0\rangle$ . A Hadamard acts on the first qubit and leaves the second one alone,

$$(H \otimes I) |00\rangle = \frac{1}{\sqrt{2}} (|0\rangle + |1\rangle)|0\rangle.$$

The CNOT is **conditional**: it flips the second qubit only when the first one is  $|1\rangle$ . It gives the maximally entangled Bell state

$$|\Phi^+\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle).$$

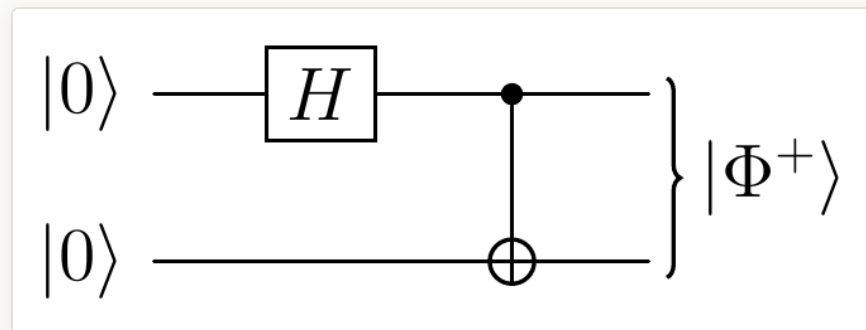

Any product state can be written as  $(a|0\rangle + b|1\rangle) \otimes (c|0\rangle + d|1\rangle)$ , which would need  $ad = bc = 0$  together with  $ac = bd \neq 0$ . No product of two kets reproduces the Bell state.

## INTRO Mixed state

Suppose our interest is the first qubit. Every measurement on it is  $\text{Tr}(\rho_1 O)$ , with the other qubit traced out,

$$\rho_1 = \text{Tr}_2 |\Phi^+\rangle\langle\Phi^+| = \frac{1}{2} (|0\rangle\langle 0| + |1\rangle\langle 1|) = \frac{1}{2} I.$$

This has rank two, while a ket gives

$\rho = |\psi\rangle\langle\psi|$  of rank one: no ket describes the first qubit alone, so we call it **mixed**. Every

Pauli matrix is traceless, so

$\langle\sigma_i\rangle = \frac{1}{2} \text{Tr} \sigma_i = 0$  and the arrow sits at the centre,  $|\vec{r}_1| = 0$ . The length is the purity,  $\text{Tr} \rho^2 = \frac{1}{2} (1 + |\vec{r}|^2)$ : 1 on the surface, 1/2 at the centre.

**Entanglement with the outside looks like mixing inside our qubit: the more entangled, the shorter the Bloch vector.**

Two qubits: an interaction builds the Bell state

$$|\psi_0\rangle = |0\rangle |0\rangle$$

$$(H \otimes I) |\psi_0\rangle = \frac{1}{\sqrt{2}} (|0\rangle + |1\rangle) |0\rangle$$


$$\text{CNOT} : |\Phi^+\rangle = \frac{1}{\sqrt{2}} (|00\rangle + |11\rangle)$$

$$\rho_1 = \text{Tr}_2 |\Phi^+\rangle\langle\Phi^+| = \frac{1}{2} (|0\rangle\langle 0| + |1\rangle\langle 1|) = \frac{1}{2} I$$

$$\langle\sigma_i\rangle = \text{Tr}(\frac{1}{2} I \sigma_i) = \frac{1}{2} \text{Tr} \sigma_i = 0 \Rightarrow |\vec{r}_1| = 0$$

$$\langle X \rangle = 0.00 \quad \langle Y \rangle = 0.00 \quad \langle Z \rangle = 0.00$$

$$|\vec{r}_1| = \sqrt{\langle X \rangle^2 + \langle Y \rangle^2 + \langle Z \rangle^2} = 0.00$$

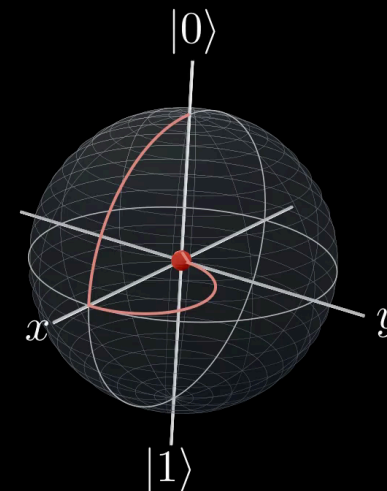

# Interaction is the source of entanglement.

The CNOT came from an interaction, and in the NV centre the hyperfine coupling to a nearby nucleus has the same conditional form, with  $\hat{H}_0 = \omega_L \hat{I}_z$  and  $\hat{H}_1 = \hat{H}_0 + A\hat{I}_z + B\hat{I}_x$ :

$$\begin{aligned}\hat{H} &= |0\rangle\langle 0| \otimes \hat{H}_0 + |1\rangle\langle 1| \otimes \hat{H}_1, \\ |+\rangle|n\rangle &\rightarrow \frac{1}{\sqrt{2}} (|0\rangle U_0 |n\rangle + |1\rangle U_1 |n\rangle), \\ |\vec{r}_e| &= |\langle n| U_1^\dagger U_0 |n\rangle|.\end{aligned}$$

The nucleus precesses about a different axis in each branch, since  $H_0 \neq H_1$ , so the electron's Bloch radius is the overlap of the two branches. There are many independent nuclei, so multiply their overlaps, giving  $M(t) \simeq e^{-(t/T_2^*)^2}$ .

Three names for the same shrinking, NV at room temperature.

- **$T_2^*$ , free precession.** The Ramsey decay set by the static spread of local fields,  $\approx 180$  ns for one NV and  $\approx 500$  ns for an ensemble.
- **$T_2$ , spin echo.** A  $\pi$  pulse refocuses whatever was static, so only the motion of the bath survives, giving  $397 \pm 5$   $\mu$ s.
- **$T_1$ , relaxation.** Phonons flip the spin and the populations decay, typically  $\sim 6$  ms.

Natural-abundance  $^{13}\text{C}$  caps  $T_2^*$  near 1  $\mu$ s; 99.7%  $^{12}\text{C}$  material exceeds 10  $\mu$ s (Pham thesis, Ch. 1; conditional form from Taminiau et al., 2012).


## The decay has a name: $T_2^*$

The shrinking radius of the last slide is exactly what a Ramsey experiment measures. The free-precession signal fades within a time  $T_2^*$ , set by the static spread of local fields: each nucleus shifts the electron's precession frequency by its own hyperfine coupling, and the many shifted precessions dephase when we add them up,

$$M(t) \simeq e^{-(t/T_2^*)^2}.$$

At room temperature  $T_2^* \approx 180$  ns for a single NV and  $\approx 500$  ns for an ensemble, capped by the 1.1% natural abundance of  $^{13}\text{C}$  (Pham thesis, Ch. 1).

(a)

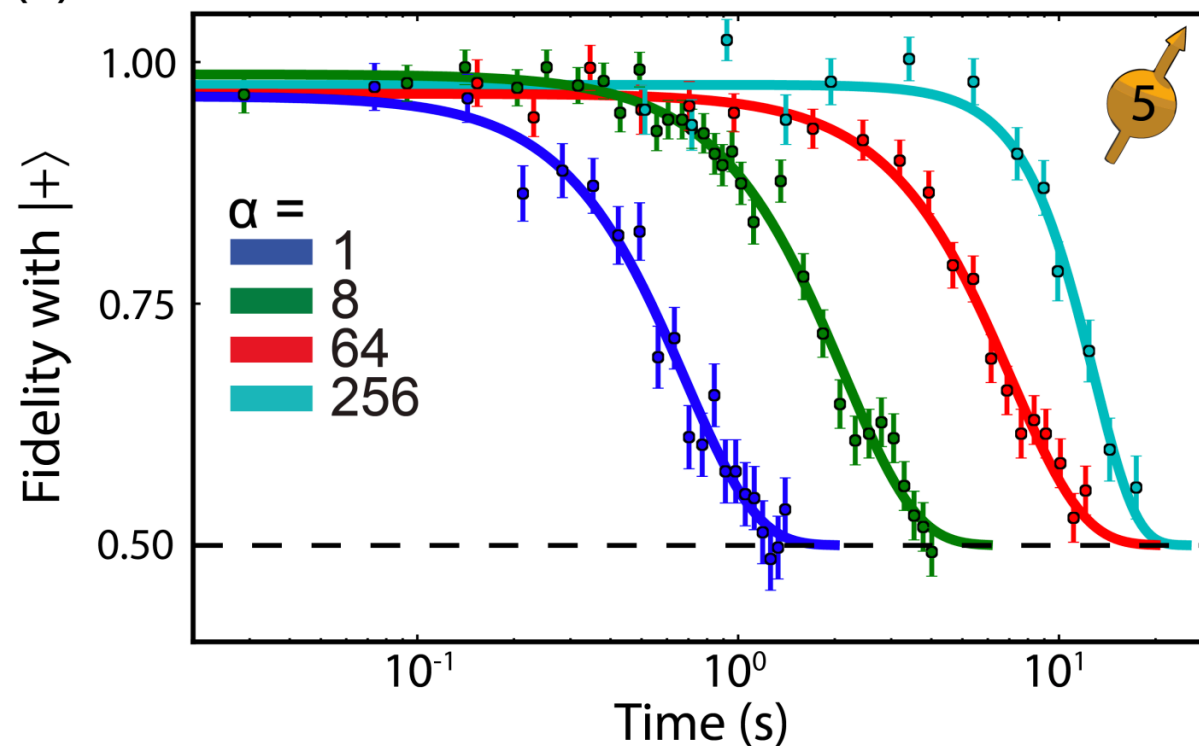

# Dynamical decoupling: make the conditional operation unconditional

$$H = |0\rangle\langle 0| \otimes H_0 + |1\rangle\langle 1| \otimes H_1 \quad \Longrightarrow \quad U(t) = e^{-iHt} = |0\rangle\langle 0| \otimes U_0(t) + |1\rangle\langle 1| \otimes U_1(t).$$

For one  $^{13}\text{C}$  near an NV centre,


$$H_0 = \omega_L I_z \text{ and}$$

$$H_1 = (\omega_L + A_{\parallel}) I_z + A_{\perp} I_x. \text{ A } \pi \text{ pulse swaps the two blocks, so the}$$

CPMG unit  $\tau - \pi - 2\tau - \pi - \tau$  interleaves them:

$$V_0 = U_0 U_1 U_1 U_0, \quad V_1 = U_1 U_0 U_0 U_1.$$

Both are unitary, so the only question is whether the two rotations agree. At a generic  $\tau$  they do:  $V_0 = V_1$ , the electron sees no difference between its branches, and  $M = 1$ . Only special spacings break that, as the next slide shows.

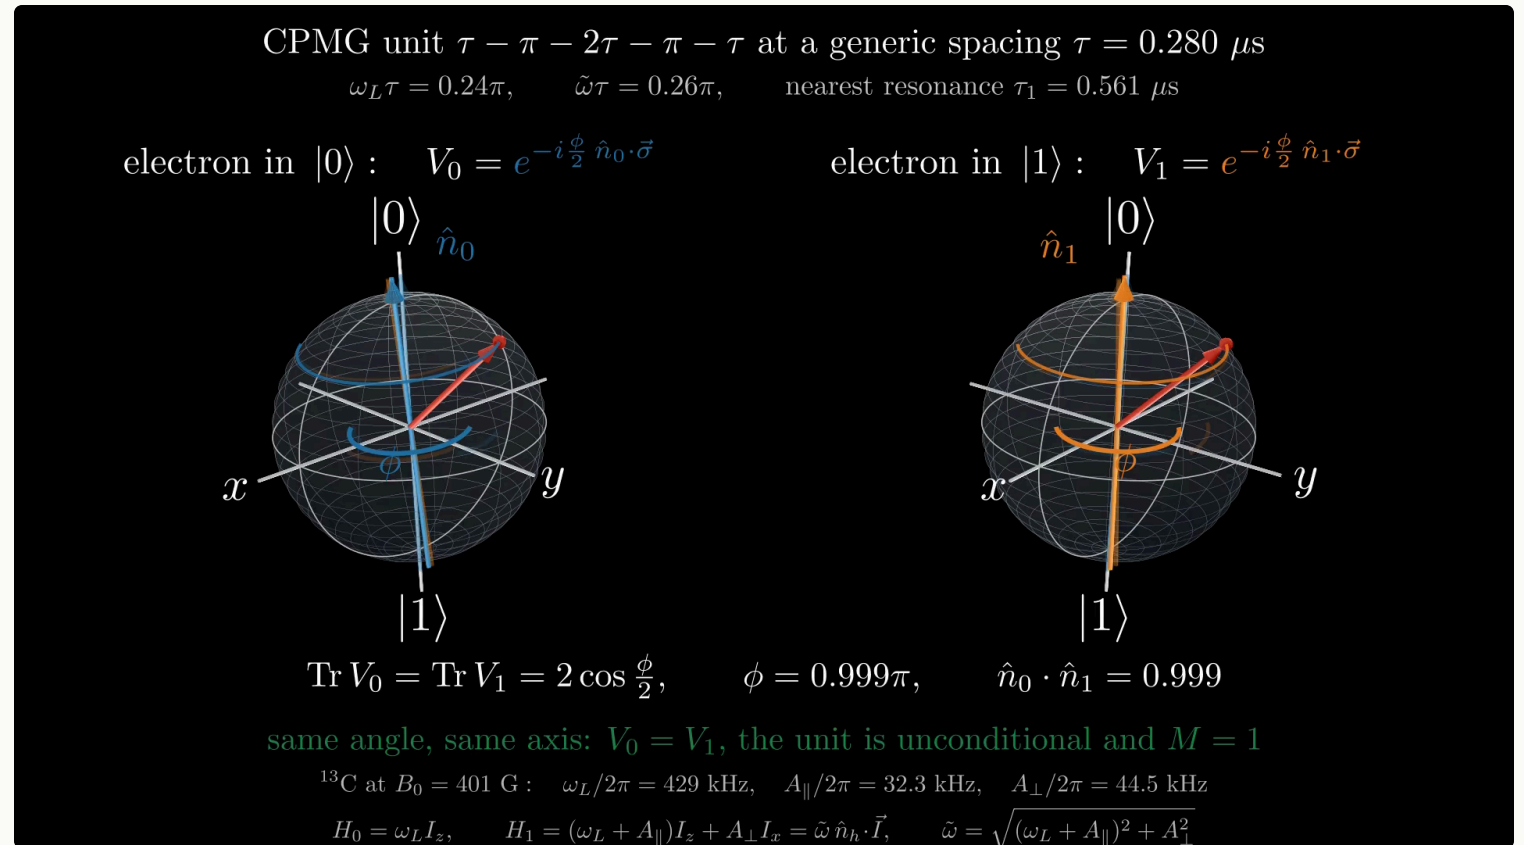


# The read-out is one number: how well the two branches agree

Prepare the electron in  $|+\rangle$ , leave the nucleus unpolarised,  $\rho_n = I/2$ , and run  $N$  units. Tracing the nucleus out leaves the electron coherence  $\langle 0|\rho_e|1\rangle = \frac{1}{2}M$ , so a read-out along  $x$  returns

$$P_x = \frac{1}{2} + \text{Re} \langle 0|\rho_e|1\rangle = \frac{1+M}{2}, \quad M = \frac{1}{2} \text{Tr} (V_0^N V_1^{\dagger N}), \quad |M| \leq 1.$$

That  $\frac{1}{2}$  is the trace normalisation of the unpolarised nucleus, so  $M$  is an average of  $V_1^{\dagger N} V_0^N$ . If the operation is **unconditional**,  $V_0 = V_1$ , then  $M = 1$  exactly and no signal is lost.

The electron Bloch vector has length  $|M|$  and purity  $\text{Tr} \rho_e^2 = \frac{1}{2}(1 + |M|^2)$ , so staying unconditional keeps the state pure. More pulses therefore buy a longer coherence time  $T_2^{(N)}$ .

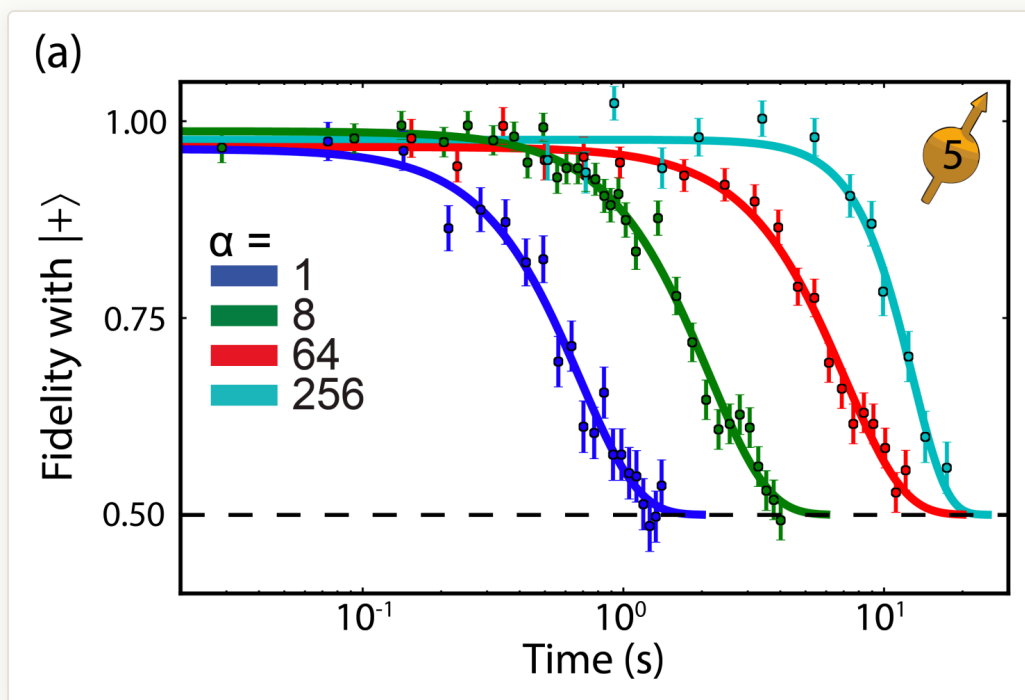


# Same angle, different axis: the dips that name one nucleus

With  $A = U_0(\tau)$  and  $B = U_1(\tau)$ , cyclicity of the trace gives  $\text{Tr}(ABBA) = \text{Tr}(A^2B^2)$ , that is  $\text{Tr } V_0 = \text{Tr } V_1$ , so both branches turn by the **same angle**  $\phi$  and only the axes  $\hat{n}_0, \hat{n}_1$  can differ:

$$M = 1 - (1 - \hat{n}_0 \cdot \hat{n}_1) \sin^2 \frac{N\phi}{2}.$$

Each nucleus has its own  $A_{\parallel}$ , hence its own comb of spacings where the axes anti-align. That comb is a fingerprint: it names the nucleus.

$$\tau_k = \frac{(2k-1)\pi}{2\omega_L + A_{\parallel}}.$$

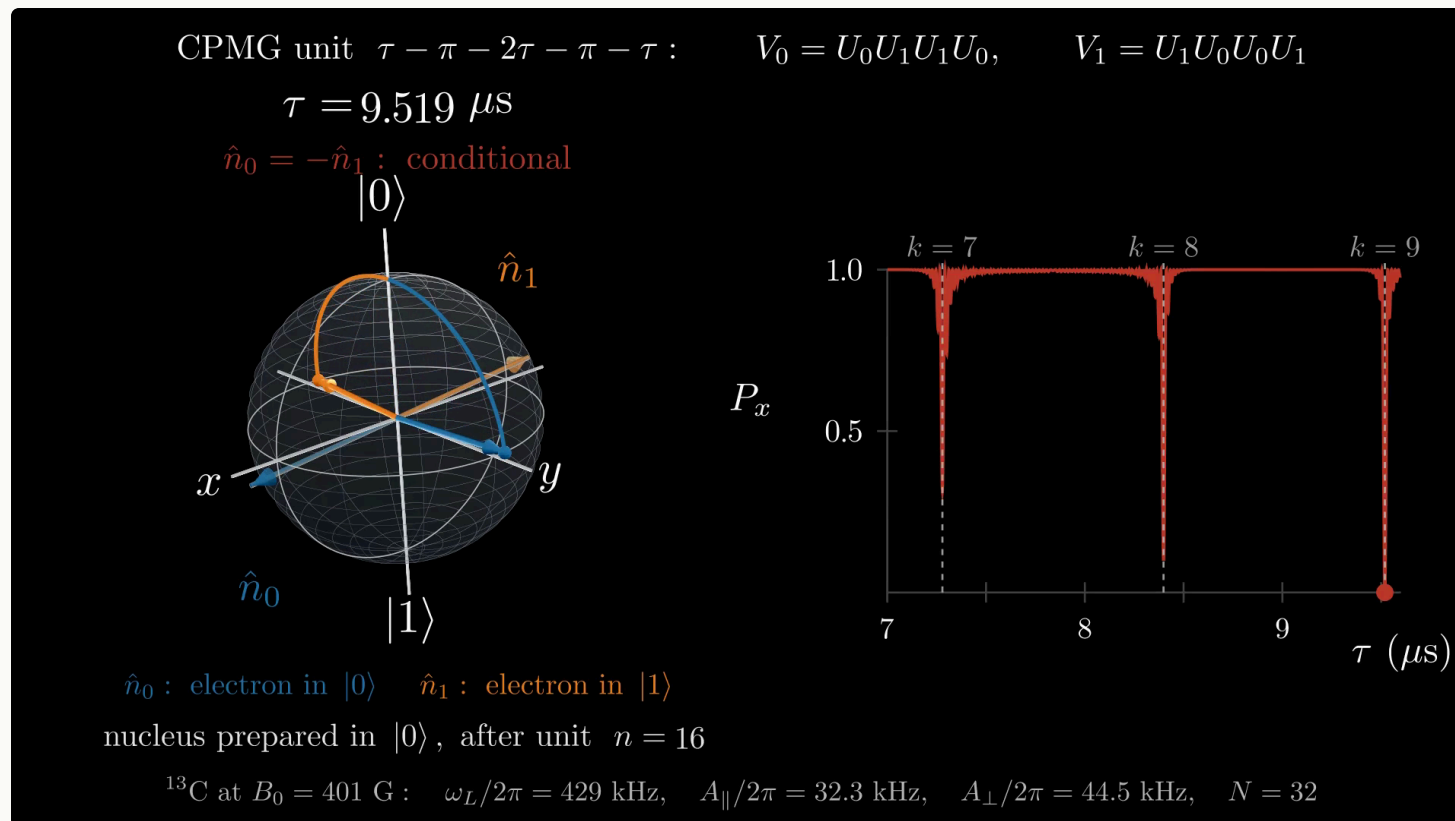

# What to carry out of chapter 1

---


- **An experiment is three steps.** We prepare a known state, apply a unitary, and measure.
- **The unitary is the part we design on purpose.**
- **The response is not the sequence alone.** It also carries the configuration of the system.

The measured curve is the designed response combined with the structure of the system, and that combination is a convolution.


02

## Convolution Operation


This chapter follows Grant Sanderson's *But what is a convolution?* on the 3Blue1Brown channel. The dice and polynomial clips are cut from his published source code, which is MIT licensed. The Bloch sphere and QSP clips of the other chapters were made with the community edition of Manim, the animation engine written for that channel.

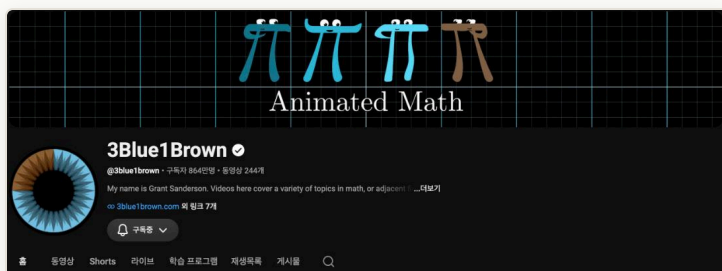

*The 3Blue1Brown channel,  
youtube.com/@3blue1brown.*

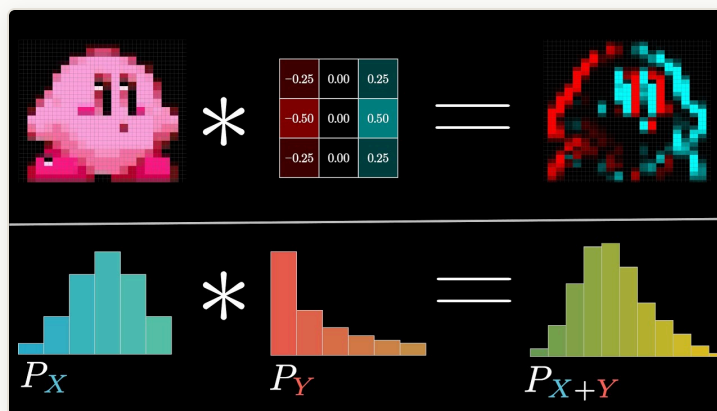

*"But what is a convolution?" (2022),  
youtu.be/KuXjwB4LzSA.*

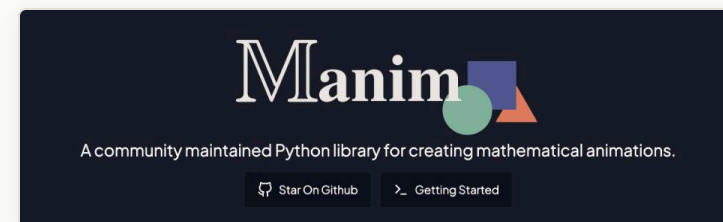


*Manim Community Edition, manim.community.*

# The response is already convolved

The **sources** are the spins in the sample. They respond to their own **signal** and to our input, the **processing** we chose, and we call the output the **response**, the spectrum for example. I would like to argue that the response is already convolved.

$$S_{\text{meas}}(\omega) = \int d\omega' S(\omega') K(\omega - \omega') \equiv [S * K](\omega).$$

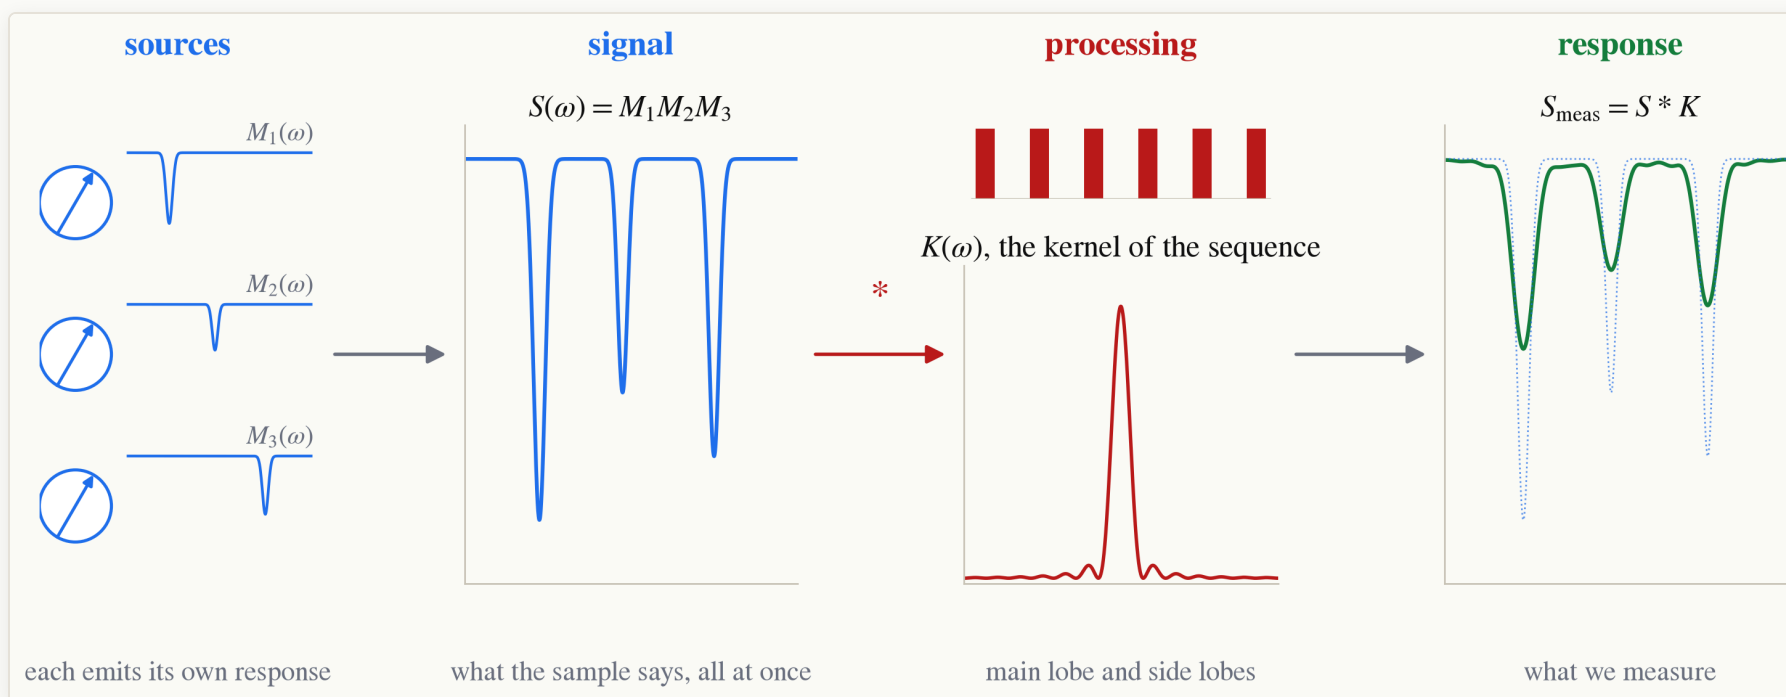

## Two dice

Consider two independent dice  $X$  and  $Y$ , and ask for the probability of their sum,  $Z = X + Y$ . The natural picture is a table of 36 cells, one per pair  $(X, Y)$ , each with weight  $\frac{1}{36}$ .

The event  $Z = n$  happens whenever  $X = k$  **and**  $Y = n - k$ , for any  $k$ . So the cells with a fixed sum lie on one anti-diagonal of the table:

$$P(Z = n) = \sum_k P(X = k) P(Y = n - k).$$

For example, the anti-diagonal of  $n = 7$  holds six cells, so  $P(Z = 7) = 6/36$ , the largest of all.

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |

$$P(\text{blue} + \text{red} = 7) = \frac{6}{36}$$

$$6^2 = 36 \text{ Combinations}$$


## INTRO Flip and slide

Write the two distributions as lists. Reverse one of them, slide it along the other, and at each displacement multiply the entries that face each other and add the products. That single number is  $P(Z = n)$  for that displacement.

$$(f * g)[n] = \sum_k f[k] g[n - k].$$

The minus sign is the **flip**, and  $n$  is the **slide**. The only rule is that the two indices add up to the output index,  $k + (n - k) = n$ .

Two lists of length 6 overlap at 11 displacements, the sums 2 to 12.

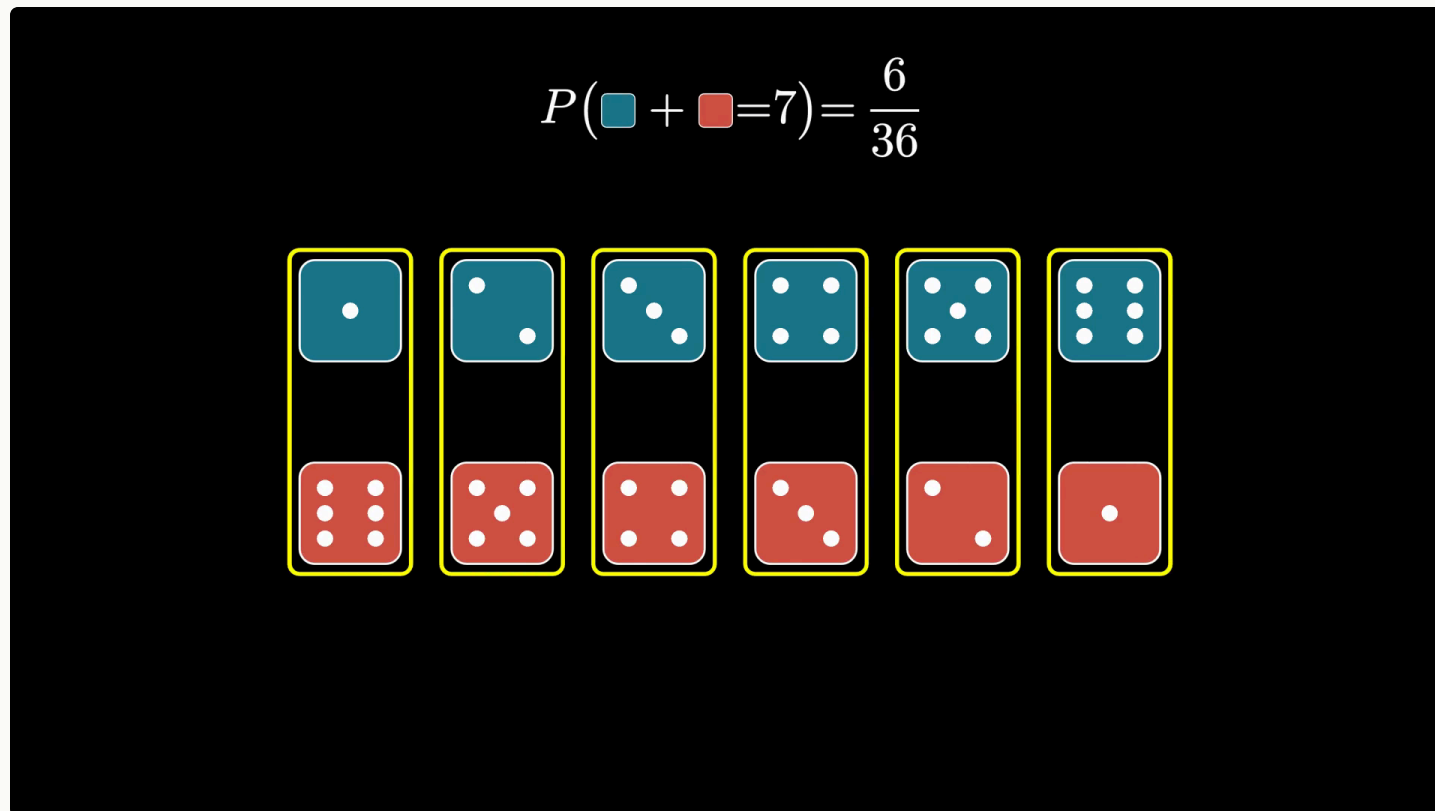

# Uneven dice


Now load the dice, so the faces are no longer equally likely. The same anti-diagonal is summed, and each cell carries the product of two unequal weights,

$$P(Z = n) = \sum_k P(X = k) P(Y = n - k) = [P_X * P_Y](n).$$

For example, the clip reads off

$$P(Z = 4) = 0.16 \cdot 0.24 + 0.21 \cdot 0.22 + 0.17 \cdot 0.11.$$

Adding two independent random variables is a convolution of their distributions.


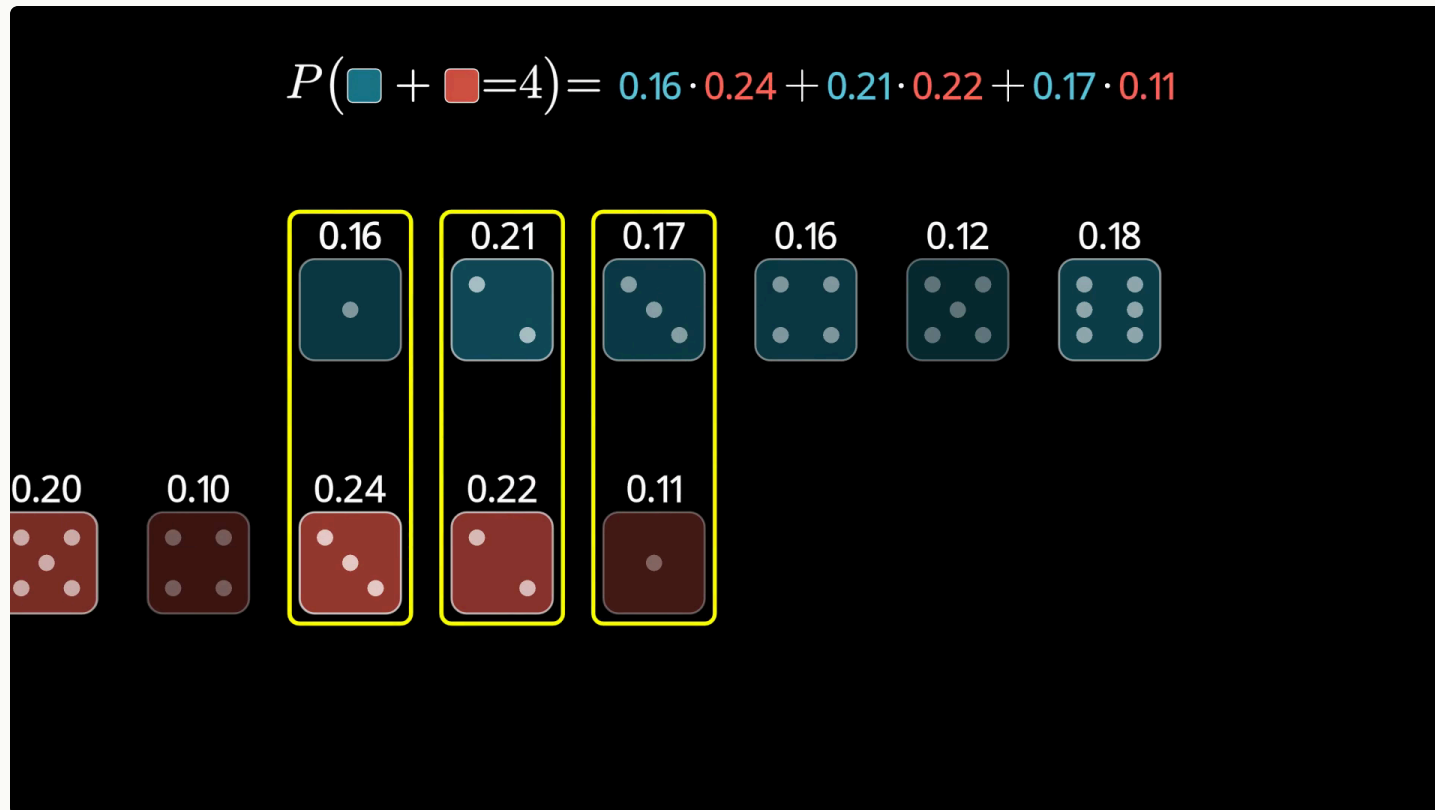


# Convolution of $(a_i)$ and $(b_i)$

Replace the weights by symbols,  $P_X(i) = a_i$  and  $P_Y(j) = b_j$ . The sliding window collects the pairs whose indices add up to  $n$ , and that is the whole definition:

$$(a * b)_n = \sum_{i+j=n} a_i b_j = \sum_i a_i b_{n-i}.$$

Up to now we have only added two independent random variables. Convolution is what that addition looks like in the distributions.

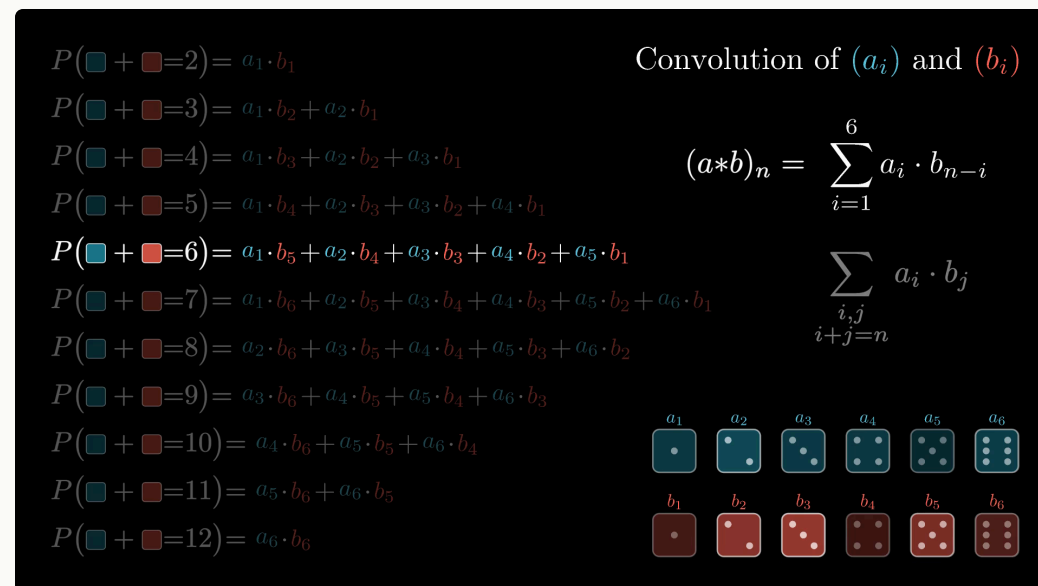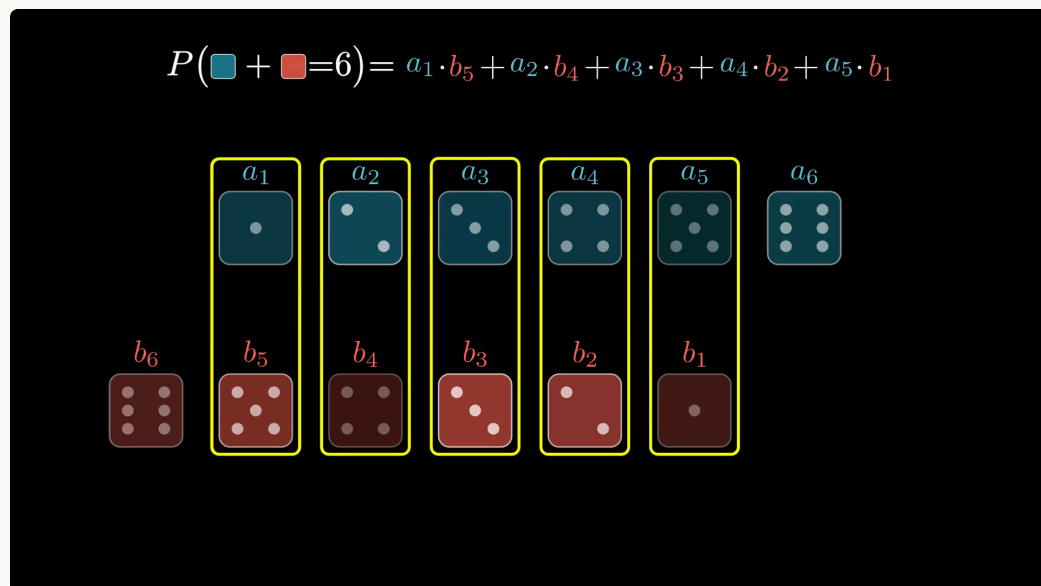

Take two plain lists,  $(1, 2, 3)$  and  $(4, 5, 6)$ , with no probabilities attached. Reverse one, slide it, multiply what faces each other, and add:

$$(1, 2, 3) * (4, 5, 6) = (4, 13, 28, 27, 18).$$

For example, at the displacement  $n = 3$  the window holds  $2 \cdot 6 + 3 \cdot 5 = 27$ . Two lists of length 3 overlap at 5 displacements, so the output has length 5.

This is the discrete definition.

$$(1, 2, 3) * (4, 5, 6) = \overset{c_0}{(4, \overset{c_1}{13, \overset{c_2}{28, \quad}})}$$

$$1 \cdot 6 + 2 \cdot 5 + 3 \cdot 4$$

| $a_0$ | $a_1$ | $a_2$ |
|-------|-------|-------|
| 1     | 2     | 3     |
|       |       |       |
| 6     | 5     | 4     |
| $b_2$ | $b_1$ | $b_0$ |


# Continuous case

For two curves the definition reads the same, with the sum replaced by an integral:

$$(f * g)(x) = \int f(y) g(x - y) dy.$$

So hold  $f$  still, reverse  $g$ , slide it by  $x$ , multiply point by point, and add up over a continuum.

If  $f$  and  $g$  are two probability densities, then  $f * g$  is the density of their sum.

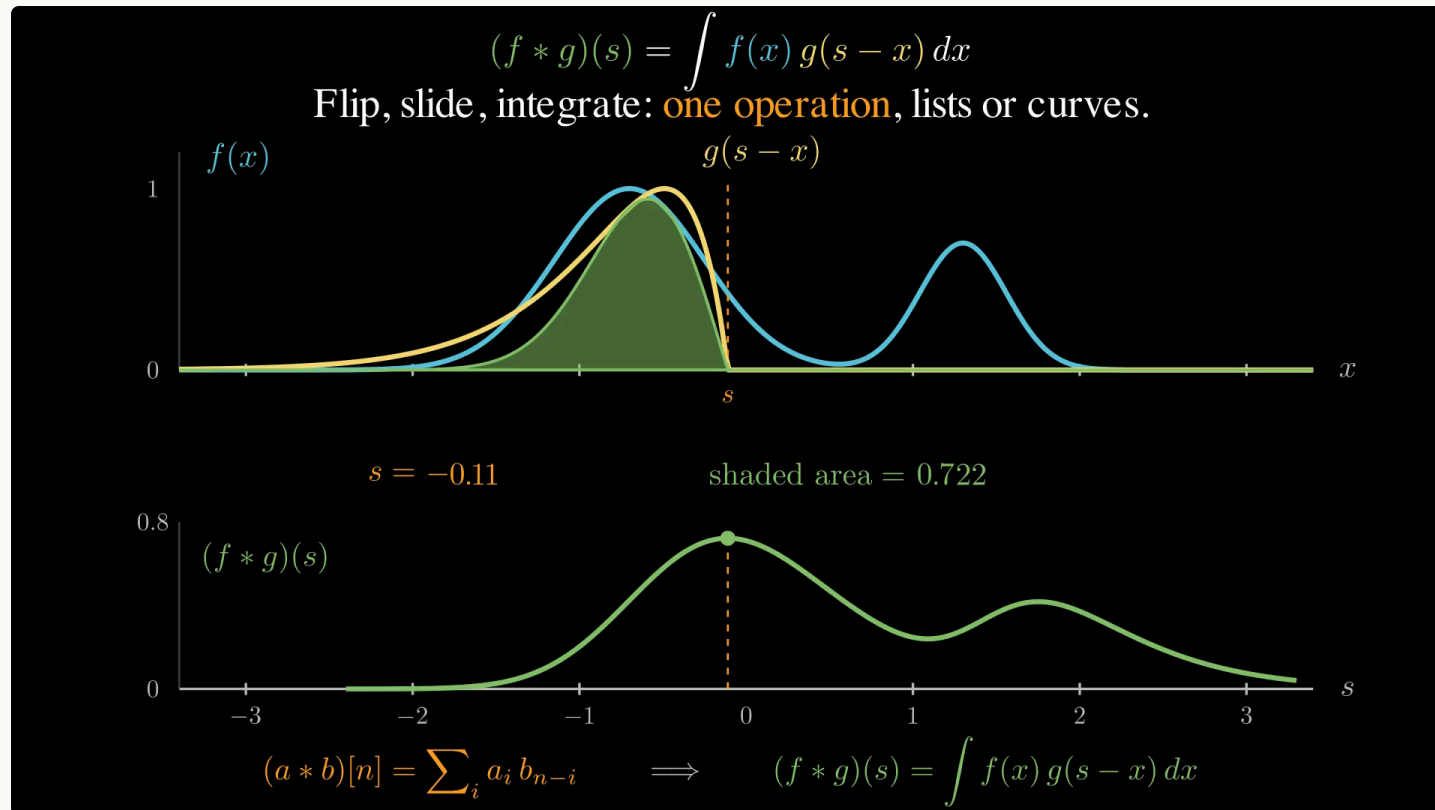

# A product of polynomials is a convolution of coefficients

Use the same numbers as coefficients and multiply two polynomials, an ordinary **pointwise** product of two functions of  $x$ :

$$\begin{aligned} (1 + 2x + 3x^2)(4 + 5x + 6x^2) \\ = 4 + 13x + 28x^2 + 27x^3 + 18x^4. \end{aligned}$$

The coefficient of  $x^n$  collects every pair of powers that adds up to  $n$ , which leads to the same result as the convolution:

$$c_n = \sum_{i+j=n} a_i b_j = (a * b)[n].$$

$$(1, 2, 3) * (4, 5, 6) = (4, 13, 28, 27, 18)$$

$$(1 + 2x + 3x^2)(4 + 5x + 6x^2) = 4 + 13x + 28x^2 + 27x^3 + 18x^4$$

|        | 1      | $2x$    | $3x^2$  |
|--------|--------|---------|---------|
| 4      | 4      | $8x$    | $12x^2$ |
| $5x$   | $5x$   | $10x^2$ | $15x^3$ |
| $6x^2$ | $6x^2$ | $12x^3$ | $18x^4$ |

# Convolution theorem

$$\widehat{f * g} = \hat{f} \cdot \hat{g} \quad \Longleftrightarrow \quad \widehat{f \cdot g} = \hat{f} * \hat{g}.$$

A convolution treats all positions alike, so it commutes with shifts, and the complex exponentials are its eigenfunctions. Convolve one with  $g$  and it comes back unchanged, times a number:


$$(e^{i\omega \cdot} * g)(x) = \int e^{i\omega(x-y)} g(y) dy = \hat{g}(\omega) e^{i\omega x}.$$

The eigenvalue is  $\hat{g}(\omega)$ , one number per frequency, so convolving with  $g$  is diagonal in that basis, and diagonal means multiply entry by entry.

Read the other way, a product of two records in time is a convolution of their spectra.

For example, a trigonometric polynomial

$F(\theta) = \sum_n c_n e^{in\theta}$  is the polynomial slide with  $x = e^{i\theta}$ . So multiplying two such responses **convolves their coefficient lists**, and this is our case.

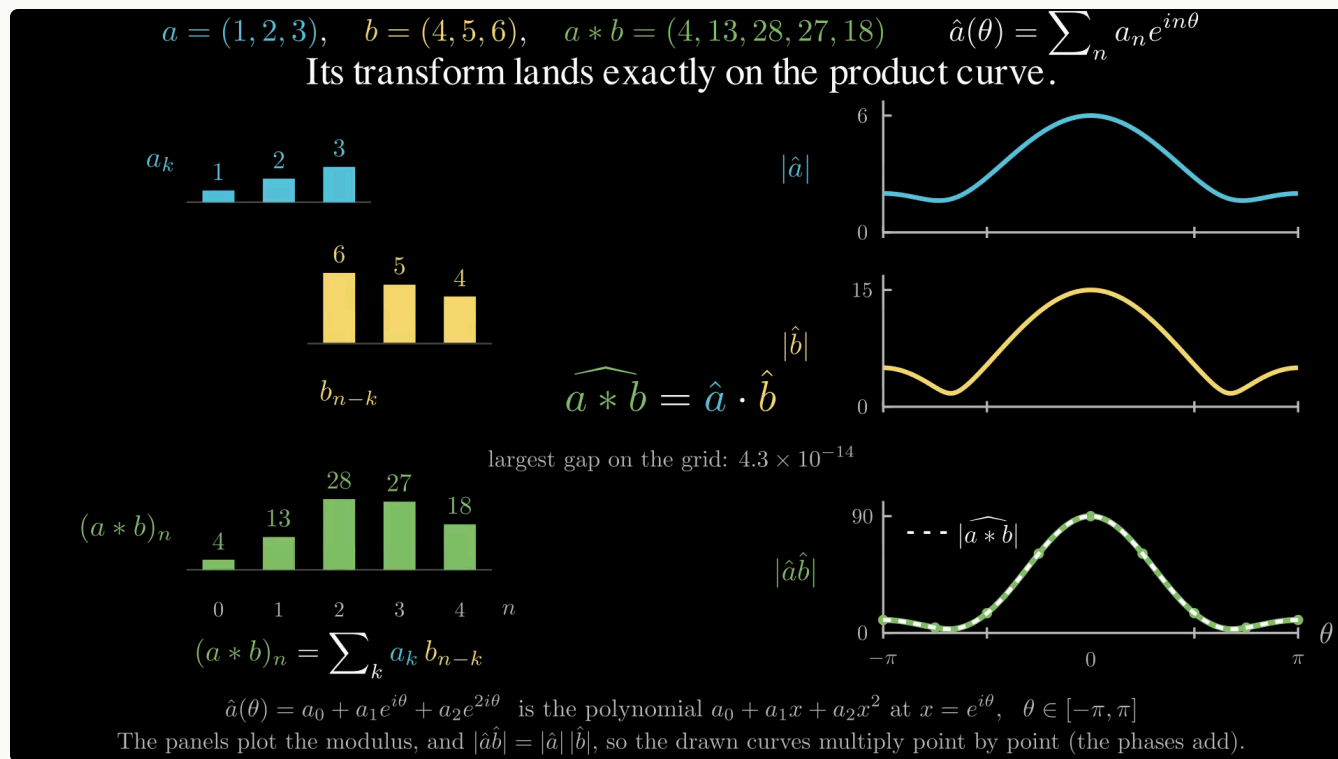

## Dynamical decoupling: many nuclear spins


Prepare the electron in  $|+\rangle$ , run a dynamical decoupling sequence, and read it out at the azimuth  $\varphi$ . Here  $V_0$  and  $V_1$  are the propagators the **nuclear** spin experiences with the electron in  $|0\rangle$  and in  $|1\rangle$ .

$$P(\varphi) = \frac{1}{2} + \frac{1}{2}|M| \cos(\varphi - \arg M), \quad M = \frac{1}{2} \text{Tr } V_0 V_1^\dagger$$

For several nuclei that do not interact with each other, the trace factorizes.

$$M = \prod_j M_j, \quad M_j = \frac{1}{2} \text{Tr } V_0^{(j)} V_1^{(j)\dagger}$$

The several combs multiply, so the plotted  $P_x = \frac{1}{2}(1 + M)$  is exactly this **pointwise product**.

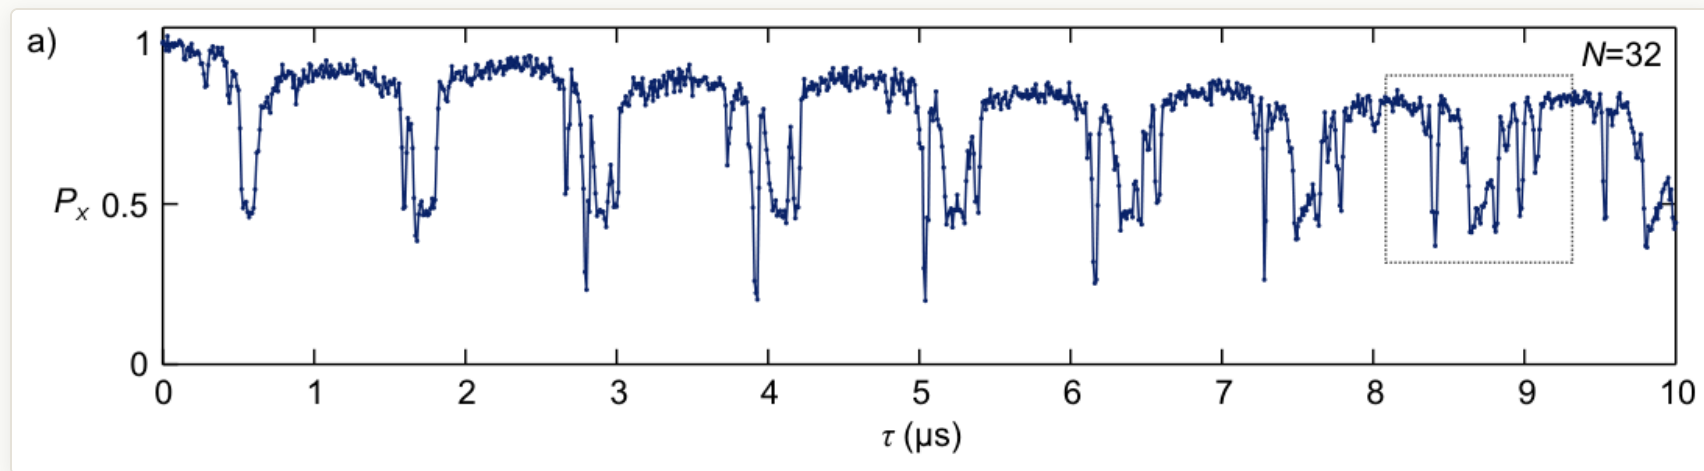

Taminiau et al., *PRL* **109**, 137602 (2012), Fig. 2(a):  $P_x$  against the interpulse delay  $\tau$ ,  $N = 32$  pulses,  $B_0 = 401$  G.

# METHOD

## A product of responses is a convolution of coefficients

Our response is a product,  $M = \prod_j M_j$ , and in Fourier space a product is a convolution. So one more nucleus is one more convolution of coefficient lists.


Each  $M_j(\theta)$  is a function of the swept variable  $\theta$ . For  $K$  equal units it is a trigonometric polynomial

$$M_j(\theta) = \sum_n c_n^{(j)} e^{in\theta} \text{ of degree } K - 1.$$

Multiplying the responses is the polynomial slide with  $x = e^{i\theta}$ :

$$M_1 M_2 = \sum_n c_n e^{in\theta}, \quad c_n = \sum_k c_k^{(1)} c_{n-k}^{(2)} = (c^{(1)} * c^{(2)})_n.$$

The degrees add, so the lists get longer.

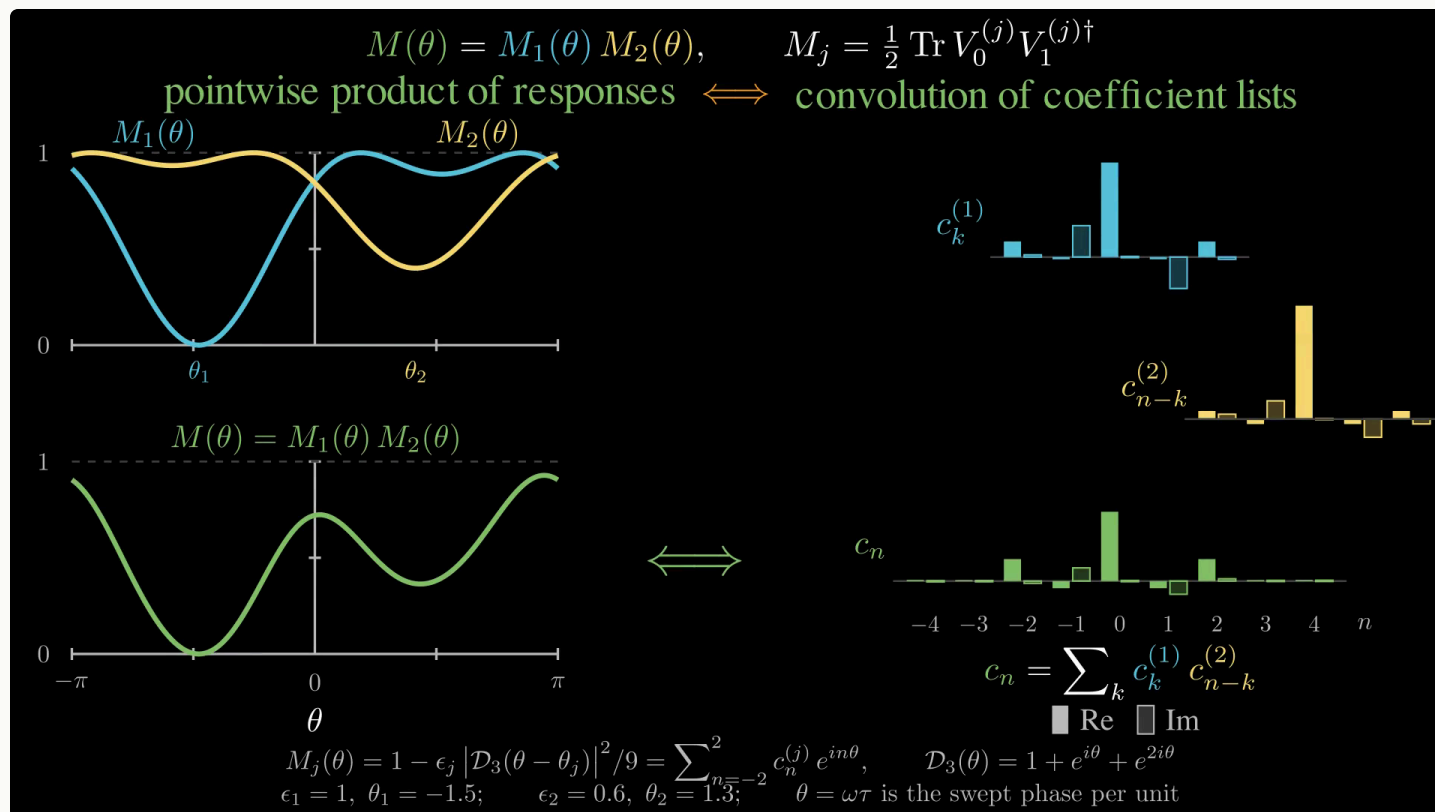


## METHOD Kernel function

A sequence is  $N$  equal units of length  $\tau$ . Unit  $k$  gives the system one small operation of amplitude  $w_k$ : a pulse area, or an RF amplitude. Between the operations the system precesses at the swept variable  $\omega$ , so the operation of unit  $k$  arrives with the phase  $e^{ik\omega\tau}$ . To first order the operations add, so the total amplitude is the Fourier series of the amplitude list, the polynomial of the dice slides with  $z = e^{i\omega\tau}$ :

$$A(\omega) = \sum_{k=0}^{N-1} w_k e^{ik\omega\tau}, \quad K(\omega) = \frac{|A(\omega)|^2}{|A(0)|^2}.$$

Here  $A(\omega)$  is the amplitude the whole sequence drives at an offset  $\omega$  from resonance, and  $|A|^2$  is the population it transfers there. Normalised by its resonant value,  $K$  is the **kernel**, or the filter function: what the sequence transfers at an offset  $\omega$  from a line. For equal amplitudes the sum is geometric,  $\sum_k e^{ik\theta} = e^{i(N-1)\theta/2} \sin(N\theta/2) / \sin(\theta/2)$ , so  $K = |\mathcal{D}_N(\omega\tau)|^2$ , the Dirichlet kernel.

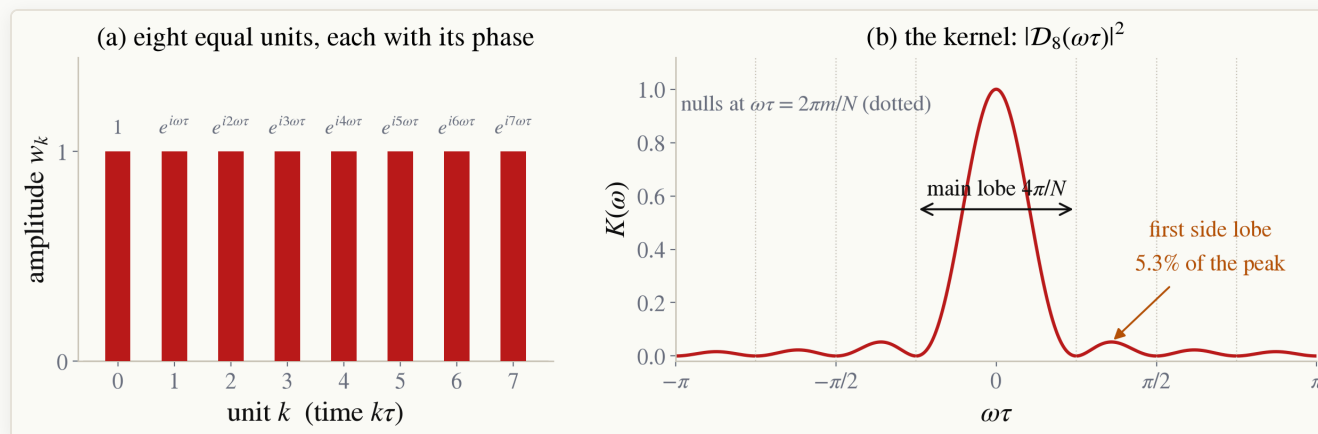


## METHOD One kernel copy per line

The sample answers at its own resonant frequencies. So write its spectrum as a set of lines, one per source, at the position  $\omega_j$  with the strength  $s_j$ :


$$S(\omega') = \sum_j s_j \delta(\omega' - \omega_j) \implies S_{\text{meas}}(\omega) = \int d\omega' S(\omega') K(\omega - \omega') = \sum_j s_j K(\omega - \omega_j).$$

Each line sees the kernel only at its own offset  $\omega - \omega_j$ . So the measured curve is a copy of  $K$  placed on every line, scaled by  $s_j$ , and added.

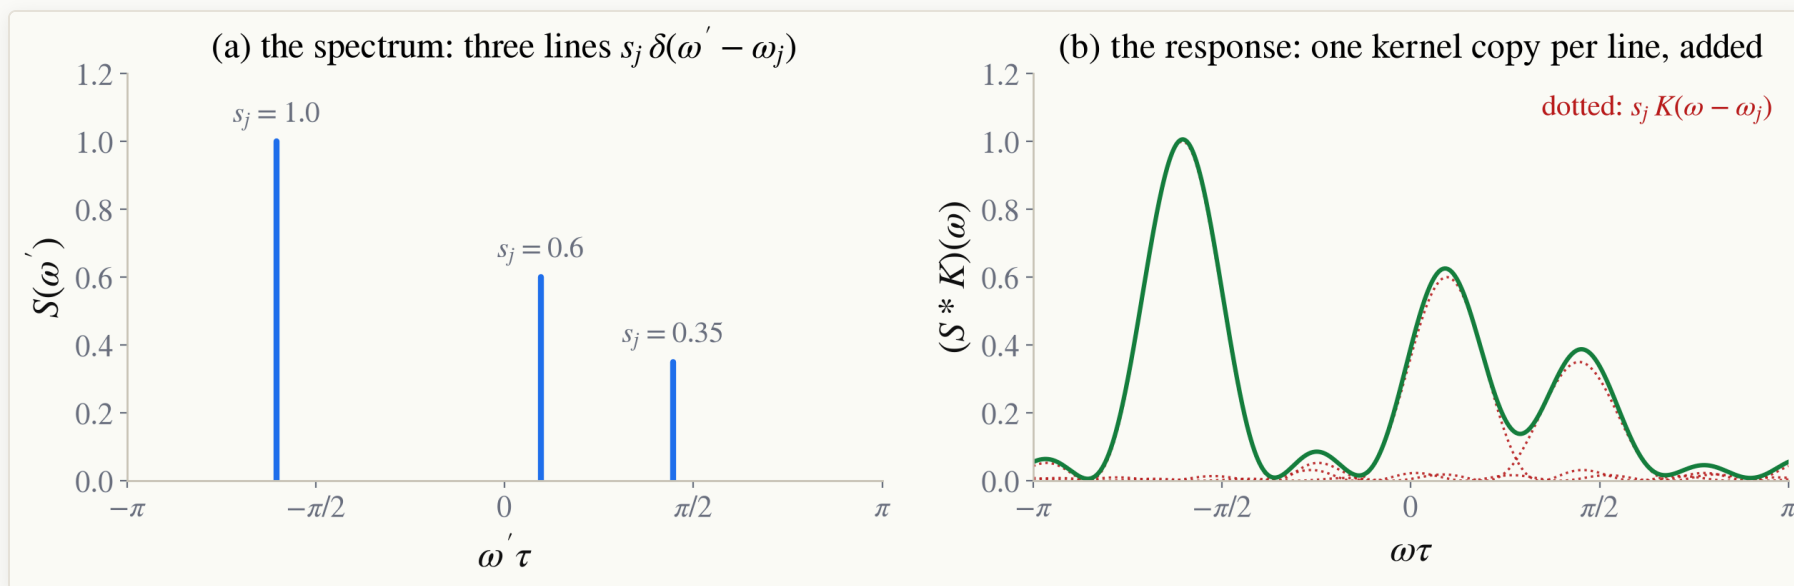


# Apodization

The side lobes come from the sharp edges of the boxcar. If we try  $w_k = \sin^2(\pi(k+1)/(N+1))$ , a Hann window, the kernel becomes smooth, which gives lobes that fall away fast. For  $N = 8$  the largest drops from 5.3% to 0.07% of the peak.

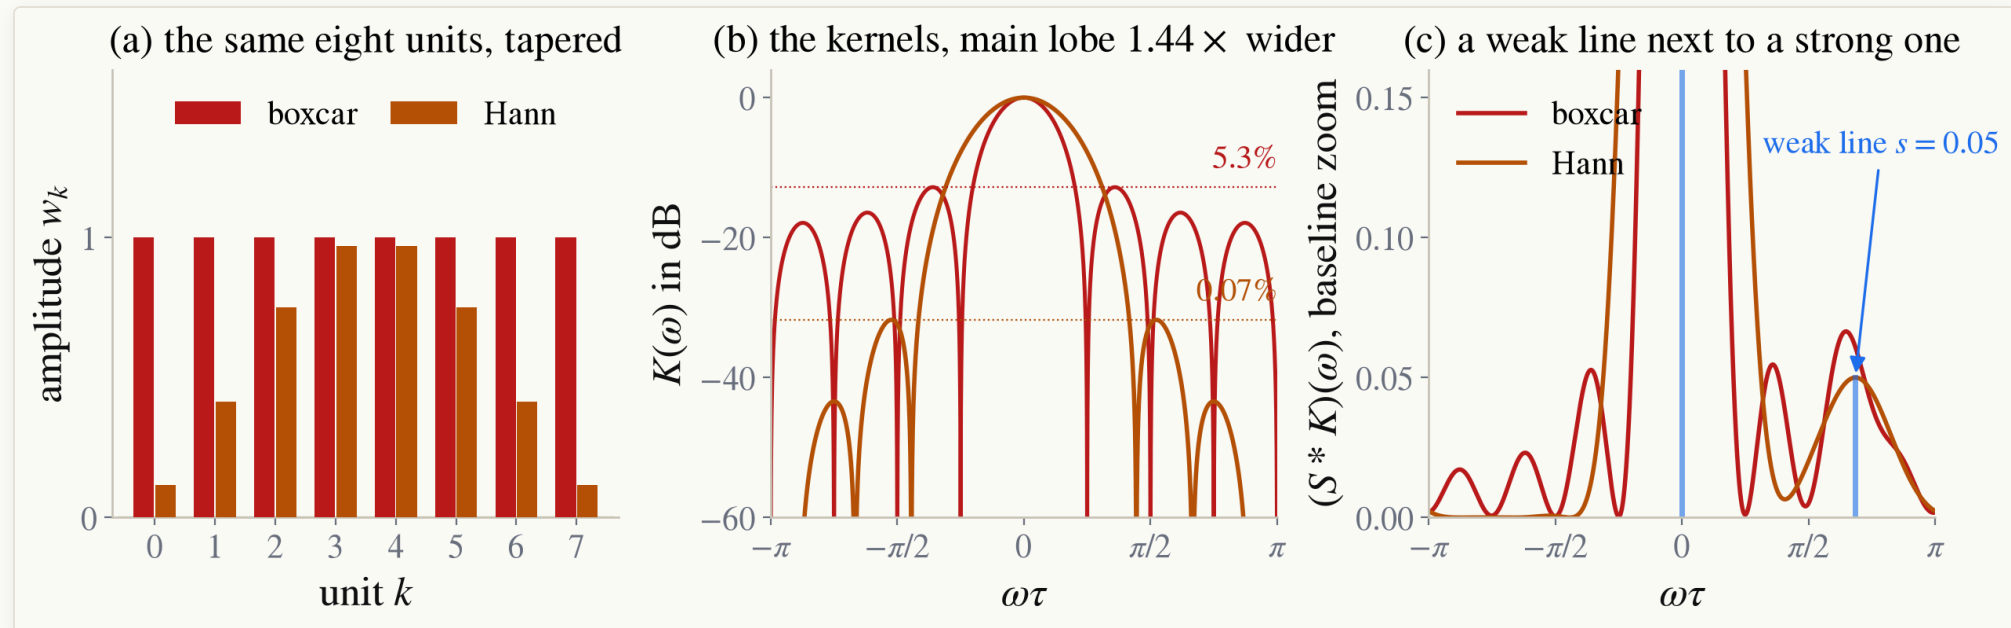


## What to carry out of chapter 2

- The response, or spectrum, combined from the multiple sources is already a convolved response.
- The response we measure is convolved once again through our processing, which acts as the kernel function.

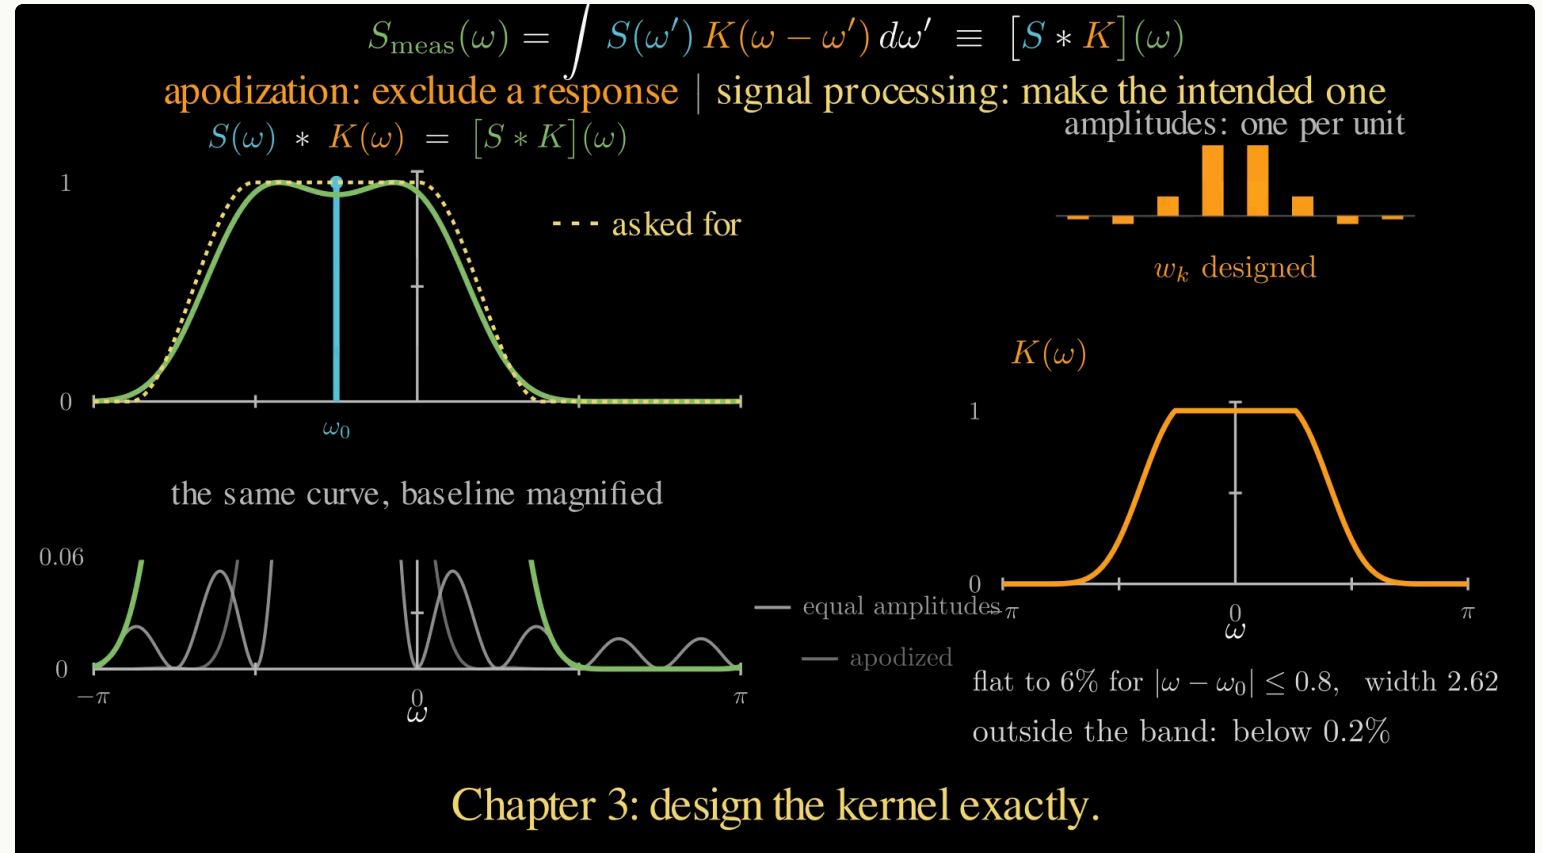

# Two things are convolved

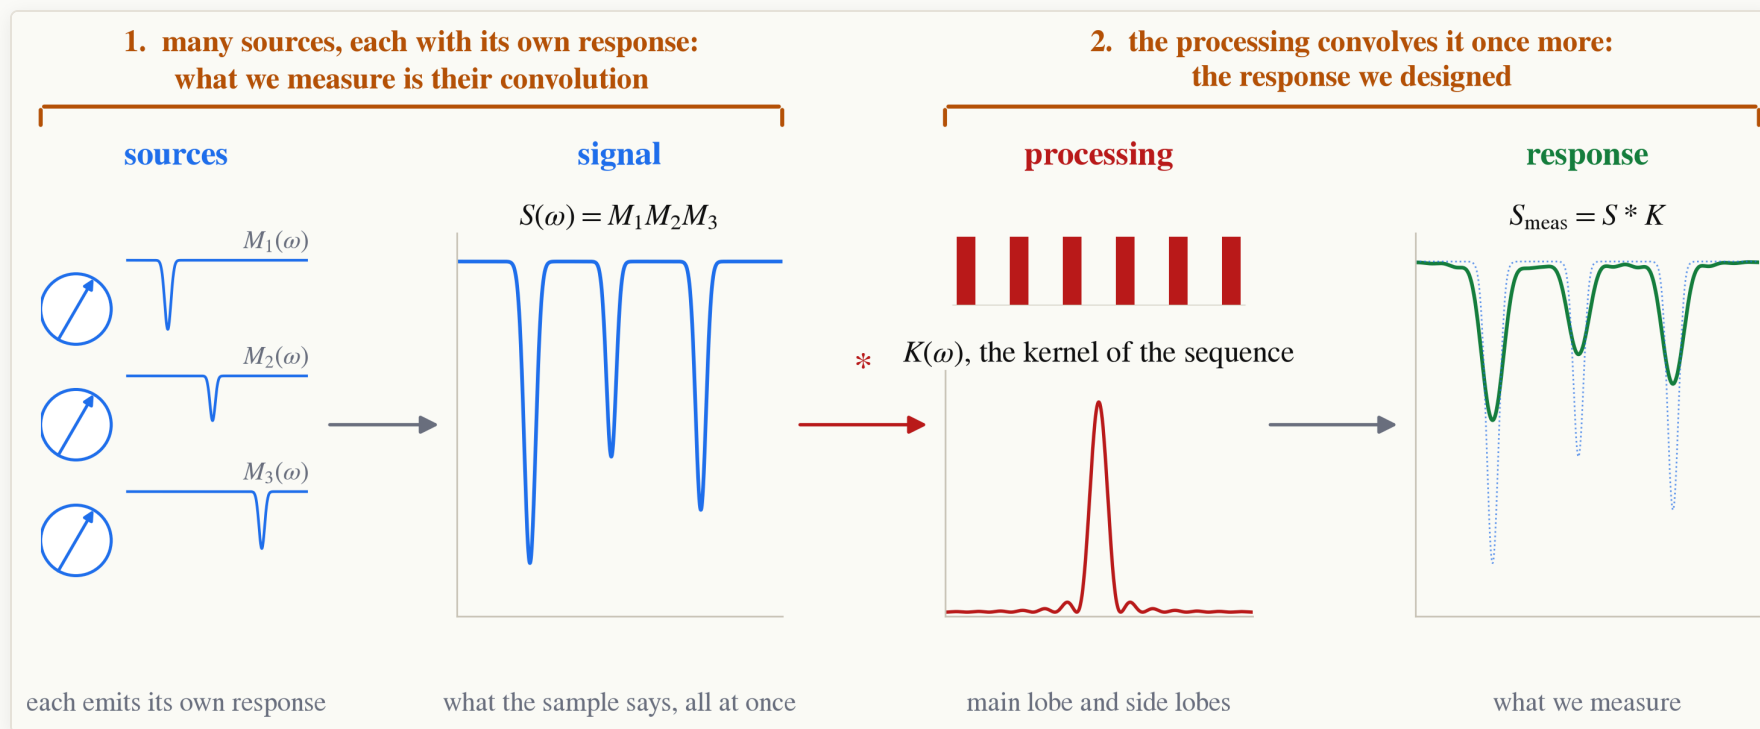

**1. The sources.** Many spins each emit their own response  $M_j(\omega)$ . The signal is their product  $S = \prod_j M_j$ , which is a convolution of their coefficient lists, so what we measure is already a convolved signal.

**2. The processing.** The sequence we run is a kernel  $K(\omega)$ , so the read-out is the convolution  $S * K$  once more. This one we design. Its coefficients are our pulses, so it can exclude what we do not want, or make the response we intended.

03

# Quantum Signal Processing

## METHOD The sequence

Given


$$H = \frac{\delta}{2} Z + \frac{\Omega}{2} Y,$$

when the drive is off, the only surviving term is the detuning. So a wait of length  $\tau$  is a precession about the  $z$  axis,

$$W(\delta) = R_z(\delta\tau) = \begin{pmatrix} z^{-1/2} & 0 \\ 0 & z^{1/2} \end{pmatrix}, \quad z = e^{i\delta\tau}.$$

This is the **signal**: the detuning  $\delta$  is what the system hands us. The microwave pulses  $G_k$  are the **processing**, chosen freely through their area  $\beta_k$  and carrier phase  $\varphi_k$ . With  $d$  equal waits and  $d + 1$  pulses,

$$U(\delta) = G_d W(\delta) G_{d-1} \cdots W(\delta) G_0.$$

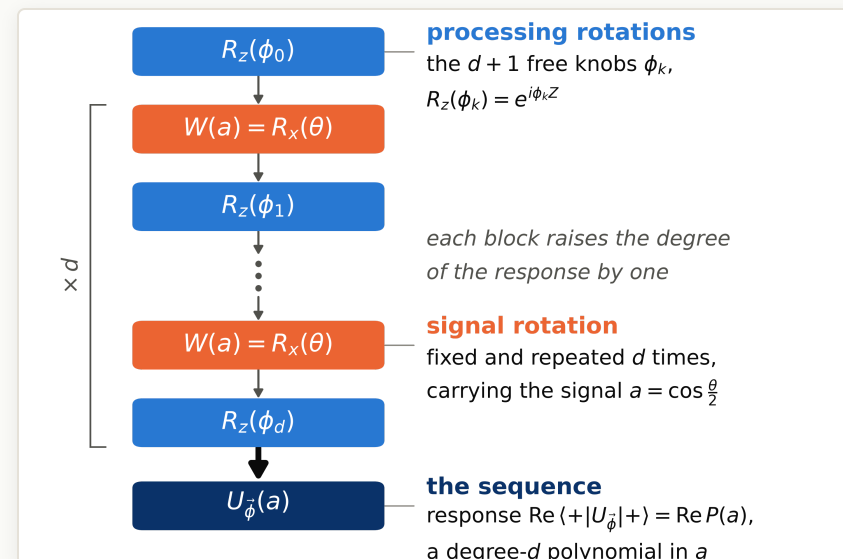

The textbook ladder of [1] puts the signal in an  $x$ -rotation  $W_x(a)$ . It is the same sequence in a rotated basis, with  $a = \cos(\delta\tau/2)$ .

## METHOD The sequence is a polynomial

Split the half-powers off the wait,  
 $W(\delta) = z^{-1/2} A(z)$  with  $A(z) = \text{diag}(1, z)$ ,  
 so the  $d$  of them make one phase:


$$U(\delta) = z^{-d/2} \tilde{U}(z),$$

$$\tilde{U}(z) = G_d A(z) G_{d-1} A(z) \cdots G_1 A(z) G_0.$$

Each coloured block is one wait and then one pulse: a  $2 \times 2$  matrix of degree-one polynomials in  $z$ . So the **degree is the number of waits**. Every  $G_k$  and every  $W$  is in  $SU(2)$ , so

$$U(\delta) = \begin{pmatrix} \hat{P} & -\hat{Q}^* \\ \hat{Q} & \hat{P}^* \end{pmatrix}, \quad |\hat{P}|^2 + |\hat{Q}|^2 = 1.$$

Here  $\hat{P} = z^{-d/2} P(z)$  and  $\hat{Q} = z^{-d/2} Q(z)$ , with  $\deg P, \deg Q \leq d$ . We prepare and read  $|0\rangle$ , so the experiment measures exactly  $|\hat{P}(\delta)|^2$ . **Designing the sequence is designing one polynomial.**

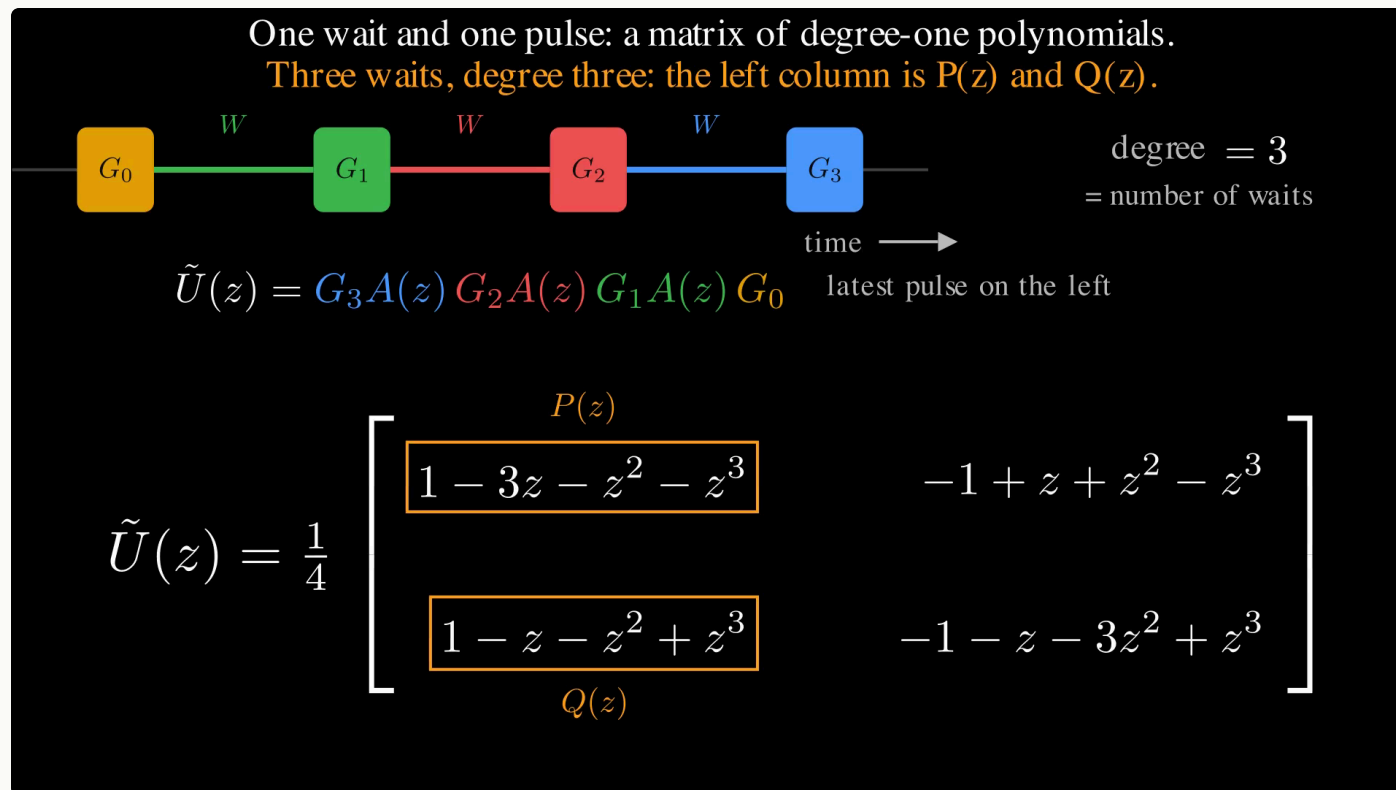

## An example


Switch every pulse off. The sequence is bare precession,  $U(\delta) = W(\delta)^d$ , and the amplitude we read is one pure harmonic:

$$\langle 0|U|0\rangle = e^{-i d \delta\tau/2},$$

$$\text{Re} \langle 0|U|0\rangle = \cos\left(d \frac{\delta\tau}{2}\right) = T_d(a),$$

with  $a = \cos(\delta\tau/2)$ . At  $d = 1$  that is  $a$ , at  $d = 2$  it is  $2a^2 - 1$ , and at  $d = 5$  it is  $16a^5 - 20a^3 + 5a$ . These are the Chebyshev polynomials, the textbook's  $P = T_d(a)$  and  $Q = U_{d-1}(a)$ .

Now switch three pulses on at  $d = 2$ , with the areas  $\beta = (\frac{\pi}{4}, \frac{\pi}{2}, \frac{\pi}{4})$  about  $y$ . The same read-out becomes  $\text{Re} \langle 0|U|0\rangle = a^2 - 1 = \frac{1}{2}T_2(a) - \frac{1}{2}$ , a different polynomial of the same degree. **The waits fix the degree, and the pulses choose which polynomial of that degree we measure.**

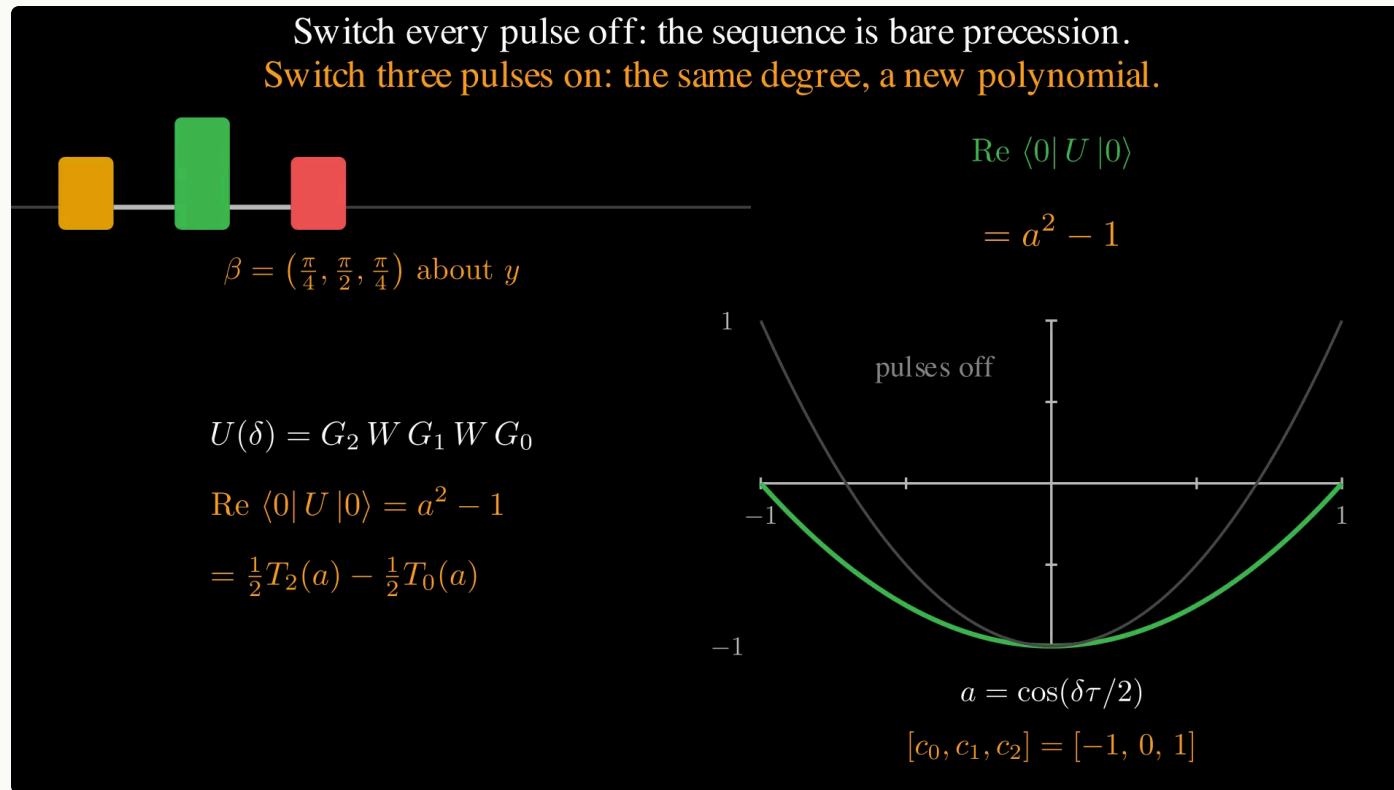

## One wait and one pulse make a kernel function

Let  $\Pi_b = |b\rangle\langle b|$  be the projector onto  $|b\rangle$ , so that  $\Pi_0 + \Pi_1 = I$ . During a wait only  $|1\rangle$  collects the phase  $\delta\tau$  relative to  $|0\rangle$ . So the wait leaves the  $|0\rangle$  component where it is, and advances the  $|1\rangle$  component by one power of  $z$ :

$$A(z) = \text{diag}(1, z) = \Pi_0 + z\Pi_1, \quad z = e^{i\delta\tau}.$$

**One power of  $z$  is one wait.** The pulse that follows is a fixed matrix while  $z$  is a scalar, so it multiplies straight through both terms:

$$G_k A(z) = K_k^{(0)} + z K_k^{(1)}, \quad K_k^{(0)} = G_k \Pi_0, \quad K_k^{(1)} = G_k \Pi_1.$$

For a pulse about  $x$  of area  $\beta_k$ , writing  $c = \cos \frac{\beta_k}{2}$  and  $s = \sin \frac{\beta_k}{2}$ ,

$$G_k = R_x(\beta_k) = \begin{pmatrix} c & -is \\ -is & c \end{pmatrix}, \quad K_k^{(0)} = \begin{pmatrix} c & 0 \\ -is & 0 \end{pmatrix}, \quad K_k^{(1)} = \begin{pmatrix} 0 & -is \\ 0 & c \end{pmatrix}.$$

So each step of the sequence is a kernel function with two terms, and its coefficients are matrices. The term at  $z^0$  sends the  $|0\rangle$  amplitude through the pulse at the same power of  $z$ , and the term at  $z^1$  sends the  $|1\rangle$  amplitude through the pulse one power of  $z$  later.

# METHOD

## Each added step convolves the coefficient list

The state after  $k$  steps is a list of 2-vectors, one entry per number of waits:


$$\tilde{U}_k|0\rangle = \sum_n v_n^{(k)} z^n.$$

The coefficient of  $z^n$  in  $G_k A(z) \tilde{U}_{k-1}$  is

$$v_n^{(k)} = K_k^{(0)} v_n^{(k-1)} + K_k^{(1)} v_{n-1}^{(k-1)},$$

which is a flip-and-slide sum with matrix coefficients,  $(K_k * v^{(k-1)})_n$ . Each  $v_n^{(k)}$  is a two-component vector, the  $|0\rangle$  amplitude above the  $|1\rangle$  amplitude, which the clip prints as a column in every box. Unrolled from  $v_0^{(0)} = G_0|0\rangle$ :

$$\begin{aligned} (v_0^{(1)}, v_1^{(1)}) &= (K_1^{(0)} v_0^{(0)}, K_1^{(1)} v_0^{(0)}) \\ (v_0^{(2)}, v_1^{(2)}, v_2^{(2)}) &= (K_2^{(0)} v_0^{(1)}, K_2^{(0)} v_1^{(1)} + K_2^{(1)} v_0^{(1)}, K_2^{(1)} v_1^{(1)}). \end{aligned}$$

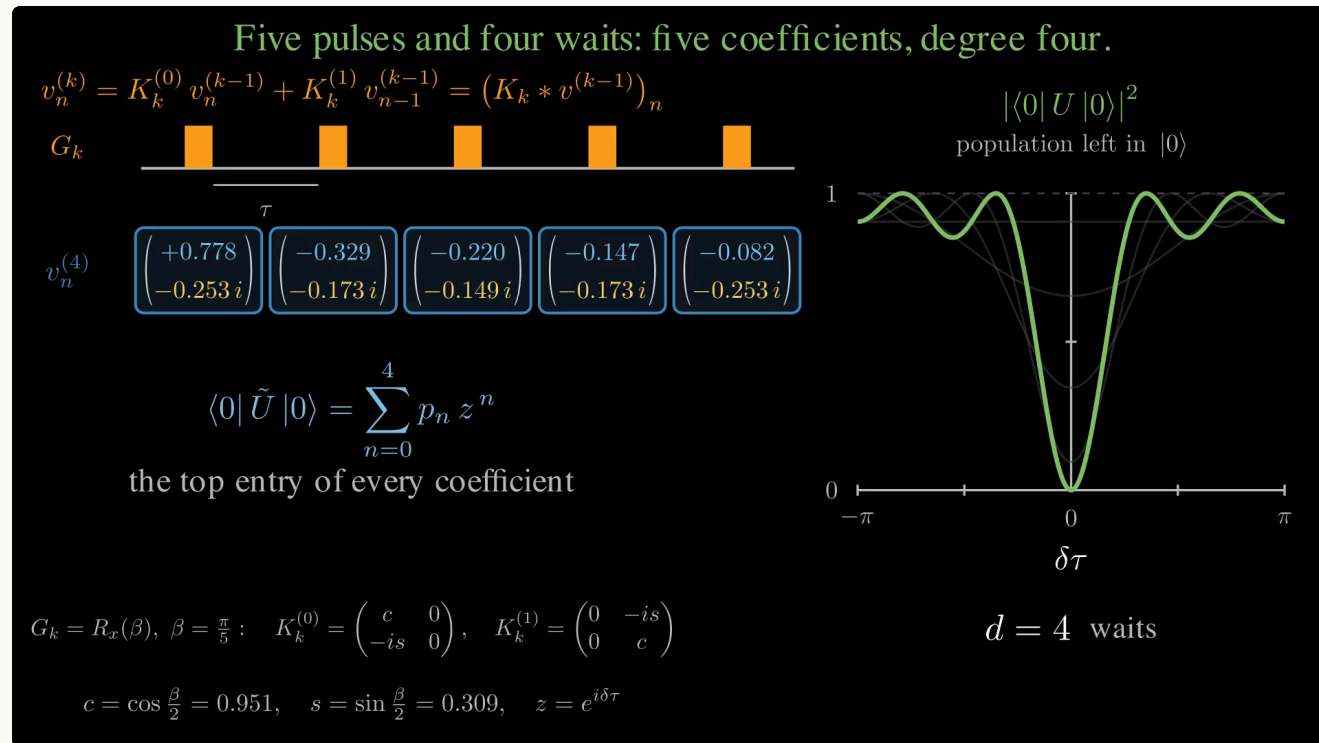

## The response is the Fourier transform of the coefficients

Keep only the  $|0\rangle$  component of the list. Writing  $p_n$  for the upper entry of  $v_n$ ,

$$P(z) = \langle 0|\tilde{U}|0\rangle = \sum_{n=0}^d p_n z^n.$$

The experiment does not hand us a free  $z$ : the sweep puts  $z$  on the unit circle,  $z = e^{i\delta\tau}$ . Put back the phase  $z^{-d/2}$  that the  $d$  waits gave up, which only centres the exponents and never changes  $|\hat{P}|$ ,

$$\hat{P}(\delta) = z^{-d/2} P(z) = \sum_{n=0}^d p_n e^{i(n-\frac{d}{2})\delta\tau},$$

a **Fourier series in the detuning** whose coefficients are  $p_n$ . Each one is one harmonic of the wait: an amplitude that has waited  $n$  times carries the phase  $n\delta\tau$ , so  $p_n$  oscillates in  $\delta$  at the frequency  $n\tau$ .

The measurement squares it, and  $|\hat{P}|^2 = \hat{P}\hat{P}^*$  is a product of two such series.

$$|\hat{P}(\delta)|^2 = \sum_{m=-d}^d r_m e^{im\delta\tau}, \quad r_m = \sum_n p_{n+m} p_n^*,$$

and the measured curve is the transform of the **autocorrelation** of the coefficient list:  $r_m$  is the overlap of the list with itself shifted by  $m$ .

For example, take  $d = 1$ , two coefficients. Then

$$|\hat{P}|^2 = |p_0|^2 + |p_1|^2 + 2 \operatorname{Re}(p_1 p_0^* e^{i\delta\tau}),$$

a constant plus one cosine. Two  $\pi/2$  pulses of opposite sign around one wait give  $p_0 = p_1 = \frac{1}{2}$  and  $\frac{1}{2}(1 + \cos \delta\tau)$ , the Ramsey fringe of chapter 1.


## METHOD Period and resolution

**Periodicity.** The response depends on the detuning only through  $z = e^{i\delta\tau}$ , and  $z$  returns to itself when  $\delta\tau$  advances by  $2\pi$ . So the measured curve repeats with the period  $2\pi/\tau$  in  $\delta$ . The wait is a **sampling interval**: choosing  $\tau$  chooses where the lines of the spectrum land on the circle, and two lines a multiple of  $2\pi/\tau$  apart are aliased onto the same point and can never be told apart.

**Resolution.** The highest harmonic on the list is  $e^{\pm id\delta\tau/2}$ , so the fastest the curve can vary is set by  $d\tau$ , and the narrowest feature it can carry is

$$\Delta\delta \sim \frac{2\pi}{d\tau} = \frac{2\pi}{T}.$$

The total sequence time  $T = d\tau$  is a **record length**. This is the statement chapter 2 made with the Dirichlet kernel: a record of finite length convolves every line with the transform of its window. **Resolution is bought with sequence length.**

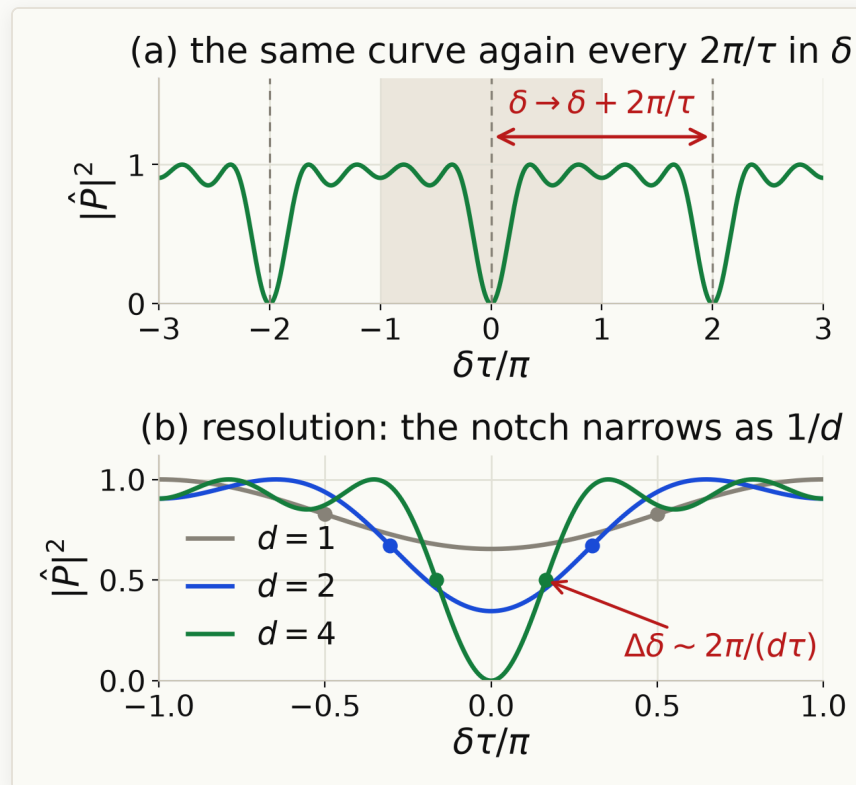

Top: the  $d = 4$  curve over three periods, one period shaded. Bottom: the notch at  $d = 1, 2, 4$ . Fig. by `fig_response.py`.

**Why this limit:** weak pulses make the response linear in their amplitudes, so the sequence is exactly a classical filter and chapter 2 applies word for word.


Expand each pulse to first order,

$G_k \simeq I - \frac{i}{2}\beta_k(\cos \varphi_k X + \sin \varphi_k Y)$ , and keep the terms with one pulse in them. Each wait left of pulse  $k$  contributes  $e^{+i\delta\tau/2}$  and each wait to its right  $e^{-i\delta\tau/2}$ , so

$$\hat{Q}(\delta) \simeq -\frac{i}{2} \sum_{k=0}^d \beta_k e^{i\varphi_k} e^{i(\frac{d}{2}-k)\delta\tau}.$$

The coefficient  $q_k$  is the complex amplitude  $\beta_k e^{i\varphi_k}$ , so the knobs on the bench are the coefficient list. Equal pulses are the all-ones boxcar of length  $N = d + 1$ , and its transform is the Dirichlet kernel,


$$|\hat{Q}(\delta)|^2 = \frac{(N\beta)^2}{4} |\mathcal{D}_N(\delta\tau)|^2, \quad \mathcal{D}_N(\theta) = \frac{\sin(N\theta/2)}{N \sin(\theta/2)},$$

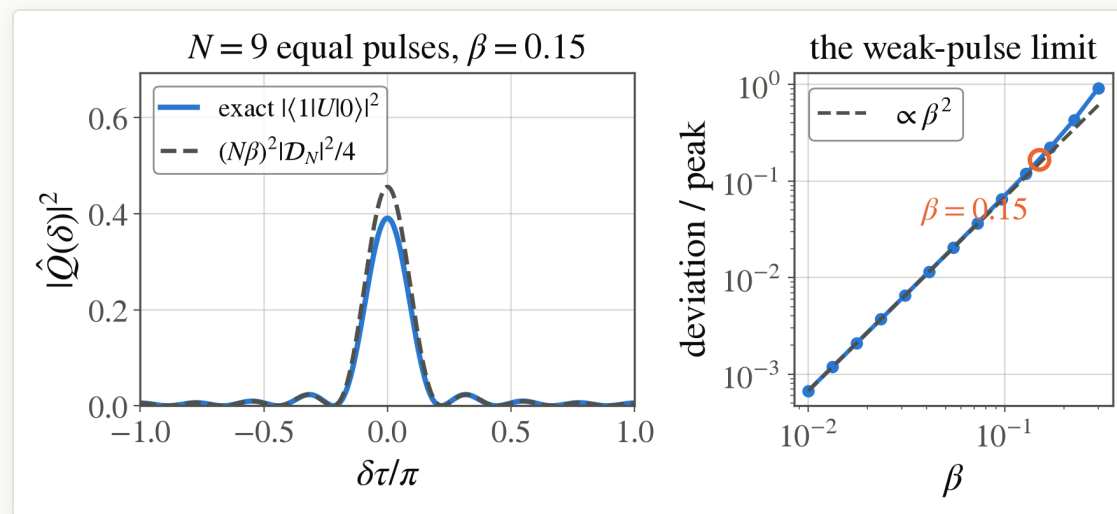


$N = 9$  equal pulses of area  $\beta = 0.15$ : the exact product (solid) against the formula above (dashed). The peak differs by 17% here and falls as  $\beta^2$ . Fig. by

[fig\\_qsp\\_design.py](#).

# Apodization in our data

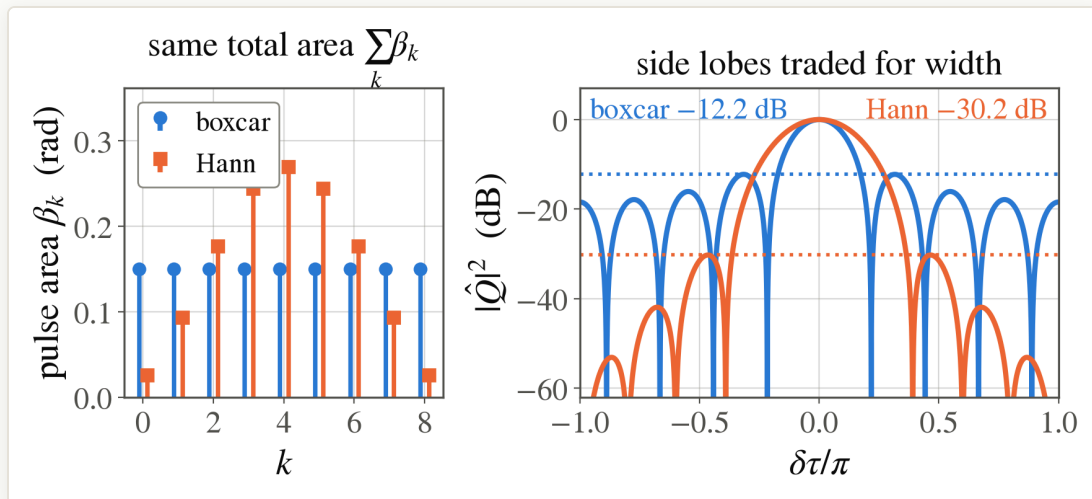

Nine pulses of the same total area  $\sum_k \beta_k = 1.35$ . Hann pushes the largest side lobe from  $-12.2$  dB to  $-30.2$  dB and widens the main lobe by 1.46. Fig. by `fig_qsp_design.py`.

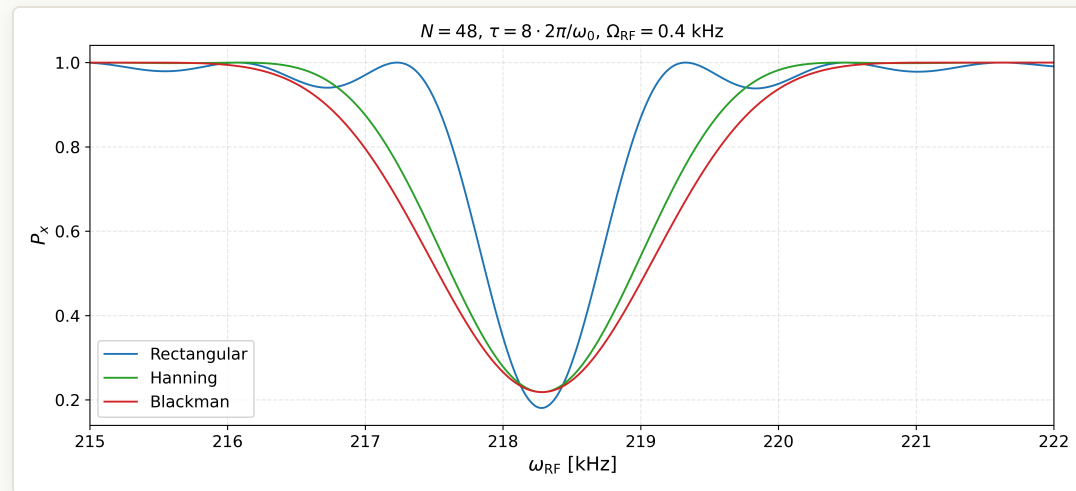

The same trade in our own DDrf data:  $N = 48$  RF cells of amplitude  $\Omega_k = \Omega f(k)$ , swept in  $\omega_{RF}$ , with  $1 - P_x$  the transfer. (source: lab meeting 2026-04-28)

Shaping the  $\beta_k$  is apodization, so in this limit QSP is classical window design. At large pulse areas the linear map from the amplitudes to the coefficients is replaced by the exact matrix convolution we started from, and that is where QSP goes further.

**Theorem.** With  $d$  waits and  $d + 1$  pulses the sequence is always  $U = \begin{pmatrix} \hat{P} & -\hat{Q}^* \\ \hat{Q} & \hat{P}^* \end{pmatrix}$  with  $\deg P, \deg Q \leq d$  and  $|\hat{P}|^2 + |\hat{Q}|^2 = 1$  on the circle, and conversely **every** such pair is realized by some choice of pulses [2, Thm. 3]. The textbook  $W_x$  form is the restricted version, with real coefficients and definite parity:  $\deg P \leq d, \deg Q \leq d - 1$ , parities  $d$  and  $d - 1$ , and  $|P|^2 + (1 - a^2)|Q|^2 = 1$  [1, Thm. 1].

The forward direction is nothing but the convolution recursion: each step appends one coefficient and raises the degree by one, which is what flips the parity in the  $W_x$  form, while unitarity is inherited because every factor is unitary on the circle.

## METHOD Reachable polynomials


Switch every pulse off. The sequence is bare free precession,  $U = W(\delta)^d$ , whose coefficient list has a single nonzero entry, so its response is one pure harmonic,

$$\langle 0|U|0\rangle = e^{-id\delta\tau/2}, \quad \text{Re} \langle 0|U|0\rangle = \cos(dx) = T_d(a),$$

with  $a = \cos x$  and  $x = \delta\tau/2$ . In the textbook labelling this is the trivial-phase case of [1],  $P = T_d(a)$  and  $Q = U_{d-1}(a)$ , Chebyshev of the first and second kind, and the unitarity condition is just

$$T_d^2 + (1 - a^2)U_{d-1}^2 = \cos^2(dx) + \sin^2(dx) = 1.$$


**Chebyshev polynomials are the pure harmonics of the wait**, and the pulses turn one harmonic into a designed sum of them.

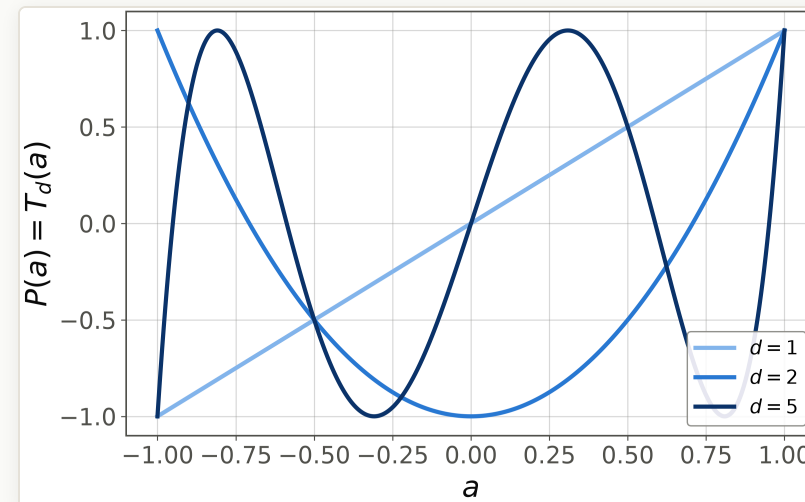


$P(a) = T_d(a)$  at trivial phases,  $d = 1, 2, 5$ . From our evaluator.

At  $a = \pm 1$  the wait is trivial, so the sequence collapses to one fixed rotation and  $|P(\pm 1)| = 1$  is forced. A target such as  $\frac{1}{2} \text{sign}(a)$  is then unreachable as  $P$  itself. Reading only the real part cures it, since  $\text{Im } P$  can absorb the unit-modulus burden. **Re  $P$  may then be any real polynomial with parity  $d \bmod 2$  and  $|\text{Re } P| \leq 1$  [1].**

# Choosing the polynomial is choosing the algorithm

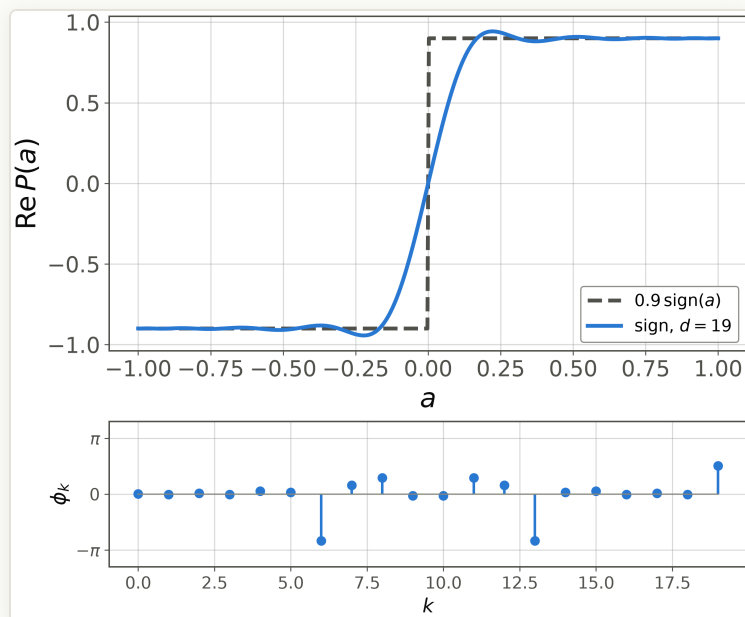


*Sign function at  $d = 19$ , the decision primitive behind amplitude amplification and search.*

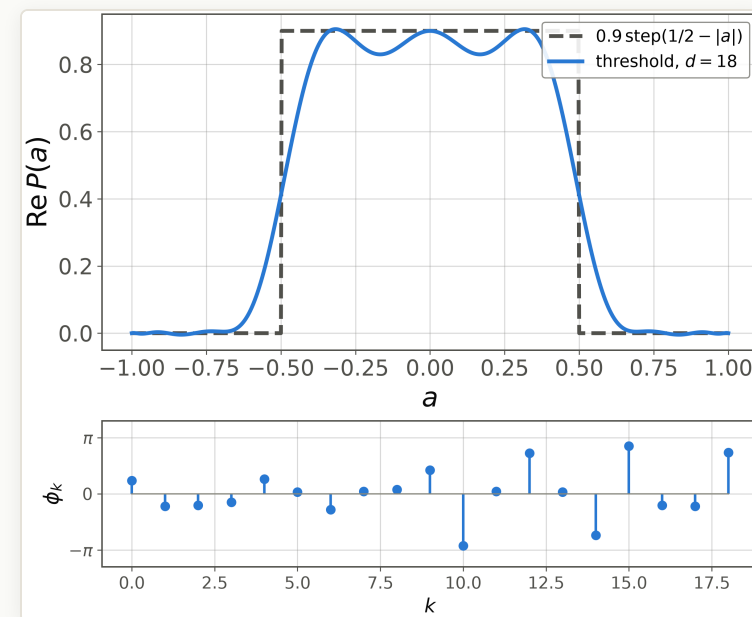


*Threshold function at  $d = 18$ , a band-pass response used for eigenvalue thresholding and eigenstate filtering.*

The lower panel of each figure is the phase list, which is the entire program. Appendix D of [1] gives lists for  $\cos$ ,  $\sin$ ,  $1/a$  and  $e^{-\beta a}$  as well.

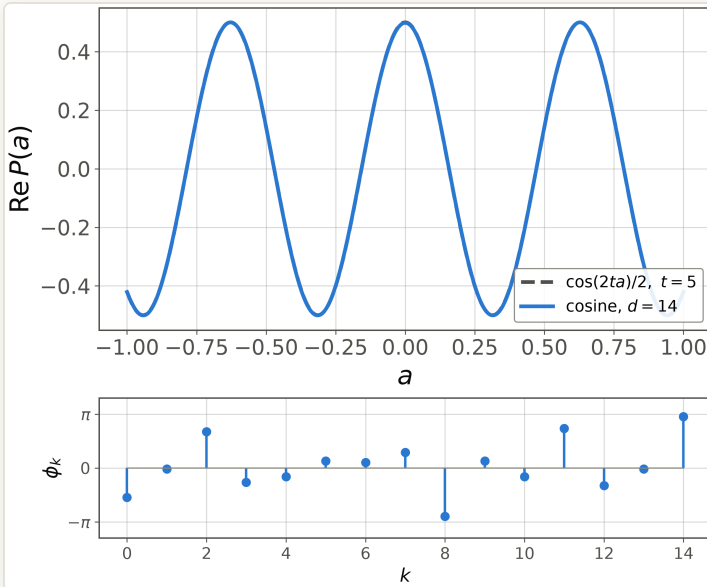

*Cosine response at  $t = 5$ ,  $d = 14$ , from the phase list of [1, App. D4].*

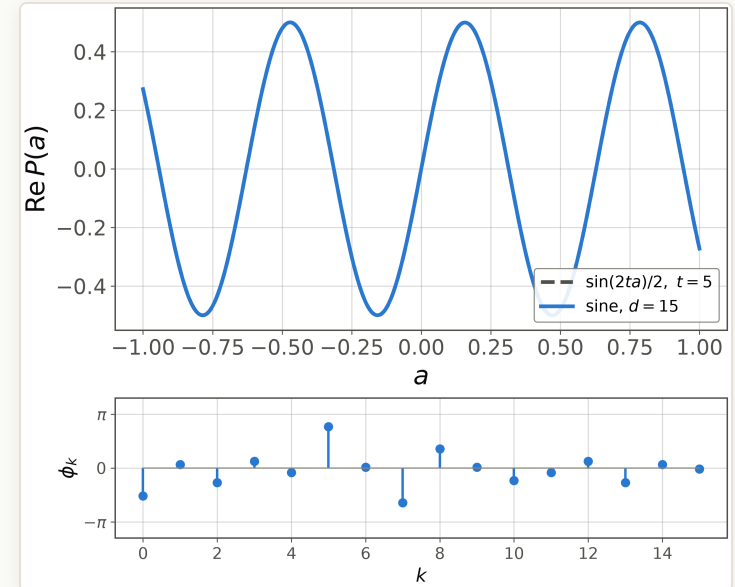

*Sine response at  $t = 5$ ,  $d = 15$ , from the phase list of [1, App. D4].*

Hamiltonian simulation uses the pair through  $e^{-i\mathcal{H}t} = \cos(\mathcal{H}t) - i \sin(\mathcal{H}t)$ . So these two angle lists are the entire program, and the degree grows linearly with the simulated time  $t$ .

## From a target to the pulses

Everything so far designed a polynomial. The bench needs the  $2(d+1)$  numbers  $\beta_k$  and  $\varphi_k$ , so the design is finished only once  $P$  is turned back into pulses.

Complete the matrix first: unitarity on the circle asks for a partner with  $|Q|^2 = 1 - |P|^2$ , and the bound  $|P| \leq 1$  is the only obstruction, because no entry of a unitary matrix can exceed one in modulus.

**Fejér and Riesz:** a trigonometric polynomial that is non-negative everywhere on the circle is the squared modulus of an ordinary polynomial of the same degree.

Since  $S = 1 - |P|^2 \geq 0$  is exactly such a polynomial, the partner exists. To build it, note that  $z^d S(z)$  has  $2d$  roots which pair up as  $(r, 1/\bar{r})$  because  $S$  is real on the circle, and keeping one root of each pair fixes  $Q$  [2].

With  $P$  and  $Q$  in hand every coefficient of  $\tilde{U}(z) = \sum_n C_n z^n$  is known. Its two ends are single terms, since only one choice of projector per wait reaches an extreme power:

$$\begin{aligned} C_d &= G_d \Pi_1 G_{d-1} \Pi_1 \cdots \Pi_1 G_0, \\ C_0 &= G_d \Pi_0 G_{d-1} \Pi_0 \cdots \Pi_0 G_0. \end{aligned}$$

Each  $\Pi_b = |b\rangle\langle b|$  cuts its product into scalars,

$$C_d = \left( \prod_{k=1}^{d-1} \langle 1|G_k|1\rangle \right) G_d|1\rangle\langle 1|G_0,$$

so both ends have rank one, with the column spaces  $G_d|1\rangle$  and  $G_d|0\rangle$ . Unitarity makes those orthogonal: on the circle  $\tilde{U}^\dagger = \sum_n C_n^\dagger z^{-n}$ , so  $\tilde{U}\tilde{U}^\dagger = I$  reads coefficient by coefficient as  $\sum_n C_{n+m} C_n^\dagger = \delta_{m0} I$ , whose top power  $m = d$  is the single term  $C_d C_0^\dagger = 0$ .

**The last pulse is read off the two ends of the list.**

## Peeling the pulses off is deconvolution

Now strip  $G_d$  away. In

$G_d^\dagger \tilde{U}(z) = A(z)G_{d-1} \cdots A(z)G_0$  the top coefficient carries  $\Pi_1$  on the left and the bottom coefficient carries  $\Pi_0$ , so the  $\langle 0|$  row has no  $z^d$  and the  $\langle 1|$  row no  $z^0$ .

Dividing that row by  $z$  is legal, and

$$A(z)^{-1}G_d^\dagger \tilde{U}(z) = G_{d-1}A(z) \cdots A(z)G_0$$

is the same object with one wait fewer, so  $d$  steps leave  $G_0$ . This is deconvolution: one two-term kernel

$G_k \Pi_0 + zG_k \Pi_1$  per step built the sequence, and the recursion divides one out per step, in reverse order.

**One wait, two pulses.** With  $G_0 = R_x(\pi/3)$  and  $G_1 = R_x(\pi/2)$ ,  $\tilde{U}(z) = C_0 + zC_1$  where

$$C_0 = \frac{1}{4} \begin{pmatrix} \sqrt{6} & -i\sqrt{2} \\ -i\sqrt{6} & -\sqrt{2} \end{pmatrix}, \quad C_1 = \frac{1}{4} \begin{pmatrix} -\sqrt{2} & -i\sqrt{6} \\ -i\sqrt{2} & \sqrt{6} \end{pmatrix}.$$

Both determinants vanish and  $C_1 C_0^\dagger = 0$  exactly. The column directions  $(1, -i)/\sqrt{2}$  and  $(1, i)/\sqrt{2}$  are orthogonal as promised, and as the two columns of one  $SU(2)$  matrix they rebuild  $G_1 = R_x(\pi/2)$ , up to one phase per column that is a harmless virtual  $z$ -rotation. One division then returns  $G_0$ , and the same recursion peels a random  $d = 3$  sequence back to  $10^{-15}$ .

Optimization over the areas and phases skips the factorization altogether, the route of `pyqsp` and QSPACK and of our own fits of 2026-08-18, at the price of local minima. For a **gate** target the design is instead a linear program in  $P$  with a global optimum, whose pulses this same peel-off returns.

# References

---

1. J. M. Martyn, Z. M. Rossi, A. K. Tan, I. L. Chuang, *Grand Unification of Quantum Algorithms*. PRX Quantum **2**, 040203 (2021). [arXiv:2105.02859](#) . QSP theorem, Chebyshev pair, reachability, Appendix-D phase lists.
2. D. Motlagh, N. Wiebe, *Generalized Quantum Signal Processing*. PRX Quantum **5**, 020368 (2024). [arXiv:2308.01501](#) . Laurent form of the theorem and the peel-off recursion.
3. T. H. Taminiau, J. J. T. Wagenaar, T. van der Sar, F. Jelezko, V. V. Dobrovitski, R. Hanson, *Detection and control of individual nuclear spins using a weakly coupled electron spin*. Phys. Rev. Lett. **109**, 137602 (2012). Conditional Hamiltonian, CPMG branch propagators,  $P_x = (1 + M)/2$ , resonance condition, spin 3 of Table I.
4. L. M. Pham, *Magnetic Field Sensing with Nitrogen-Vacancy Color Centers in Diamond*. Ph.D. thesis, Harvard University (2013), Ch. 1. NV level structure, ESR/ODMR, Rabi, Ramsey,  $T_2^*$ ,  $T_2$ ,  $T_1$ ; Figs. 1.4, 1.5, 1.7 reused.
5. M. A. Nielsen, I. L. Chuang, *Quantum Computation and Quantum Information*, Cambridge (2010), Chs. 1, 2, 4. Textbook material of section 1.

## References (continued)

---

6. J. Haah, *Product decomposition of periodic functions in quantum signal processing*. Quantum **3**, 190 (2019); QSPPACK (Y. Dong *et al.*, Phys. Rev. A **103**, 042419 (2021)); pyqsp ( [github.com/ichuang/pyqsp](https://github.com/ichuang/pyqsp) ).
7. G. Sanderson, *But what is a convolution?*, 3Blue1Brown (2022), [youtu.be/KuXjwB4LzSA](https://youtu.be/KuXjwB4LzSA) ; source [github.com/3b1b/videos](https://github.com/3b1b/videos) (MIT). The Manim Community Edition, [manim.community](https://manim.community) , renders every other clip.
8. C. E. Bradley *et al.*, *A ten-qubit solid-state spin register with quantum memory up to one minute*. Phys. Rev. X **9**, 031045 (2019). Presumed source of the nuclear-spin coherence-versus-decoupling figure on the  $T_2^*$  and decoupling slides (to be confirmed by the speaker).

# Thank you

*Questions & discussion*

**Donghun Jung**

Paulee Group, Center for Quantum Technology, KIST