

AlloSystem Install Tutorial

Lance Putnam and Lars Knudsen

January 31, 2013

Contents

1	Introduction	1
1.1	Supported Operating Systems	1
2	Get Development Tools	2
2.1	Linux Ubuntu	2
2.2	Mac OS X	2
2.3	Windows and MinGW/MSYS	5
3	Install AlloSystem	7
3.1	Build AlloSystem	7
3.2	Build GLV and Gamma	8
4	Creating Your Own Projects	9
4.1	Create Project Directory	9
4.2	Compiling and Running Applications	9
5	Advanced Project Configuration	10
5.1	Linking to Other Libraries	10
5.2	Compiling Your Own Object Code	10

1 Introduction

This tutorial explains how to install AlloSystem under Linux Ubuntu, Mac OS X, and Windows. The main means of operating AlloSystem is through a Unix-like shell and GNU tools GCC and make. The first part of the tutorial explains how to set up a Unix environment and install the necessary tools. The second part describes how to install AlloSystem. The last part explains how to compile and run custom applications using AlloSystem.

1.1 Supported Operating Systems

Currently, the following operating systems are known to work with AlloSystem:

- Linux Ubuntu
- Mac OS X 10.5.x (Leopard), 10.6.x (Snow Leopard), 10.7.x (Lion), 10.8.x (Mountain Lion)
- Windows 7

For Windows users, it is highly recommended to install Linux Ubuntu. This can be done easily and safely using Wubi. If you choose to use operating systems or tools other than those recommended in this tutorial, then *you are on your own*.

2 Get Development Tools

The first step is to obtain the development tools necessary to compile and run AlloSystem programs. Skip to the platform you are using and follow the instructions there.

2.1 Linux Ubuntu

Ensure that both `make` and `g++` are installed by entering the following command in the terminal:

```
$ sudo apt-get install make g++
```

When that finishes, proceed to 3.


2.2 Mac OS X

Before Beginning


Before beginning to install the development tools, it is crucial that you complete any OS updates. If you don't, the installation of Xcode may fail with an "unknown error". (This is a known issue with OS X 10.6.x Snow Leopard and Xcode 3.2.6.) Do system updates by clicking the Apple symbol in the upper-left corner of the screen and then selecting "Software Update...". Let the updater finish its course which may require restarting. Repeat this update process until there are no more updates.

Get Apple Development Tools


To get the Apple development tools, start by going to <http://developer.apple.com/programs/register>. Click the 'Sign In' button to login or create a new account.

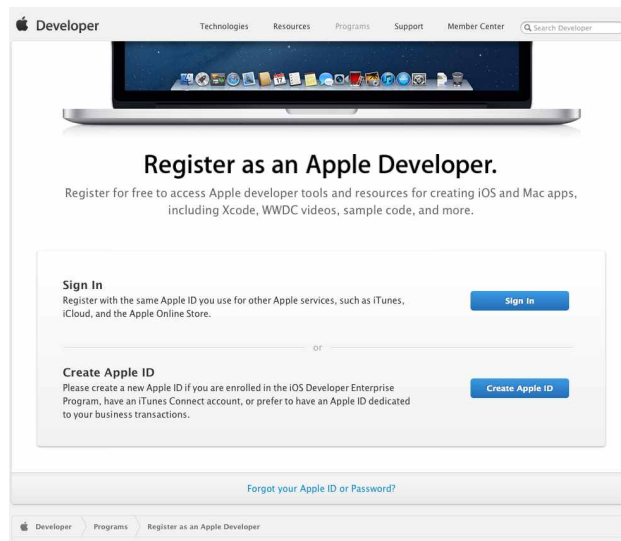


Under 'Dev Centers' click 'Mac'.

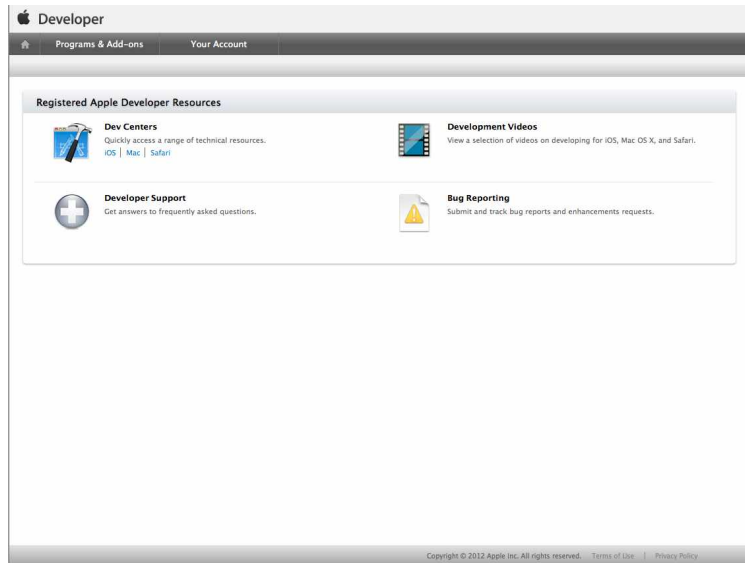

Scroll down and click 'View all downloads'.

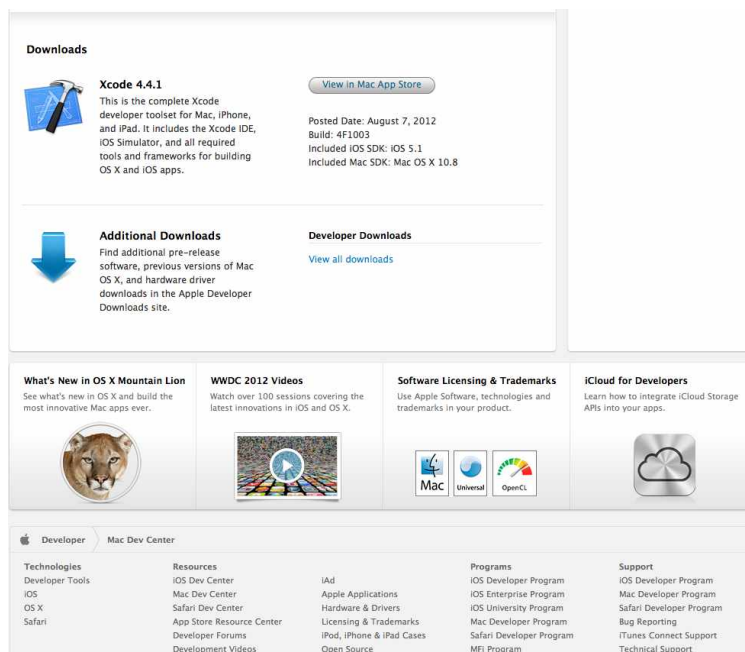

This takes you to a search page.

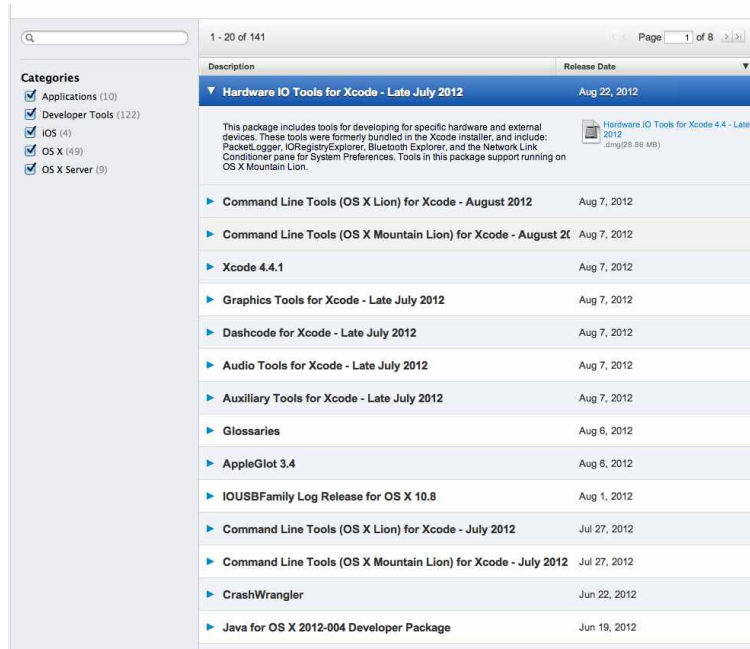

Enter 'Xcode' into the search bar and get the latest version of *Xcode* **and** *Command Line Tools* that work for your version of OS X. (Note that with older versions of Xcode the command line tools are included with Xcode.) Unfortunately, every major version of OS X seems to have a new and backwards-incompatible version of Xcode. Use the following table to determine which version of Xcode and Command Line Tools to install with what version of OS X:

OS X Version	What To Install
10.5 (Leopard)	Xcode 3.1.4 Developer Tools
10.6 (Snow Leopard)	Xcode 3.2.6 and iOS SDK 4.3
10.7 (Lion)	Xcode 4.4.1, Command Line Tools (OS X Lion) - August 2012
10.8 (Mountain Lion)	Xcode 4.4.1, Command Line Tools (OS X Mountain Lion) - August 2012

Table 1: What tools to install for which version of OS X

After downloading the disk images (.dmg file), double-click them to mount them (if not done automatically). If you downloaded either Xcode 3.1.4 or Xcode 3.2.6, double-click the appropriate package (.pkg) file inside the mounted drive to run the installer. If you downloaded Xcode 4.4.1, then drag-n-drop the Xcode icon into your Applications folder and then run the Command Line Tools installer. When installation is complete, you will have both an editor and all the command-line tools we will be using such as 'make' and 'g++'.

Notes On Multiple Versions of Xcode

This section is only relevant if you have older versions of Xcode installed and are trying to install a newer version. If you are installing Xcode for the first time, then skip to the next section.

If you have older versions of Xcode installed and want to remove them (i.e., to save space or fix installation problems) you can uninstall them by running in a terminal

```
$ sudo /Developer/Library/uninstall-devtools --mode=all
```

If you want to keep multiple versions of Xcode installed on your machine, you can switch between them by running

```
$ sudo xcode-select -switch [path to Xcode]
```

where the path after `-switch` is the version of Xcode you want to use, e.g. `/Applications/Xcode.app/`.

Install Package Manager

We will use Macports, a package management tool for OS X, to install AlloSystem dependencies. Download and install the latest version from <http://www.macports.org/install.php>. Make sure to install the correct version for your version of OSX (Leopard, Snow Leopard, Lion, or Mountain Lion).

2.3 Windows and MinGW/MSYS

Install Code Editor

You will need to install an editor that recognizes and syntax colorizes source code. We recommend either Visual Studio Express or Notepad++. Visual Studio is a full-blown IDE while Notepad++ is a lightweight text editor. Notepad++ is preferred as it starts up much more quickly.

Install MinGW and MSYS

MinGW is an emulation of the GCC compiler suite. MSYS provides a Unix-like CLI and commands (bash, make, grep, etc.). Download and run the latest version of the MinGW installer `mingw-get-inst-xxxxxxx.exe` from <http://sourceforge.net/projects/mingw/files/Installer/mingw-get-inst/>. Be careful when installing not to install MinGW in a path containing spaces, such as `C:\Program Files (x86)\MinGW`, as this will cause a lot of problems later on. The rest of the tutorial assumes `C:\MinGW` is the install directory. If you choose another install directory just replace any following instances of `C:\MinGW` with your path. When asked to "Select Components", choose

- C Compiler
- C++ Compiler
- MSYS Basic System

Finish the MinGW installer.


Next, bring up a DOS prompt. Do this by clicking the Windows button in the lower-left corner, typing `cmd.exe` into the search bar, and pressing enter. At the DOS prompt, execute the following commands:

```
cd C:\MinGW\bin
mingw-get update
mingw-get install msys-wget msys-unzip msys-man
```

This will install additional programs for MSYS that we will need later to install dependencies. When the install command is finished, close the DOS prompt window and move on to the next step.

Start MSYS

Open a new MSYS shell (not to be confused with a DOS shell!) by launching MSYS from the Start menu or desktop or by running `C:\MinGW\msys\1.0\msys.bat`. The MSYS shell looks like this:

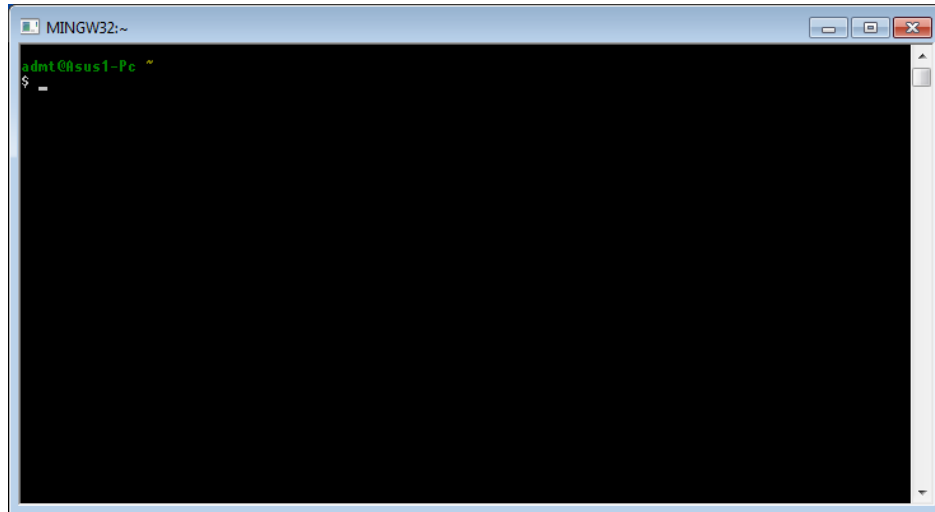

By default, the MSYS directory `C:\MinGW\msys\1.0` will be mounted as root directory `/` and as `/usr/`. Traditional Windows drives, like `C:` and `D:`, can be accessed as `/d` or `/e`. Use the `mount` command to get an overview of all the drive mappings.

3 Install AlloSystem

At this point, you should have the appropriate development tools installed. In the following instructions, when we say 'Unix shell' we mean MSYS for Windows users, and the 'Terminal' application for Mac OS X and Linux users.

3.1 Build AlloSystem

Download the AlloSystem source code <https://github.com/AlloSphere-Research-Group/AlloSystem/archive/stable13feb.zip>. Unzip the contents to ~/code/allosystem/ (if using Windows and MinGW/MSYS ~ will be something like C:/MinGW/msys/1.0/home/<username>). From the Unix shell, 'cd' into the allosystem/ directory. If you do 'ls' you should see something like:

```
$ ls
Makefile          alloGLV          alloutil
Makefile.buildandrun allocore          doc
Makefile.common   allocv           linux
Makefile.rules    allonect         osx
README.md         alloni
```

Next, you need to install the necessary dependencies for AlloSystem. (Windows users only: you must deactivate any virus checkers. Many virus checkers are known to terminate important configuration processes that take place in the following steps. If you do not disable them, then the libraries will not get installed properly.) Install dependencies with the following commands (notice if you are using MinGW/MSYS then you don't need the sudo in front of the command):

```
$ cd allocore
$ sudo ./install_dependencies.sh
$ cd ..
$ cd alloutil
$ sudo ./install_dependencies.sh
$ cd ..
```

If prompted for your password, enter the same password you use to log in to the OS. If you have trouble getting either of the scripts to run (the .sh files), then it's possible that the file modes are incorrect. Simply run

```
$ chmod u+x install_dependencies.sh
```

on the troublesome script(s). This will make them executable.

Installing all the dependencies may take some time, so please be patient. After dependencies are installed, the next step is to build the AlloCore and AlloUtil modules with the following commands:

```
$ make allocore
$ make alloutil
```

To check if the system is installed successfully you can build an example by navigating to the ~/code/allosystem/allocore folder and run the following command:

```
$ make examples/av/simpleApp.cpp
```

If a ball with oscillating color shows up, then your system is configured correctly.

3.2 Build GLV and Gamma

GLV is a GUI toolkit and Gamma is an audio synthesis library. We will use these libraries to extend the functionality of AlloSystem. First, download the source code of each at <https://github.com/AlloSphere-Research-Group/GLV/zipball/master> and <https://github.com/LancePutnam/Gamma/zipball/master>. Unzip them within the directory `~/code` (alongside where you installed AlloSystem). Rename the GLV and Gamma directories to GLV and Gamma. From the shell, this will look like

```
$ cd ~/code/  
$ ls  
allosystem  
Gamma  
GLV
```

Next, build GLV and Gamma using the following commands:

```
$ cd ~/code/allosystem  
$ make Gamma  
$ make GLV  
$ make alloGLV
```

4 Creating Your Own Projects

While AlloSystem is intended to be used mainly as a library, it does provide a simple means of compiling and running custom applications that link to AlloSystem. It is flexible enough to be used all the way from building simple prototypes to creating complex applications. This section describes how to setup and use AlloSystem's "build-and-run" capability.

4.1 Create Project Directory

The first step will be to configure AlloSystem to use your own custom project directory. We will call this your *user directory* and specify it generically as [userdir]. [userdir] can be anything you choose as long as it is a valid path, e.g., myprojects, mycode or your initials, such as ljp. Start by creating the directory ~/code/allosystem/[userdir]/. Next, make a copy of the file Makefile.usertemplate and name it Makefile.user. Makefile.user must be in the folder ~/code/allosystem/ along with Makefile.usertemplate. You can do this from the terminal with the commands

```
$ cd ~/code/allosystem/  
$ cp Makefile.usertemplate Makefile.user
```

Now, open Makefile.user in an editor and change the line reading

```
#RUN_DIRS += foo/
```

to

```
RUN_DIRS += [userdir]/
```

using the same directory name you created in the previous step. Notice the # (comment symbol) is removed. Also, do not forget the trailing slash after [userdir]. Relative paths in RUN_DIRS are relative to the the allosystem/ directory. At this point, AlloSystem will recognize your user directory as a valid build-and-run directory. You can add as many user directories as you like to RUN_DIRS remembering to separate them with spaces.

While it is possible to have as many user build-and-run directories, sometimes it is convenient to be able to build and run sources from other directories without always having to add them to the RUN_DIRS variable. This can be accomplished by creating a symbolic link in one of your valid build-and-run directories:

```
$ cd ~/code/allosystem/  
$ ln -s [sourcedir]/ [userdir]/[targetdir]
```

This creates a symbolic link to [sourcedir]/ that is treated like the directory [userdir]/[targetdir]/.

4.2 Compiling and Running Applications

At this point, you can place any source (.cpp) files having a main() function in any of your user directories (or any subdirectories thereof) and compile and run the source with the command

```
$ make [userdir]/myfile.cpp
```

Remember, you must be in ~/code/allosystem/ when running the make command.

5 Advanced Project Configuration

5.1 Linking to Other Libraries

If your projects need to link to libraries that are not already used by AlloSystem, then there is some additional configuration required. You can configure this in one of two ways—globally, where all projects link to specified libraries, or locally, where only a specific project links to specified libraries. To set up global linking, simply add the linker flags to your existing `Makefile.user` file. For example,

```
# Somewhere in Makefile.user ...

# Append directories to be searched for include files
CPPFLAGS += -I/usr/include/

# Append directories to be searched for library files
LDFLAGS += -L/usr/lib/

# Append libraries to be linked to
LDFLAGS += -lfftw3f -lMagick++
```

If you would only like local linking, that is, linking to libraries for only one project, then place all the project's source files along with a file `flags.txt` in a subdirectory of one of your user directories. Then, in `flags.txt`, add all the necessary linker flags in the same way as done above with `Makefile.user`.

5.2 Compiling Your Own Object Code

There comes a time when you would like many separate projects to reuse your own custom code, akin to using a library. For example, you may have several utility functions or classes that you would like all projects to have access to. Let's say you have the two files `myutils.h` and `myutils.cpp` that contain your custom functions and classes. At this point, all that is necessary is to place these files in some directory, say `~/code/allosystem/myutils/`, and add the following line to your existing `Makefile.user` file:

```
RUN_SRC_DIRS += myutils/
```
