

JavaFX Documentation Project

Published 2017-06-12

Table of Contents

1. Introduction	1
1.1. Contributors	1
1.2. Contributing	1
2. Scenegraph	2
3. UI Controls	3
3.1. ChoiceBox	3
3.2. ComboBox	7
3.3. ListView	11
3.4. TableView	18
3.5. ImageView	24
3.6. LineChart	27
4. Layout	30
4.1. VBox and HBox	30
4.2. Absolute Positioning with Pane	37
4.3. Clipping	43
4.4. GridPane	47
4.5. GridPane Spanning	51
4.6. GridPane ColumnConstraints and RowConstraints	56
4.7. AnchorPane	65
4.8. TilePane	70
4.9. TitledPane	77
5. CSS	82
6. Performance	83
7. Application Structure	84
7.1. The MVVM Pattern	84
7.2. Model Change with MVVM	92
7.3. The Dialog Class	106
8. Best Practices	113
8.1. Styleable Properties	113
8.2. Tasks	113
8.3. Avoid Nulls in ComboBoxes	120
8.4. Writing Javadoc for JavaFX Properties	126
8.5. Ignoring Warnings for Null Select Binding Expressions	128
8.6. POJO Binding	129
9. Contributing	136
10. License	137

Chapter 1. Introduction

The JavaFX Documentation Project aims to pull together useful information for JavaFX developers from all over the web. The project is [open source](#) and encourages community participation to ensure that the documentation is as highly polished and useful as possible.

1.1. Contributors

This project would not be possible without the contributors who work hard on the content contained within this documentation. Whenever possible contributors are given attribution within the document when they write a section, but it is also important to gather all names here, at the top of the document, to give the recognition that these contributors deserve.

1.2. Contributing

Contributing to this project is easy - fork the [GitHub](#) repo, edit the relevant files, and create a pull request! Once merged, your content will form a part of the documentation and you'll have the unending appreciation of the entire community!

The JavaFX Documentation Project uses AsciiDoc as the syntax of choice for writing the documentation. The [AsciiDoc Syntax Quick Reference](#) guide is a great resource for those learning how to write AsciiDoc.

Authors are welcome to include a byline beneath the sections that they have authored. To ensure consistency, the recommended format for the byline is the following:

Contributed by <name> - <website>

Chapter 2. Scenegraph

Placeholder whilst things get built...↵

Chapter 3. UI Controls

3.1. ChoiceBox

Author: Carl Walker

This article demonstrates the `ChoiceBox`. The `ChoiceBox` control is a list of values from which the user makes a selection. In this particular implementation, there is an empty value which makes the selection optional.

The following screenshot shows `ChoiceBox` app. A selection "Furniture" is made and the `Save Button` is pressed. The `Save Button` call invokes a `println()` which prints out the object.

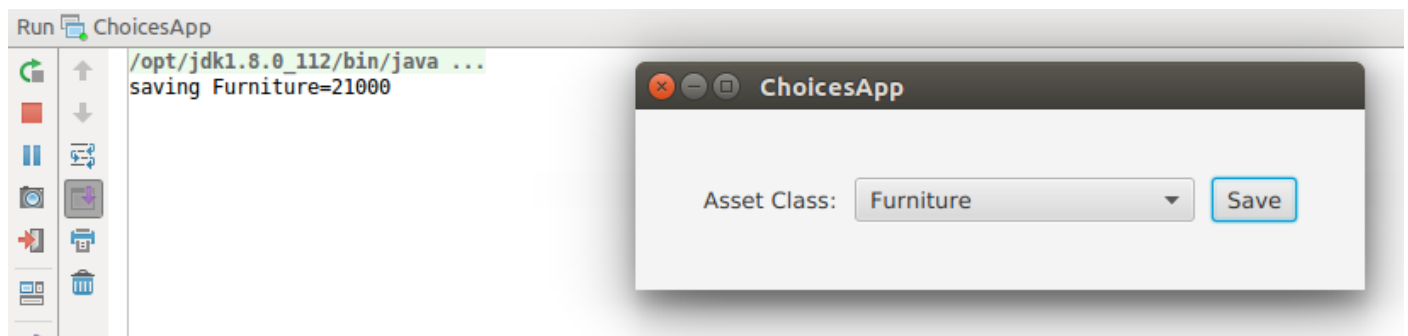


Figure 1. ChoiceBox Printing Out Selection

The program puts a `Label`, a `ChoiceBox`, and a `Button` into an `HBox`. An action is set on the `Save Button` which prints out the value.

The simplest usage of the `ChoiceBox` is to fill it with `Strings`. This `ChoiceBox` in this article is built on a JavaFX class called `Pair`. `Pair` is a general container for any key/value pair and can be used in place of a domain or other special-purpose object. `Strings` should only be used if they can be used without manipulation or decoded consistently.

ChoicesApp.class

```
public class ChoicesApp extends Application {

    private final ChoiceBox<Pair<String,String>> assetClass = new ChoiceBox<>();

    @Override
    public void start(Stage primaryStage) throws Exception {

        Label label = new Label("Asset Class:");
        assetClass.setPrefWidth(200);
        Button saveButton = new Button("Save");

        HBox hbox = new HBox(
            label,
            assetClass,
            saveButton);
        hbox.setSpacing( 10.0d );
        hbox.setAlignment(Pos.CENTER );
        hbox.setPadding( new Insets(40) );

        Scene scene = new Scene(hbox);

        initChoice();

        saveButton.setOnAction(
            (evt) -> System.out.println("saving " + assetClass.getValue())
        );

        primaryStage.setTitle("ChoicesApp");
        primaryStage.setScene( scene );
        primaryStage.show();

    }
}
```

3.1.1. StringConverter

When using a complex object to back a `ChoiceBox`, a `StringConverter` is needed. This object serializes a `String` to and from the `ChoiceBox`. For this program, only the `toString()` needs to be coded which replaces the default `toString()` of the `Pair` object. (Both `toString` and `fromString` will need an implementation in order to compile.)

An empty object `EMPTY_PAIR` is used to prevent `NullPointerExceptions`. The returned value from `assetClass().getValue()` can be accessed and compared consistently without adding special null handling logic.

```

private final static Pair<String, String> EMPTY_PAIR = new Pair<>("", "");

private void initChoice() {

    List<Pair<String,String>> assetClasses = new ArrayList<>();
    assetClasses.add( new Pair("Equipment", "20000"));
    assetClasses.add( new Pair("Furniture", "21000"));
    assetClasses.add( new Pair("Investment", "22000"));

    assetClass.setConverter( new StringConverter<Pair<String,String>>() {
        @Override
        public String toString(Pair<String, String> pair) {
            return pair.getKey();
        }

        @Override
        public Pair<String, String> fromString(String string) {
            return null;
        }
    });

    assetClass.getItems().add( EMPTY_PAIR );
    assetClass.getItems().addAll( assetClasses );
    assetClass.setValue( EMPTY_PAIR );

}

```

The ChoiceBox is used to select from a list of values. When the list of values is a complex type, provide a StringFormatter to serialize a list object into something presentable. If possible, use an empty object (rather than a null) to support optional values.

Complete Code

The code can be tested in a single .java file.

ChoicesApp.class

```

public class ChoicesApp extends Application {

    private final ChoiceBox<Pair<String,String>> assetClass = new ChoiceBox<>();

    private final static Pair<String, String> EMPTY_PAIR = new Pair<>("", "");

    @Override
    public void start(Stage primaryStage) throws Exception {

        Label label = new Label("Asset Class:");
        assetClass.setPrefWidth(200);
        Button saveButton = new Button("Save");

        HBox hbox = new HBox(
            label,

```

```

        assetClass,
        saveButton);
hbox.setSpacing( 10.0d );
hbox.setAlignment(Pos.CENTER );
hbox.setPadding( new Insets(40) );

Scene scene = new Scene(hbox);

initChoice();

saveButton.setOnAction(
    (evt) -> System.out.println("saving " + assetClass.getValue())
);

primaryStage.setTitle("ChoicesApp");
primaryStage.setScene( scene );
primaryStage.show();
}

private void initChoice() {

    List<Pair<String,String>> assetClasses = new ArrayList<>();
    assetClasses.add( new Pair("Equipment", "20000"));
    assetClasses.add( new Pair("Furniture", "21000"));
    assetClasses.add( new Pair("Investment", "22000"));

    assetClass.setConverter( new StringConverter<Pair<String,String>>() {
        @Override
        public String toString(Pair<String, String> pair) {
            return pair.getKey();
        }

        @Override
        public Pair<String, String> fromString(String string) {
            return null;
        }
    });

    assetClass.getItems().add( EMPTY_PAIR );
    assetClass.getItems().addAll( assetClasses );
    assetClass.setValue( EMPTY_PAIR );

}

public static void main(String[] args) {
    launch(args);
}
}

```


3.2. ComboBox

Author: Carl Walker

A `ComboBox` is a hybrid control that presents a list of values plus an edit control. This article demonstrates a basic form of the `ComboBox` which is an un-editable list of items built on a complex data structure.

This screenshot shows a `ComboBoxApp` containing a list of expense accounts. The accounts are stored in a key/value JavaFX class `Pair`. The console shows the result of a save operation after the user selects "Auto Expense".

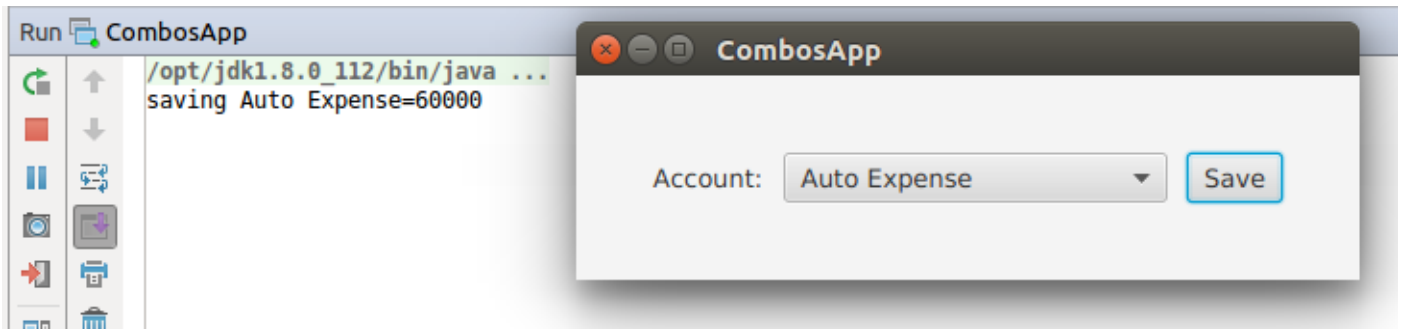


Figure 2. ComboBox Application

This code adds a `Label`, a `ComboBox`, and a `Button` to an `HBox`. The `ComboBox` is instantiated as a field and initialized in a method presented later `initCombo()`. A handler is put on the `Save Button` which outputs a value if an item is selected or a special message if no item is selected.

CombosApp.class

```
public class CombosApp extends Application {

    private final ComboBox<Pair<String, String>> account = new ComboBox<>();

    private final static Pair<String, String> EMPTY_PAIR = new Pair<>("", "");

    @Override
    public void start(Stage primaryStage) throws Exception {

        Label accountsLabel = new Label("Account:");
        account.setPrefWidth(200);
        Button saveButton = new Button("Save");

        HBox hbox = new HBox(
            accountsLabel,
            account,
            saveButton);
        hbox.setSpacing( 10.0d );
        hbox.setAlignment(Pos.CENTER );
        hbox.setPadding( new Insets(40) );

        Scene scene = new Scene(hbox);

        initCombo();

        saveButton.setOnAction( (evt) -> {
            if( account.getValue().equals(EMPTY_PAIR) ) {
                System.out.println("no save needed; no item selected");
            } else {
                System.out.println("saving " + account.getValue());
            }
        });

        primaryStage.setTitle("CombosApp");
        primaryStage.setScene( scene );
        primaryStage.show();
    }
}
```

3.2.1. CellFactory

The `initCombo()` method adds several expense accounts to a `List`. This `List` is added to the `ComboBox` items after an empty `Pair` object is added. The initial value is set to the `EMPTY_PAIR` which is a constant.

If not specified, the `ComboBox` will use the `toString()` method of the object (in this article, a `Pair`) to render a backing object. For Strings, such as a "Yes" or "No" selection, no extra code is needed. However, the `toString()` of a `Pair` will output both the human-readable key and the machine-preferred value. The requirements for this `ComboBox` are to use only the human-readable keys in the display.

To do this, a `cellFactory` is provided which will configure a `ListCell` object with the `Pair` key as the contents. The `Callback` type is verbose, but the gist of the factory is set the text of a `ListCell` in the `updateItem()` method of an anonymous inner class. Notice that the super class method must be called.

```
private void initCombo() {

    List<Pair<String,String>> accounts = new ArrayList<>();

    accounts.add( new Pair<>("Auto Expense", "60000") );
    accounts.add( new Pair<>("Interest Expense", "61000") );
    accounts.add( new Pair<>("Office Expense", "62000") );
    accounts.add( new Pair<>("Salaries Expense", "63000") );

    account.getItems().add( EMPTY_PAIR );
    account.getItems().addAll( accounts );
    account.setValue( EMPTY_PAIR );

    Callback<ListView<Pair<String,String>>, ListCell<Pair<String,String>>> factory
=
        (lv) ->
            new ListCell<Pair<String,String>>() {
                @Override
                protected void updateItem(Pair<String, String> item, boolean
empty) {

                    super.updateItem(item, empty);
                    if( empty ) {
                        setText("");
                    } else {
                        setText( item.getKey() );
                    }
                }
            };

    account.setCellFactory( factory );
    account.setButtonCell( factory.call( null ) );
}
```

The `Callback` is used in the `setButtonCell()` method to provide a cell for the editing control. Note that this program is not editable which is the default. However, the `factory.call(null)` is needed otherwise only the contents of the popup menu will be properly formatted and the view of the control at rest will fallback on a `toString()`.

This article presented a simple usage of `ComboBox`. Since this control was not editable, `ChoiceBox` can be substituted. For un-editable graphical renderings (ex a color coded shape for a status value), `ComboBox` still would be needed to define the specific `Node` used in the control.

Complete Code

The code can be tested in a single `.java` file.

CombosApp.class

```

public class CombosApp extends Application {

    private final ComboBox<Pair<String, String>> account = new ComboBox<>();

    private final static Pair<String, String> EMPTY_PAIR = new Pair<>("", "");

    @Override
    public void start(Stage primaryStage) throws Exception {

        Label accountsLabel = new Label("Account:");
        account.setPrefWidth(200);
        Button saveButton = new Button("Save");

        HBox hbox = new HBox(
            accountsLabel,
            account,
            saveButton);
        hbox.setSpacing( 10.0d );
        hbox.setAlignment(Pos.CENTER );
        hbox.setPadding( new Insets(40) );

        Scene scene = new Scene(hbox);

        initCombo();

        saveButton.setOnAction( (evt) -> {
            if( account.getValue().equals(EMPTY_PAIR) ) {
                System.out.println("no save needed; no item selected");
            } else {
                System.out.println("saving " + account.getValue());
            }
        });

        primaryStage.setTitle("CombosApp");
        primaryStage.setScene( scene );
        primaryStage.show();
    }

    private void initCombo() {

        List<Pair<String,String>> accounts = new ArrayList<>();

        accounts.add( new Pair<>("Auto Expense", "60000") );
        accounts.add( new Pair<>("Interest Expense", "61000") );
        accounts.add( new Pair<>("Office Expense", "62000") );
        accounts.add( new Pair<>("Salaries Expense", "63000") );

        account.getItems().add( EMPTY_PAIR );
        account.getItems().addAll( accounts );
        account.setValue( EMPTY_PAIR );

        Callback<ListView<Pair<String,String>>, ListCell<Pair<String,String>>> factory

```

```

        (lv) ->
            new ListCell<Pair<String,String>>() {
                @Override
                protected void updateItem(Pair<String, String> item, boolean
empty) {
                    super.updateItem(item, empty);
                    if( empty ) {
                        setText("");
                    } else {
                        setText( item.getKey() );
                    }
                }
            };

        account.setCellFactory( factory );
        account.setButtonCell( factory.call( null ) );
    }

    public static void main(String[] args) {
        launch(args);
    }
}

```

3.3. ListView

3.3.1. ListView Filtering in JavaFX

Author: Carl Walker

This article demonstrates how to filter a ListView in a JavaFX Application. Two lists are managed by the Application. One list contains all of the items in the data model. The second list contains the items currently being viewed. A scrap of comparison logic stored as a filter mediates between the two.

Binding is used heavily to keep the data structures in sync with what the user has selected.

This screenshot shows the Application which contains a top row of ToggleButtons which set the filter and a ListView containing the objects.

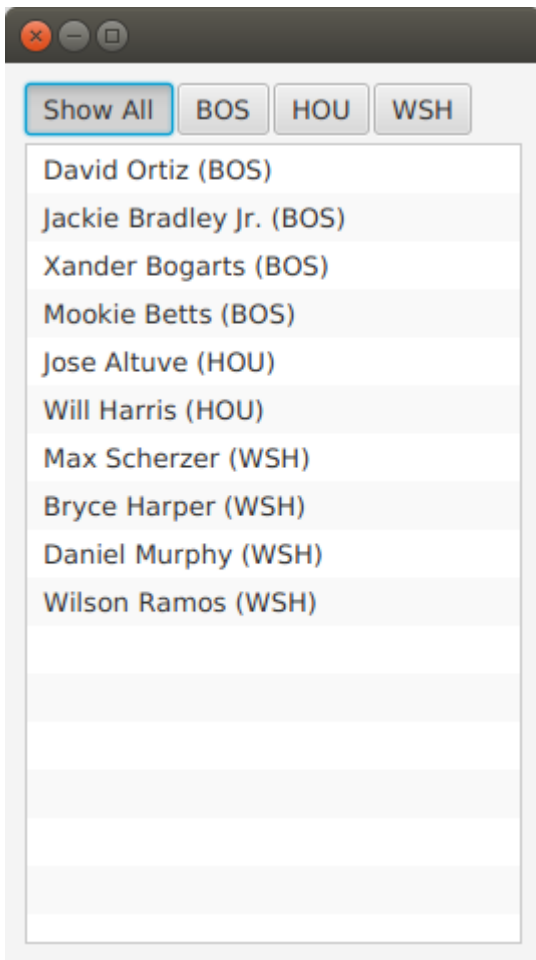


Figure 3. Screenshot of ListView Filtering App

The complete code—a single .java file—is listed at the end of the article.

Data Structures

The program begins with a domain model `Player` and an array of `Player` objects.

```
static class Player {  
  
    private final String team;  
    private final String playerName;  
    public Player(String team, String playerName) {  
        this.team = team;  
        this.playerName = playerName;  
    }  
    public String getTeam() {  
        return team;  
    }  
    public String getPlayerName() {  
        return playerName;  
    }  
    @Override  
    public String toString() { return playerName + " (" + team + ")"; }  
}
```

The `Player` class contains a pair of fields, `team` and `playerName`. A `toString()` is provided so that

when the object is added to the ListView (presented later), a custom ListCell class is not needed.

The test data for this example is a list of American baseball players.

```
Player[] players = {new Player("BOS", "David Ortiz"),
                    new Player("BOS", "Jackie Bradley Jr."),
                    new Player("BOS", "Xander Bogarts"),
                    new Player("BOS", "Mookie Betts"),
                    new Player("HOU", "Jose Altuve"),
                    new Player("HOU", "Will Harris"),
                    new Player("WSH", "Max Scherzer"),
                    new Player("WSH", "Bryce Harper"),
                    new Player("WSH", "Daniel Murphy"),
                    new Player("WSH", "Wilson Ramos") };
```

Model

As mentioned at the start of the article, the ListView filtering is centered around the management of two lists. All the objects are stored in a wrapped ObservableList playersProperty and the objects that are currently viewable are stored in a wrapped FilteredList, viewablePlayersProperty. viewablePlayersProperty is built off of playersProperty so updates made to players that meet the FilteredList criteria will also be made to viewablePlayers.

```
ReadOnlyObjectProperty<ObservableList<Player>> playersProperty =
    new SimpleObjectProperty<>(FXCollections.observableArrayList());

ReadOnlyObjectProperty<FilteredList<Player>> viewablePlayersProperty =
    new SimpleObjectProperty<FilteredList<Player>>(
        new FilteredList<>(playersProperty.get()
            ));
```

filterProperty() is a convenience to allow callers to bind to the underlying Predicate.

```
ObjectProperty<Predicate<? super Player>> filterProperty =
    viewablePlayersProperty.get().predicateProperty();
```

The UI root is a VBox which contains an HBox of ToggleButtons and a ListView.

```
VBox vbox = new VBox();
vbox.setPadding( new Insets(10));
vbox.setSpacing(4);

HBox hbox = new HBox();
hbox.setSpacing( 2 );

ToggleGroup filterTG = new ToggleGroup();
```

Filtering Action

A handler is attached the ToggleButtons which will modify filterProperty. Each ToggleButton is supplied a Predicate in the userData field. toggleHandler uses this supplied Predicate when setting the filter property. This code sets the special case "Show All" ToggleButton.

```
@SuppressWarnings("unchecked")
EventHandler<ActionEvent> toggleHandler = (event) -> {
    ToggleButton tb = (ToggleButton)event.getSource();
    Predicate<Player> filter = (Predicate<Player>)tb.getUserData();
    filterProperty.set( filter );
};

ToggleButton tbShowAll = new ToggleButton("Show All");
tbShowAll.setSelected(true);
tbShowAll.setToggleGroup( filterTG );
tbShowAll.setOnAction(toggleHandler);
tbShowAll.setUserData( (Predicate<Player>) (Player p) -> true);
```

The ToggleButtons that filter a specific team are created at runtime based on the Players array. This Stream does the following.

1. Distill the list of Players down to a distinct list of team Strings
2. Create a ToggleButton for each team String
3. Set a Predicate for each ToggleButton to be used as a filter
4. Collect the ToggleButtons for addition into the HBox container

```
List<ToggleButton> tbs = Arrays.asList( players)
    .stream()
    .map( (p) -> p.getTeam() )
    .distinct()
    .map( (team) -> {
        ToggleButton tb = new ToggleButton( team );
        tb.setToggleGroup( filterTG );
        tb.setOnAction( toggleHandler );
        tb.setUserData( (Predicate<Player>) (Player p) -> team.equals(p.getTeam())
    );
    return tb;
})
    .collect(Collectors.toList());

hbox.getChildren().add( tbShowAll );
hbox.getChildren().addAll( tbs );
```

ListView

The next step creates the ListView and binds the ListView to the viewablePlayersProperty. This enables the ListView to receive updates based on the changing filter.


```
ListView<Player> lv = new ListView<>();
lv.itemsProperty().bind( viewablePlayersProperty );
```

The remainder of the program creates a Scene and shows the Stage. `onShown` loads the data set into the `playersProperty` and the `viewablePlayersProperty` lists. Although both lists are in sync in this particular version of the program, if the stock filter is every different than "no filter", this code would not need to be modified.

```
vbox.getChildren().addAll( hbox, lv );

Scene scene = new Scene(vbox);

primaryStage.setScene( scene );
    primaryStage.setOnShown((evt) -> {
        playersProperty.get().addAll( players );
    });

primaryStage.show();
```

This article used binding to tie a list of viewable Player objects to a ListView. The viewable Players were updated when a ToggleButton is selected. The selection applied a filter to a full set of Players which was maintained separately as a FilteredList (thanks @kleopatra_jx). Binding was used to keep the UI in sync and to allow for a separation of concerns in the design.

Further Reading

To see how such a design would implement basic add and remove functionality, visit the following page https://courses.bekwam.net/public_tutorials/bkcourse_filterlistapp.php.

Complete Code

The code can be tested in a single .java file.

[illegible]

```

        new Player("WSH", "Wilson Ramos") });

//
// Set up the model which is two lists of Players and a filter criteria
//
ReadOnlyObjectProperty<ObservableList<Player>> playersProperty =
    new SimpleObjectProperty<>(FXCollections.observableArrayList());

ReadOnlyObjectProperty<FilteredList<Player>> viewablePlayersProperty =
    new SimpleObjectProperty<FilteredList<Player>>(
        new FilteredList<>(playersProperty.get()
            ));

ObjectProperty<Predicate<? super Player>> filterProperty =
    viewablePlayersProperty.get().predicateProperty();

//
// Build the UI
//
VBox vbox = new VBox();
vbox.setPadding( new Insets(10));
vbox.setSpacing(4);

HBox hbox = new HBox();
hbox.setSpacing( 2 );

ToggleGroup filterTG = new ToggleGroup();

//
// The toggleHandler action wills set the filter based on the TB selected
//
@SuppressWarnings("unchecked")
EventHandler<ActionEvent> toggleHandler = (event) -> {
    ToggleButton tb = (ToggleButton)event.getSource();
    Predicate<Player> filter = (Predicate<Player>)tb.getUserData();
    filterProperty.set( filter );
};

ToggleButton tbShowAll = new ToggleButton("Show All");
tbShowAll.setSelected(true);
tbShowAll.setToggleGroup( filterTG );
tbShowAll.setOnAction(toggleHandler);
tbShowAll.setUserData( (Predicate<Player>) (Player p) -> true);

//
// Create a distinct list of teams from the Player objects, then create
// ToggleButtons
//
List<ToggleButton> tbs = Arrays.asList( players)
    .stream()
    .map( (p) -> p.getTeam() )
    .distinct()

```

```

        .map( (team) -> {
            ToggleButton tb = new ToggleButton( team );
            tb.setToggleGroup( filterTG );
            tb.setOnAction( toggleHandler );
            tb.setUserData( (Predicate<Player>) (Player p) ->
team.equals(p.getTeam()) );
            return tb;
        })
        .collect(Collectors.toList());

hbox.getChildren().add( tbShowAll );
hbox.getChildren().addAll( tbs );

//
// Create a ListView bound to the viewablePlayers property
//
ListView<Player> lv = new ListView<>();
lv.itemsProperty().bind( viewablePlayersProperty );

vbox.getChildren().addAll( hbox, lv );

Scene scene = new Scene(vbox);

primaryStage.setScene( scene );
primaryStage.setOnShown((evt) -> {
    playersProperty.get().addAll( players );
});

primaryStage.show();
}

public static void main(String args[]) {
    launch(args);
}

static class Player {

    private final String team;
    private final String playerName;
    public Player(String team, String playerName) {
        this.team = team;
        this.playerName = playerName;
    }
    public String getTeam() {
        return team;
    }
    public String getPlayerName() {
        return playerName;
    }
    @Override
    public String toString() { return playerName + " (" + team + ")"; }
}

```


```
}
```

3.4. TableView

Author: Carl Walker

For JavaFX business applications, the `TableView` is an essential control. Use a `TableView` when you need to present multiple records in a flat row/column structure. This example shows the basic elements of a `TableView` and demonstrates the power of the component when JavaFX Binding is applied.

The demonstration app is a `TableView` and a pair of `Buttons`. The `TableView` has four `TableColumns`: `SKU`, `Item`, `Price`, `Tax`. The `TableView` shows three objects in three rows: Mechanical Keyboard, Product Docs, O-Rings. The following screenshot shows the app immediately after startup.

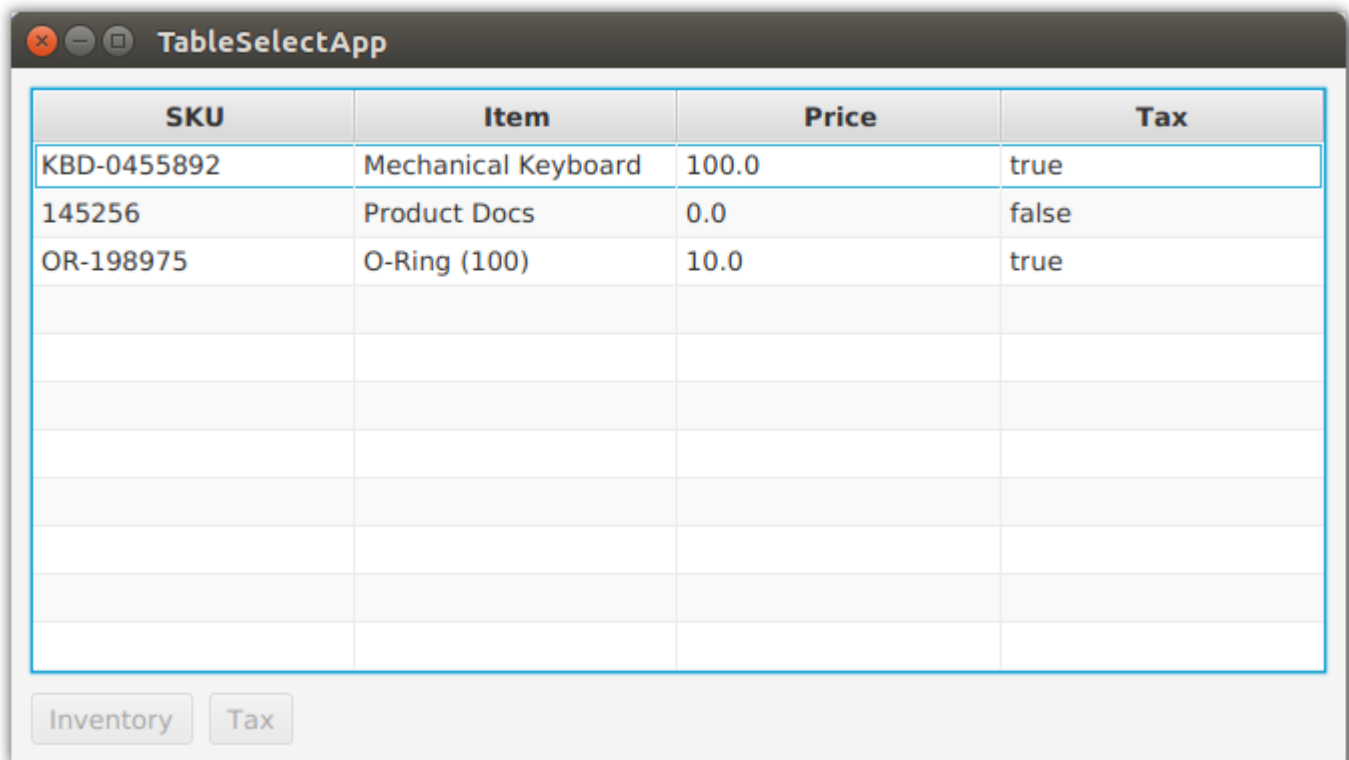

SKU	Item	Price	Tax
KBD-0455892	Mechanical Keyboard	100.0	true
145256	Product Docs	0.0	false
OR-198975	O-Ring (100)	10.0	true

Inventory Tax

Figure 4. Initial View of Demo App

The disabled logic of the `Buttons` is based on the selections in the `TableView`. Initially, no items are selected so both `Buttons` are disabled. If any item is selected—the first item in the following screenshot—the `Inventory Button` is enabled. The `Tax Button` is also enabled although that requires consulting the `Tax` value.

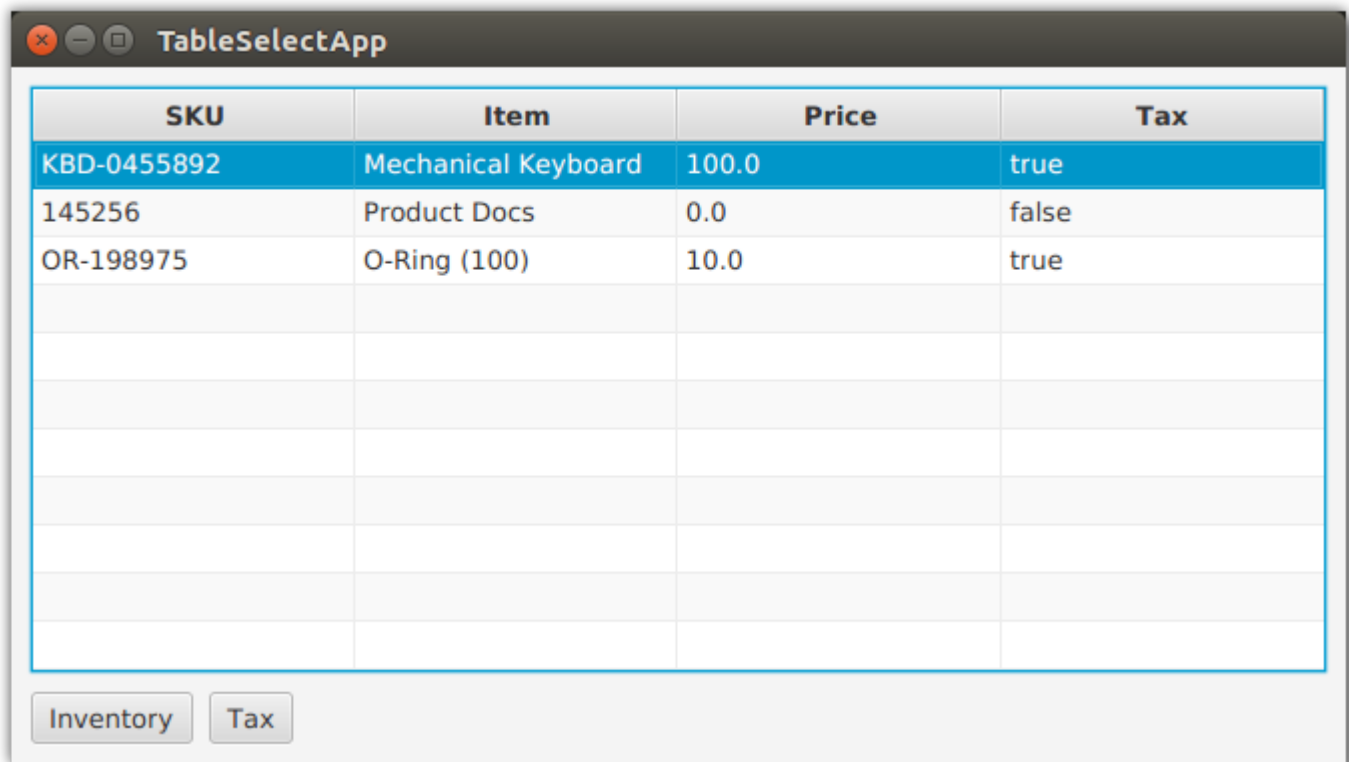


Figure 5. With Taxable Item Selected

If the Tax value for the selected item is false, then the Tax Button will be disabled. This screenshot shows the second item selected. The Inventory Button is enabled but the Tax Button is not.

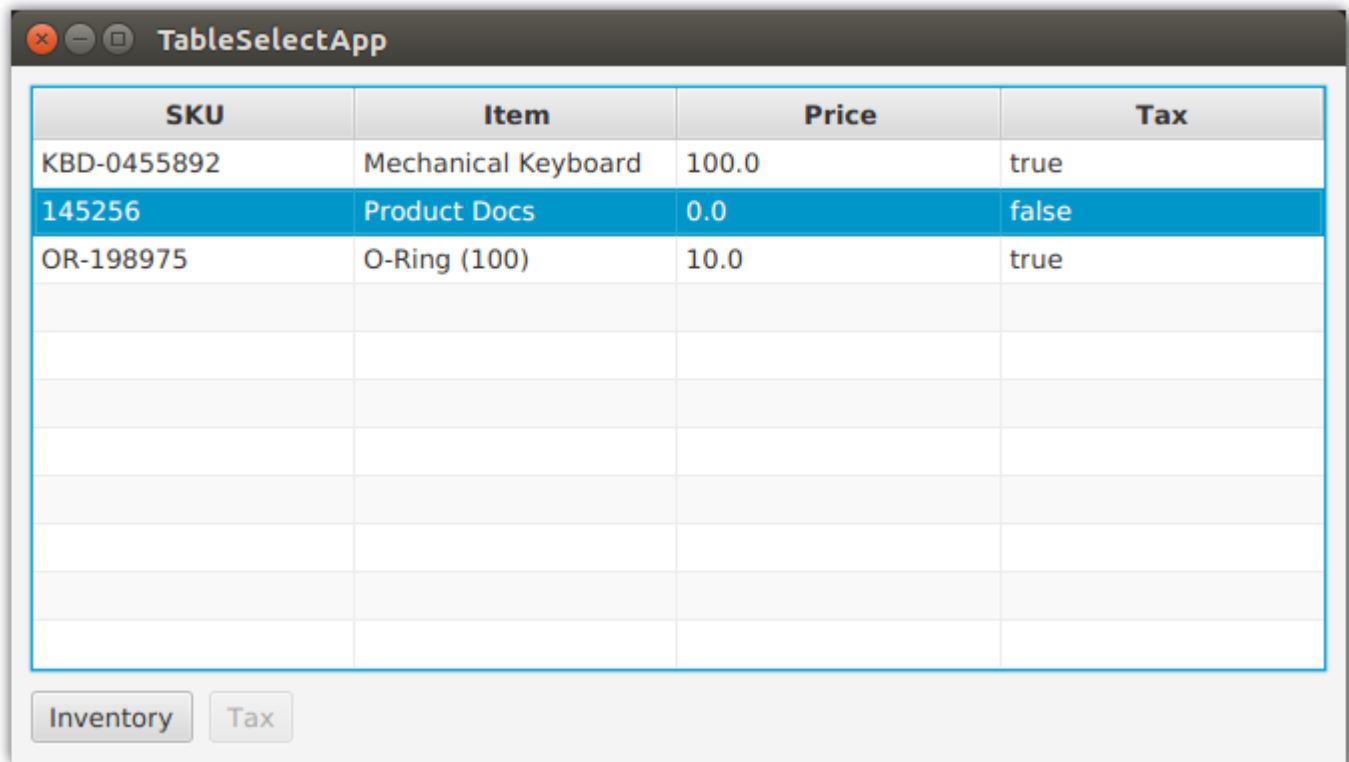


Figure 6. A Non-Taxable Item Disables the Tax Button

3.4.1. Model and Declarations

A `TableView` is based on a model which is a POJO called `Item`.

Item.java

```
public class Item {

    private final String sku;
    private final String descr;
    private final Float price;
    private final Boolean taxable;

    public Item(String sku, String descr, Float price, Boolean taxable) {
        this.sku = sku;
        this.descr = descr;
        this.price = price;
        this.taxable = taxable;
    }

    public String getSku() {
        return sku;
    }

    public String getDescr() {
        return descr;
    }

    public Float getPrice() {
        return price;
    }

    public Boolean getTaxable() {
        return taxable;
    }
}
```

The `TableView` and `TableColumn` use generics in their declarations. For `TableView`, the type parameter is `Item`. For the `TableColumns`, the type parameters are `Item` and the field type. The constructor of `TableColumn` accepts a column name. In this example, the column names diverge slightly from the actual field names.

TableSelectApp.java

```
TableView<Item> tblItems = new TableView<>();

TableColumn<Item, String> colSKU = new TableColumn<>("SKU");
TableColumn<Item, String> colDescr = new TableColumn<>("Item");
TableColumn<Item, Float> colPrice = new TableColumn<>("Price");
TableColumn<Item, Boolean> colTaxable = new TableColumn<>("Tax");

tblItems.getColumns().addAll(
    colSKU, colDescr, colPrice, colTaxable
);
```

Adding model items to the `TableView` is done by adding items to the underlying collection.

TableSelectApp.java

```
tblItems.getItems().addAll(
    new Item("KBD-0455892", "Mechanical Keyboard", 100.0f, true),
    new Item( "145256", "Product Docs", 0.0f, false ),
    new Item( "OR-198975", "O-Ring (100)", 10.0f, true)
);
```

At this point, the `TableView` has been configured and test data has been added. However, if you were to view the program, you would see three empty rows. That is because JavaFX is missing the linkage between the POJO and the `TableColumns`. That linkage is added to the `TableColumns` using a `cellValueFactory`.

TableSelectApp.java

```
colSKU.setCellValueFactory( new PropertyValueFactory<>("sku") );
colDescr.setCellValueFactory( new PropertyValueFactory<>("descr") );
colPrice.setCellValueFactory( new PropertyValueFactory<>("price") );
colTaxable.setCellValueFactory( new PropertyValueFactory<>("taxable") );
```

Viewing the program at this point will display the data in the appropriate columns.

3.4.2. Selection

To retrieve the selected item or items in a `TableView`, use the separate `selectionModel` object. Calling `tblItems.getSelectionModel()` returns an object that includes a property "selectedItem". This can be retrieved and used in a method, say to bring up an edit details screen. Alternatively, `getSelectionModel()` can return a JavaFX property "selectedItemProperty" for binding expressions.

In the demo app, two `Buttons` are bound to the `selectionModel` of the `TableView`. Without binding, you might add listeners that examine the selection and make a call like `setDisabled()` on a `Button`. Prior to the `TableView` selection, you would also need initialization logic to handle the case where there is no selection. The binding syntax expresses this logic in a declarative statement that can handle both the listener and the initialization in a single line.

TableSelectApp.java

```
Button btnInventory = new Button("Inventory");
Button btnCalcTax = new Button("Tax");

btnInventory.disableProperty().bind(
    tblItems.getSelectionModel().selectedItemProperty().isNull()
);
```

- See "Ignoring Warnings for Null Select Binding Expressions" under "Best Practices" to show how to turn off warning messages when using this construct

The `btnInventory` disable property will be true if there is no item selected (`isNull()`). When the screen is first displayed, no selection is made and the `Button` is disabled. Once any selection is made, `btnInventory` is enabled (`disable=false`).

the `btnCalcTax` logic is slightly more complex. `btnCalcTax` too is disabled when there is no selection. However, `btnCalcTax` will also consider the contents of the `selectedItem`. A composite binding `or()` is used to join these two conditions. As before, there is an `isNull()` expression for no selection. The `Bindings.select()` checks the value of `Item.taxable`. A true taxable `Item` will enable `btnCalcTax` while a false item will disable the `Button`.

TableSelectApp.java

```
btnCalcTax.disableProperty().bind(
    tblItems.getSelectionModel().selectedItemProperty().isNull().or(
        Bindings.select(
            tblItems.getSelectionModel().selectedItemProperty(),
            "taxable"
        ).isEqualTo(false)
    )
);
```

`Bindings.select()` is the mechanism to extract a field from an object. `selectedItemProperty()` is the changing `selectedItem` and `"taxable"` is the single-hop path to the `taxable` field.

This example showed how to set up a `TableView` based on a POJO. It also featured a pair of powerful binding expressions that allow you to link related controls without writing extra listeners and initialization code. The `TableView` is an indispensable control for the JavaFX business applications developer. It will be the best and most familiar control for displaying a list of structured items.

3.4.3. Complete Code

The complete code for the application follows. It is a pair of class files `TableSelectApp.java` and `Item.java`. `Item.java` was already presented in its entirety in an earlier section.

TableSelectApp.java

```
public class TableSelectApp extends Application {

    @Override
```



```

public void start(Stage primaryStage) throws Exception {

    TableView<Item> tblItems = new TableView<>();
    tblItems.setColumnResizePolicy(TableView.CONSTRAINED_RESIZE_POLICY);

    VBox.setVgrow(tblItems, Priority.ALWAYS );

    TableColumn<Item, String> colSKU = new TableColumn<>("SKU");
    TableColumn<Item, String> colDescr = new TableColumn<>("Item");
    TableColumn<Item, Float> colPrice = new TableColumn<>("Price");
    TableColumn<Item, Boolean> colTaxable = new TableColumn<>("Tax");

    colSKU.setCellValueFactory( new PropertyValueFactory<>("sku") );
    colDescr.setCellValueFactory( new PropertyValueFactory<>("descr") );
    colPrice.setCellValueFactory( new PropertyValueFactory<>("price") );
    colTaxable.setCellValueFactory( new PropertyValueFactory<>("taxable") );

    tblItems.getColumns().addAll(
        colSKU, colDescr, colPrice, colTaxable
    );

    tblItems.getItems().addAll(
        new Item("KBD-0455892", "Mechanical Keyboard", 100.0f, true),
        new Item( "145256", "Product Docs", 0.0f, false ),
        new Item( "OR-198975", "O-Ring (100)", 10.0f, true)
    );

    Button btnInventory = new Button("Inventory");
    Button btnCalcTax = new Button("Tax");

    btnInventory.disableProperty().bind(
        tblItems.getSelectionModel().selectedItemProperty().isNull()
    );

    btnCalcTax.disableProperty().bind(
        tblItems.getSelectionModel().selectedItemProperty().isNull().or(
            Bindings.select(
                tblItems.getSelectionModel().selectedItemProperty(),
                "taxable"
            ).isEqualTo(false)
        )
    );

    HBox buttonHBox = new HBox( btnInventory, btnCalcTax );
    buttonHBox.setSpacing( 8 );

    VBox vbox = new VBox( tblItems, buttonHBox );
    vbox.setPadding( new Insets(10) );
    vbox.setSpacing( 10 );

    Scene scene = new Scene(vbox);

    primaryStage.setTitle("TableSelectApp");
}

```

```
        primaryStage.setScene( scene );
        primaryStage.setHeight( 376 );
        primaryStage.setWidth( 667 );
        primaryStage.show();
    }

    public static void main(String[] args) {

        launch(args);
    }
}
```

3.5. ImageView

Author: Carl Walker

JavaFX provides the `Image` and `ImageView` classes to display BMP, GIF, JPEG, and PNG graphical images. `Image` is a class that holds the bytes of the image and optionally scaling information. The `Image` object is loaded by a background thread, and the `Image` class provides methods for interacting with the load operation. The `Image` object is used independently of `ImageView` to create cursors and app icons.

`ImageView` is a JavaFX `Node` that holds an `Image` object. `ImageView` makes an image available throughout the framework. An `ImageView` can be added to a container by itself or alongside other UI controls. For example an image can be added to a `Label` by setting the `graphic` property of the `Label`.

Images can also be displayed and manipulated using JavaFX CSS.

This screenshot shows a `TilePane` containing four equally-sized tiles. Each tile contains an `ImageView` of a keyboard.



Figure 7. Different Image and ImageView Settings

The top-left image is displayed using the original image size of 320x240. The top-right image is scaled proportionally. Since the top-right image is a rectangle and the containing tile is a square, there are gaps on the top and bottom to maintain the correct ratio when stretching the width.

The lower-left image fills the container completely. However, in making the rectangular image fit the square container, the image is not scaled proportionally and instead stretched in both directions.

The lower-right image fills the container using a zoomed-in version of the image. A square Viewport is created from a 100x100 Rectangle2D and scaled up proportionally. While the low-quality image is blurry, it is not deformed.

3.5.1. Image

The Image class provides constructors to build an Image object from the image file dimensions or from a transformed object. These three constructor calls create the Image objects used in the top-right, bottom-left, and bottom-left tiles, respectively.

ImageApp.java

```
public class ImageApp extends Application {  
  
    private final static String IMAGE_LOC = "images/keyboard.jpg";  
  
    @Override  
    public void start(Stage primaryStage) throws Exception {  
  
        Image image2 = new Image(IMAGE_LOC, 360.0d, 360.0d, true, true );  
        Image image3 = new Image(IMAGE_LOC, 360.0d, 360.0d, false, true);  
        Image image4 = new Image(IMAGE_LOC);  

```

The String URL passed in to all forms of the Image constructor is relative to the classpath. An absolute URL such as "https://www.bekwam.com/images/bekwam_logo_hdr_rounded.png" can also be used. Note that the absolute URLs will not throw an error if their resource is not found.

image2 and image3 specify dimensions, forming a square larger than the rectangle of the original image. image2 will preserve the aspect ratio ("true"). The constructor of image3 does not preserve the aspect ratio and will appear stretched.

3.5.2. ImageView

ImageView is a Node contain that allows the Image object to be used in JavaFX containers and UI controls. In the top-left image, a short form of ImageView is used which passes in only the image URL. It will honor the original dimensions and does not require an additional Image object.

ImageApp.java

```
        ImageView iv1 = new ImageView(IMAGE_LOC);  
  
        ImageView iv2 = new ImageView(image2);  
        ImageView iv3 = new ImageView(image3);  
        ImageView iv4 = new ImageView(image4);  
  
        iv4.setPreserveRatio(true);  
        iv4.setFitHeight(360);  
        iv4.setFitWidth(360);  
        Rectangle2D viewportRect = new Rectangle2D(20, 50, 100, 100);  
        iv4.setViewport(viewportRect);
```

iv3 and iv3 are based on the image2 and image3 objects. Recall that these objects produced transformed images that fit the square container.

iv4 is also based on a transformed Image object, but in the case of iv4, the transformation is done

through the `ImageView` object rather than the `Image`. `ImageView.setFitHeight` is called rather than `Image.setFitHeight`.

Additionally, the Viewport of `iv4` is adjusted. The Viewport controls the visible part of the `ImageView`. In this case, the Viewport is defined as a 100x100 section of the Image shifted left 50 pixels and up 100 pixels.

This section demonstrated the `Image` and `ImageView` classes which are used to display an image in a container or other UI control. These classes define the scaling behavior of the image and can be used with a `Rectangle2D` Viewport to give additional image display customization.

3.5.3. Source

The complete source code and Gradle project can be found at the link below.

[ImageApp Source Zip](#)

3.6. LineChart

Author: Carl Walker

While you can plot a graph using a `Line` on a `Canvas`, JavaFX's `LineChart` makes graphing easier. In addition to customizing standard charting components like axis legends, `LineChart` encapsulates the source data of the graph. As with all JavaFX controls, `LineChart` enables you to style the graph using CSS.

This screenshot shows a plot of seven points. The X-Axis has units of Time Constants ranging from 0 to 5. The Y-Axis shows Voltage ranging from 0 to 1 with more frequent gradients than the X-Axis.

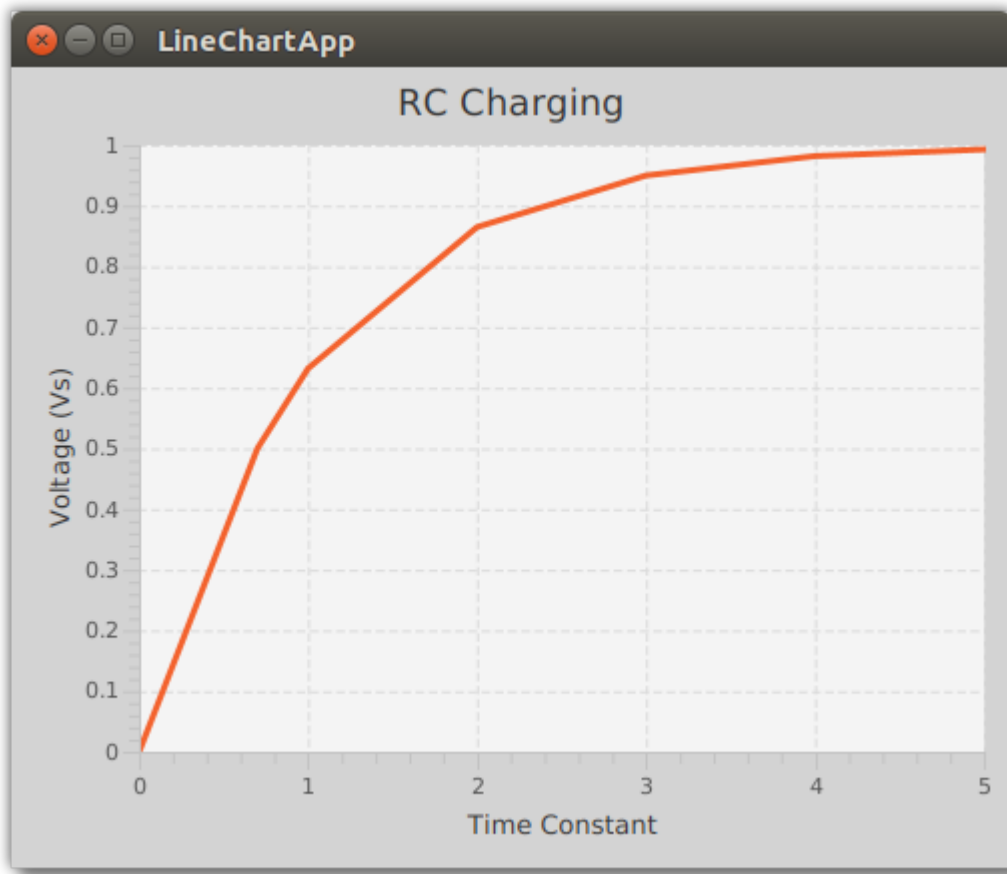


Figure 8. LineChartApp Screenshot

3.6.1. Data

LineChart includes an API for managing data. Data points are grouped into series. This particular example uses a single series.

LineChartApp.java

```
public class LineChartApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        XYChart.Series<Double, Double> series = new XYChart.Series<>();
        series.getData().add( new XYChart.Data<>(0.0,0.0));
        series.getData().add( new XYChart.Data<>(0.7,0.5));
        series.getData().add( new XYChart.Data<>(1.0,0.632));
        series.getData().add( new XYChart.Data<>(2.0,0.865));
        series.getData().add( new XYChart.Data<>(3.0,0.95));
        series.getData().add( new XYChart.Data<>( 4.0, 0.982 ));
        series.getData().add( new XYChart.Data<>( 5.0, 0.993 ));
```

Each data point is an `XYChart.Data` object that is added to an `XYChart.Series` container. To show a comparison of different series, create additional `XYChart.Series` objects. These will be rendered as different colors by the LineChart.

3.6.2. Chart

The LineChart object is created with Axis objects. The first Axis parameter is for the X axis. Each Axis object includes an optional label: Time Constant, Voltage (Vs). The next two numeric parameters give the lower and upper bounds. The final parameter sets the step increment. Another form of the LineChart constructor, not used in this example, accepts the data. This example, makes an explicit add() call on the LineChart's data field.

LineChartApp.java

```
LineChart lc = new LineChart(  
    new NumberAxis("Time Constant", 0.0, 5.0, 1),  
    new NumberAxis("Voltage (Vs)", 0.0, 1.0, 0.1)  
);  
  
lc.getData().add( series );
```

The LineChart can be customized with a title using setTitle() and an individual style with setStyle(). For consistency, it is best to use a style sheet so that a single style definition can be applied across a set of LineCharts.

LineChartApp.java

```
lc.setTitle("RC Charging");  
lc.setStyle("-fx-background-color: lightgray");
```

There are many other properties that can be set to configure the LineChart. setLegendVisible() removes a series identifier since there is only one series in this graph. setCreateSymbols() removes a graphic on each data point that was being clipped at the origin and end of the graph.

LineChartApp.java

```
lc.setCreateSymbols(false);  
lc.setLegendVisible(false);
```

For modest reporting requirements, JavaFX provides classes like LineChart to plot multiple series of data points into a graph. The LineChart object is highly customizable, giving control over the legends, lines, and data point icons. Additionally, CSS styling is available to make a set of these reports consistent.

3.6.3. Source

The complete source code and Gradle project can be found at the link below.

[ChartApp Source Zip](#)

Chapter 4. Layout

4.1. VBox and HBox

Author: Carl Walker

Layout in JavaFX begins with selecting the right container controls. The two layout controls I use most often are `VBox` and `HBox`. `VBox` is a container that arranges its children in a vertical stack. `HBox` arranges its children in a horizontal row. The power of these two controls comes from wrapping them and setting a few key properties: alignment, `hgrow`, and `vgrow`.

This article will demonstrate these controls through a sample project. A mockup of the project shows a UI with the following:

- A row of top controls containing a `Refresh Button` and a `Sign Out Hyperlink`,
- A `TableView` that will grow to take up the extra vertical space, and
- A `Close Button`.

The UI also features a `Separator` which divides the top part of the screen with what may become a standard lower panel (`Save Button`, `Cancel Button`, etc) for the application.

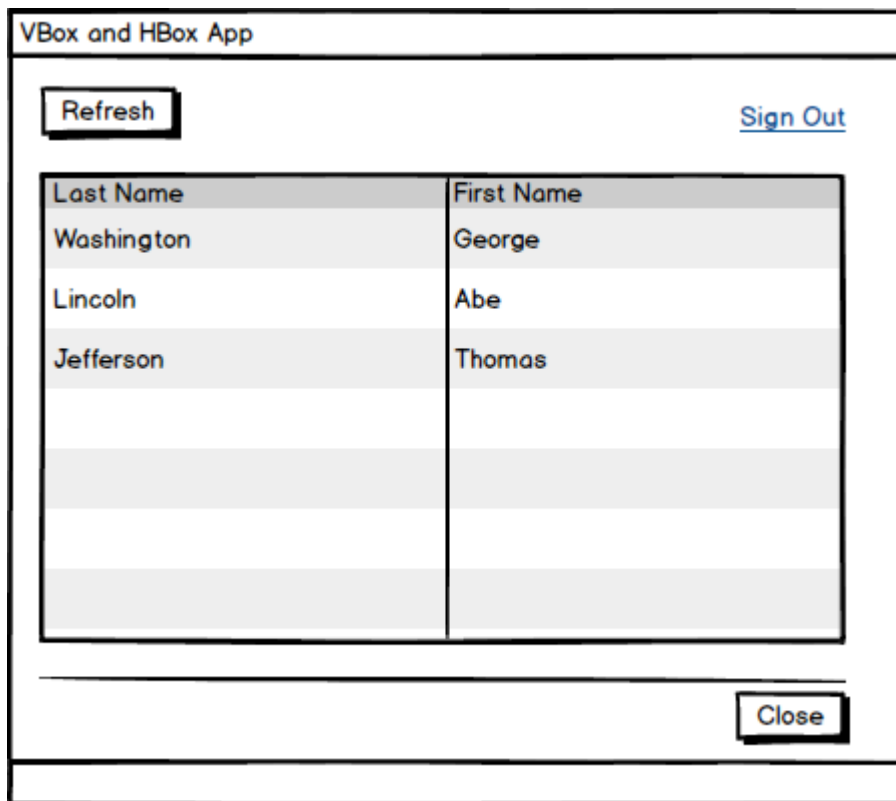


Figure 9. Mockup

4.1.1. Structure

A `VBox` is the outermost container "vbox". This will be the `Parent` provided to the `Scene`. Simply putting UI controls in this `VBox` will allow the controls—to most notably the `TableView`—to stretch to fit the available horizontal space. The top controls, the `Refresh Button` and the `Sign Out Hyperlink`, are wrapped in an `HBox`. Similarly, I wrap the bottom `Close Button` in an `HBox`,

allowing for additional Buttons.

```
VBox vbox = new VBox();

Button btnRefresh = new Button("Refresh");

HBox topRightControls = new HBox();
topRightControls.getChildren().add( signOutLink );

topControls.getChildren().addAll( btnRefresh, topRightControls );

TableView<Customer> tblCustomers = new TableView<>();
Separator sep = new Separator();

HBox bottomControls = new HBox();

Button btnClose = new Button("Close");

bottomControls.getChildren().add( btnClose );

vbox.getChildren().addAll(
    topControls,
    tblCustomers,
    sep,
    bottomControls
);
```

This picture shows the mockup broken down by container. The parent `VBox` is the outermost blue rectangle. The `HBoxes` are the inner rectangles (red and green).

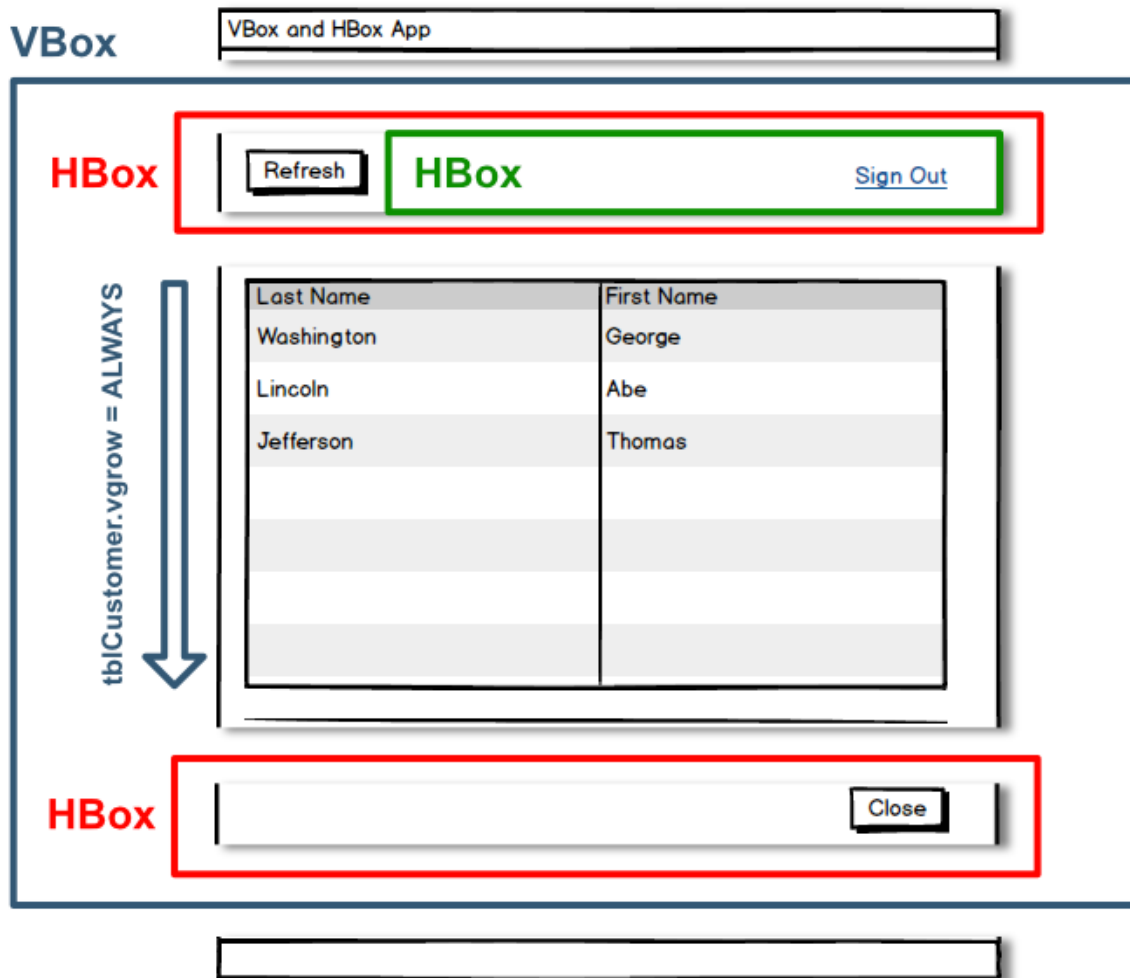


Figure 10. Mockup Broken Down

4.1.2. Alignment and Hgrow

The `Refresh` `Button` is aligned to the left while the `Sign Out` `Hyperlink` is aligned to the right. This is accomplished using two `HBoxes`. `topControls` is an `HBox` that contains the `Refresh` `Button` and also contains an `HBox` with the `Sign Out` `Hyperlink`. As the screen grows wider, the `Sign Out` `Hyperlink` will be pulled to the right while the `Refresh` `Button` will retain its left alignment.

Alignment is the property that tells a container where to position a control. `topControls` sets alignment to the `BOTTOM_LEFT`. `topRightControls` sets alignment to the `BOTTOM_RIGHT`. "BOTTOM" makes sure that the baseline of the text "Refresh" matches the baseline of the text "Sign Out".

In order to make the `Sign Out` `Hyperlink` move to the right when the screen gets wider, `Priority.ALWAYS` is needed. This is a cue to the JavaFX to widen `topRightControls`. Otherwise, `topControls` will keep the space and `topRightControls` will appear to the left. `Sign Out` `Hyperlink` still would be right-aligned but in a narrower container.

Notice that `setHgrow()` is a static method and neither invoked on the `topControls` `HBox` nor on itself, `topRightControls`. This is a facet of the JavaFX API that can be confusing because most of the API sets properties via setters on objects.

```
topControls.setAlignment( Pos.BOTTOM_LEFT );

HBox.setHgrow(topRightControls, Priority.ALWAYS );
topRightControls.setAlignment( Pos.BOTTOM_RIGHT );
```

`Close Button` is wrapped in an `HBox` and positioned using the `BOTTOM_RIGHT` priority.

```
bottomControls.setAlignment(Pos.BOTTOM_RIGHT );
```

4.1.3. Vgrow

Since the outermost container is `VBox`, the child `TableView` will expand to take up extra horizontal space when the window is widened. However, vertically resizing the window will produce a gap at the bottom of the screen. The `VBox` does not automatically resize any of its children. As with the `topRightControls HBox`, a grow indicator can be set. In the case of the `HBox`, this was a horizontal resizing instruction `setHgrow()`. For the `TableView` container `VBox`, this will be `setVgrow()`.

```
VBox.setVgrow( tblCustomers, Priority.ALWAYS );
```

4.1.4. Margin

There are a few ways to space out UI controls. This article uses the margin property on several of the containers to add whitespace around the controls. These are set individually rather than using a spacing on the `VBox` so that the `Separator` will span the entire width.

```
VBox.setMargin( topControls, new Insets(10.0d) );
VBox.setMargin( tblCustomers, new Insets(0.0d, 10.0d, 10.0d, 10.0d) );
VBox.setMargin( bottomControls, new Insets(10.0d) );
```

The `Insets` used by `tblCustomers` omits any top spacing to keep the spacing even. JavaFX does not consolidate whitespace as in web design. If the top `Inset` were set to `10.0d` for the `TableView`, the distance between the top controls and the `TableView` would be twice as wide as the distance between any of the other controls.

Notice that these are static methods like the `Priority`.

This picture shows the application when run in its initial 800x600 size.

4.1.5. Select the Right Containers

The philosophy of JavaFX layout is the same as the philosophy of Swing. Select the right container for the task at hand. This article presented the two most versatile containers: `VBox` and `HBox`. By setting properties like alignment, `hgrow`, and `vgrow`, you can build incredibly complex layouts through nesting. These are the containers I use the most and often are the only containers that I need.

4.1.6. Complete Code

The code can be tested in a pair of .java files. There is a POJO for the Customer object used by the `TableView`

```
public class Customer {

    private String firstName;
    private String lastName;

    public Customer(String firstName,
                    String lastName) {
        this.firstName = firstName;
        this.lastName = lastName;
    }

    public String getFirstName() {
        return firstName;
    }

    public void setFirstName(String firstName) {
        this.firstName = firstName;
    }

    public String getLastName() {
        return lastName;
    }

    public void setLastName(String lastName) {
        this.lastName = lastName;
    }

}
```

This is the completed JavaFX `Application` subclass and main.

```
public class VBoxAndHBoxApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox();

        HBox topControls = new HBox();
        VBox.setMargin( topControls, new Insets(10.0d) );
```

```

topControls.setAlignment( Pos.BOTTOM_LEFT );

Button btnRefresh = new Button("Refresh");

HBox topRightControls = new HBox();
HBox.setHgrow(topRightControls, Priority.ALWAYS );
topRightControls.setAlignment( Pos.BOTTOM_RIGHT );
Hyperlink signOutLink = new Hyperlink("Sign Out");
topRightControls.getChildren().add( signOutLink );

topControls.getChildren().addAll( btnRefresh, topRightControls );

TableView<Customer> tblCustomers = new TableView<>();
tblCustomers.setColumnResizePolicy(TableView.CONSTRAINED_RESIZE_POLICY);
VBox.setMargin( tblCustomers, new Insets(0.0d, 10.0d, 10.0d, 10.0d) );
VBox.setVgrow( tblCustomers, Priority.ALWAYS );

TableColumn<Customer, String> lastNameCol = new TableColumn<>("Last Name");
lastNameCol.setCellValueFactory(new PropertyValueFactory<>("lastName"));

TableColumn<Customer, String> firstNameCol = new TableColumn<>("First Name");
firstNameCol.setCellValueFactory(new PropertyValueFactory<>("firstName"));

tblCustomers.getColumns().addAll( lastNameCol, firstNameCol );

Separator sep = new Separator();

HBox bottomControls = new HBox();
bottomControls.setAlignment(Pos.BOTTOM_RIGHT );
VBox.setMargin( bottomControls, new Insets(10.0d) );

Button btnClose = new Button("Close");

bottomControls.getChildren().add( btnClose );

vbox.getChildren().addAll(
    topControls,
    tblCustomers,
    sep,
    bottomControls
);

Scene scene = new Scene(vbox );

primaryStage.setScene( scene );
primaryStage.setWidth( 800 );
primaryStage.setHeight( 600 );
primaryStage.setTitle("VBox and HBox App");
primaryStage.setOnShown( (evt) -> loadTable(tblCustomers) );
primaryStage.show();
}

public static void main(String[] args) {

```

```

        launch(args);
    }

    private void loadTable(Table<Customer> tblCustomers) {
        tblCustomers.getItems().add(new Customer("George", "Washington"));
        tblCustomers.getItems().add(new Customer("Abe", "Lincoln"));
        tblCustomers.getItems().add(new Customer("Thomas", "Jefferson"));
    }
}

```

4.2. Absolute Positioning with Pane

Author: Carl Walker

Containers like `VBox` or `BorderPane` align and distribute their children. The superclass `Pane` is also a container, but does not impose an order on its children. The children position themselves through properties like `x`, `centerX`, and `layoutX`. This is called absolute positioning and it is a technique to place a `Shape` or a `Node` at a certain location on the screen.

This screenshot shows an About View. The About View contains a `Hyperlink` in the middle of the screen "About this App". The About View uses several JavaFX shapes to form a design which is cropped to appear like a business card.

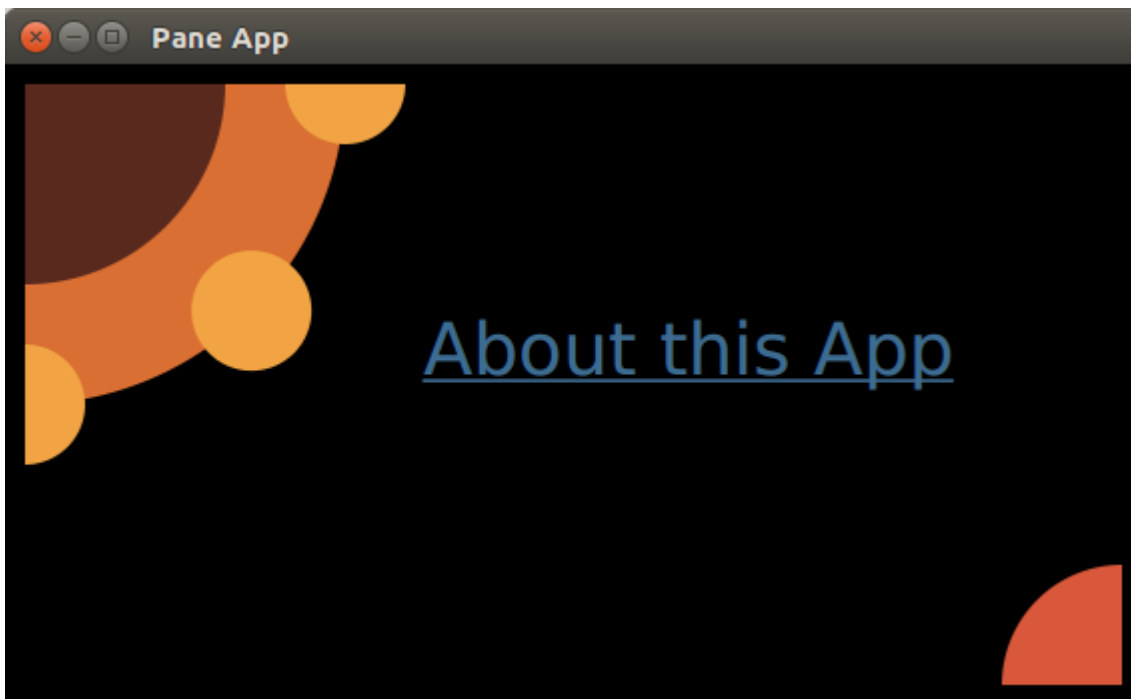


Figure 13. Screenshot of About View in PaneApp

4.2.1. Pane Size

Unlike most containers, `Pane` resizes to fit its contents and not the other way around. This picture is a screenshot from Scenic View taken prior to adding the lower-right Arc. The `Pane` is the yellow highlighted area. Notice that it does not take up the full `Stage`.

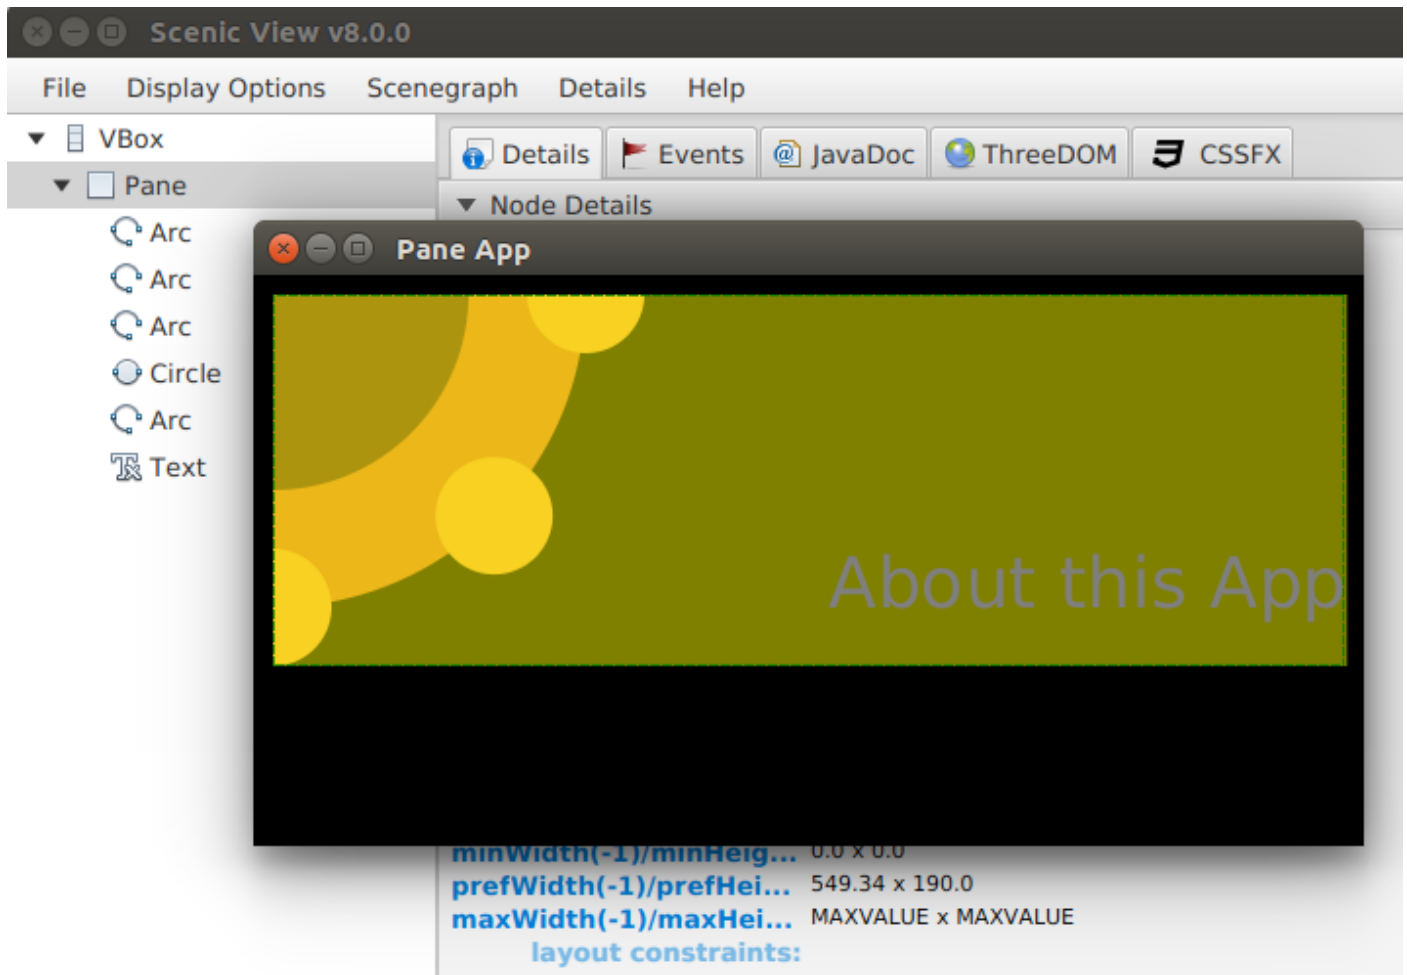


Figure 14. Scenic View Highlighting Partially Built Screen

This is a screenshot taken after the lower-right `Arc` was added. This `Arc` was placed closer to the bottom-right edge of the `Stage`. This forces the `Pane` to stretch to accommodate the expanded contents.

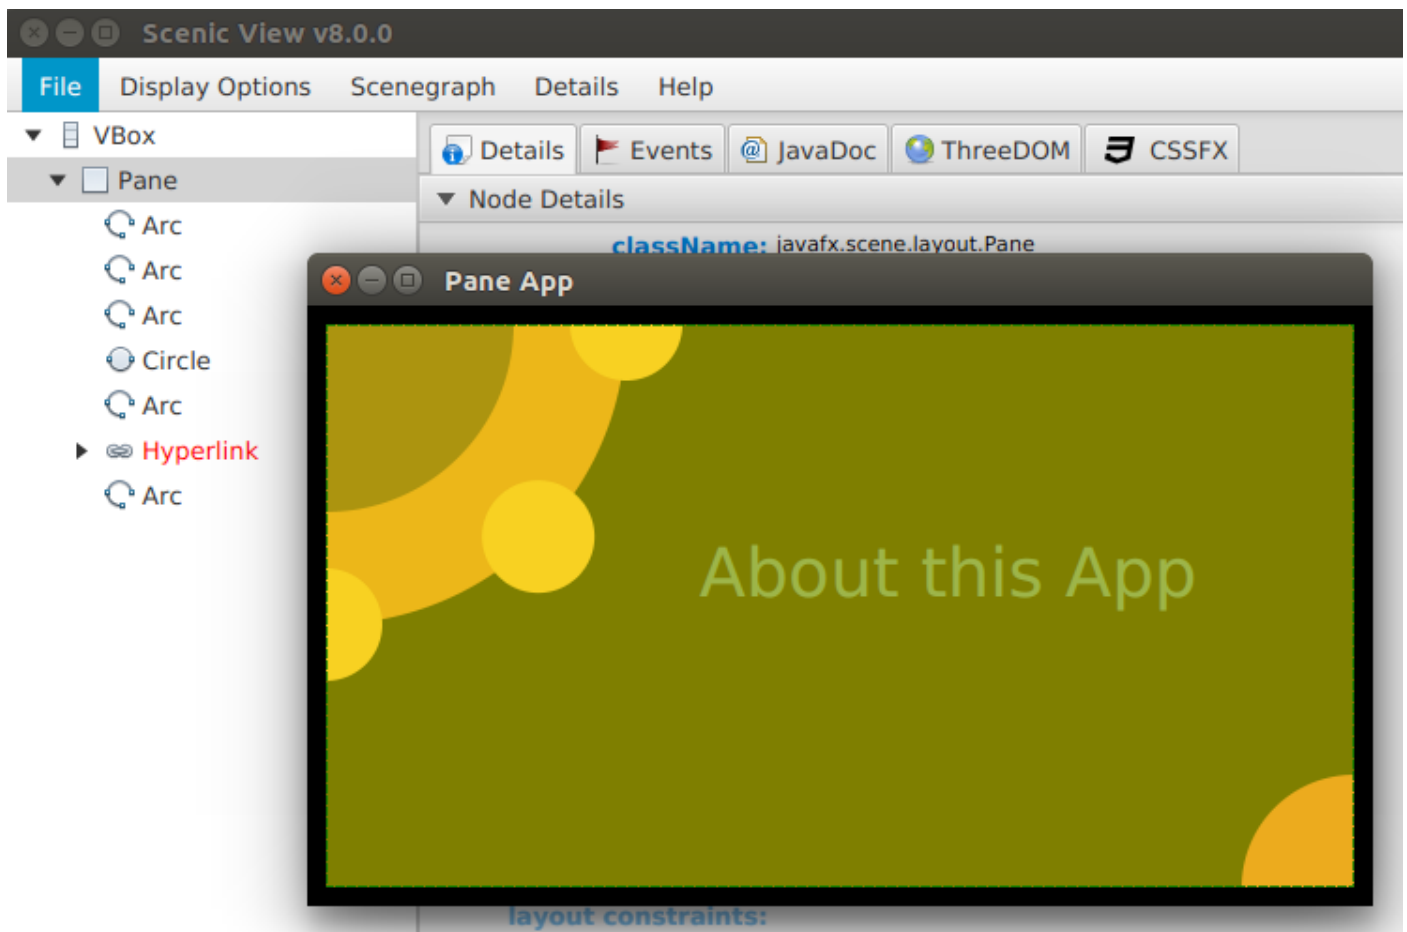


Figure 15. Scenic View Highlighting Expanded Pane

4.2.2. The Pane

The outermost container of the About View is a `VBox` whose sole contents are the `Pane`. The `VBox` is used to fit the entire `Stage` and provides a background.

```
VBox vbox = new VBox();
vbox.setPadding( new Insets( 10 ) );
vbox.setBackground(
    new Background(
        new BackgroundFill(Color.BLACK, new CornerRadii(0), new Insets(0))
    ));

Pane p = new Pane();
```

4.2.3. The Shapes

In the upper left of the screen, there is a group of 4 'Arcs' and 1 'Circle'. This code positions `largeArc` at (0,0) through the `centerX` and `centerY` arguments in the `Arc` constructor. Notice that `backgroundArc` is also positioned at (0,0) and appears underneath `largeArc`. `Pane` does not attempt to deconflict overlapping shapes and in this case, overlapping is what is wanted. `smArc1` is placed at (0,160) which is down on the Y axis. `smArc2` is positioned at (160,0) which is right on the X axis. `smCircle` is positioned at the same distance as `smArc1` and `smArc2`, but at a 45 degree angle.

```

Arc largeArc = new Arc(0, 0, 100, 100, 270, 90);
largeArc.setType(ArcType.ROUND);

Arc backgroundArc = new Arc(0, 0, 160, 160, 270, 90 );
backgroundArc.setType( ArcType.ROUND );

Arc smArc1 = new Arc( 0, 160, 30, 30, 270, 180);
smArc1.setType(ArcType.ROUND);

Circle smCircle = new Circle(160/Math.sqrt(2.0), 160/Math.sqrt(2.0),
30,Color.web("0xF2A444"));

Arc smArc2 = new Arc( 160, 0, 30, 30, 180, 180);
smArc2.setType(ArcType.ROUND);

```

The lower-right `Arc` is positioned based on the overall height of the `Stage`. The 20 subtracted from the height is the 10 pixel `Insets` from the `VBox` (10 for left + 10 for right).

```

Arc medArc = new Arc(568-20, 320-20, 60, 60, 90, 90);
medArc.setType(ArcType.ROUND);

primaryStage.setWidth( 568 );
primaryStage.setHeight( 320 );

```

4.2.4. The Hyperlink

The `Hyperlink` is positioned offset the center (284,160) which is the width and height of the `Stage` both divided by two. This positions the text of the `Hyperlink` in the lower-right quadrant of the screen, so an offset is needed based on the `Hyperlink` width and height. The dimensions are not available for the `Hyperlink` until the screen is shown, so I make a post-shown adjustment to the position.

```

Hyperlink hyperlink = new Hyperlink("About this App");

primaryStage.setOnShown( (evt) -> {
    hyperlink.setLayoutX( 284 - (hyperlink.getWidth()/3) );
    hyperlink.setLayoutY( 160 - hyperlink.getHeight() );
});

```

The `Hyperlink` is not placed in the true center of the screen. The `layoutX` value is based on a divide-by-three operation that moves it away from the upper-left design.

4.2.5. Z-Order

As mentioned earlier, `Pane` supports overlapping children. This picture shows the About View with depth added to the upper-left design. The smaller `Arcs` and `Circle` hover over `backgroundArc` as does `largeArc`.

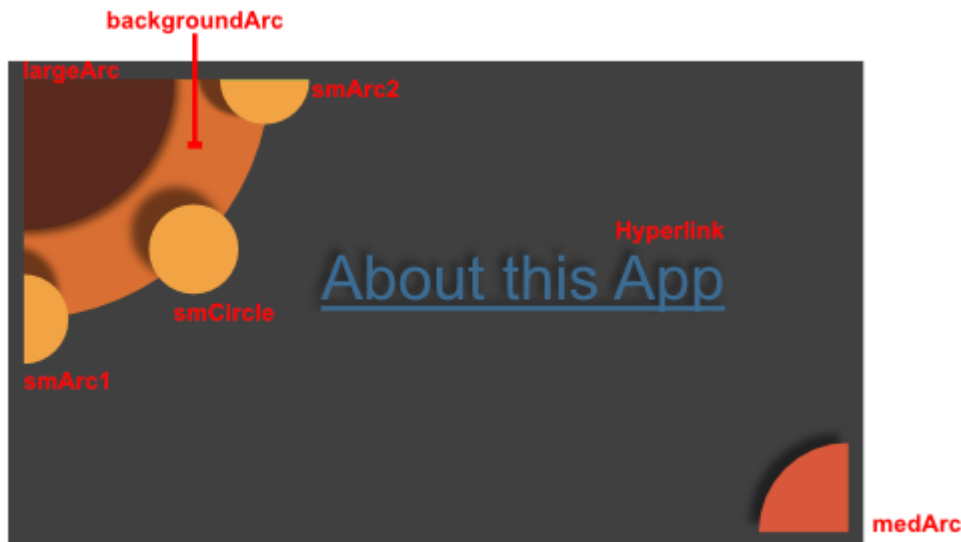


Figure 16. About View Showing Depth

The z-order in this example is determined by the order in which the children are added to the `Pane`. `backgroundArc` is obscured by items added later, most notably `largeArc`. To rearrange the children, use the `toFront()` and `toBack()` methods after the items have been added to the `Pane`.

```
p.getChildren().addAll( backgroundArc, largeArc, smArc1, smCircle, smArc2, hyperlink,
    medArc );

vbox.getChildren().add( p );
```

When starting JavaFX, it is tempting to build an absolute layout. Be aware that absolute layouts are brittle, often breaking when the screen is resized or when items are added during the software maintenance phase. Yet, there are good reasons for using absolute positioning. Gaming is one such usage. In a game, you can adjust the (x,y) coordinate of a 'Shape' to move a game piece around the screen. This article demonstrated the JavaFX class `Pane` which provides absolute positioning to any shape-driven UI.

4.2.6. Completed Code

This is the completed JavaFX `Application` subclass and main.

```
public class PaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox();
        vbox.setPadding( new Insets( 10 ) );
        vbox.setBackground(
            new Background(
                new BackgroundFill(Color.BLACK, new CornerRadii(0), new Insets(0))
            ));
```

```

Pane p = new Pane();

Arc largeArc = new Arc(0, 0, 100, 100, 270, 90);
largeArc.setFill(Color.web("0x59291E"));
largeArc.setType(ArcType.ROUND);

Arc backgroundArc = new Arc(0, 0, 160, 160, 270, 90 );
backgroundArc.setFill( Color.web("0xD96F32") );
backgroundArc.setType( ArcType.ROUND );

Arc smArc1 = new Arc( 0, 160, 30, 30, 270, 180);
smArc1.setFill(Color.web("0xF2A444"));
smArc1.setType(ArcType.ROUND);

Circle smCircle = new Circle(
    160/Math.sqrt(2.0), 160/Math.sqrt(2.0), 30,Color.web("0xF2A444")
);

Arc smArc2 = new Arc( 160, 0, 30, 30, 180, 180);
smArc2.setFill(Color.web("0xF2A444"));
smArc2.setType(ArcType.ROUND);

Hyperlink hyperlink = new Hyperlink("About this App");
hyperlink.setFont( Font.font(36) );
hyperlink.setTextFill( Color.web("0x3E6C93") );
hyperlink.setBorder( Border.EMPTY );

Arc medArc = new Arc(568-20, 320-20, 60, 60, 90, 90);
medArc.setFill(Color.web("0xD9583B"));
medArc.setType(ArcType.ROUND);

p.getChildren().addAll( backgroundArc, largeArc, smArc1, smCircle,
    smArc2, hyperlink, medArc );

vbox.getChildren().add( p );

Scene scene = new Scene(vbox);
scene.setFill(Color.BLACK);

primaryStage.setTitle("Pane App");
primaryStage.setScene( scene );
primaryStage.setWidth( 568 );
primaryStage.setHeight( 320 );
primaryStage.setOnShown( (evt) -> {
    hyperlink.setLayoutX( 284 - (hyperlink.getWidth()/3) );
    hyperlink.setLayoutY( 160 - hyperlink.getHeight() );
});
primaryStage.show();
}

public static void main(String[] args) {
    launch(args);
}

```

```
}
```

4.3. Clipping

Author: Christoph Nahr

Most JavaFX layout containers (base class [Region](#)) automatically position and size their children, so clipping any child contents that might protrude beyond the container's layout bounds is never an issue. The big exception is [Pane](#), a direct subclass of [Region](#) and the base class for all layout containers with publicly accessible children. Unlike its subclasses [Pane](#) does not attempt to arrange its children but simply accepts explicit user positioning and sizing.

This makes [Pane](#) suitable as a drawing surface, similar to [Canvas](#) but rendering user-defined [Shape](#) children rather than direct drawing commands. The problem is that drawing surfaces are usually expected to automatically clip their contents at their bounds. [Canvas](#) does this by default but [Pane](#) does not. From the last paragraph of the Javadoc entry for [Pane](#):

[Pane](#) does not clip its content by default, so it is possible that children's bounds may extend outside its own bounds, either if children are positioned at negative coordinates or the pane is resized smaller than its preferred size.

This quote is somewhat misleading. Children are rendered (wholly or partially) outside their parent [Pane](#) 'whenever' their combination of position and size extends beyond the parent's bounds, regardless of whether the position is negative or the [Pane](#) is ever resized. Quite simply, [Pane](#) only provides a coordinate shift to its children, based on its upper-left corner – but its layout bounds are completely ignored while rendering children. Note that the Javadoc for all [Pane](#) subclasses (that I checked) includes a similar warning. They don't clip their contents either, but as mentioned above this is not usually a problem for them because they automatically arrange their children.

So to properly use [Pane](#) as a drawing surface for [Shapes](#), we need to manually clip its contents. This is somewhat complex, especially when a visible border is involved. I wrote a small demo application to illustrate the default behavior and various steps to fix it. You can download it as [PaneDemo.zip](#) which contains a project for NetBeans 8.2 and Java SE 8u112. The following sections explain each step with screenshots and pertinent code snippets.

4.3.1. Default Behavior

Starting up, [PaneDemo](#) shows what happens when you put an [Ellipse](#) shape into a [Pane](#) that's too small to contain it entirely. The [Pane](#) has a nice thick rounded [Border](#) to visualize its area. The application window is resizable, with the [Pane](#) size following the window size. The three buttons on the left are used to switch to the other steps in the demo; click Default (Alt+D) to revert to the default output from a later step.

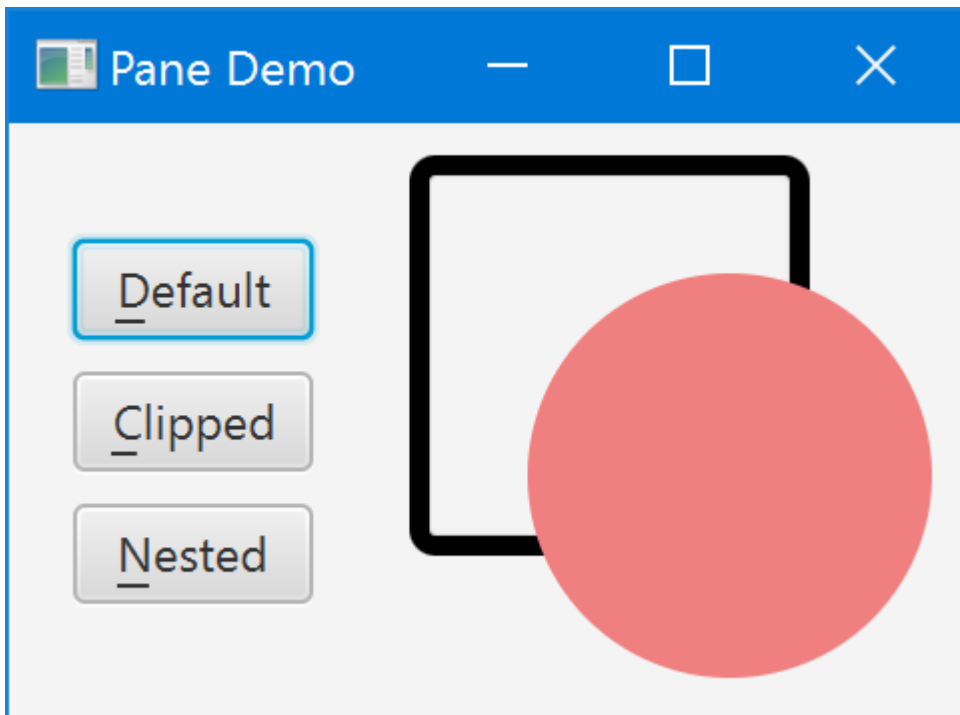


Figure 17. Child Extending Outside Pane Bounds

As you can see, the `Ellipse` overwrites its parent's `Border` and protrudes well beyond it. The following code is used to generate the default view. It's split into several smaller methods, and a constant for the `Border` corner radius, because they will be referenced in the next steps.

```
static final double BORDER_RADIUS = 4;

static Border createBorder() {
    return new Border(
        new BorderStroke(Color.BLACK, BorderStrokeStyle.SOLID,
            new CornerRadii(BORDER_RADIUS), BorderStroke.THICK));
}

static Shape createShape() {
    final Ellipse shape = new Ellipse(50, 50);
    shape.setCenterX(80);
    shape.setCenterY(80);
    shape.setFill(Color.LIGHTCORAL);
    shape.setStroke(Color.LIGHTCORAL);
    return shape;
}

static Region createDefault() {
    final Pane pane = new Pane(createShape());
    pane.setBorder(createBorder());
    pane.setPrefSize(100, 100);
    return pane;
}
```

4.3.2. Simple Clipping

Surprisingly, there is no predefined option to have a resizable `Region` automatically clip its children to its current size. Instead, you need to use the basic `clipProperty` defined on `Node` and keep it updated manually to reflect changing layout bounds. Method `clipChildren` below show how this works (with Javadoc because you may want to reuse it in your own code):

```
/**
 * Clips the children of the specified {@link Region} to its current size.
 * This requires attaching a change listener to the region's layout bounds,
 * as JavaFX does not currently provide any built-in way to clip children.
 *
 * @param region the {@link Region} whose children to clip
 * @param arc the {@link Rectangle#arcWidth} and {@link Rectangle#arcHeight}
 *            of the clipping {@link Rectangle}
 * @throws NullPointerException if {@code region} is {@code null}
 */
static void clipChildren(Region region, double arc) {

    final Rectangle outputClip = new Rectangle();
    outputClip.setArcWidth(arc);
    outputClip.setArcHeight(arc);
    region.setClip(outputClip);

    region.layoutBoundsProperty().addListener((ov, oldValue, newValue) -> {
        outputClip.setWidth(newValue.getWidth());
        outputClip.setHeight(newValue.getHeight());
    });
}

static Region createClipped() {
    final Pane pane = new Pane(createShape());
    pane.setBorder(createBorder());
    pane.setPrefSize(100, 100);

    // clipped children still overwrite Border!
    clipChildren(pane, 3 * BORDER_RADIUS);

    return pane;
}
```

Choose Clipped (Alt+C) in PaneDemo to render the corresponding output. Here's how that looks:

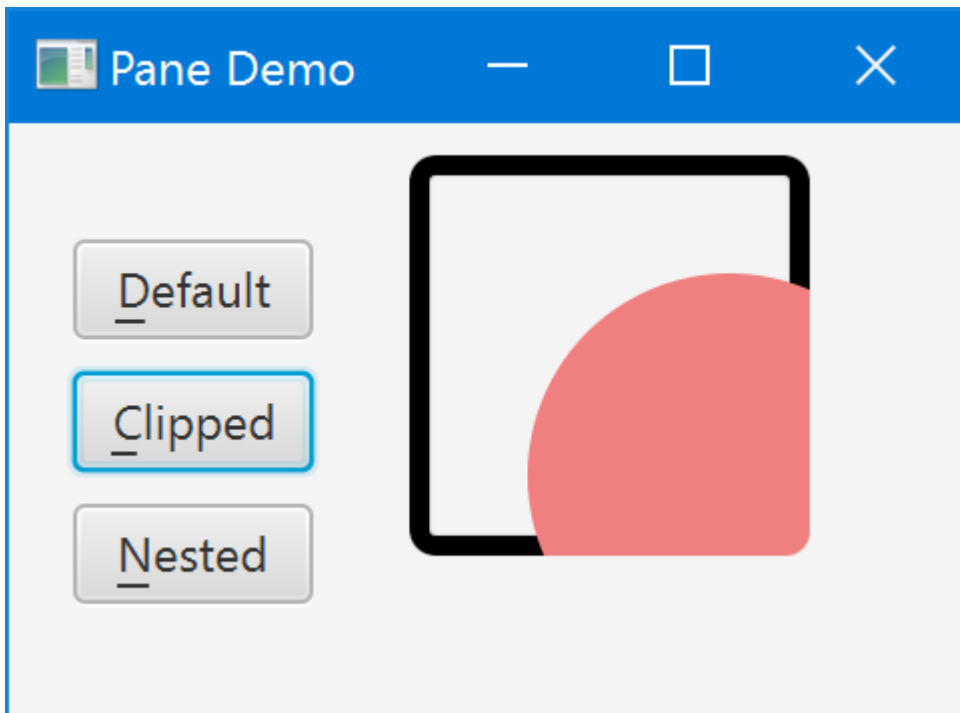


Figure 18. Pane with Clip Applied

That's better. The `Ellipse` no longer protrudes beyond the `Pane` – but still overwrites its `Border`. Also note that we had to manually specify an estimated corner rounding for the clipping `Rectangle` in order to reflect the rounded `Border` corners. This estimate is `3 * BORDER_RADIUS`

because the corner radius specified on `Border` actually defines its inner radius, and the outer radius (which we need here) will be greater depending on the `Border` thickness. (You could compute the outer radius exactly if you really wanted to, but I skipped that for the demo application.)

4.3.3. Nested Panes

Can we somehow specify a clipping region that excludes a visible `Border`? Not on the drawing `Pane` itself, as far as I can tell. The clipping region affects the `Border` as well as other contents, so if you were to shrink the clipping region to exclude it you would no longer see any `Border` at all. Instead, the solution is to create two nested panes: one inner drawing `Pane` without `Border` that clips exactly to its bounds, and one outer `StackPane` that defines the visible `Border` and also resizes the drawing `Pane`. Here is the final code:

```
static Region createNested() {
    // create drawing Pane without Border or size
    final Pane pane = new Pane(createShape());
    clipChildren(pane, BORDER_RADIUS);

    // create sized enclosing Region with Border
    final Region container = new StackPane(pane);
    container.setBorder(createBorder());
    container.setPrefSize(100, 100);
    return container;
}
```

Choose Nested (Alt+N) in `PaneDemo` to render the corresponding output. Now everything looks as

it should:

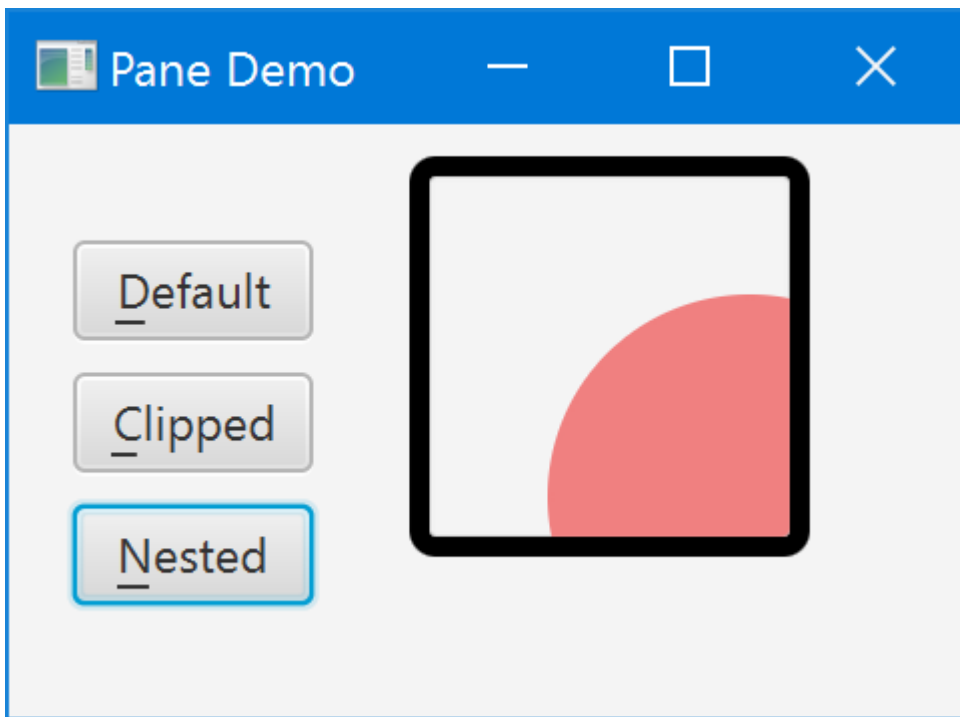


Figure 19. Nesting Pane in StackPane

As an added bonus, we no longer need to guesstimate a correct corner radius for the clipping `Rectangle`. We now clip to the inner rather than outer circumference of our visible `Border`, so we can directly reuse its inner corner radius. Should you specify multiple different corner radii or an otherwise more complex `Border` you'd have to define a correspondingly more complex clipping `Shape`.

There is one small caveat. The top-left corner of the drawing `Pane` to which all child coordinates are relative now starts *within* the visible `Border`. If you retroactively change a single `Pane` with visible `Border` to nested panes as shown here, all children will exhibit a slight positioning shift corresponding to the `Border` thickness.

4.4. GridPane

Author: Carl Walker

Forms in business applications often use a layout that mimics a database record. For each column in a table, a header is added on the left-hand side which is matched with a row value on the right-hand side. JavaFX has a special purpose control called `GridPane` for this type of layout that keeps contents aligned by row and column. `GridPane` also supports spanning for more complex layouts.

This screenshot shows a basic `GridPane` layout. On the left-hand side of the form, there is a column of field names: Email, Priority, Problem, Description. On the right-hand side of the form, there is a column of controls which will display the value of the corresponding field. The field names are of type `Label` and the value controls are a mixture including `TextField`, `TextArea`, and `ComboBox`.

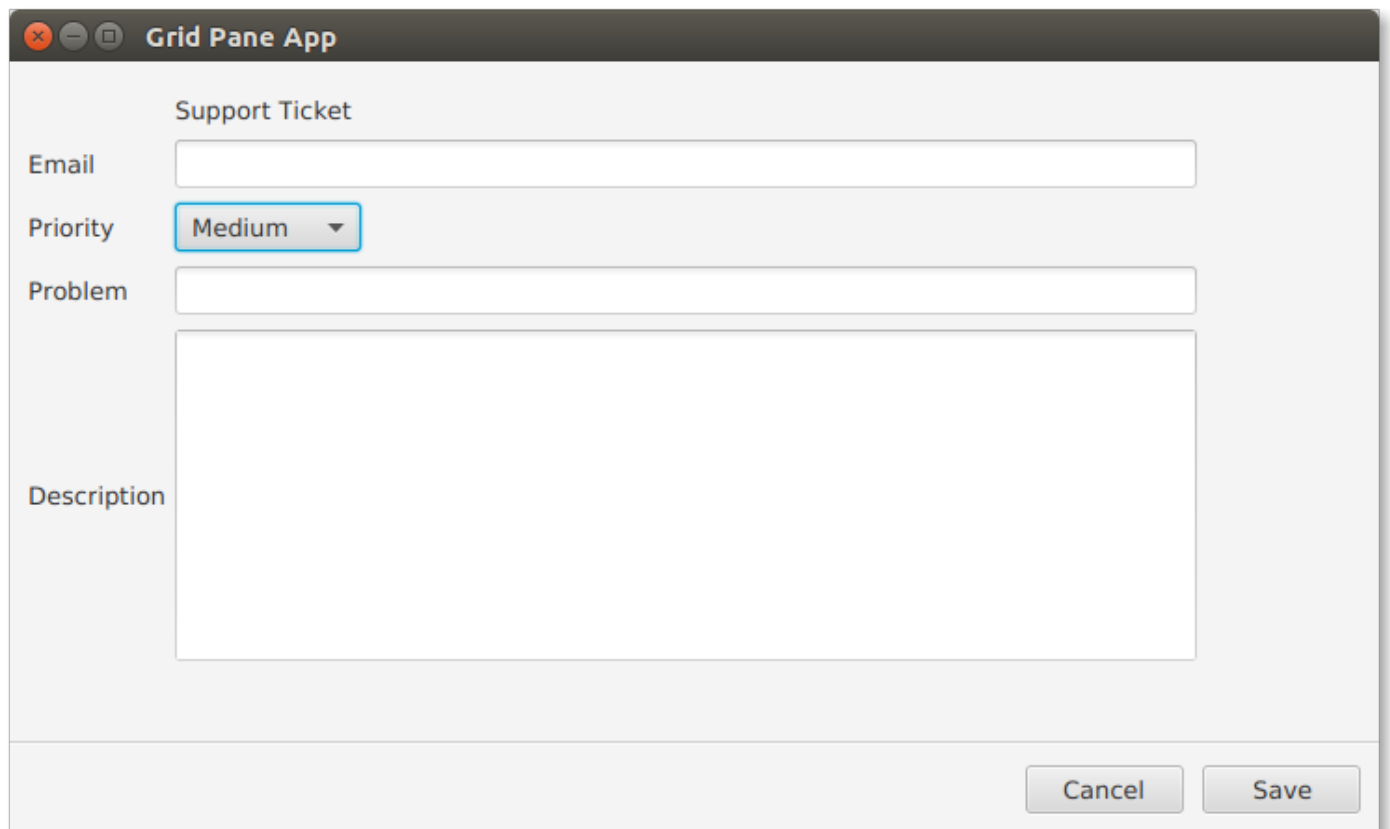


Figure 20. Field Name / Value Pairs in a GridPane

The following code shows the objects created for the form. "vbox" is the root of the Scene and will also contain the `ButtonBar` at the base of the form.

```
VBox vbox = new VBox();

GridPane gp = new GridPane();

Label lblTitle = new Label("Support Ticket");

Label lblEmail = new Label("Email");
TextField tfEmail = new TextField();

Label lblPriority = new Label("Priority");
ObservableList<String> priorities = FXCollections.observableArrayList("Medium", "High", "Low");
ComboBox<String> cbPriority = new ComboBox<>(priorities);

Label lblProblem = new Label("Problem");
TextField tfProblem = new TextField();

Label lblDescription = new Label("Description");
TextArea taDescription = new TextArea();
```

`GridPane` has a handy method `setGridLinesVisible()` which shows the grid structure and gutters. It is especially useful in more complex layouts where spanning is involved because gaps in the row/col assignments can cause shifts in the layout.

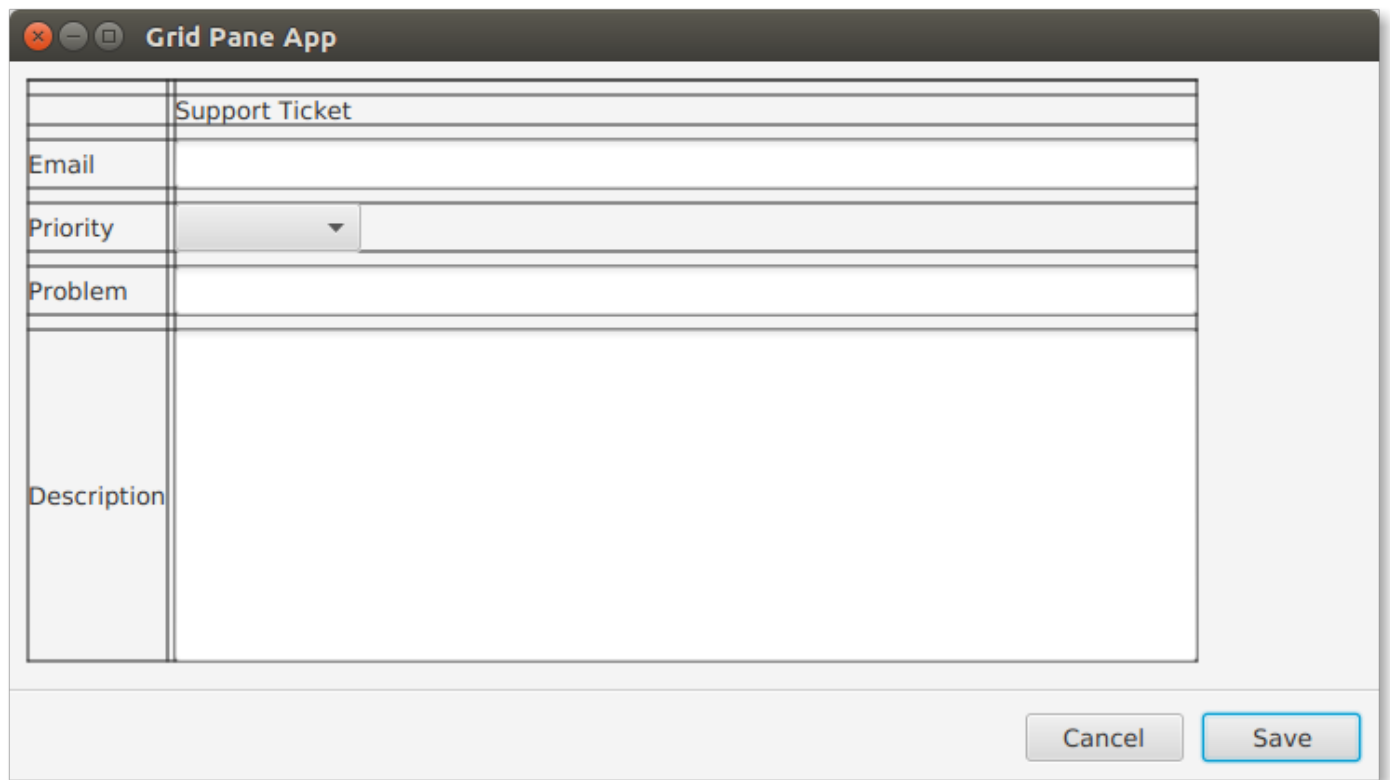


Figure 21. Grid Structure and Gutters

4.4.1. Spacing

As a container, `GridPane` has a `padding` property that can be set to surround the `GridPane` contents with whitespace. "padding" will take an `Inset` object as a parameter. In this example, 10 pixels of whitespace is applied to all sides so a short form constructor is used for `Inset`.

Within the `GridPane`, `vgap` and `hgap` control the gutters. The `hgap` is set to 4 to keep the fields close to their values. `vgap` is slightly larger to help with mouse navigation.

```
gp.setPadding( new Insets(10) );
gp.setHgap( 4 );
gp.setVgap( 8 );
```

In order to keep the lower part of the form consistent, a `Priority` is set on the `VBox`. This will *not* resize the individual rows however. For individual resize specifications, use `ColumnConstraints` and `RowConstraints`.

```
VBox.setVgrow(gp, Priority.ALWAYS );
```

4.4.2. Adding Items

Unlike containers like `BorderPane` or `HBox`, `Nodes` need to specify their position within the `GridPane`. This is done with the `add()` method on the `GridPane` and not the `add` method on a container children property. This form of the `GridPane` `add()` method takes a zero-based column position and a zero-based row position. This code puts two statements on the same line for readability.

```

gp.add( lblTitle,      1, 1); // empty item at 0,0
gp.add( lblEmail,      0, 2); gp.add(tfEmail,      1, 2);
gp.add( lblPriority,    0, 3); gp.add( cbPriority,    1, 3);
gp.add( lblProblem,    0, 4); gp.add( tfProblem,    1, 4);
gp.add( lblDescription, 0, 5); gp.add( taDescription, 1, 5);

```

lblTitle is put in the second column of the first row. There is no entry in the first column of the first row.

Subsequent additions are presented in pairs. Field name `Label` objects are put in the first column (column index=0) and value controls are put in the second column (column index=1). The rows are added by the incremented second value. For example, lblPriority is put in the fourth row along with its `ComboBox`.

`GridPane` is an important container in JavaFX business application design. When you have a requirement for name / value pairs, `GridPane` will be an easy way to support the strong column orientation of a traditional form.

4.4.3. Completed Code

The following class is the complete code form the example. This include the definition of the `ButtonBar` which was not presented in the preceding sections focused on `GridPane`.

```

public class GridPaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox();

        GridPane gp = new GridPane();
        gp.setPadding( new Insets(10) );
        gp.setHgap( 4 );
        gp.setVgap( 8 );

        VBox.setVgrow(gp, Priority.ALWAYS );

        Label lblTitle = new Label("Support Ticket");

        Label lblEmail = new Label("Email");
        TextField tfEmail = new TextField();

        Label lblPriority = new Label("Priority");
        ObservableList<String> priorities =
            FXCollections.observableArrayList("Medium", "High", "Low");
        ComboBox<String> cbPriority = new ComboBox<>(priorities);

        Label lblProblem = new Label("Problem");
        TextField tfProblem = new TextField();

        Label lblDescription = new Label("Description");

```

```

        TextArea taDescription = new TextArea();

        gp.add( lblTitle,      1, 1); // empty item at 0,0
        gp.add( lblEmail,      0, 2); gp.add( tfEmail,      1, 2);
        gp.add( lblPriority,    0, 3); gp.add( cbPriority,    1, 3);
        gp.add( lblProblem,     0, 4); gp.add( tfProblem,    1, 4);
        gp.add( lblDescription, 0, 5); gp.add( taDescription, 1, 5);

        Separator sep = new Separator(); // hr

        ButtonBar buttonBar = new ButtonBar();
        buttonBar.setPadding( new Insets(10) );

        Button saveButton = new Button("Save");
        Button cancelButton = new Button("Cancel");

        buttonBar.setButtonData(saveButton, ButtonBar.ButtonData.OK_DONE);
        buttonBar.setButtonData(cancelButton, ButtonBar.ButtonData.CANCEL_CLOSE);

        buttonBar.getButtons().addAll(saveButton, cancelButton);

        vbox.getChildren().addAll( gp, sep, buttonBar );

        Scene scene = new Scene(vbox);

        primaryStage.setTitle("Grid Pane App");
        primaryStage.setScene(scene);
        primaryStage.setWidth( 736 );
        primaryStage.setHeight( 414 );
        primaryStage.show();

    }

    public static void main(String[] args) {
        launch(args);
    }
}

```

4.5. GridPane Spanning

Author: Carl Walker

For more complex forms implemented with `GridPane`, spanning is supported. Spanning allows a control to claim the space of neighboring columns (`colspan`) and neighboring rows (`rowspan`). This screenshot shows a form that extends the example in the previous section. The two-column layout of the earlier version has been replaced with a multiple-column layout. Fields like Problem and Description retain the original structure. But controls were added to the rows that formerly held only Email and Priority.

Support Ticket

Email Contract

Priority Severity Category

Problem

Description

Cancel Save

Figure 22. Spanning Columns

Turning the grid lines on, notice that the former two column grid is replaced with a six column grid. The third row containing six items—3 field name / value pairs—dictates the structure. The rest of the form will use spanning in order to fill in the whitespace.

Support Ticket

Email Contract

Priority Severity Category

Problem

Description

Cancel Save

Figure 23. Lines Highlighting Spanning

The VBox and GridPane container objects used in this update follow. There is a little more Vgap to help the user select the ComboBox controls.

```
GridPane gp = new GridPane();
gp.setPadding( new Insets(10) );
gp.setHgap( 4 );
gp.setVgap( 10 );

VBox.setVgrow(gp, Priority.ALWAYS );
```

These are control creation statements from the updated example.

```
Label lblTitle = new Label("Support Ticket");

Label lblEmail = new Label("Email");
TextField tfEmail = new TextField();

Label lblContract = new Label("Contract");
TextField tfContract = new TextField();

Label lblPriority = new Label("Priority");
ObservableList<String> priorities =
    FXCollections.observableArrayList("Medium", "High", "Low");
ComboBox<String> cbPriority = new ComboBox<>(priorities);

Label lblSeverity = new Label("Severity");
ObservableList<String> severities =
    FXCollections.observableArrayList("Blocker", "Workaround", "N/A");
ComboBox<String> cbSeverity = new ComboBox<>(severities);

Label lblCategory = new Label("Category");
ObservableList<String> categories =
    FXCollections.observableArrayList("Bug", "Feature");
ComboBox<String> cbCategory = new ComboBox<>(categories);

Label lblProblem = new Label("Problem");
TextField tfProblem = new TextField();

Label lblDescription = new Label("Description");
TextArea taDescription = new TextArea();
```

As in the earlier version, the controls are added to the `GridPane` using the `add()` method. A column and row are specified. In this snippet, the indexing is not straightforward as there are gaps expected to be filled in by spanning content.

```

gp.add( lblTitle,      1, 0); // empty item at 0,0

gp.add( lblEmail,      0, 1);
gp.add( tfEmail,       1, 1);
gp.add( lblContract,   4, 1 );
gp.add( tfContract,    5, 1 );

gp.add( lblPriority,    0, 2);
gp.add( cbPriority,     1, 2);
gp.add( lblSeverity,   2, 2);
gp.add( cbSeverity,    3, 2);
gp.add( lblCategory,   4, 2);
gp.add( cbCategory,    5, 2);

gp.add( lblProblem,     0, 3); gp.add( tfProblem,     1, 3);
gp.add( lblDescription, 0, 4); gp.add( taDescription, 1, 4);

```

Finally, the spanning definitions are set using a static method on `GridPane`. There is a similar method to do row spanning. Title will take up 5 columns as will Problem and Description. Email shares a row with Contract, but will take up more columns. The third row of ComboBoxes is a set of three field/value pairs each taking up one column.

```

GridPane.setColumnSpan( lblTitle, 5 );
GridPane.setColumnSpan( tfEmail, 3 );
GridPane.setColumnSpan( tfProblem, 5 );
GridPane.setColumnSpan( taDescription, 5 );

```

Alternatively, a variation of the `add()` method will `columnSpan` and `rowSpan` arguments to avoid the subsequent static method call.

This expanded `GridPane` example demonstrated column spanning. The same capability is available for row spanning which would allow a control to claim additional vertical space. Spanning keeps controls aligned even in cases where the number of items in a given row (or column) varies. To keep the focus on the spanning topic, this grid allowed the column widths to vary. The article on `ColumnConstraints` and `RowConstraints` will focus on building true modular and column typographical grids by better controlling the columns (and rows).

4.5.1. Completed Code

The following is the completed code for the spanning `GridPane` example.

```

public class ComplexGridPaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox();

        GridPane gp = new GridPane();

```



```

gp.setPadding( new Insets(10) );
gp.setHgap( 4 );
gp.setVgap( 10 );

VBox.setVgrow(gp, Priority.ALWAYS );

Label lblTitle = new Label("Support Ticket");

Label lblEmail = new Label("Email");
TextField tfEmail = new TextField();

Label lblContract = new Label("Contract");
TextField tfContract = new TextField();

Label lblPriority = new Label("Priority");
ObservableList<String> priorities =
    FXCollections.observableArrayList("Medium", "High", "Low");
ComboBox<String> cbPriority = new ComboBox<>(priorities);

Label lblSeverity = new Label("Severity");
ObservableList<String> severities =
    FXCollections.observableArrayList("Blocker", "Workaround", "N/A");
ComboBox<String> cbSeverity = new ComboBox<>(severities);

Label lblCategory = new Label("Category");
ObservableList<String> categories = FXCollections.observableArrayList("Bug",
"Feature");
ComboBox<String> cbCategory = new ComboBox<>(categories);

Label lblProblem = new Label("Problem");
TextField tfProblem = new TextField();

Label lblDescription = new Label("Description");
TextArea taDescription = new TextArea();

gp.add( lblTitle,      1, 0); // empty item at 0,0

gp.add( lblEmail,      0, 1);
gp.add( tfEmail,       1, 1);
gp.add( lblContract,   4, 1 );
gp.add( tfContract,    5, 1 );

gp.add( lblPriority,    0, 2);
gp.add( cbPriority,     1, 2);
gp.add( lblSeverity,   2, 2);
gp.add( cbSeverity,    3, 2);
gp.add( lblCategory,   4, 2);
gp.add( cbCategory,    5, 2);

gp.add( lblProblem,    0, 3); gp.add( tfProblem,    1, 3);
gp.add( lblDescription, 0, 4); gp.add( taDescription, 1, 4);

GridPane.setColumnSpan( lblTitle, 5 );

```

```

GridPane.setColumnSpan( tfEmail, 3 );
GridPane.setColumnSpan( tfProblem, 5 );
GridPane.setColumnSpan( taDescription, 5 );

Separator sep = new Separator(); // hr

ButtonBar buttonBar = new ButtonBar();
buttonBar.setPadding( new Insets(10) );

Button saveButton = new Button("Save");
Button cancelButton = new Button("Cancel");

buttonBar.setButtonData(saveButton, ButtonBar.ButtonData.OK_DONE);
buttonBar.setButtonData(cancelButton, ButtonBar.ButtonData.CANCEL_CLOSE);

buttonBar.getButtons().addAll(saveButton, cancelButton);

vbox.getChildren().addAll( gp, sep, buttonBar );

Scene scene = new Scene(vbox);

primaryStage.setTitle("Grid Pane App");
primaryStage.setScene(scene);
primaryStage.setWidth( 736 );
primaryStage.setHeight( 414 );
primaryStage.show();
}

public static void main(String[] args) {
    launch(args);
}
}

```

4.6. GridPane ColumnConstraints and RowConstraints

Author: Carl Walker

Previous articles on `GridPane` showed how to create a two-column layout with field names on the left-hand side and field values on the right-hand side. That example was expanded to add more controls to a given row and to use spanning handle gaps in content. This article introduces a pair of JavaFX classes `ColumnConstraints` and `RowConstraints`. These classes give additional specification to a row or column. In this example, a row containing a `TextArea` will be given all extra space when the window is resized. The two columns will be set to equals widths.

This screenshot shows an example modified from previous articles. The demo program for this article has a rotated feel whereby the field names are paired with the field values vertically (on top of the values) rather than horizontally. Row spanning and column spanning is used to align items that are larger than a single cell.

The screenshot shows a window titled "Grid Pane App" with a support ticket form. The form contains the following elements:

- Support Ticket** header
- Email** label and a text input field.
- Contract** label and a text input field.
- Priority** section with three radio buttons: ☐ Medium, ☒ High, and ☐ Low.
- Severity** label and a dropdown menu showing "Workaround".
- Category** label and a dropdown menu showing "Feature".
- Problem** label and a text input field.
- Description** label and a large text area.
- Buttons** at the bottom: "Cancel" and "Save".

Two red rectangles are overlaid on the form to indicate areas for constraints:

- A red rectangle on the right side, spanning the Priority, Severity, and Category sections, containing the text "Extra Space Available".
- A red rectangle at the bottom, spanning the width of the form below the Description text area, containing the text "Extra Space Available".

Figure 24. Example App Using Row and Column Spanning

The red rectangles and text are not part of the UI. They are identifying sections of the screen that will be addressed later with `ColumnConstraints` and `RowConstraints`.

This code is the creation of the `Scene` root and `GridPane` objects.

```

VBox vbox = new VBox();

GridPane gp = new GridPane();
gp.setPadding( new Insets(10) );
gp.setHgap( 4 );
gp.setVgap( 10 );

VBox.setVgrow(gp, Priority.ALWAYS );

```

This code creates the UI controls objects used in the article. Notice that Priority is now implemented as a VBox containing RadioButtons.

```

Label lblTitle = new Label("Support Ticket");

Label lblEmail = new Label("Email");
TextField tfEmail = new TextField();

Label lblContract = new Label("Contract");
TextField tfContract = new TextField();

Label lblPriority = new Label("Priority");
RadioButton rbMedium = new RadioButton("Medium");
RadioButton rbHigh = new RadioButton("High");
RadioButton rbLow = new RadioButton("Low");
VBox priorityVBox = new VBox();
priorityVBox.setSpacing( 2 );
GridPane.setVgrow(priorityVBox, Priority.SOMETIMES);
priorityVBox.getChildren().addAll( lblPriority, rbMedium, rbHigh, rbLow );

Label lblSeverity = new Label("Severity");
ObservableList<String> severities =
    FXCollections.observableArrayList("Blocker", "Workaround", "N/A");
ComboBox<String> cbSeverity = new ComboBox<>(severities);

Label lblCategory = new Label("Category");
ObservableList<String> categories =
    FXCollections.observableArrayList("Bug", "Feature");
ComboBox<String> cbCategory = new ComboBox<>(categories);

Label lblProblem = new Label("Problem");
TextField tfProblem = new TextField();

Label lblDescription = new Label("Description");
TextArea taDescription = new TextArea();

```

The Label and value control pairings of Email, Contract, Problem, and Description are put in a single column. They should take the full width of the GridPane so each has its columnSpan set to 2.

```
GridPane.setColumnSpan( tfEmail, 2 );
GridPane.setColumnSpan( tfContract, 2 );
GridPane.setColumnSpan( tfProblem, 2 );
GridPane.setColumnSpan( taDescription, 2 );
```

The new Priority RadioButtons are matched horizontally with four controls for Severity and Category. This `rowSpan` setting instructs JavaFX to put the VBox containing the RadioButton in a merged cell that is four rows in height.

```
GridPane.setRowSpan( priorityVBox, 4 );
```

4.6.1. Row Constraints

At this point, the code reflects the UI screenshot presented in [Example App Using Row and Column Spanning](#). To reallocate the extra space at the base of the form, use a `RowConstraints` object to set a `Priority.ALWAYS` on the row of the `TextArea`. This will result in the `TextArea` growing to fill the available space with something usable.

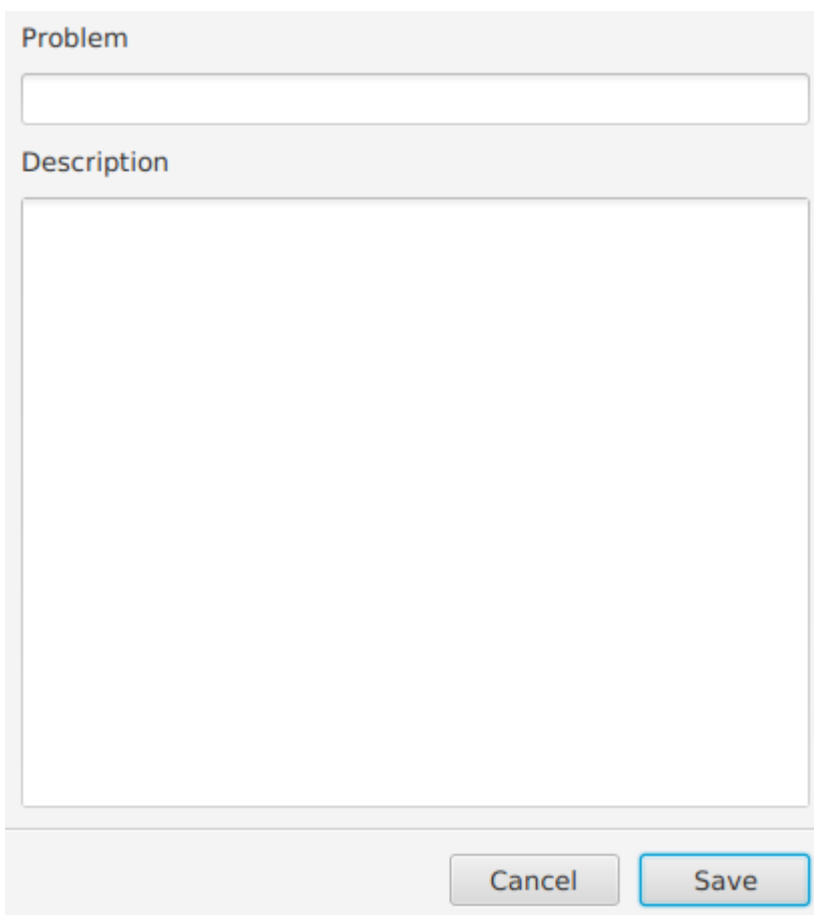


Figure 25. TextArea Grows to Fill Extra Space

This code is a `RowConstraints` object to the `GridPane` for the `TextArea`. Prior to the setter, `RowConstraints` objects are allocated for all of the other rows. The set method of `getRowConstraints()` will throw an index exception when you specify row 12 without first allocating an object.

```

RowConstraints taDescriptionRowConstraints = new RowConstraints();
taDescriptionRowConstraints.setVgrow(Priority.ALWAYS);

for( int i=0; i<13; i++ ) {
    gp.getRowConstraints().add( new RowConstraints() );
}

gp.getRowConstraints().set( 12, taDescriptionRowConstraints );

```

As an alternative syntax, there is a `setConstraints()` method available from the `GridPane`. This will pass in several values and obviates the need for the dedicated `columnSpan` set call for the `TextArea`. The `RowConstraints` code from the previous listing will not appear in the finished program.

```

gp.setConstraints(taDescription,
                 0, 12,
                 2, 1,
                 HPos.LEFT, VPos.TOP,
                 Priority.SOMETIMES, Priority.ALWAYS);

```

This code identifies the `Node` at (0,12) which is the `TextArea`. The `TextArea` will span 2 columns but only 1 row. The `HPos` and `Vpos` are set to the TOP LEFT. Finally, the `Priority` of the `hgrow` is `SOMETIMES` and the `vgrow` is `ALWAYS`. Since the `TextArea` is the only row with "ALWAYS", it will get the additional space. If there were other `ALWAYS` settings, the space would be shared among multiple rows.

4.6.2. Column Constraints

To properly allocate the space surrounding the `Severity` and `Category` controls, `ColumnConstraints` will be specified. The default behavior allocates less space to the first column because of the smaller `Priority` `RadioButtons`. The following wireframe shows the desired layout which has equal columns separated by a gutter of 4 pixels (`Hgap`).

The image shows a wireframe of a 'Grid Pane App' window. The window has a title bar with standard OS controls and the text 'Grid Pane App'. The main content area is a grid with two columns. The first column contains labels for 'Support Ticket', 'Email', 'Contract', 'Priority', 'Problem', and 'Description'. The second column contains labels for 'Severity' and 'Category'. Below the 'Priority' label are three radio buttons labeled 'Medium', 'High', and 'Low'. Below the 'Severity' label is a dropdown menu. Below the 'Category' label is a dropdown menu. At the bottom of the window are two buttons: 'Cancel' and 'Save'.

Figure 26. Wireframe of the Demo App

To make the column widths equal, define two `ColumnConstraint` objects and use a percentage specifier.

```
ColumnConstraints col1 = new ColumnConstraints();
col1.setPercentWidth( 50 );
ColumnConstraints col2 = new ColumnConstraints();
col2.setPercentWidth( 50 );
gp.getColumnConstraints().addAll( col1, col2 );
```

This is a screenshot of the finished example.

The screenshot shows a JavaFX application window titled "Grid Pane App". Inside the window is a form titled "Support Ticket". The form is organized into a grid layout. It contains the following fields and controls:

- Email:** A single-line text input field.
- Contract:** A single-line text input field.
- Priority:** Three radio buttons labeled "Medium", "High", and "Low".
- Severity:** A dropdown menu.
- Category:** A dropdown menu.
- Problem:** A single-line text input field.
- Description:** A multi-line text area.
- Buttons:** At the bottom right, there are two buttons: "Cancel" and "Save".

Figure 27. App With Extra Space Properly Allocated

`GridPane` is an important control in developing JavaFX business applications. When working on a requirement involving name / value pairs and a single record view, use `GridPane`. While `GridPane` is easier to use than the `GridBagLayout` from Swing, I still find that the API is a little inconvenient (assigning own indexes, disassociated constraints). Fortunately, there is `Scene Builder` which simplifies the construction of this form greatly.

4.6.3. Completed Code

The following is the completed code for the constraints `GridPane` example.

```

public class ConstraintsGridPaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox();

        GridPane gp = new GridPane();
        gp.setPadding( new Insets(10) );
        gp.setHgap( 4 );
        gp.setVgap( 10 );

        VBox.setVgrow(gp, Priority.ALWAYS );

        Label lblTitle = new Label("Support Ticket");

        Label lblEmail = new Label("Email");
        TextField tfEmail = new TextField();

        Label lblContract = new Label("Contract");
        TextField tfContract = new TextField();

        Label lblPriority = new Label("Priority");
        RadioButton rbMedium = new RadioButton("Medium");
        RadioButton rbHigh = new RadioButton("High");
        RadioButton rbLow = new RadioButton("Low");
        VBox priorityVBox = new VBox();
        priorityVBox.setSpacing( 2 );
        GridPane.setVgrow(priorityVBox, Priority.SOMETIMES);
        priorityVBox.getChildren().addAll( lblPriority, rbMedium, rbHigh, rbLow );

        Label lblSeverity = new Label("Severity");
        ObservableList<String> severities =
FXCollections.observableArrayList("Blocker", "Workaround", "N/A");
        ComboBox<String> cbSeverity = new ComboBox<>(severities);

        Label lblCategory = new Label("Category");
        ObservableList<String> categories = FXCollections.observableArrayList("Bug",
"Feature");
        ComboBox<String> cbCategory = new ComboBox<>(categories);

        Label lblProblem = new Label("Problem");
        TextField tfProblem = new TextField();

        Label lblDescription = new Label("Description");
        TextArea taDescription = new TextArea();

        gp.add( lblTitle,          0, 0);

        gp.add( lblEmail,          0, 1);
        gp.add(tfEmail,            0, 2);

        gp.add( lblContract,       0, 3 );
    }
}

```

```

gp.add( tfContract,      0, 4 );

gp.add( priorityVBox,    0, 5);

gp.add( lblSeverity,     1, 5);
gp.add( cbSeverity,      1, 6);
gp.add( lblCategory,     1, 7);
gp.add( cbCategory,      1, 8);

gp.add( lblProblem,      0, 9);
gp.add( tfProblem,       0, 10);

gp.add( lblDescription,  0, 11);
gp.add( taDescription,   0, 12);

GridPane.setColumnSpan( tfEmail, 2 );
GridPane.setColumnSpan( tfContract, 2 );
GridPane.setColumnSpan( tfProblem, 2 );

GridPane.setRowSpan( priorityVBox, 4 );

gp.setConstraints(taDescription,
                 0, 12,
                 2, 1,
                 HPos.LEFT, VPos.TOP,
                 Priority.SOMETIMES, Priority.ALWAYS);

ColumnConstraints col1 = new ColumnConstraints();
col1.setPercentWidth( 50 );
ColumnConstraints col2 = new ColumnConstraints();
col2.setPercentWidth( 50 );
gp.getColumnConstraints().addAll( col1, col2 );

Separator sep = new Separator(); // hr

ButtonBar buttonBar = new ButtonBar();
buttonBar.setPadding( new Insets(10) );

Button saveButton = new Button("Save");
Button cancelButton = new Button("Cancel");

buttonBar.setButtonData(saveButton, ButtonBar.ButtonData.OK_DONE);
buttonBar.setButtonData(cancelButton, ButtonBar.ButtonData.CANCEL_CLOSE);

buttonBar.getButtons().addAll(saveButton, cancelButton);

vbox.getChildren().addAll( gp, sep, buttonBar );

Scene scene = new Scene(vbox);

primaryStage.setTitle("Grid Pane App");
primaryStage.setScene(scene);
primaryStage.setWidth( 414 );

```

```

        primaryStage.setHeight( 736 );
        primaryStage.show();

    }

    public static void main(String[] args) {
        launch(args);
    }
}

```

4.7. AnchorPane

Author: Carl Walker

`AnchorPane` is a container control that defines its layout in terms of edges. When placed in a container, the `AnchorPane` stretches to fill the available space. The children of `AnchorPane` express their positions and sizes as distances from the edges: Top, Left, Bottom, Right. If one or two anchor settings are placed on an `AnchorPane` child, the child will be fixed to that corner of the window. If more than two anchor settings are used, the child will be stretched to fill the available horizontal and vertical space.

This mockup shows a `TextArea` surrounded by a set of controls: a `Hyperlink` and two status indicators. Since the `TextArea` will contain all of the content, it should take up most of the space initially and should acquire any additional space from a resize. On the periphery, there is a `Hyperlink` in the upper-right, a connection `Label` and `Circle` in the lower-right, and a status `Label` in the lower-left.

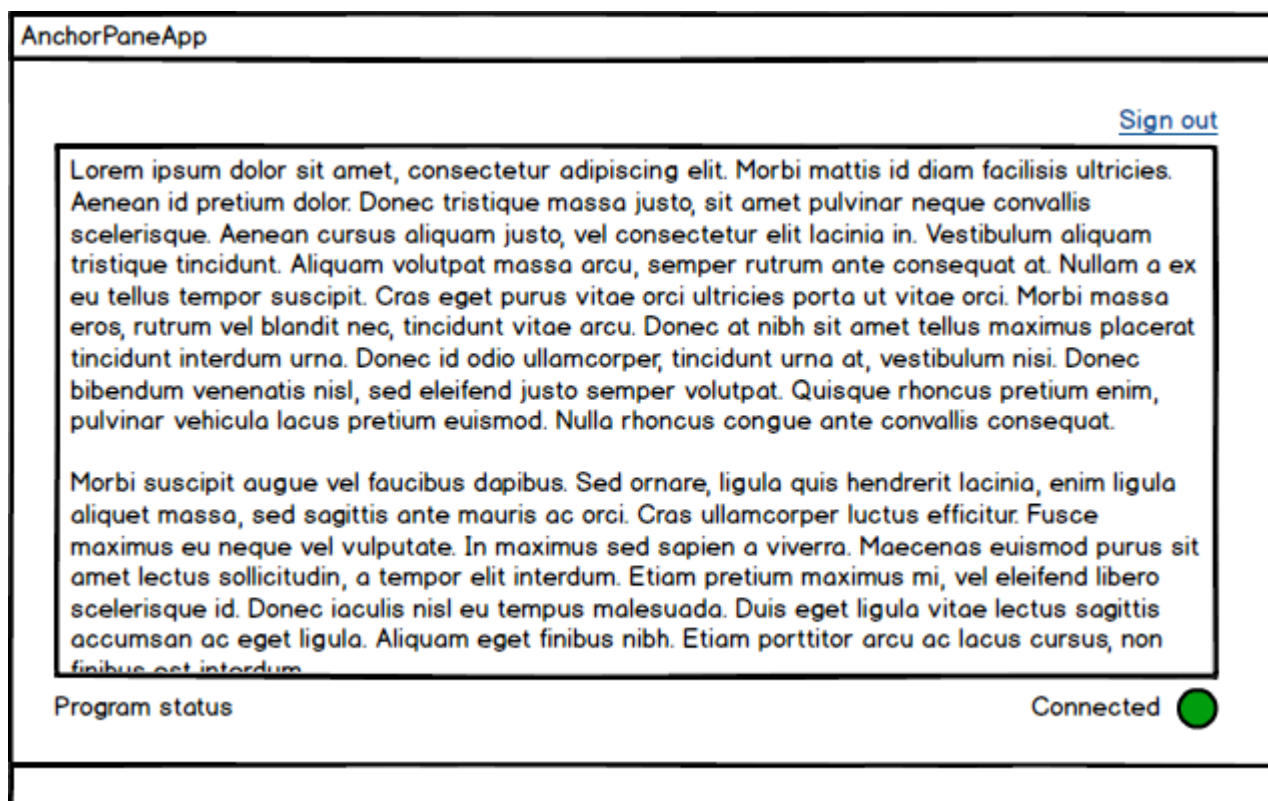


Figure 28. `AnchorPane` With `TextArea`

4.7.1. Anchors

To begin the layout, create an `AnchorPane` object and add it to the `Scene`.

```
AnchorPane ap = new AnchorPane();
Scene scene = new Scene(ap);
```

Anchors are set using static methods of the `AnchorPane` class. The methods—one per edge—accept the `Node` and an offset. For the `Hyperlink`, an anchor to the top edge and an anchor to the right edge will be set. An offset of 10.0 is set for each edge so that the link is not compressed against the side.

```
Hyperlink signoutLink = new Hyperlink("Sign Out");

ap.getChildren().add( signoutLink );

AnchorPane.setTopAnchor( signoutLink, 10.0d );
AnchorPane.setRightAnchor( signoutLink, 10.0d );
```

When the screen is resized, the `AnchorPane` will resize and `signoutLink` will maintain its top-right position. Because neither the left nor bottom anchors are specified, `signoutLink` will not be stretched.

Next, the connection `Label` and `Circle` are added. These controls are wrapped in an `HBox`.

```
Circle circle = new Circle();
circle.setFill(Color.GREEN );
circle.setRadius(10);

Label connLabel = new Label("Connection");

HBox connHBox = new HBox();
connHBox.setSpacing( 4.0d );
connHBox.setAlignment(Pos.BOTTOM_RIGHT);
connHBox.getChildren().addAll( connLabel, circle );

AnchorPane.setBottomAnchor( connHBox, 10.0d );
AnchorPane.setRightAnchor( connHBox, 10.0d );

ap.getChildren().add( connHBox );
```

As with `signoutLink`, `connHBox` is fixed to a place on the screen. `connHBox` is set to be 10 pixels from the bottom edge and 10 pixels from the right edge.

The lower-left status `Label` is added. The left and the bottom anchors are set.

```

Label statusLabel = new Label("Program status");
ap.getChildren().add( statusLabel );

AnchorPane.setBottomAnchor( statusLabel, 10.0d );
AnchorPane.setLeftAnchor( statusLabel, 10.0d );

```

This is a screenshot of the finished app. The status and control labels are at the bottom of the screen, pinned to the left and right edges respectively. The `Hyperlink` is pinned to the top-right.

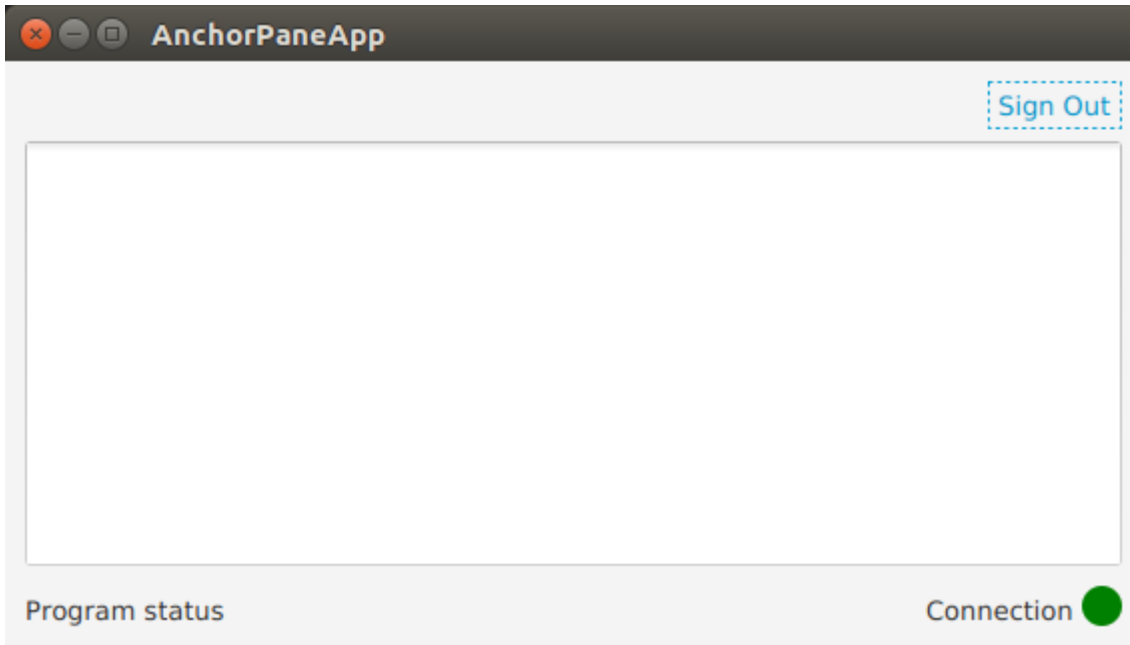


Figure 29. "AnchorPane App"

4.7.2. Resizing

The controls on the periphery may vary in size. For example, a status message or a connection message may be longer. However, the extra length can be accommodated in this layout by extending the bottom-left status `Label` to the right and by extending the bottom-right connection status `Label` to the left. Resizing with this layout will move these controls in absolute terms, but they will adhere to their respective edges plus the offset.

That is not the case with the `TextArea`. Because the `TextArea` may contain a lot of content, it should receive any extra space that the user gives the window. This control will be anchored to all four corners of the `AnchorPane`. This will cause the `TextArea` to resize when the window resizes. The `TextArea` is fixed on the top-left and as the user drags the window handles to the bottom-right, the bottom-right corner of the `TextArea` moves as well.

This picture shows the result of two resize operations. The top screenshot is a vertical resize from dragging the bottom edge of the window down. The bottom screenshot is a horizontal resize from dragging the right edge of the window right.

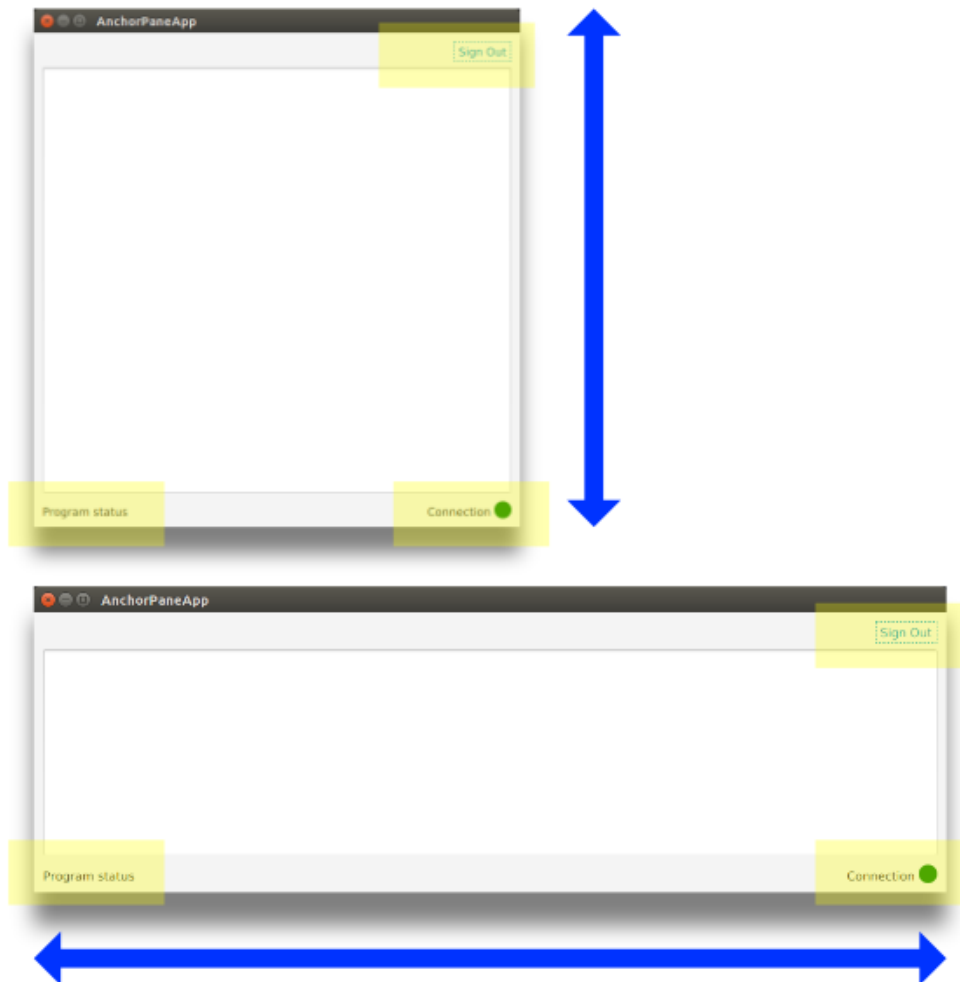


Figure 30. "AnchorPane App Resized"

The highlighted boxes show that the controls bordering the `TextArea` retain their positions relative to the edges. The `TextArea` itself is resized based on the Window resize. The top and bottom offsets of the `TextArea` account for the other controls so that they are not hidden.

```
TextArea ta = new TextArea();

AnchorPane.setTopAnchor( ta, 40.0d );
AnchorPane.setBottomAnchor( ta, 40.0d );
AnchorPane.setRightAnchor( ta, 10.0d );
AnchorPane.setLeftAnchor( ta, 10.0d );

ap.getChildren().add( ta );
```

`AnchorPane` is a good choice when you have a mixture of resizable and fixed-position children. Other controls like `VBox` and `HBox` with a `Priority` setting are preferred if there is only one child needing resizing. Use these controls instead of `AnchorPane` with a single child that has all four anchors set. Remember that to set an anchor on a child, you use a static method of the container class such as `AnchorPane.setTopAnchor()`.

4.7.3. Completed Code

The following is the completed code for the `AnchorPane` example.

```
public class AnchorPaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        AnchorPane ap = new AnchorPane();

        // upper-right sign out control
        Hyperlink signoutLink = new Hyperlink("Sign Out");

        ap.getChildren().add( signoutLink );

        AnchorPane.setTopAnchor( signoutLink, 10.0d );
        AnchorPane.setRightAnchor( signoutLink, 10.0d );

        // lower-left status label
        Label statusLabel = new Label("Program status");
        ap.getChildren().add( statusLabel );

        AnchorPane.setBottomAnchor( statusLabel, 10.0d );
        AnchorPane.setLeftAnchor( statusLabel, 10.0d );

        // lower-right connection status control
        Circle circle = new Circle();
        circle.setFill(Color.GREEN );
        circle.setRadius(10);

        Label connLabel = new Label("Connection");

        HBox connHBox = new HBox();
        connHBox.setSpacing( 4.0d );
        connHBox.setAlignment(Pos.BOTTOM_RIGHT);
        connHBox.getChildren().addAll( connLabel, circle );

        AnchorPane.setBottomAnchor( connHBox, 10.0d );
        AnchorPane.setRightAnchor( connHBox, 10.0d );

        ap.getChildren().add( connHBox );

        // top-left content; takes up extra space
        TextArea ta = new TextArea();
        ap.getChildren().add( ta );

        AnchorPane.setTopAnchor( ta, 40.0d );
        AnchorPane.setBottomAnchor( ta, 40.0d );
        AnchorPane.setRightAnchor( ta, 10.0d );
        AnchorPane.setLeftAnchor( ta, 10.0d );
    }
}
```

```

    Scene scene = new Scene(ap);

    primaryStage.setTitle("AnchorPaneApp");
    primaryStage.setScene( scene );
    primaryStage.setWidth(568);
    primaryStage.setHeight(320);
    primaryStage.show();
}

public static void main(String[] args) {
    launch(args);
}
}

```

4.8. TilePane

Author: Carl Walker

A `TilePane` is used for grid layout of equally sized cells. The `prefColumns` and the `prefRows` properties define the number of rows and columns in the grid. To add Nodes to `TilePane`, access the `children` property and call the `add()` or `addAll()` method. This is easier to use than `GridPane` which requires explicit setting of the row / column position of Nodes.

This screenshot shows a `TilePane` defined as a three-by-three grid. The `TilePane` contains nine `Rectangle` objects.

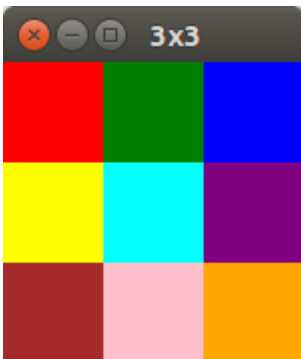


Figure 31. A 3x3 TilePane

The complete code for the three-by-three grid follows. The `children` property of the `TilePane` provides the `addAll()` method to which `Rectangle` objects are added. The `tileAlignment` property positions each of the `Rectangle` objects in the center of its corresponding tile.

ThreeByThreeApp.java

```
public class ThreeByThreeApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        TilePane tilePane = new TilePane();
        tilePane.setPrefColumns(3);
        tilePane.setPrefRows(3);
        tilePane.setTileAlignment( Pos.CENTER );

        tilePane.getChildren().addAll(
            new Rectangle(50, 50, Color.RED),
            new Rectangle( 50, 50, Color.GREEN ),
            new Rectangle( 50, 50, Color.BLUE ),
            new Rectangle( 50, 50, Color.YELLOW ),
            new Rectangle( 50, 50, Color.CYAN ),
            new Rectangle( 50, 50, Color.PURPLE ),
            new Rectangle( 50, 50, Color.BROWN ),
            new Rectangle( 50, 50, Color.PINK ),
            new Rectangle( 50, 50, Color.ORANGE )
        );

        Scene scene = new Scene(tilePane);
        scene.setFill(Color.LIGHTGRAY);

        primaryStage.setTitle("3x3");
        primaryStage.setScene( scene );
        primaryStage.show();
    }

    public static void main(String[] args) {launch(args);}
}
```

Since all of the `Node` contents of the `TilePane` were equally-sized `Rectangles`, the layout is packed together and the `tileAlignment` setting is not noticeable. When the `tilePrefHeight` and `tilePrefWidth` properties are set to be larger than the contents—say 100x100 tiles containing 50x50 `Rectangles`—`tileAlignment` will determine how the extra space will be used.

See the following modified `ThreeByThreeApp` class that sets the `tilePrefHeight` and `tilePrefWidth`.

```
tilePane.setPrefTileHeight(100);
tilePane.setPrefTileWidth(100);
```



Figure 32. 3x3 TilePane (Modified)

In the prior screenshots, nine `Rectangle` objects were provided to the three-by-three grid. If the contents do not match up with the `TilePane` definition, those cells will collapse. This modification adds only five `Rectangles` rather than nine. The first row contains has content for all three tiles. The second row has content for only the first two files. The third row is missing entirely.



Figure 33. 3x3 App - Sparse

There is a property "orientation" that instructs `TilePane` to add items row-by-row (`HORIZONTAL`, the default) or column-by-column (`VERTICAL`). If `VERTICAL` is used, then the first column will have three elements, the second column will have only the top two, and the third column will be missing. This screenshot shows the five `Rectangles` being added to the three-by-three grid (nine tiles) using `VERTICAL` orientation.

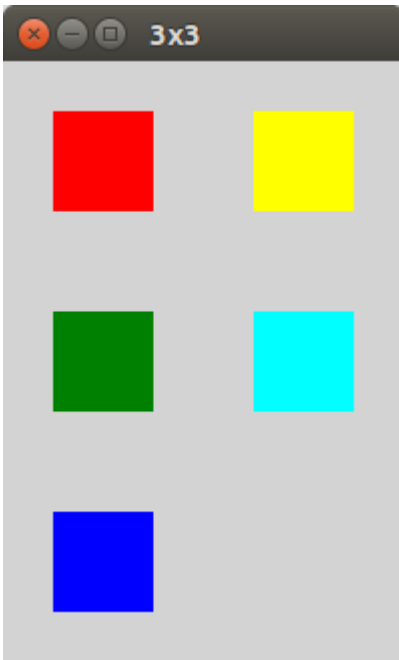


Figure 34. 3x3 App - VERTICAL

4.8.1. Algorithms

It is possible to create JavaFX grid layouts with other containers like `GridPane`, `VBox`, and `HBox`. `TilePane` is a convenience that defines the grid layout in advance and makes adding items to the grid a simple `add()` or `addAll()` call. Unlike a grid layout built with a combination of nested `VBox` and `HBox` containers, the `TilePane` contents are direct children. This makes it easy to loop over the children during event processing which helps implement certain algorithms.

This example app places four `Circles` in a `TilePane`. An event handler is attached to the `TilePane` which looks for a selection of one of the `Circles`. If a `Circle` is selected, it is dimmed through the opacity setting. If the `Circle` is re-selected, its original color is restored. This screenshot shows the app with the blue `Circle` appearing purple-ish because it has been selected.

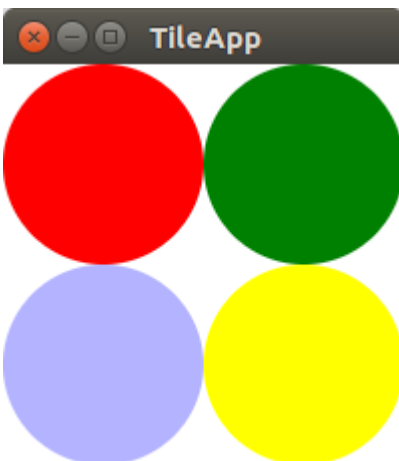


Figure 35. TileApp with Blue Circle Selected

The program begins by adding the items and setting a custom property "selected" using the Java 8 Stream API.

TileApp.java

```
TilePane tilePane = new TilePane();
tilePane.setPrefColumns(2);
tilePane.setPrefRows(2);
tilePane.setTileAlignment( Pos.CENTER );

Circle redCircle = new Circle(50, Color.RED);
Circle greenCircle = new Circle( 50, Color.GREEN );
Circle blueCircle = new Circle( 50, Color.BLUE );
Circle yellowCircle = new Circle( 50, Color.YELLOW );

List<Circle> circles = new ArrayList<>();
circles.add( redCircle );
circles.add( greenCircle );
circles.add( blueCircle );
circles.add( yellowCircle );

circles
    .stream()
    .forEach( (c) -> c.getProperties().put( "selected", Boolean.FALSE ) );

tilePane.getChildren().addAll(
    circles
);
```

Next, the event handler is attached to the mouse event. This is also using Java 8 Streams. The `filter()` method is determining whether or not a `Circle` is selected using the `Node.contains()` method on converted coordinates. If that expression passes, `findFirst()` is used to retrieve the first (and in this case, only) match. The block of code in `ifPresent()` sets the "selected" flag for keeping track of the `Circle` state and tweaks the opacity.

TileApp.java

```
tilePane.setOnMouseClicked(

    (evt) -> tilePane
        .getChildren()
        .stream()
        .filter( c ->
            c.contains(
                c.sceneToLocal(evt.getSceneX(), evt.getSceneY(), true)
            )
        )
        .findFirst()
        .ifPresent(
            (c) -> {
                Boolean selected = (Boolean)
c.getProperties().get("selected");
                if( selected == null || selected == Boolean.FALSE ) {
                    c.setOpacity(0.3d);
                    c.getProperties().put("selected", Boolean.TRUE);
                } else {
                    c.setOpacity( 1.0d );
                    c.getProperties().put("selected", Boolean.FALSE);
                }
            }
        )
);
```

4.8.2. Another Handler

Since the program saves the Circles in a Java Collections `List`, the `TilePane` contents can be replaced with repeated `addAll()` calls. This event handler is triggered by the user pressing an "S" in the `Scene`. The contents of the backing `List` are shuffled and re-added to the `TilePane`.

TileApp.java

```
scene.setOnKeyPressed(
    (evt) -> {
        if( evt.getCode().equals(KeyCode.S) ) {
            Collections.shuffle( circles );
            tilePane.getChildren().clear();
            tilePane.getChildren().addAll( circles );
        }
    }
);
```

While feasible, a grid built with `VBoxes` and `HBoxes` would be slightly more difficult because of the nested structures. Also, `TilePane` will not stretch the contents to fill extra space, making it suitable for composite controls that need to be packed together for ergonomic reasons.

`TilePane` creates a grid based layout of equally sized cells. Contents are added to the

TilePane based on the prefRows, prefColumns, and orientation settings. If the grid contains more tiles than added Nodes, there will be gaps in the layout and rows and columns may collapse if no content was provided whatsoever. This post showed a pair of algorithms that were implemented easily because of TilePane's simply interface.

4.8.3. Complete Code

The complete code for TileApp follows.

TileApp.java (Complete)

```
public class TileApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        TilePane tilePane = new TilePane();
        tilePane.setPrefColumns(2);
        tilePane.setPrefRows(2);
        tilePane.setTileAlignment( Pos.CENTER );

        Circle redCircle = new Circle(50, Color.RED);
        Circle greenCircle = new Circle( 50, Color.GREEN );
        Circle blueCircle = new Circle( 50, Color.BLUE );
        Circle yellowCircle = new Circle( 50, Color.YELLOW );

        List<Circle> circles = new ArrayList<>();
        circles.add( redCircle );
        circles.add( greenCircle );
        circles.add( blueCircle );
        circles.add( yellowCircle );

        circles
            .stream()
            .forEach( (c) -> c.getProperties().put( "selected", Boolean.FALSE ) );

        tilePane.getChildren().addAll(
            circles
        );

        tilePane.setOnMouseClicked(

            (evt) -> tilePane
                .getChildren()
                .stream()
                .filter( c ->
                    c.contains(
                        c.sceneToLocal(evt.getSceneX(), evt.getSceneY(), true)
                    )
                )
                .findFirst()
                .ifPresent(
                    (c) -> {
```

```

        Boolean selected = (Boolean)
c.getProperties().get("selected");
        if( selected == null || selected == Boolean.FALSE )
{
            c.setOpacity(0.3d);
            c.getProperties().put("selected",
Boolean.TRUE);
        } else {
            c.setOpacity( 1.0d );
            c.getProperties().put("selected",
Boolean.FALSE);
        }
    }
}

);

Scene scene = new Scene(tilePane);

scene.setOnKeyPressed(
    (evt) -> {
        if( evt.getCode().equals(KeyCode.S) ) {
            Collections.shuffle( circles );
            tilePane.getChildren().clear();
            tilePane.getChildren().addAll( circles );
        }
    }
);

primaryStage.setTitle("TileApp");
primaryStage.setScene( scene );
primaryStage.show();

}

public static void main(String[] args) {
    launch(args);
}
}

```

4.9. TitledPane

Author: Carl Walker

A `TitledPane` is a `Node` container matched with a `Label` and an optional control for showing and hiding the container contents. Since `TitledPane` is limited to a single `Node`, it is often paired with a container supporting multiple children like a `VBox`. Functionally, it can hide non-essential details of a form or group related controls.

This example is a web search app that accepts a set of keywords in a `TextField`. The user presses the Search Button to run a search. The `Advanced TitledPane` expands to provide additional search arguments.

This screenshot shows the un-expanded state which is the view for a user executing a simple keyword search.

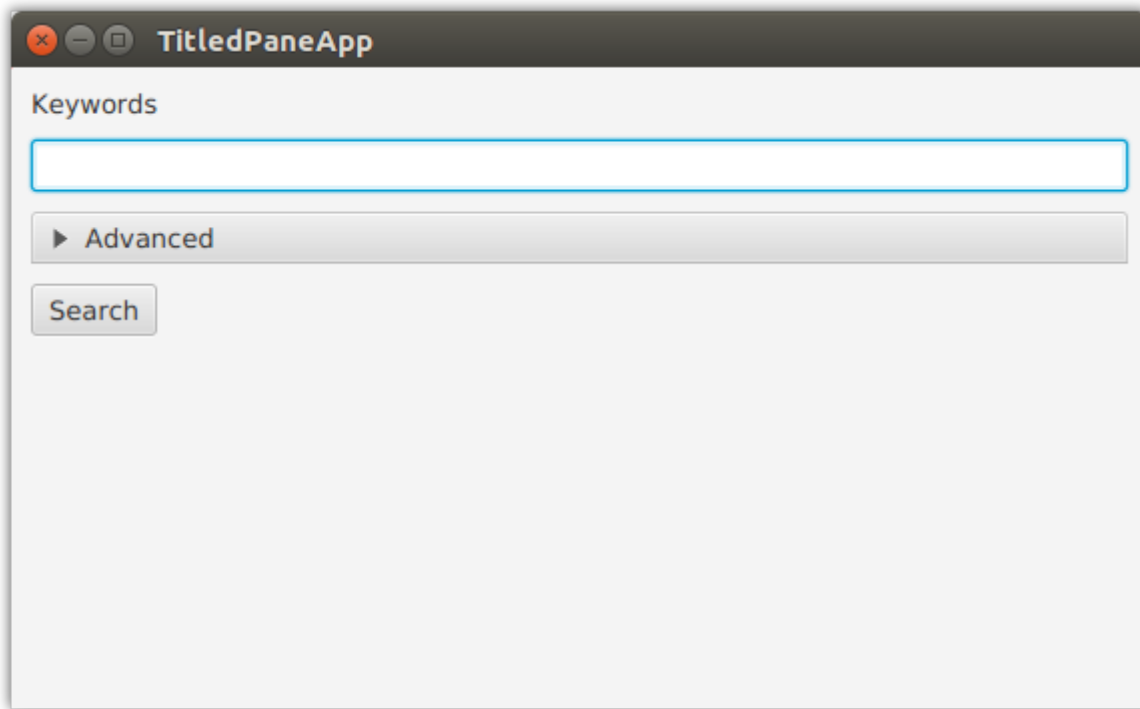


Figure 36. Unexpanded TitledPane

This next screenshot shows the view for a user requiring advanced search parameters. The Advanced TitledPane was expanded by pressing on the arrow in the TitledPane header.

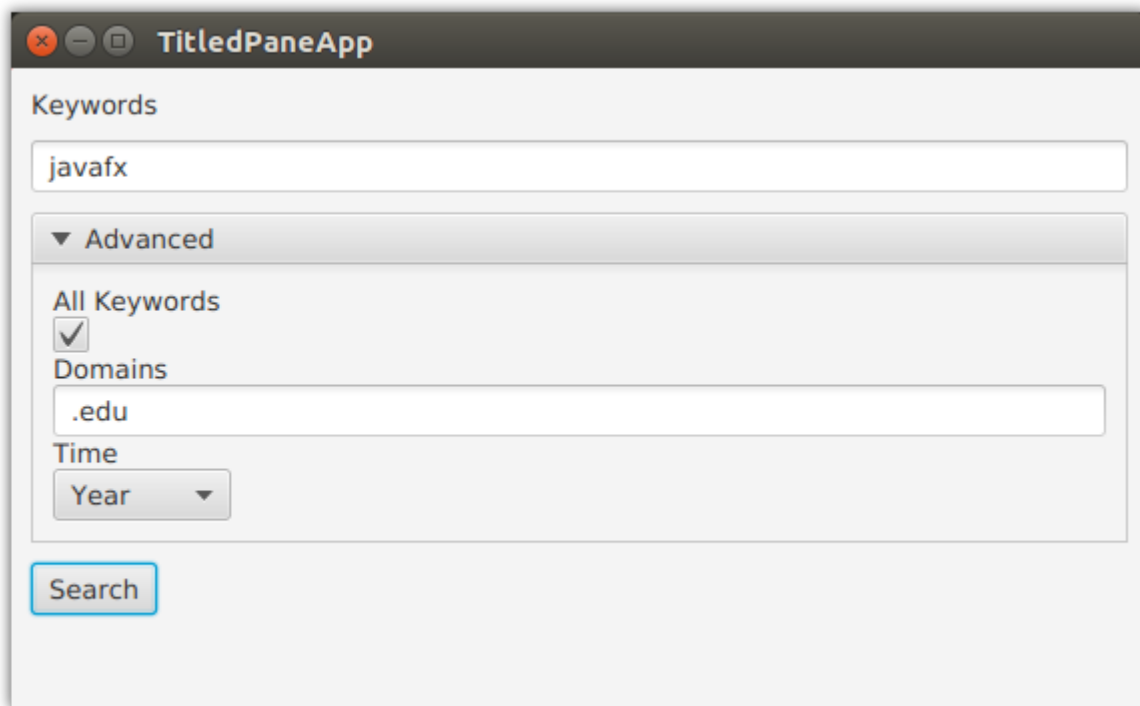


Figure 37. Expanded TitledPane Shows More Controls

To create a `TitledPane`, use the constructor to pass in a `String` title and a single `Node` child. The default constructor can also be used and the title and `Node` set using setters. This code uses the parameterized constructor. A `VBox` is the single child of the `TitledPane`. However, the `VBox` itself contains several controls.


```
    VBox advancedVBox = new VBox(  
        new Label("All Keywords"),  
        new CheckBox(),  
        new Label("Domains"),  
        new TextField(),  
        new Label("Time"),  
        new ComboBox<>(  
            FXCollections.observableArrayList( "Day", "Month", "Year" )  
        )  
    );  
  
    TitledPane titledPane = new TitledPane(  
        "Advanced",  
        advancedVBox  
    );  
    titledPane.setExpanded( false );
```

By default, the `TitledPane` will be expanded. This does not fit the use case of hiding non-essential information, so the expanded property is set after the object is created.

4.9.1. Collapsible

Another property of `TitledPane` is collapsible. By default, the `TitledPane` collapsible property is set to true. However, a quick grouping can be provided to controls that are not collapsible. The following screenshot demonstrates this use case.

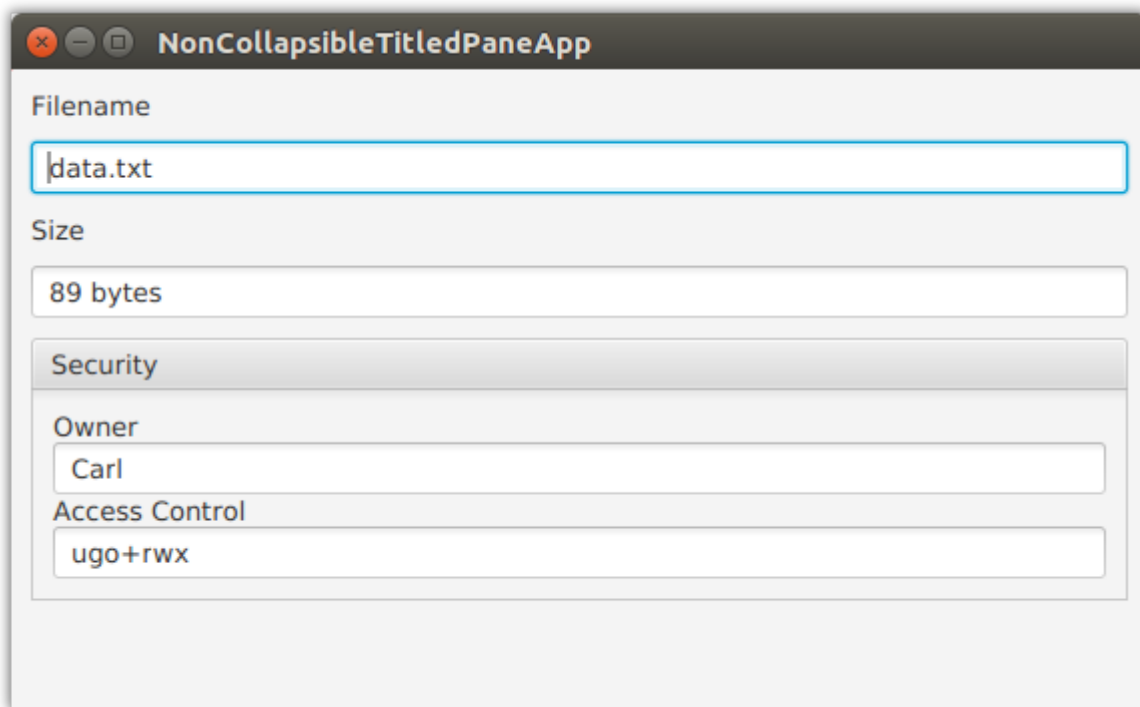


Figure 38. Collapsible Set to False

This code sets the collapsible flag after the constructor is called.

```
VBox securityVBox = new VBox(  
    new Label("Owner"),  
    new TextField(),  
    new Label("Access Control"),  
    new TextField()  
);  
  
TitledPane tp = new TitledPane("Security", securityVBox);  
tp.setCollapsible( false );
```

4.9.2. Complete Code

The following is the complete code for the first demonstration involving the hidden search parameters "TitledPaneApp".

```

public class TitledPaneApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        VBox vbox = new VBox(
            new Label("Keywords" ),
            new TextField()
        );

        vbox.setPadding( new Insets(10) );
        vbox.setSpacing( 10 );

        VBox advancedVBox = new VBox(
            new Label("All Keywords"),
            new CheckBox(),
            new Label("Domains"),
            new TextField(),
            new Label("Time"),
            new ComboBox<>(
                FXCollections.observableArrayList( "Day", "Month", "Year" )
            )
        );

        TitledPane titledPane = new TitledPane(
            "Advanced",
            advancedVBox
        );
        titledPane.setExpanded( false );

        vbox.getChildren().addAll(
            titledPane,
            new Button("Search")
        );

        Scene scene = new Scene( vbox );

        primaryStage.setTitle( "TitledPaneApp" );
        primaryStage.setScene( scene );
        primaryStage.setWidth( 568 );
        primaryStage.setHeight( 320 );
        primaryStage.show();
    }

    public static void main(String[] args) {
        launch(args);
    }
}

```

Chapter 5. CSS

Placeholder whilst things get built...↩

Chapter 6. Performance

Placeholder whilst things get built...↵

Chapter 7. Application Structure

7.1. The MVVM Pattern

Author: Carl Walker

Model-View-ViewModel (MVVM) is a software architecture that separates UI controls (the View) from data access and business logic (the Model). The separation helps larger applications during the maintenance phase. With MVVM, View changes—especially those that are purely cosmetic—can be made without fear of introducing side effects. Changes to the Model (usually less volatile than the View) can be applied more easily throughout the application because MVVM promotes reuse.

In between the View and the Model is the ViewModel. The ViewModel mediates between the View and the Model, yet contains no references to the View. This enables ViewModel sharing which is useful when two Views show similar data.

This article presents a simplified MVVM example. An Employment Request Form submits several data elements to a back-end service. This screenshot shows the application with the name, position, and annual salary data elements set.

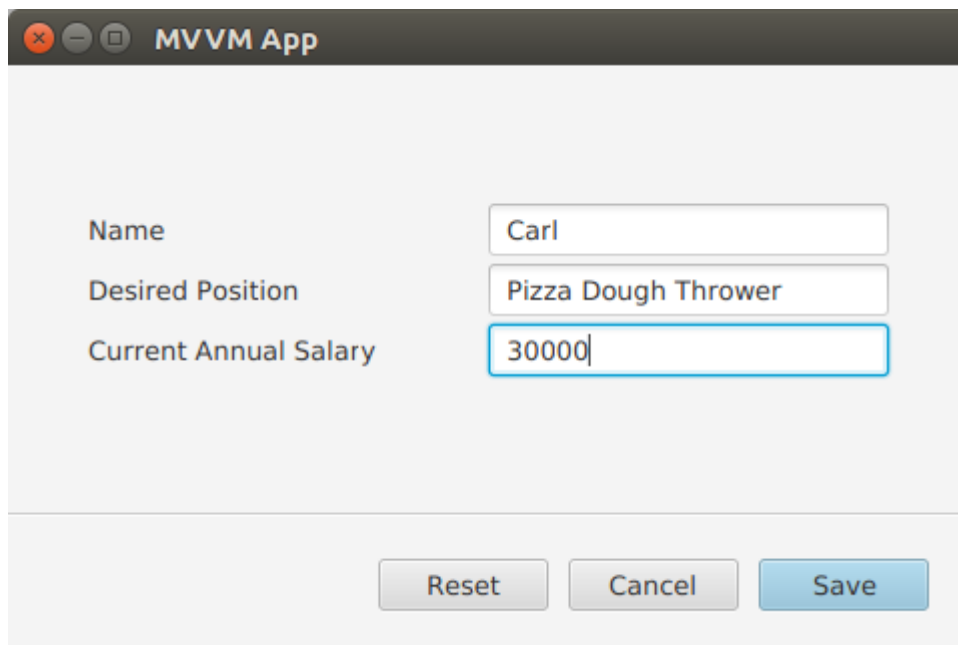
The image shows a screenshot of a software application window titled "MVVM App". Inside the window, there is a form with three text input fields. The first field is labeled "Name" and contains the text "Carl". The second field is labeled "Desired Position" and contains the text "Pizza Dough Thrower". The third field is labeled "Current Annual Salary" and contains the text "30000". Below these fields, there are three buttons: "Reset", "Cancel", and "Save". The "Save" button is highlighted with a blue border.

Figure 39. Employment Request Form

After entering the data and pressing Save, the Model object responds with a `println()`.

Program Output

```
saving EmploymentRequest{name='Carl', position='Pizza Dough Thrower',
annualSalary=30000.0}
```

If the Reset button is pressed after filling in the TextFields, the form is restored to its original values: empty name and position and an annualSalary of 0.

The Cancel button ends the application.

7.1.1. Structure

A simplified MVVM application is composed of the following types of classes

App

Main entry point

View

UI controls

Model

Function call to business logic and data access

ViewModel

Contains screen state and UI logic

Domain object

UI-neutral transfer object

Converter

Helper class for ViewModel to Model communication

This UML shows the structure of the Employment Request Form. The View class is EmploymentRequestView which contains the UI control objects like the Name TextField. The ViewModel class is EmploymentRequestViewModel and contains JavaFX properties. The Model class is EmploymentRequestModel with a single method for persisting the form. EmploymentRequestConverter is a helper class. EmploymentRequest is a POJO containing data fields. MVVMApp is the main entry point, a JavaFX Application subclass.

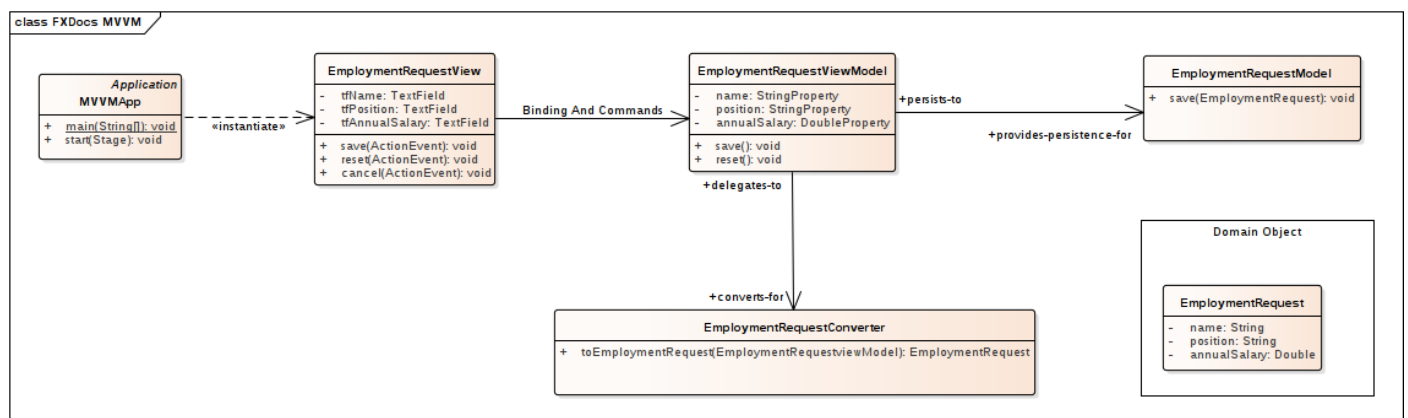


Figure 40. UML Class Model of Application

7.1.2. View

In MVVM, the View class is responsible for the UI controls and nothing else. Event handlers attached to UI controls delegate immediately to the ViewModel. JavaFX data binding updates the UI with Model changes. In the Employment Request Form, three TextFields gather input from the user: `tfName`, `tfPosition`, `tfAnnualSalary`. Three Buttons initiate operations on the application: `btnSave`, `btnCancel`, `btnReset`. This is the beginning of the **EmploymentRequestView** class.

EmploymentRequestView.class

```
public class EmploymentRequestView extends VBox {

    private GridPane gp = new GridPane();

    private TextField tfName = new TextField();
    private TextField tfPosition = new TextField();
    private TextField tfAnnualSalary = new TextField();

    private Button btnSave = new Button("Save");
    private Button btnCancel = new Button("Cancel");
    private Button btnReset = new Button("Reset");

    public EmploymentRequestView() {
        createView();
        bindViewModel();
    }
}
```

The View knows about the ViewModel and uses JavaFX binding to synchronize the UI with the ViewModel. This demo treats the ViewModel as a prototype object, created when the View object is created. Alternatively, the ViewModel can be a singleton or provided by CDI. Each UI field is bound bi-directionally to the ViewModel. As the UI changes—say through entering a value in `tfName`—the corresponding field in the ViewModel is updated. The more complicated expression for the `tfAnnualSalary` field is needed to convert the String-based `TextField` into a `DoubleProperty`.

EmploymentRequestView.class (cont.)

```
private final EmploymentRequestViewModel viewModel =
    new EmploymentRequestViewModel();

private void bindViewModel() {

    tfName.textProperty().bindBidirectional(viewModel.nameProperty());

    tfPosition.textProperty().bindBidirectional(viewModel.positionProperty());

    Bindings.bindBidirectional(
        tfAnnualSalary.textProperty(),
        viewModel.annualSalaryProperty(),
        new NumberStringConverter()
    );
}
```

The UI in this demo is built in code. The following `createView()` method handles the layout of the form and puts the core controls (such as `tfName` and `btnSave`) in containers.

EmploymentRequestView.class (cont.)

```
private void createView() {
    VBox gpwrap = new VBox();
    gpwrap.setAlignment( Pos.CENTER );

    gp.setPadding( new Insets(40) );
    gp.setVgap( 4 );
    gp.add(new Label("Name"), 0, 0);          gp.add(tfName, 1, 0);
    gp.add(new Label("Desired Position"), 0, 1);      gp.add(tfPosition, 1, 1);
    gp.add(new Label("Current Annual Salary"), 0, 2); gp.add(tfAnnualSalary, 1, 2);

    final ColumnConstraints col = new ColumnConstraints();
    col.setPercentWidth( 50 );

    gp.getColumnConstraints().addAll( col, col );

    gpwrap.getChildren().add( gp );

    VBox.setVgrow( gpwrap, Priority.ALWAYS );

    btnSave.setOnAction( this::save );
    btnCancel.setOnAction( this::cancel );
    btnReset.setOnAction( this::reset );

    btnSave.setDefaultButton(true);

    ButtonBar buttonBar = new ButtonBar();
    buttonBar.setPadding( new Insets(20.0d) );
    ButtonBar.setButtonData(btnSave, ButtonBar.ButtonData.OK_DONE);
    ButtonBar.setButtonData(btnCancel, ButtonBar.ButtonData.CANCEL_CLOSE);
    ButtonBar.setButtonData(btnReset, ButtonBar.ButtonData.OTHER);

    buttonBar.getButtons().addAll( btnSave, btnCancel, btnReset );

    this.getChildren().addAll(
        gpwrap,
        new Separator(),
        buttonBar);
}
```

The class ends with handlers for the Buttons. These handlers delegate their actions to the ViewModel.

EmploymentRequestView.class (cont.)

```
private void save(ActionEvent evt) { viewModel.save(); }

private void cancel(ActionEvent evt) {
    Platform.exit();
}

private void reset(ActionEvent evt) { viewModel.reset(); }
}
```

FXML and Scene Builder

In this example, the UI is built in code. Scene Builder is a design-oriented alternative that can be more productive. To convert this example to FXML, the product of Scene Builder, you would build the UI in the tool and annotate the fields and methods of the `EmploymentRequestView` class with `@FXML`. See the following screenshot for how the demo looks in Scene Builder. This is informational only and not part of the working demo.

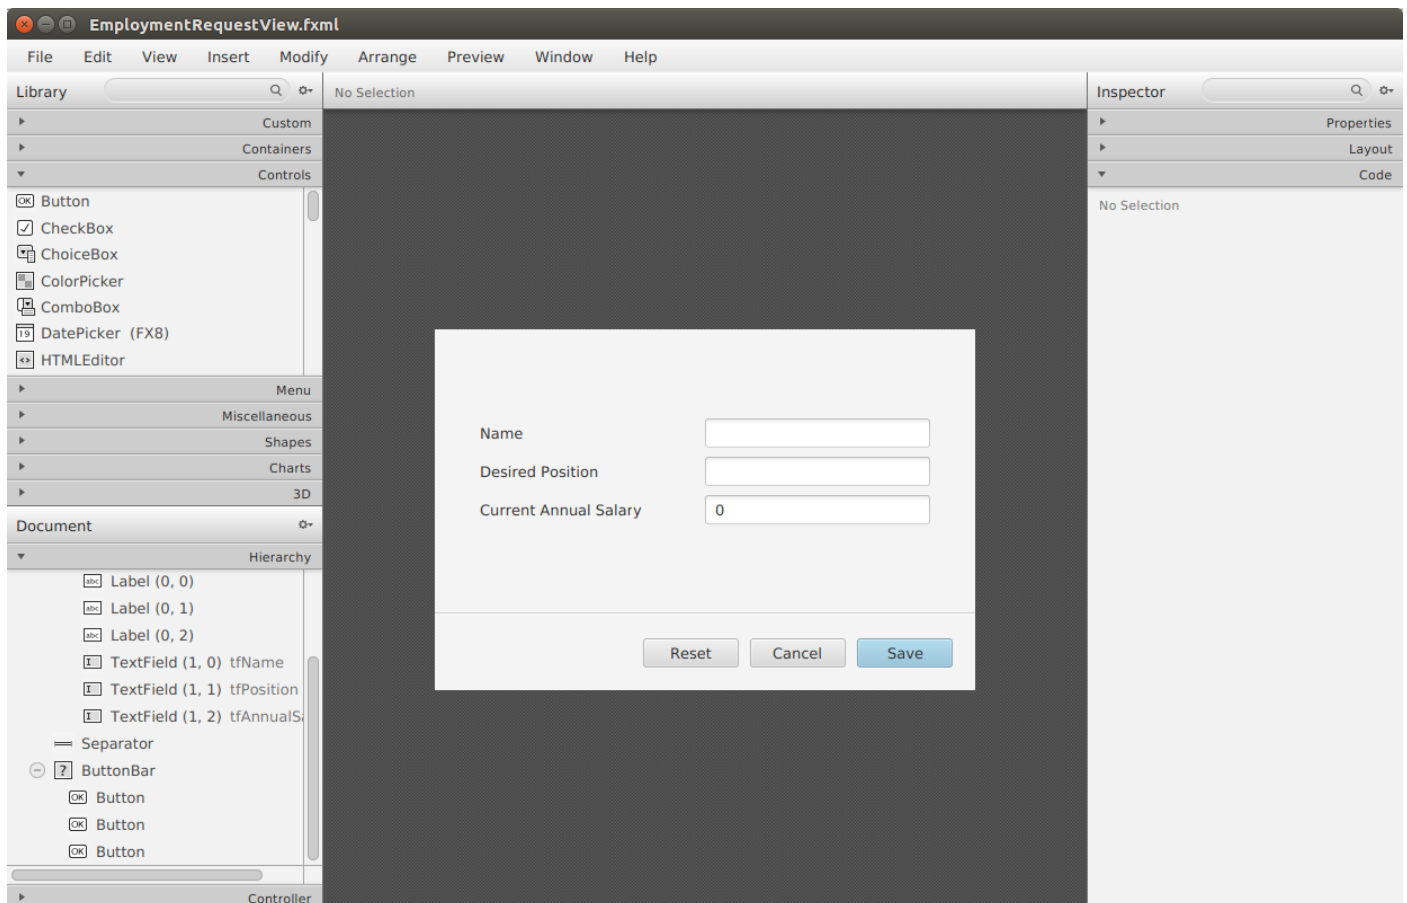


Figure 41. Scene Builder Could Also Implement the View

Notice that the right "half" of the UML diagram would not be changed by switching the View implementation from code to Scene Builder. A sign of a good design is when alternative presentations can be supported easily.

7.1.3. ViewModel

The `ViewModel` is a layer that interacts with both the View and the Model. In this simple

presentation, the value of such a layer is limited; one could just unpack the TextFields into the Model in the `Button` handler. As the UI becomes more complex, it is useful to have a plainer, more business-oriented object to work with. While there is a one-to-one correspondence between View, Model, and ViewModel, that may not always be the case.

Handling a many-to-many relationship is key for the ViewModel. There may be many Views that working with the same Model element. Multiple models may contribute to a single View.

This ViewModel looks like the domain object that will be presented later with one key difference: JavaFX Binding. `EmploymentRequestViewModel` was bound to the `EmploymentRequestView` UI controls and the methods of `EmploymentRequestViewModel` will have access to all of the information within the `save()` method. No extra marshaling of arguments is needed.

EmploymentRequestViewModel.class

```
public class EmploymentRequestViewModel {

    private final StringProperty name = new SimpleStringProperty("");
    private final StringProperty position = new SimpleStringProperty("");
    private final DoubleProperty annualSalary = new SimpleDoubleProperty();

    private final EmploymentRequestConverter converter =
        new EmploymentRequestConverter();

    private final EmploymentRequestModel model = new EmploymentRequestModel();

    public String getName() {
        return name.get();
    }

    public StringProperty nameProperty() {
        return name;
    }

    public void setName(String name) {
        this.name.set(name);
    }

    public String getPosition() {
        return position.get();
    }

    public StringProperty positionProperty() {
        return position;
    }

    public void setPosition(String position) {
        this.position.set(position);
    }

    public double getAnnualSalary() {
        return annualSalary.get();
    }
}
```

```

public DoubleProperty annualSalaryProperty() {
    return annualSalary;
}

public void setAnnualSalary(double annualSalary) {
    this.annualSalary.set(annualSalary);
}

public void save() {
    EmploymentRequest data = converter.toEmploymentRequest( this );
    model.save( data );
}

public void reset() {
    this.name.set("");
    this.position.set("");
    this.annualSalary.set(0.0d);
}
}

```

Both the Converter and the Model have been added to this ViewModel as prototypes, meaning that they were created when the ViewModel was created.

Converter

The Converter is a class the translates between ViewModel and domain object. In this app, there is a single `toEmploymentRequest()` method that creates an object from the ViewModel fields.

EmploymentRequestConverter.class

```

public class EmploymentRequestConverter {

    public EmploymentRequest toEmploymentRequest(EmploymentRequestViewModel viewModel)
    {
        return new EmploymentRequest(
            viewModel.getName(),
            viewModel.getPosition(),
            viewModel.getAnnualSalary()
        );
    }
}

```

7.1.4. Model

Finally, the Model persists the information. This Model example has a single mocked method which will verify that it receives the correct data for the `save()` operation.

EmploymentRequestModel.class

```
public class EmploymentRequestModel {  
  
    public void save(EmploymentRequest req) {  
        System.out.println("saving " + req);  
    }  
}
```

This is the plain Java object used to transport data from the Model to the UI.

EmploymentRequest.class

```
public class EmploymentRequest {  
  
    private final String name;  
    private final String position;  
    private final Double annualSalary;  
  
    public EmploymentRequest(String name,  
                             String position,  
                             Double annualSalary) {  
        this.name = name;  
        this.position = position;  
        this.annualSalary = annualSalary;  
    }  
  
    public String getName() {  
        return name;  
    }  
  
    public String getPosition() {  
        return position;  
    }  
  
    public Double getAnnualSalary() {  
        return annualSalary;  
    }  
  
    @Override  
    public String toString() {  
        return "EmploymentRequest{" +  
            "name='" + name + '\'' +  
            ", position='" + position + '\'' +  
            ", annualSalary=" + annualSalary +  
            "'}";  
    }  
}
```

JavaFX provides developers with a powerful toolkit to build applications. However, a design is still needed for an effective program. MVVM is an architectural pattern that separates pure UI classes called Views from pure data classes called Models. In the middle sits the ViewModel which relies

heavily on the data binding in JavaFX.

7.1.5. Further Work

Sometimes, the View needs to know of a Model change. Because MVVM dictates a one-way control flow—View to ViewModel to Model and not the reverse—a different mechanism than data binding is needed to make the ViewModel aware of Model changes. A publishing / subscribing library can be used for this requirement which would broker the Model/ViewModel interaction. ViewModel would receive a notification from the Model and the Model would not require a reference to the ViewModel object.

To read more about MVVM and JavaFX, check out the mvvmFX project. The examples in that project provided the basis for this demonstration.

[mvvmFX](#)

7.1.6. Completed Code

The completed code in this example is available as a Gradle project [here](#). There are two examples in the JAR. Run the class `net.bekwam.bkcourse.mvvmapp.MVVMApp`.

[bkcourse_mvvmapp_sources.zip](#)

7.2. Model Change with MVVM

The previous article showed how to add a JavaFX binding-based ViewModel to an application architecture. However, the Model presented was a simple service call. This expands on the prior concepts and adds

1. Asynchrony,
2. A `ProgressBar` and status `Label`, and
3. Event broadcasting.

All operations taking more than a few milliseconds should be run on a separate `Thread`. Something that runs quickly but involves IO or the network often turns into a performance problem as code moves to new computers and new network configurations. A JavaFX `Task` is used to invoke the Model operation. While this potentially long process is running, feedback is given to the user via a `ProgressBar` and `Label`. The status `Label` conveys messages to the user from the JavaFX `Task`.

It is important that the Model not hold a reference to the ViewModel, so an event notification scheme is introduced. The ViewModel listens for an `EVENT_MODEL_UPDATE` message from the Model. Although this example uses only one ViewModel, this scheme makes it possible for more than one ViewModel to be aware of data changes from a single Model component.

7.2.1. Demo Program

The demo program in this section is a URL tester. The user enters a URL in the `TextField` and presses the `Submit Button`. If the HTTP request to the specified URL returns successfully, the

HTTP response status code is displayed alongside the number of milliseconds the request took. This screenshot shows a successful usage.

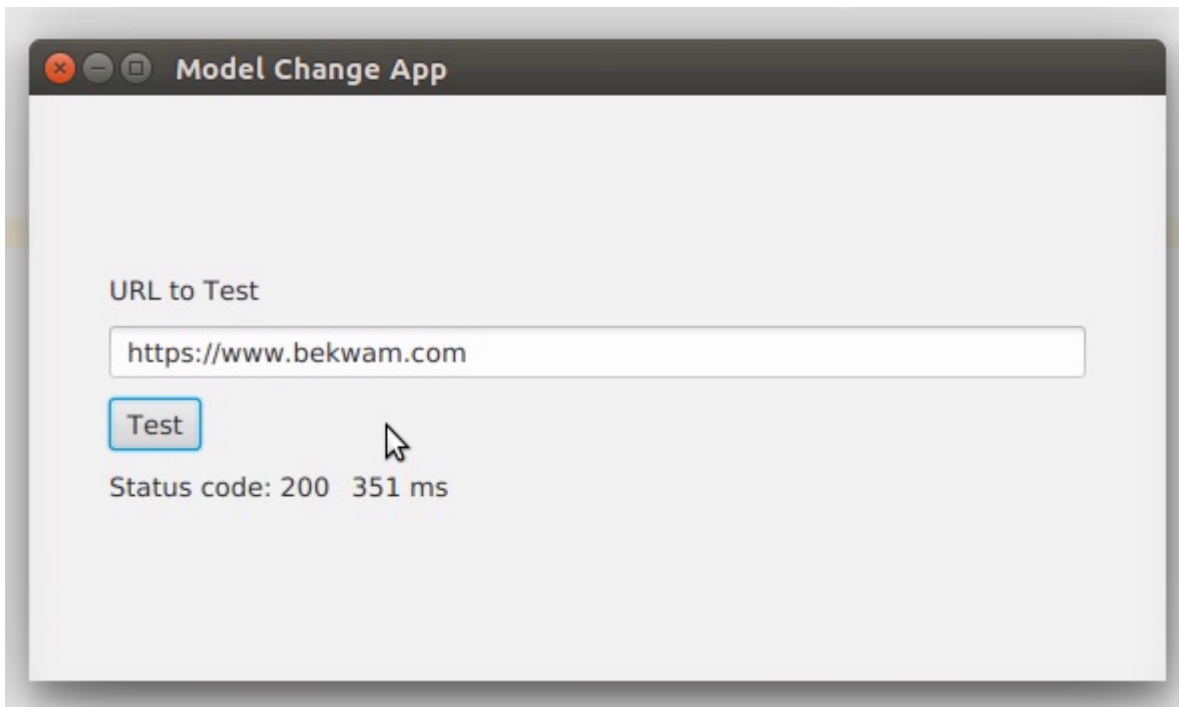


Figure 42. A Successful Run

The UI remains responsive throughout the request. The responsiveness comes from the use of a `Task` to run the URL retrieval on a background thread. To make the user aware that processing is occurring, UI controls are tied to the properties of the `Task` through JavaFX binding. This screenshot shows the feedback the user receives while the `Task` runs.

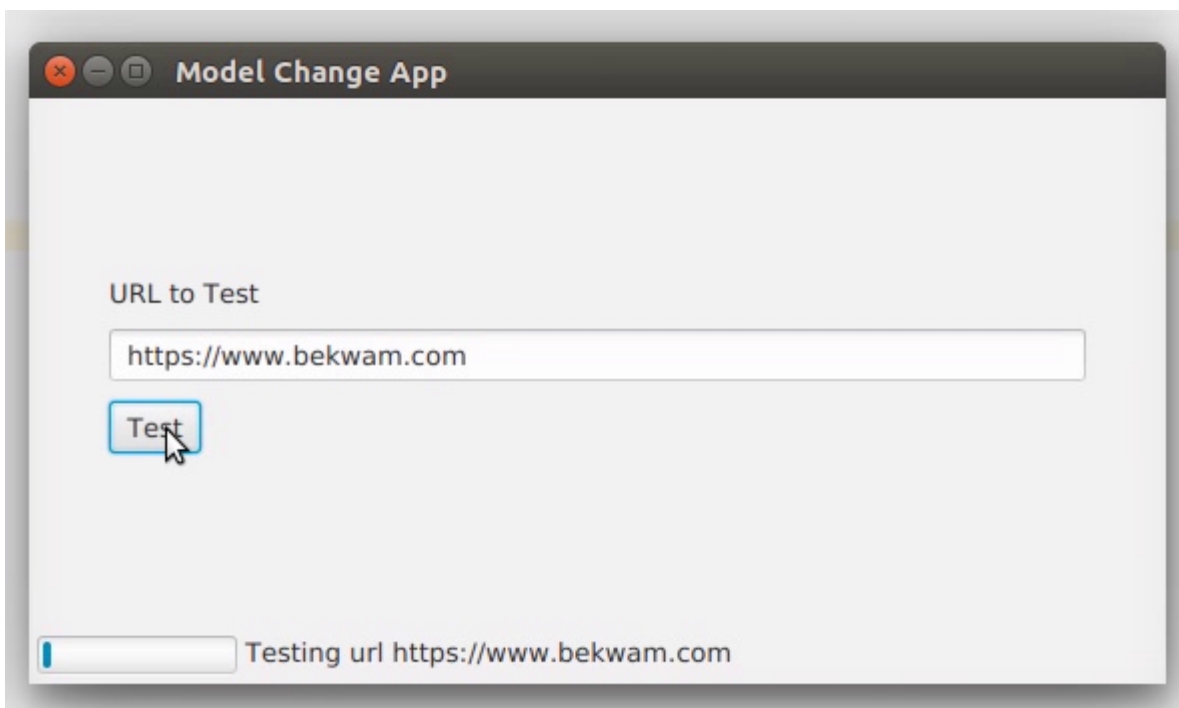


Figure 43. In-Progress View of a Retrieval

When the Submit Button is pressed, a pair of controls are displayed: a `ProgressBar` and a `Label`. Both controls are updated with information about the running background `Thread`.

Errors in the URL retrieval are handled by passing an alternate response object out of the `Model`.

In the successful case, the Model returned the HTTP status code and elapsed time. In the error case, the Model sets a flag and returns an error message. This screenshot shows an error dialog produced by the View in response to an error in the Model. The errorMessage is from the message property of the thrown Exception. If needed, additional fields like the Exception class name can be added.

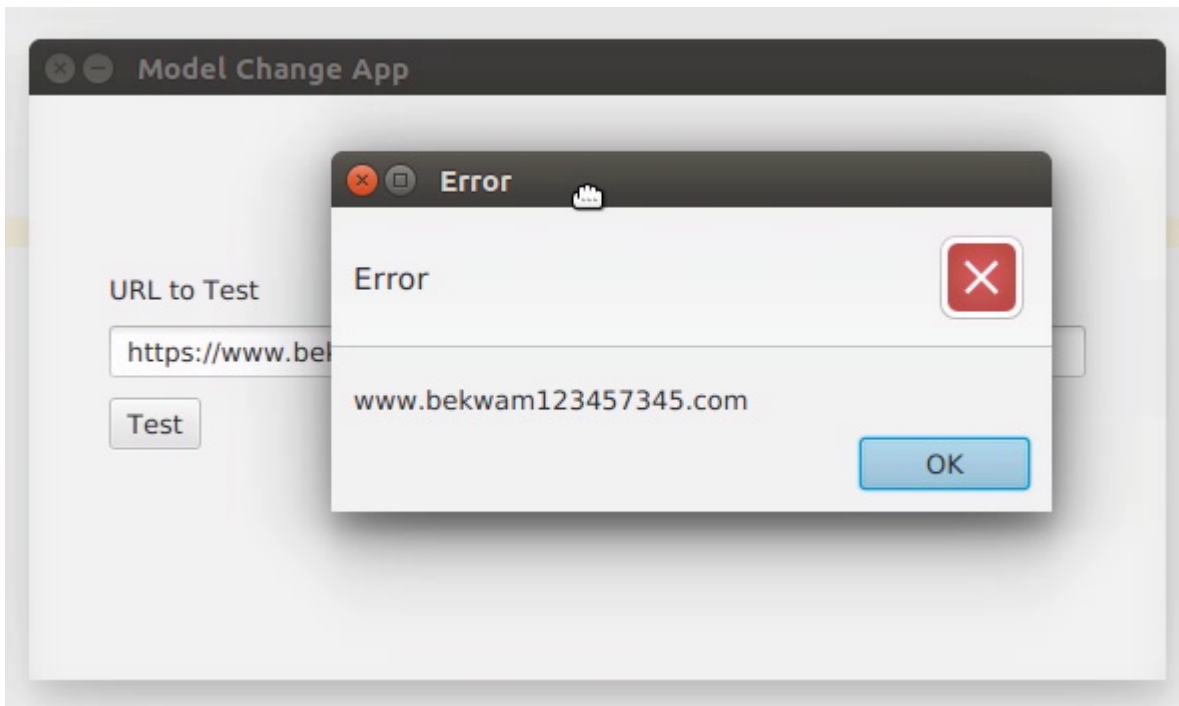


Figure 44. Error Produced by Model

7.2.2. Design

The demo program consists of a single View / ViewModel / Model triple. The View communicates with the ViewModel through JavaFX binding. UI controls in the View are bound to JavaFX properties in the ViewModel. Event handlers in the View delegate to methods in the ViewModel. The ViewModel forms an asynchronous command which interacts with the Model. The Model communicates indirectly with the ViewModel through a notification subsystem rather than an object reference.

This is a UML class model of the program.

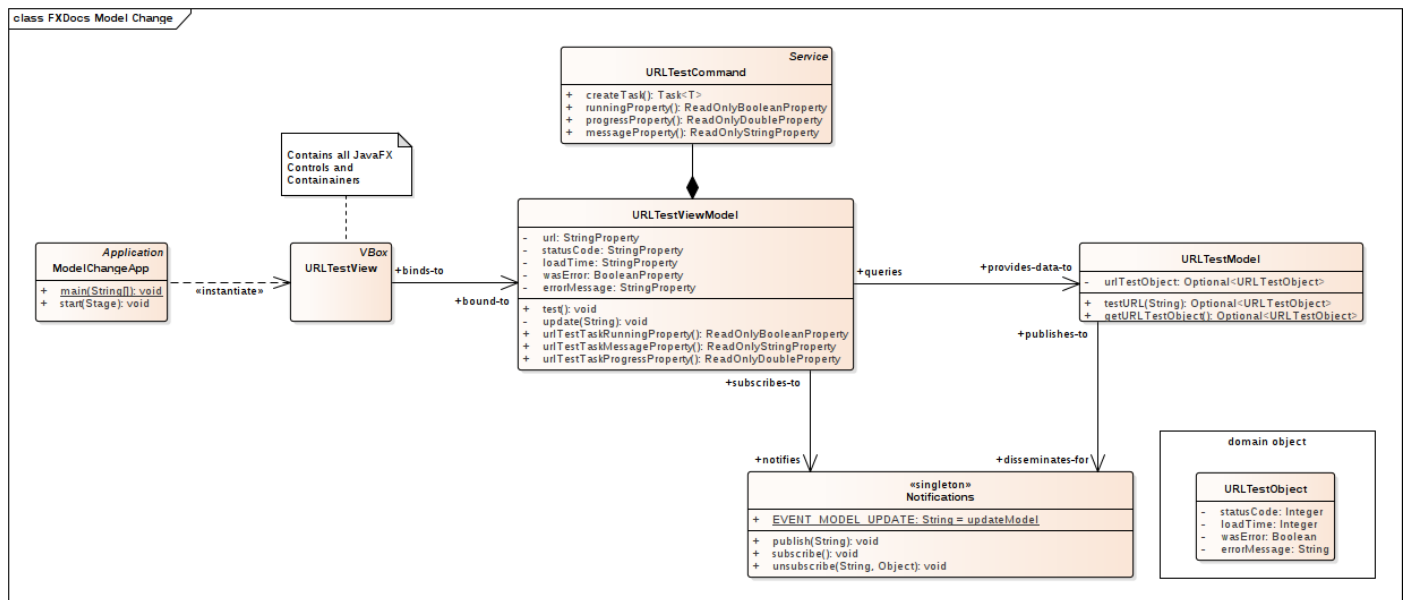


Figure 45. Class Model of MVVM App

URLTestView is the View component and contains the UI controls. The ViewModel contains properties for the domain—`url`, last status code, last elapsed time—and for the screen state such as `urlTestTaskRunning`. Model contains a service call and works with a UI-neutral POJO `URLTestObject`. Communication between the Model and the ViewModel is brokered through a Notifications singleton which has methods for publishing (for the Model) and subscribing (for the ViewModel).

This sequence diagram shows how the app wires itself up and the interactions that follow from a test operation.

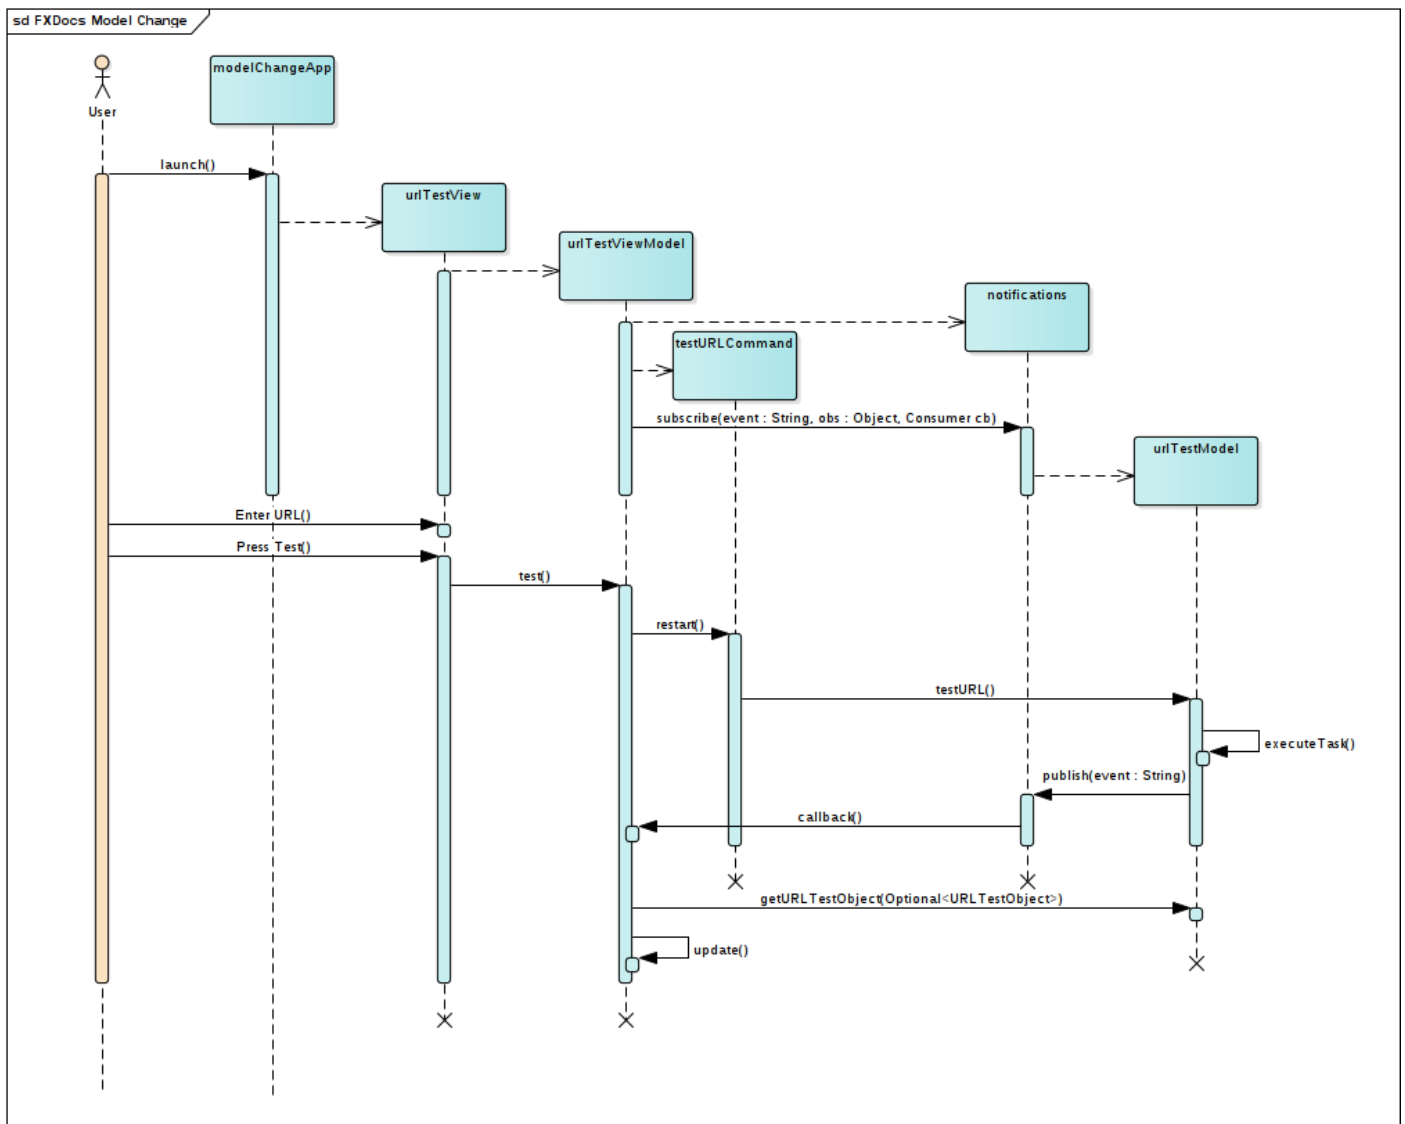


Figure 46. Sequence Diagram of Successful Retrieval

After all the objects are created, the user initiates a test operation. This results in a `TestURLCommand` object being created which is a JavaFX `Service`. The service invokes a Model method `testURL()`. When `testURL()` finishes, it publishes a notification. This notification triggers a call to the ViewModel to refresh itself which uses a second call to the Model. The ViewModel refresh sets ViewModel JavaFX properties which automatically update the View.

7.2.3. View

The View is a `StackPane` containing the `TextField` that will gather the URL input and a `Submit Button`. A `StackPane` was used so that the temporary status display could be added without breaking the centering of the main UI controls. The `HBox` containing the status `Label` and `ProgressBar` is always present in the lower-left, but hidden unless a `Task` is running.

URLTestView.class

```
public class URLTestView extends StackPane {

    private final URLTestViewModel testViewModel =
        new URLTestViewModel();

    public URLTestView() {

        Label lblURL = new Label("URL to Test");
        TextField tfURL = new TextField();
        Button btnTest = new Button("Test");
        Label lblStatus = new Label("");
        Label lblLoadTime = new Label("");
        HBox resultHBox = new HBox(lblStatus, lblLoadTime);
        resultHBox.setSpacing(10);

        VBox vbox = new VBox( lblURL, tfURL, btnTest, resultHBox );
        vbox.setPadding( new Insets(40) );
        vbox.setSpacing( 10 );
        vbox.setAlignment(Pos.CENTER_LEFT);

        Label lblTaskStatus = new Label("");
        ProgressBar pb = new ProgressBar();
        HBox statusHBox = new HBox(pb, lblTaskStatus);
        statusHBox.setSpacing(4);
        statusHBox.setPadding(new Insets(4));
        statusHBox.setMaxHeight( 20 );

        StackPane.setAlignment(statusHBox, Pos.BOTTOM_LEFT );

        this.getChildren().addAll( vbox, statusHBox );
    }
}
```

The URLTestViewModel object is created in this class. Alternatively, dependency injection can be used to distribute the same ViewModel object among other Views.

The URLTestView constructor continues with several binding expressions. These link the UI controls to the ViewModel properties.

URLTestView.class (cont.)

```
lblStatus.textProperty().bind( testViewModel.statusCodeProperty() );
lblLoadTime.textProperty().bind( testViewModel.loadTimeProperty() );
testViewModel.urlProperty().bind( tfURL.textProperty() );

statusHBox.visibleProperty().bind(testViewModel.urlTestTaskRunningProperty() );
pb.progressProperty().bind( testViewModel.urlTestTaskProgressProperty() );
lblTaskStatus.textProperty().bind( testViewModel.urlTestTaskMessageProperty());
```

The above statements register the UI controls for changes to the corresponding property in the ViewModel, except for tfURL. tfURL uses a different binding direction since it is producing the value for the ViewModel. In some cases, the binding may need to be bi-directional if a control can

both be manipulated by the user and set from the ViewModel.

The action which initiates the testURL() operation is mapped to the Submit Button.

URLTestView.class (cont.)

```
btnTest.setOnAction( (evt) -> testViewModel.test() );
```

The URLTestView constructor finishes with a special ChangeListener binding to a ViewModel property. This is a notification that an error has occurred. When the errorMessage property of the ViewModel is notified, the View displays a popup dialog.

URLTestView.class (cont.)

```
testViewModel.errorMessageProperty().addListener(
    (obs,ov,nv) -> {
        if( nv != null && !nv.isEmpty() ) {
            Alert alert = new Alert(
                Alert.AlertType.ERROR, nv
            );
            alert.showAndWait();
        }
    }
);
```

7.2.4. ViewModel

URLTestView binds its UI controls to properties in URLTestViewModel. This section of the class URLTestViewModel shows the properties used by the View and their corresponding access methods. The test() method—which was mapped to the Submit Button press event—is also listed. The object urlTestCommand will be presented later.

URLTestViewModel.class

```
public class URLTestViewModel {

    // Data elements
    private final StringProperty url = new SimpleStringProperty("");
    private final StringProperty statusCode = new SimpleStringProperty("");
    private final StringProperty loadTime = new SimpleStringProperty("");

    // Status elements
    private final BooleanProperty wasError = new SimpleBooleanProperty(false);
    private final StringProperty errorMessage = new SimpleStringProperty("");

    public StringProperty urlProperty() { return url; }

    public StringProperty statusCodeProperty() { return statusCode; }

    public StringProperty loadTimeProperty() { return loadTime; }

    public StringProperty errorMessageProperty() { return errorMessage; }

    public ReadOnlyBooleanProperty urlTestTaskRunningProperty() {
        return urlTestCommand.runningProperty(); // presented later
    }

    public ReadOnlyStringProperty urlTestTaskMessageProperty() {
        return urlTestCommand.messageProperty(); // presented later
    }

    public ReadOnlyDoubleProperty urlTestTaskProgressProperty() {
        return urlTestCommand.progressProperty(); // presented later
    }

    public void test() {
        urlTestCommand.restart(); // presented later
    }
}
```

URLTestViewModel collaborates with two objects: URLTestModel and Notifications. URLTestViewModel subscribes to a Notification in its constructor. A URLTestViewModel method "update" will be called when the Notifications object posts an EVENT_MODEL_UPDATE.

URLTestViewModel.class (cont.)

```
private final URLTestModel urlTestModel = new URLTestModel();  
  
private final Notifications notifications = new Notifications();  
  
public URLTestViewModel() {  
    notifications.subscribe(Notifications.EVENT_MODEL_UPDATE,  
                             this,  
                             this::update); // presented later  
}
```

Command

`urlTestCommand` is a JavaFX `Service` object. As a part of the `URLTestViewModel` class, `urlTestCommand` has access to the `url` property which provides a parameter for the call to the `Model` object. `urlTestCommand` also uses the `URLTestModel` member to initiate the call to test the URL.

URLTestViewModel.class (cont.)

```
private final Service<Void> urlTestCommand = new Service<Void>() {
    @Override
    protected Task<Void> createTask() {
        return new Task<Void>() {
            @Override
            protected Void call() throws Exception {
                updateProgress(0.1d, 1.0d);
                updateMessage("Testing url " + url.get());
                urlTestModel.testURL( url.get() );
                return null;
            }
            protected void failed() {
                getException().printStackTrace(); // just in case
            }
        };
    }
};
```

A JavaFX `Service` was used since the `Service` objects needs to always exist for binding purposes. `URLTestView` binds its `ProgressBar`, `status Label`, and container controls to the `URLTestViewModel` object which will be available for the life of the app. Shown earlier, the `URLTestViewModel` properties delegate to the `Service` object. A `Task` is a one-shot invocation and using that would not work for multiple `test()` invocations.

Asynchrony

The design in this article puts the burden of asynchronous processing on the `ViewModel`. This provides direct feedback to View controls using JavaFX binding. An alternative approach is to use a general event emitting scheme to listen for task starting, task ending, progress, and message events. This would support breaking out the `urlTestCommand Service` subclass into a separate code module.

The presentation of the `URLTestViewModel` class concludes with the `update()` method. This method issues a call to the `Model`, unpacks the results, and updates the `ViewModel` properties. Recall that the `View` has bound to these properties and will automatically be updated (there is no similar `update()` method in the `View`).

URLTestViewModel.class (cont.)

```
private void update(String event) {

    urlTestModel.getUrlTestObject().ifPresent(

        (testObject) -> {

            wasError.set( testObject.getWasError() );

            if( !testObject.getWasError() ) {

                statusCode.set(
                    "Status code: " +
                    String.valueOf(testObject.getStatusCode())
                );

                loadTime.set(
                    String.valueOf(testObject.getLoadTime()) +
                    " ms"
                );

                errorMessage.set(testObject.getErrorMessage());
            } else {
                statusCode.set(""); // use empty TextField, not 0
                loadTime.set(""); // use empty TextField, not 0
                errorMessage.set( testObject.getErrorMessage() );
            }
        }
    ));
}
```

7.2.5. Model

URLTestModel is presented in its entirety below. URLTestModel maintains a copy of a domain object. Upon initialization, this object is empty so an `Optional` is used. A getter is provided for ViewModels. The `testURL()` method issues an HTTP GET call and records the results in the `URLTestObject` member. If the HTTP GET call is successful, the `URLTestObject` will contain the status code (probably 200) and an elapsed time. If unsuccessful, the `URLTestObject` will set a convenient `wasError` flag and an `errorMessage`.

When the Model has retrieved the contents at the URL or generated an error, the `publish()` method of the Notifications object is invoked. This prompts `URLTestViewModel` to update itself, but in a decoupled fashion. It is important to note that `URLTestModel` does not hold a reference to a `URLTestViewModel` object.

URLTestModel.class

```
public class URLTestModel {

    private final Notifications notifications =
        new Notifications();

    private Optional<URLTestObject> urlTestObject =
        Optional.empty();

    public Optional<URLTestObject> getUrlTestObject() {
        return urlTestObject;
    }

    public Optional<URLTestObject> testURL(String url) {

        try {
            long startTimeMillis = System.currentTimeMillis();
            HttpURLConnection urlConnection =
                (HttpURLConnection) new URL(url).openConnection();
            try (
                InputStream is = urlConnection.getInputStream();
            ) {
                while (is.read() != -1) {
                }
            }
            long endTimeMillis = System.currentTimeMillis();

            URLTestObject uto = new URLTestObject(
                urlConnection.getResponseCode(),
                (int) (endTimeMillis - startTimeMillis)
            );

            urlTestObject = Optional.of(uto);

        } catch (Exception exc) {
            URLTestObject uto = new URLTestObject(exc.getMessage());
            urlTestObject = Optional.of(uto);
        }

        notifications.publish(Notifications.EVENT_MODEL_UPDATE);

        return urlTestObject;
    }
}
```

URLTestModel also does not attempt to bind to URLTestViewModel using JavaFX. Since the asynchrony is handled at the ViewModel layer, the Model is free to operate off of the JavaFX Thread. Attempting to double-bind (View→ViewModel→Model) would result in an application threading error if binding were used. Wrapped in a Platform.runLater(), a double-bind does not violate the prescribed dependency order—→ViewModel already holds a reference to Model—→but might result in an inconsistent update.

This POJO is the domain object used by the Model. As a POJO, this can be maintained in a commons library and shared among non-UI components like a RESTful web services project.

URLTestObject.class

```
public class URLTestObject {

    private final Integer statusCode;
    private final Integer loadTime;
    private final Boolean wasError;
    private final String errorMessage;

    public URLTestObject(Integer statusCode,
                          Integer loadTime) {
        this.statusCode = statusCode;
        this.loadTime = loadTime;
        wasError = false;
        errorMessage = "";
    }

    public URLTestObject(String errorMessage) {
        this.statusCode = null;
        this.loadTime = null;
        wasError = true;
        this.errorMessage = errorMessage;
    }

    public Integer getLoadTime() {
        return loadTime;
    }

    public Integer getStatusCode() {
        return statusCode;
    }

    public Boolean getWasError() {
        return wasError;
    }

    public String getErrorMessage() {
        return errorMessage;
    }
}
```

7.2.6. Notifications

This class is a lightweight pub/sub implementation. Event types are registered as String constants at the top of the file. Subscribers are identified by their class hashCode. All the published events will run on the JavaFX Thread.

Notifications.class


```

        this.subscriber = subscriber;
        this.cb = cb;
    }

    public Object getSubscriber() {
        return subscriber;
    }

    public Consumer<String> getCb() {
        return cb;
    }

    @Override
    public int hashCode() {
        return subscriber.hashCode();
    }

    @Override
    public boolean equals(Object obj) {
        return subscriber.equals(obj);
    }
}

```

Notifications is a singleton so that any class—both URLTestViewModel and URLTestModel in this case—will subscribe to and publish to the right instance.

7.2.7. App

For completeness, the Application subclass is listed below.

ModelChangeApp.class

```

public class ModelChangeApp extends Application {

    @Override
    public void start(Stage primaryStage) throws Exception {

        Scene scene = new Scene(new URLTestView());

        primaryStage.setTitle("Model Change App");
        primaryStage.setScene( scene );
        primaryStage.setWidth(568);
        primaryStage.setHeight(320);
        primaryStage.show();
    }

    public static void main(String[] args) {
        launch(args);
    }
}

```

MVVM is an architecture that separates the View from the Model. Unlike other architectures, this separation includes a specific dependency graph: View depends on ViewModel depends on Model. All three component types collaborate, but in cases where data moves in the opposite direction of the dependency graph, the communication is indirect. In this example, the indirect communication was provided by JavaFX binding and a special Notifications class. By keeping the Model and ViewModel free of View dependencies, the MVVM architecture fosters reuse. URLTestModel can be used by other ViewModels and URLTestViewModel can be used by other Views.

7.2.8. Completed Code

The completed code in this example is available as a Gradle project [here](#). There are two examples in the JAR. Run the class `net.bekwam.bkcourse.modelchangeapp.ModelChangeApp`.

[bkcourse_mvvmapp_sources.zip](#)

7.3. The Dialog Class

Author: Carl Walker

The `Dialog` class was a surprising latecomer to the JavaFX library. The `Dialog` class displays a customized supporting window to execute an operation or to retrieve additional information. The subclass `Alert` is also available and is better suited for focused interactions like a confirmation, retrieving a text value (`TextInputDialog`), or a selected item (`ChoiceDialog`).

This section will demonstrate the `Dialog` class built on a domain object, `ConnectionInfo`. A main screen is displayed with a `TextField` for a database URL. Pressing the `set` Button displays the `Dialog`. If the user fills in values and presses the `Save` Button, the `Dialog` is dismissed and the `ConnectionInfo` domain object is returned to the caller. If the `Cancel` Button is pressed, an empty `Optional` is returned.

This screenshot shows the app when it starts up. The DB URL field is empty.

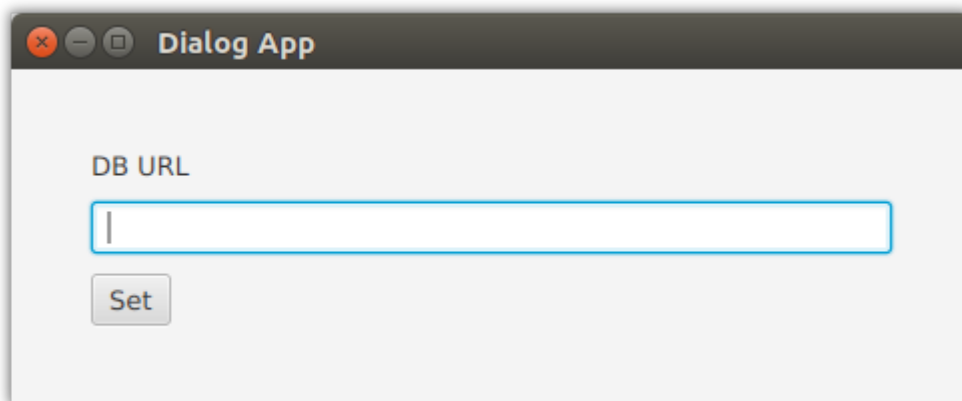


Figure 47. DialogApp At Startup

Pressing the `Set` Button displays the `Dialog`. The user has filled in values for host, username, and password.

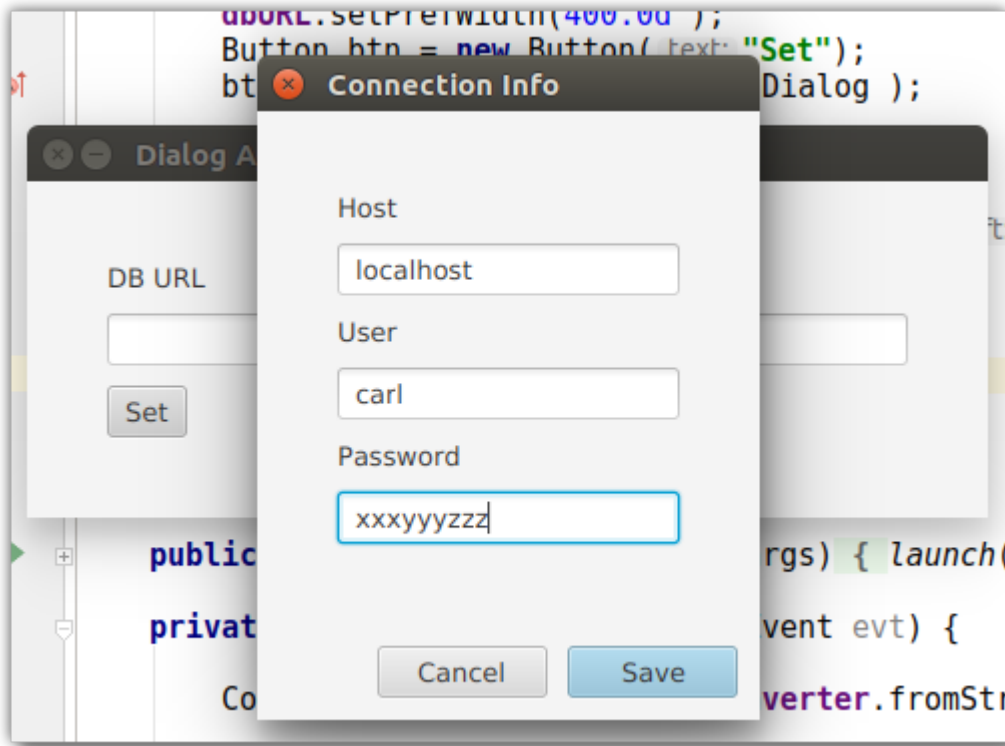


Figure 48. Gathering Values

Closing the Dialog via the Save Button forms a `ConnectionInfo` object that is returned to the caller. This value is formed into a `String` and put into the `TextField`.

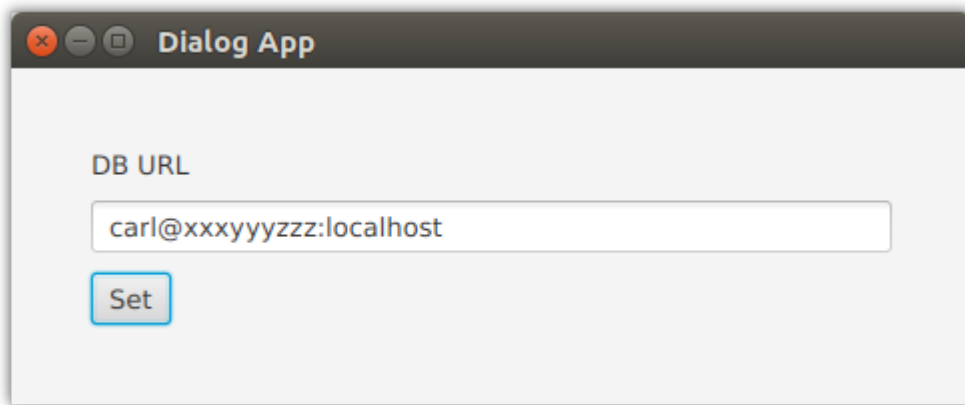


Figure 49. Values Retrieved

The reverse interaction is also supported in this example. If the user types in a well-formed URL, that URL will be parsed and displayed in the Dialog. URL String validation has been left off. An invalid URL String will result in an empty Dialog.

7.3.1. App

The `JavaFX Application` subclass adds UI controls for the DB URL `TextField` and `Save Button`.

DialogApp.java

```
public class DialogApp extends Application {

    private final TextField dbURL = new TextField();

    @Override
    public void start(Stage primaryStage) throws Exception {

        Label label = new Label("DB URL");
        dbURL.setPrefWidth(400.0d );
        Button btn = new Button("Set");
        btn.setOnAction( this::showSetDialog );

        VBox vbox = new VBox(label, dbURL, btn );
        vbox.setSpacing( 10.0d );
        vbox.setPadding( new Insets(40.0d) );

        Scene scene = new Scene( vbox );

        primaryStage.setTitle("Dialog App");
        primaryStage.setScene( scene );
        primaryStage.show();
    }

    public static void main(String[] args) {
        launch(args);
    }
}
```

`showSetDialog()` is a method reference that initializes a `ConnectionInfo` object, displays the Dialog, and retrieves a value if set by the user.

DialogApp.java

```
private void showSetDialog(ActionEvent evt) {

    ConnectionInfo fromURL = ciConverter.fromString( dbURL.getText() );

    ConnectionDialog dialog = new ConnectionDialog(fromURL);

    Optional<ConnectionInfo> ci = dialog.showAndWait();

    ci.ifPresent( c -> dbURL.setText(
        ciConverter.toString(c)
    )
    );
}
```

The app is using a JavaFX `StringConverter` to encapsulate the code behind forming a `String` from the set of fields of the `ConnectionInfo` object. The `StringConverter` is stored as a field in the `Application` subclass.

```
private final ConnectionInfoStringConverter ciConverter =
    new ConnectionInfoStringConverter();

class ConnectionInfoStringConverter extends StringConverter<ConnectionInfo> {

    private final String format = "%s@%s:%s";

    @Override
    public String toString(ConnectionInfo c) {
        return String.format( format, c.getUsername(), c.getPassword(), c.getHost()
    );
    }

    @Override
    public ConnectionInfo fromString(String s) {

        if( s != null && s.contains("@") && s.contains(":") ) {
            String[] toks = s.split("@");
            String username = toks[0];
            String[] secondPart = toks[1].split(":");
            String password = secondPart[0];
            String host = secondPart[1];
            ConnectionInfo ci = new ConnectionInfo(
                username, password, host
            );
            return ci;
        }

        return null;
    }
}
```

7.3.2. Dialog

The Dialog subclass adds UI controls to the DialogPane field in the constructor. Notice the lack of explicit `ActionEvent` handlers. When using Dialog or Alert, `ButtonType` and `ButtonData` are preferred over raw `Button` objects. These higher-order objects make the app UI more consistent because the Button placement, labeling, and behavior is handed in the Dialog abstraction.

The subclass contains a type parameter to the `ConnectionInfo` domain object.

ConnectionDialog.java

```
public class ConnectionDialog extends Dialog<ConnectionInfo> {

    private final TextField tfHost = new TextField();
    private final TextField tfUser = new TextField();
    private final TextField tfPassword = new TextField();

    public ConnectionDialog(ConnectionInfo initialData) {

        Label hostLabel = new Label("Host");
        Label userLabel = new Label("User");
        Label passwordLabel = new Label("Password");

        VBox vbox = new VBox(
            hostLabel, tfHost,
            userLabel, tfUser,
            passwordLabel, tfPassword
        );

        vbox.setSpacing( 10.0d );
        vbox.setPadding( new Insets(40.0d) );

        DialogPane dp = getDialogPane();

        setTitle( "Connection Info" );
        setResultConverter( this::formResult );

        ButtonType bt = new ButtonType("Save", ButtonBar.ButtonData.OK_DONE);
        dp.getButtonTypes().addAll( bt, ButtonType.CANCEL );
        dp.setContent( vbox );

        init( initialData );
    }
}
```

The `init()` method sets the Dialog UI controls based on the `ConnectionInfo` fields.

ConnectionDialog.java

```
private void init(ConnectionInfo ci) {
    if (ci != null) {
        tfHost.setText( ci.getHost() );
        tfUser.setText( ci.getUsername() );
        tfPassword.setText( ci.getPassword() );
    }
}
```

The `setResultConverter()` is the mechanism by which the Dialog will communicate its domain object back to the caller. The converter is a callback that returns a `ConnectionInfo` object if one can be formed from the input. In this case, the Dialog makes a decision to send back an object if the Save Button was pressed. Validating the Dialog fields can be performed as part of the `TextField` themselves or as an `EventFilter` attached to the Save Button.

ConnectionDialog.java

```
private ConnectionInfo formResult(ButtonType bt) {
    ConnectionInfo retval = null;
    if( bt.getButtonData() == ButtonBar.ButtonData.OK_DONE ) {
        retval = new ConnectionInfo(
            tfHost.getText(), tfUser.getText(), tfPassword.getText()
        );
    }
    return retval;
}
```

7.3.3. Domain Object

The domain object ConnectionInfo is an immutable POJO.

ConnectionInfo.java

```
public class ConnectionInfo {

    private final String host;
    private final String username;
    private final String password;

    public ConnectionInfo(String host,
                          String username,
                          String password) {
        this.host = host;
        this.username = username;
        this.password = password;
    }

    public String getHost() {
        return host;
    }

    public String getUsername() {
        return username;
    }

    public String getPassword() {
        return password;
    }
}
```

The JavaFX Dialog and Alert subclass are windows that provide a simpler interface and a more consistent style than a raw Stage. Alert is the preferred class when a warning, confirmation, or single value needs to be retrieved from the user. Dialog is used for complex, but contained, interactions with the user. This example showed how a main Stage can keep its view simple by delegating the retrieval of detailed information to a Dialog. Dialog—when paired with a type parameter—improves information hiding in an app by turning a showAndWait() call into a

function that returns a value.

7.3.4. Source

The complete source code and Gradle project can be found at the link below.

[DialogApp Source Zip](#)

Chapter 8. Best Practices

Placeholder whilst things get built...¬

1. Styleable Properties

8.1. Styleable Properties

Author: Gerrit Grunwald

```
/* Member variables for StyleablePropertyFactory
 * and StyleableProperty
 */
private static final StyleablePropertyFactory<MY_CTRL> FACTORY =
    new StyleablePropertyFactory<>(Control.getClassCssMetaData());

private static final CssMetaData<MY_CTRL, Color> COLOR =
    FACTORY.createColorCssMetaData("-color", s -> s.color, Color.RED, false);
private final StyleableProperty<Color> color = new
SimpleStyleableObjectProperty<>(COLOR, this, "color");

// Getter, Setter and Property method
public Color getColor() {
    return this.color.getValue();
}

public void setColor(final Color color) {
    this.color.setValue(COLOR);
}

public ObjectProperty<Color> colorProperty() {
    return (ObjectProperty<Color>) this.color;
}

// Return CSS Metadata
public static List<CssMetaData<? extends Styleable, ?>> getClassCssMetaData() {
    return FACTORY.getCssMetaData();
}

@Override public List<CssMetaData<? extends Styleable, ?>> getControlCssMetaData() {
    return getClassCssMetaData();
}
```

8.2. Tasks

Author: Carl Walker

This article demonstrates how to use a JavaFX Task to keep the UI responsive. It is imperative

that any operation taking more than a few hundred milliseconds be executed on a separate Thread to avoid locking up the UI. A Task wraps up the sequence of steps in a long-running operation and provides callbacks for the possible outcomes.

The **Task** class also keeps the user aware of the operation through properties which can be bound to UI controls like ProgressBars and Labels. The binding dynamically updates the UI. These properties include

1. **runningProperty** - Whether or not the Task is running
2. **progressProperty** - The percent complete of an operation
3. **messageProperty** - Text describing a step in the operation

8.2.1. Demonstration

The following screenshots show the operation of an HTML retrieval application.

Entering a URL and pressing "Go" will start a JavaFX Task. When running, the Task will make an HBox visible that contains a ProgressBar and a Label. The ProgressBar and Label are updated throughout the operation.

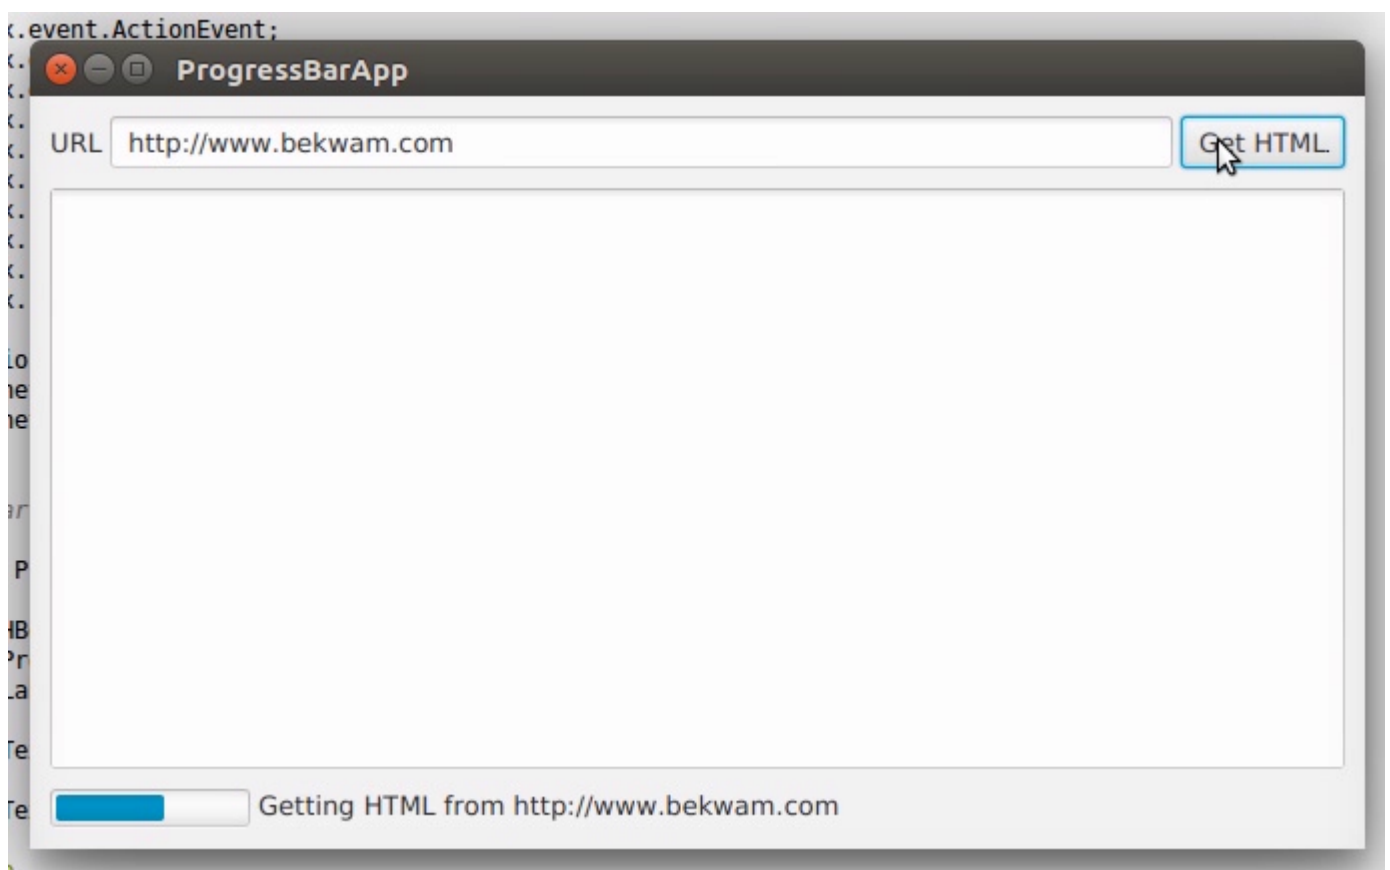


Figure 50. Screenshot of App Showing ProgressBar and Label

When the retrieval is finished, a `succeeded()` callback is invoked and the UI is updated. Note that the `succeeded()` callback takes place on the FX Thread, so it is safe to manipulate controls.

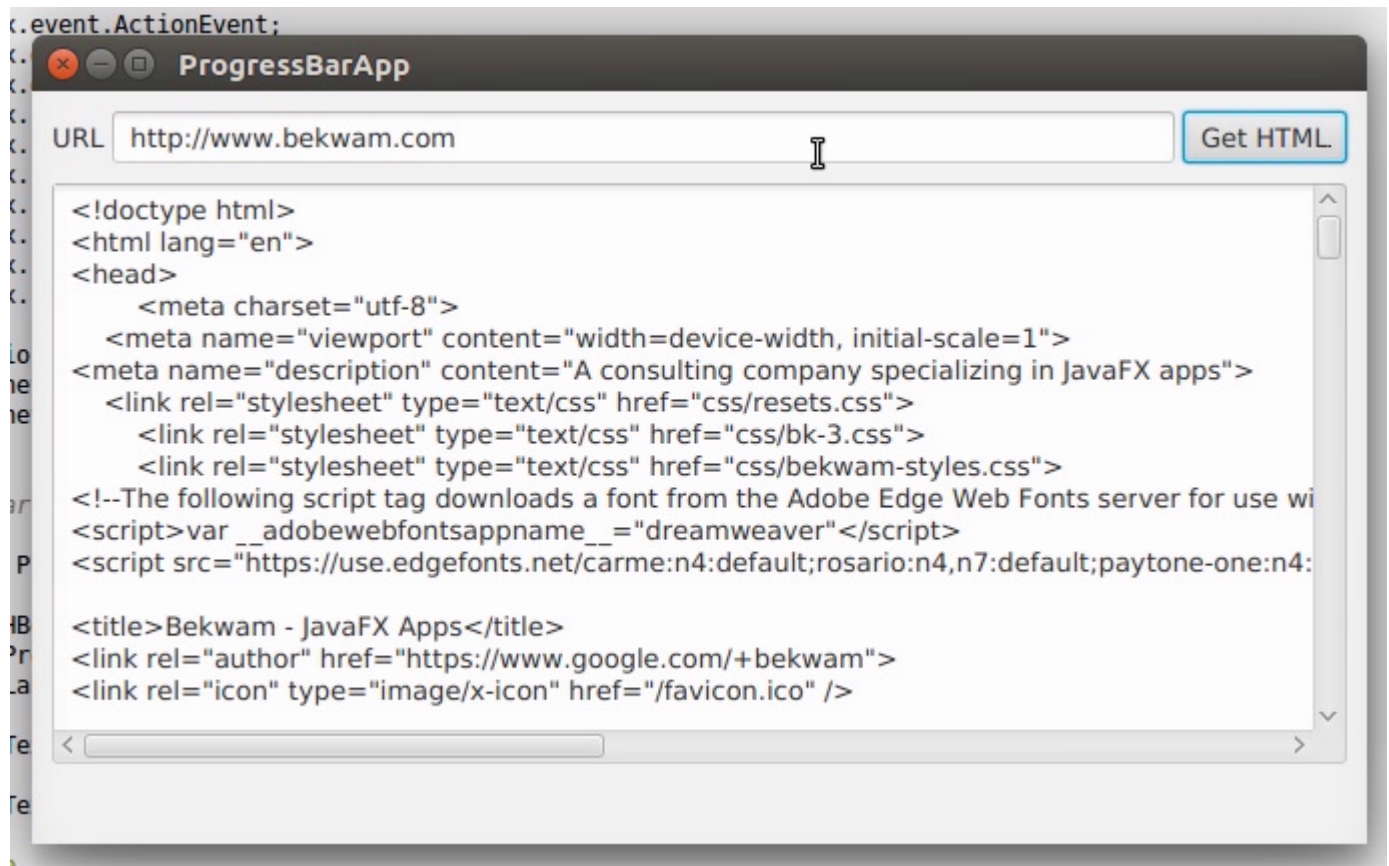


Figure 51. Screenshot of App Showing Successful Retrieval

If there was an error retrieving the HTML, a failed() callback is invoked and an error Alert is shown. failed() also takes place on the FX Thread. This screenshot shows invalid input. An "h" is used in the URL instead of the correct "http".

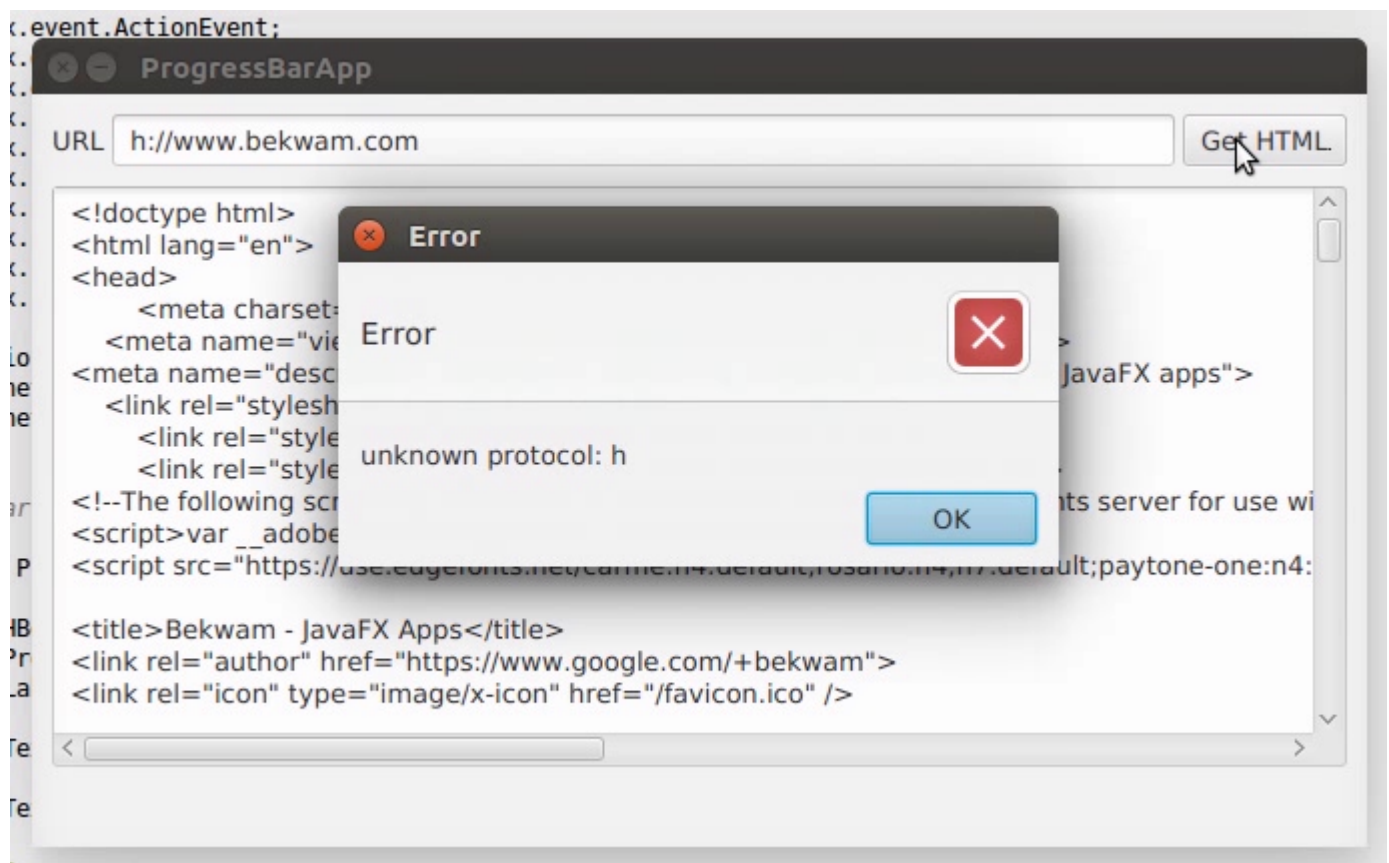


Figure 52. Screenshot of App Showing Failure

8.2.2. Code

An event handler is placed on the Get HTML Button which creates the Task. The entry point of the Task is the `call()` method which starts by calling `updateMessage()` and `updateProgress()`. These methods are executed on the FX Thread and will result in updates to any bound properties.

The program proceeds by issuing an HTTP GET using standard `java.net` classes. A String `"retval"` is built up from the retrieved characters. The message and progress properties are updated with more calls to `updateMessage()` and `updateProgress()`. The `call()` method ends with a return of the String containing the HTML text.

On a successful operation, the `succeeded()` callback is invoked. `getValue()` is a Task method that will return the value accrued in the Task (recall `"retval"`). The type of the value is what is provided in the generic argument, in this case `"String"`. This could be a complex type like a domain object or a Collection. The `succeeded()` operation runs on the FX Thread, so the `getValue()` String is directly set on the TextArea.

If the operation failed, an Exception is thrown. The Exception is caught by the Task and converted to a `failed()` call. `failed()` is also FX Thread-safe and it displays an Alert.

```

String url = tfURL.getText();

Task<String> task = new Task<String>() {

    @Override
    protected String call() throws Exception {

        updateMessage("Getting HTML from " + url );
        updateProgress( 0.5d, 1.0d );

        HttpURLConnection c = null;
        InputStream is = null;
        String retval = "";

        try {

            c = (HttpURLConnection) new URL(url).openConnection();

            updateProgress( 0.6d, 1.0d );
            is = c.getInputStream();
            int ch;
            while( (ch=is.read()) != -1 ) {
                retval += (char)ch;
            }

        } finally {
            if( is != null ) {
                is.close();
            }
            if( c != null ) {
                c.disconnect();
            }
        }

        updateMessage("HTML retrieved");
        updateProgress( 1.0d, 1.0d );

        return retval;
    }

    @Override
    protected void succeeded() {
        contents.setText( getValue() );
    }

    @Override
    protected void failed() {
        Alert alert = new Alert(Alert.AlertType.ERROR, getException().getMessage() );
        alert.showAndWait();
    }

};

```

Notice that the Task does not update the ProgressBar and status Label directly. Instead, the Task makes safe calls to `updateMessage()` and `updateProgress()`. To update the UI, JavaFX binding is used in the following statements.

```
bottomControls.visibleProperty().bind( task.runningProperty() );
pb.progressProperty().bind( task.progressProperty() );
messageLabel.textProperty().bind( task.messageProperty() );
```

`Task.runningProperty` is a boolean that can be bound to the `bottomControls HBox visibleProperty`. `Task.progressProperty` is a double that can be bound to the `ProgressBar progressProperty`. `Task.messageProperty` is a String that can be bound to the `status Label textProperty`.

To run the Task, create a Thread providing the Task as a constructor argument and invoke `start()`.

```
new Thread(task).start();
```

For any long-running operation—File IO, the Network—use a JavaFX Task to keep your application responsive. The JavaFX Task gives your application a consistent way of handling asynchronous operations and exposes several properties that can be used to eliminate boilerplate and programming logic.

8.2.3. Complete Code

The code can be tested in a single .java file.

```
public class ProgressBarApp extends Application {

    private HBox bottomControls;
    private ProgressBar pb;
    private Label messageLabel;

    private TextField tfURL;

    private TextArea contents;

    @Override
    public void start(Stage primaryStage) throws Exception {

        Parent p = createMainView();

        Scene scene = new Scene(p);

        primaryStage.setTitle("ProgressBarApp");
        primaryStage.setWidth( 667 );
        primaryStage.setHeight( 376 );
        primaryStage.setScene( scene );
        primaryStage.show();
    }

    private Parent createMainView() {
```



```

VBox vbox = new VBox();
vbox.setPadding( new Insets(10) );
vbox.setSpacing( 10 );

HBox topControls = new HBox();
topControls.setAlignment(Pos.CENTER_LEFT);
topControls.setSpacing( 4 );

Label label = new Label("URL");
tfURL = new TextField();
HBox.setHgrow( tfURL, Priority.ALWAYS );
Button btnGetHTML = new Button("Get HTML");
btnGetHTML.setOnAction( this::getHTML );
topControls.getChildren().addAll(label, tfURL, btnGetHTML);

contents = new TextArea();
VBox.setVgrow( contents, Priority.ALWAYS );

bottomControls = new HBox();
bottomControls.setVisible(false);
bottomControls.setSpacing( 4 );
HBox.setMargin( bottomControls, new Insets(4));

pb = new ProgressBar();
messageLabel = new Label("");
bottomControls.getChildren().addAll(pb, messageLabel);

vbox.getChildren().addAll(topControls, contents, bottomControls);

return vbox;
}

public void getHTML(ActionEvent evt) {

    String url = tfURL.getText();

    Task<String> task = new Task<String>() {

        @Override
        protected String call() throws Exception {

            updateMessage("Getting HTML from " + url );
            updateProgress( 0.5d, 1.0d );

            HttpURLConnection c = null;
            InputStream is = null;
            String retval = "";

            try {

                c = (HttpURLConnection) new URL(url).openConnection();

```

```

        updateProgress( 0.6d, 1.0d );
        is = c.getInputStream();
        int ch;
        while( (ch=is.read()) != -1 ) {
            retval += (char)ch;
        }

    } finally {
        if( is != null ) {
            is.close();
        }
        if( c != null ) {
            c.disconnect();
        }
    }

    updateMessage("HTML retrieved");
    updateProgress( 1.0d, 1.0d );

    return retval;
}

@Override
protected void succeeded() {
    contents.setText( getValue() );
}

@Override
protected void failed() {
    Alert alert = new Alert(Alert.AlertType.ERROR,
getException().getMessage() );
    alert.showAndWait();
}

};

bottomControls.visibleProperty().bind( task.runningProperty() );
pb.progressProperty().bind( task.progressProperty() );
messageLabel.textProperty().bind( task.messageProperty() );

new Thread(task).start();
}

public static void main(String[] args) {
    launch(args);
}
}

```

8.3. Avoid Nulls in ComboBoxes

Author: Carl Walker

To use a `ComboBox` in JavaFX, declare a `List` of items and set an initial value using `setValue()`.

The `ComboBox` method `getValue()` retrieves the currently selected value. If an initial value is not provided, the control defaults to a null value.

The null value is a problem when the `ComboBox` drives other logic like an upper-case transformation or the lookup of a database record. While a null check is usually used to prevent this type of error, an empty object is preferred in order to simplify the code. `ComboBoxes` often appear in clusters and the empty object technique reduces null checks in the interaction of related `ComboBoxes` and on save and load operations.

This article presents a pair of related `ComboBoxes`. A country selection in one `ComboBox` modifies the list of available city items in a second `ComboBox`. Neither selection is required. The user can press the `Save Button` at any time and if no selection is made for either `ComboBox`, an empty object—in this case an empty `String`—will be returned.

This is a screenshot of the app. Selecting "Switzerland" from an empty initial value will fill the city `ComboBox` with Swiss cities. Selecting the city "Zurich" and pressing `Save` will retrieve those values.

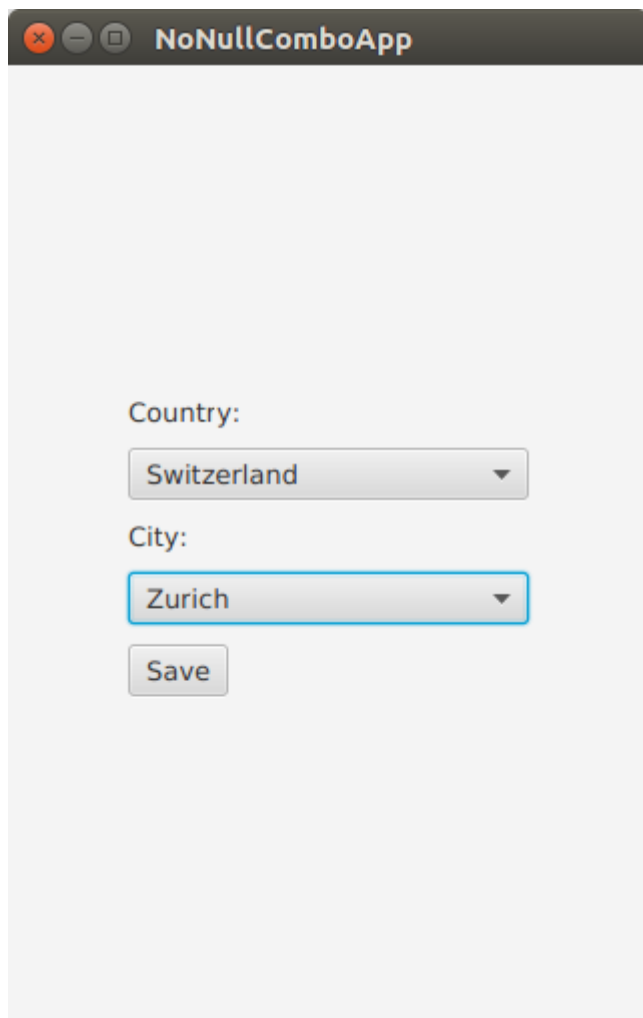


Figure 53. Related ComboBoxes

8.3.1. Data Structure

The data structures supporting the app are a `List` of countries and a `Map` of cities. The `Map` of cities uses country as a key.

NoNullComboApp.class

```
public class NoNullComboApp extends Application {

    private List<String> countries = new ArrayList<>();

    private Map<String, List<String>> citiesMap = new LinkedHashMap<>();

    private void initData() {

        String COUNTRY_FR = "France";
        String COUNTRY_DE = "Germany";
        String COUNTRY_CH = "Switzerland";

        countries.add(COUNTRY_FR); countries.add(COUNTRY_DE);
countries.add(COUNTRY_CH);

        List<String> frenchCities = new ArrayList<>();
        frenchCities.add("Paris");
        frenchCities.add("Strasbourg");

        List<String> germanCities = new ArrayList<>();
        germanCities.add("Berlin");
        germanCities.add("Cologne");
        germanCities.add("Munich");

        List<String> swissCities = new ArrayList<>();
        swissCities.add("Zurich");

        citiesMap.put(COUNTRY_FR, frenchCities );
        citiesMap.put(COUNTRY_DE, germanCities );
        citiesMap.put(COUNTRY_CH, swissCities );
    }
}
```

To retrieve the set of cities for a given country, use the `get()` method of the `Map`. The `containsKey()` method can be used to determine whether or not the `Map` contains a value for the specified country. In this example, `containsKey()` will be used to handle the empty object case.

8.3.2. UI

The UI is a pair of `ComboBoxes` with `Labels` and a `Save Button`. The controls are put in a `VBox` and left-justified. The `VBox` is wrapped in a `TilePane` and centered. The `TilePane` was used since it does not stretch the `VBox` horizontally.

NoNullComboApp.class

```
@Override
public void start(Stage primaryStage) throws Exception {

    Label countryLabel = new Label("Country:");
    country.setPrefWidth(200.0d);
    Label cityLabel = new Label("City:");
    city.setPrefWidth(200.0d);
    Button saveButton = new Button("Save");

    VBox vbox = new VBox(
        countryLabel,
        country,
        cityLabel,
        city,
        saveButton
    );
    vbox.setAlignment(Pos.CENTER_LEFT );
    vbox.setSpacing( 10.0d );

    TilePane outerBox = new TilePane(vbox);
    outerBox.setAlignment(Pos.CENTER);

    Scene scene = new Scene(outerBox);

    initData();
}
```

8.3.3. Initial Values

As mentioned earlier, if a value is not specified for a `ComboBox`, then null will be returned in a `getValue()` call. Although there are several defensive techniques—`if` checks, Commons `StringUtils` methods—for fending off `NullPointerExceptions`, it is better to avoid them completely. This is especially true as the interactions become complex or there are several `ComboBoxes` that allow empty selections.

NoNullComboApp.class

```
country.getItems().add("");
country.getItems().addAll( countries );
country.setValue( "" ); // empty selection is object and not null

city.getItems().add("");
city.setValue( "" );
```

In this app, the `Country ComboBox` will not be changed, so its items are added in the `start()` method. `Country` starts with an initial empty selection as does `city`. `City`—at this point—contains a single empty item.

8.3.4. Interaction

When the country value is changed, the contents of the city `ComboBox` should be replaced. It is common to use `clear()` on the backing list; however, this will produce a null value in the `ComboBox` (no items, no value). Instead, use `removeIf()` with a clause to keep a single empty item. With the list cleared of all data (except the empty item), the newly-selected contents can be added with `addAll()`.

NoNullComboApp.class

```
country.setOnAction( (evt) -> {

    String cty = country.getValue();

    city.getItems().removeIf( (c) -> !c.isEmpty() );

    if( citiesMap.containsKey(cty) ) { // not an empty key
        city.getItems().addAll( citiesMap.get(cty) );
    }
});

saveButton.setOnAction( (evt) -> {
    System.out.println("saving country='" + country.getValue() +
        "', city='" + city.getValue() + "'");
});
```

The Save Button action will print out the values. In no case will a null value be returned from `getValue()`.

If you're a Java developer, you've written "if not null" thousands of times. Yet, project after project, I see `NullPointerExceptions` highlighting cases that were missed or new conditions that have arisen. This article presented a technique for keeping empty objects in `ComboBoxes` by setting an initial value and using `removeIf()` rather than `clear()` when changing lists. Although, this example used `String` objects, this can be expanded to work with domain objects that have an `hashCode/equals` implementation, an empty object representation, and a `cellFactory` or `toString()` to produce an empty view.

8.3.5. Complete Code

The code can be tested in a single `.java` file.

NoNullComboApp.class

```
public class NoNullComboApp extends Application {

    private final ComboBox<String> country = new ComboBox<>();
    private final ComboBox<String> city = new ComboBox<>();

    private List<String> countries = new ArrayList<>();

    private Map<String, List<String>> citiesMap = new LinkedHashMap<>();
```

```

@Override
public void start(Stage primaryStage) throws Exception {

    Label countryLabel = new Label("Country:");
    country.setPrefWidth(200.0d);
    Label cityLabel = new Label("City:");
    city.setPrefWidth(200.0d);
    Button saveButton = new Button("Save");

    VBox vbox = new VBox(
        countryLabel,
        country,
        cityLabel,
        city,
        saveButton
    );
    vbox.setAlignment(Pos.CENTER_LEFT );
    vbox.setSpacing( 10.0d );

    TilePane outerBox = new TilePane(vbox);
    outerBox.setAlignment(Pos.CENTER);

    Scene scene = new Scene(outerBox);

    initData();

    country.getItems().add("");
    country.getItems().addAll( countries );
    country.setValue( "" ); // empty selection is object and not null

    city.getItems().add("");
    city.setValue( "" );

    country.setOnAction( (evt) -> {

        String cty = country.getValue();

        city.getItems().removeIf( (c) -> !c.isEmpty() );

        if( citiesMap.containsKey(cty) ) { // not an empty key
            city.getItems().addAll( citiesMap.get(cty) );
        }
    });

    saveButton.setOnAction( (evt) -> {
        System.out.println("saving country='" + country.getValue() +
            "', city='" + city.getValue() + "'");
    });

    primaryStage.setTitle("NotNullComboApp");
    primaryStage.setScene( scene );
    primaryStage.setWidth( 320 );
}

```

```

        primaryStage.setHeight( 480 );
        primaryStage.show();
    }

    public static void main(String[] args) {
        launch(args);
    }

    private void initData() {

        String COUNTRY_FR = "France";
        String COUNTRY_DE = "Germany";
        String COUNTRY_CH = "Switzerland";

        countries.add(COUNTRY_FR); countries.add(COUNTRY_DE);
countries.add(COUNTRY_CH);

        List<String> frenchCities = new ArrayList<>();
        frenchCities.add("Paris");
        frenchCities.add("Strasbourg");

        List<String> germanCities = new ArrayList<>();
        germanCities.add("Berlin");
        germanCities.add("Cologne");
        germanCities.add("Munich");

        List<String> swissCities = new ArrayList<>();
        swissCities.add("Zurich");

        citiesMap.put(COUNTRY_FR, frenchCities );
        citiesMap.put(COUNTRY_DE, germanCities );
        citiesMap.put(COUNTRY_CH, swissCities );
    }
}

```

8.4. Writing Javadoc for JavaFX Properties

Author: Abhinay Agarwal

8.4.1. Background

Documenting JavaFX APIs may not appear very different from documenting a Java API but most of us are unaware of the tools present to ease our work.

While writing a JavaFX application or designing a JavaFX control, a developer adds various JavaFX properties which *normally* consists of a field and three methods i.e. JavaFX property method, setter and getter. These methods are generally *public* and therefore, should be documented. Writing Javadoc for all the three methods doesn't makes sense when most of it is implied. Nevertheless, there should be some documentation and a way to show a link between all these methods.

The JavaFX team has been very thoughtful and introduced a special option "**-javafx**" for the javadoc command. This option introduces the following flexibility:

- Generates HTML documentation using the JavaFX extensions to the standard doclet. The generated documentation includes a "Property Summary" section in addition to the other summary sections generated by the standard Java doclet. The listed properties are linked to the sections for the getter and setter methods of each property.
- If there are no documentation comments written explicitly for getter and setter methods, the documentation comments from the property method are automatically copied to the generated documentation for these methods.
- Adds a new **@defaultValue** tag that allows documenting the default value for a property.
- Adds a new **@treatAsPrivate** tag that adds the flexibility to not publish the doc for a public method which is a part of the implementation detail.

```
javadoc -javafx MyClass.java -d testdir
```

8.4.2. Example

Generally, if you introduce a JavaFX property field, you will add its corresponding property method along with setter and getter. In this case, you are advised to bundle them together and document *only* the field. The "-javafx" option on the javadoc command will generate the appropriate documentation for the rest of the methods.

N.B. - You can document an individual method in case you want to add explicit information for the method.

```

/**
 * Specifies whether this {@code Node} and its child nodes should be rendered
 * as part of the scene graph. A node may be visible and yet not be shown
 * in the rendered scene if, for instance, it is off the screen or obscured
 * by another Node. Invisible nodes never receive mouse events or
 * keyboard focus and never maintain keyboard focus when they become
 * invisible.
 *
 * @defaultValue true
 */
private BooleanProperty visible = new SimpleBooleanProperty(this, "visible", true);

public final void setVisible(boolean value) {
    visibleProperty().set(value);
}

public final boolean isVisible() {
    return visible.get();
}

public final BooleanProperty visibleProperty() {
    return visible;
}

```

8.5. Ignoring Warnings for Null Select Binding Expressions

Author: Carl Walker

When working with the JavaFX Bindings class, you may get evaluation warnings in the console log. This scenario arises when using a binding expression on an object that may be null. For example, a `TableView` selection may drive the enabled state of Buttons. When the `TableView` is first displayed, there is no selection. This will display an error in the log of level WARNING.

```

Dec 31, 2016 9:11:14 AM com.sun.javafx.binding.SelectBinding$SelectBindingHelper
getObservableValue
WARNING: Exception while evaluating select-binding [taxable]

```

"taxable" is a Boolean property on a POJO. The expression that caused this message is the following.

```

btnCalcTax.disableProperty().bind(
    tblItems.getSelectionModel().selectedItemProperty().isNull().or(
        Bindings.select(
            tblItems.getSelectionModel().selectedItemProperty(),
            "taxable"
        ).isEqualTo(false)
    )
);

```

The preceding statement disables the Calc Tax Button when there is no table selection or if there is a table selection, the selected item has its taxable field set to false. That is, the Calc Tax Button should only be enabled when a taxable item is selected.

JavaFX Bindings uses Java Logging, so raising the verbosity to SEVERE will ignore the WARNING level message. Conversely, if you want to lower the verbosity to see the stack trace supporting the WARNING, lower the verbosity to FINE. This statement is added to a logging.properties file. The program can be instructed to use that file by specifying -Djava.util.logging.config.file in the command.

```
javafx.beans.level=SEVERE
```

For a quick check that does not require a separate file or command modification, you can add this to your program. Because of the dependency on Sun classes, you should remove this prior to committing.

```
Logging.getLogger().setLevel(PlatformLogger.Level.FINE )
```

The JavaFX WARNING may be too strong for a common use case. There is a ticket JDK-8162600 that may address this in a later JavaFX release.

8.6. POJO Binding

Author: Carl Walker

In larger apps involving non-JavaFX technologies, sharing POJOs is a great way to help with maintenance. Doing an impact analysis is quicker when an IDE can search for common accesses and extensions. Moreover, POJO-based validation, logic, and utilities can also be reused.

JavaFX has a collection of static methods in the `Bindings` class to work with both POJOs and JavaFX-enabled Properties. This section demonstrates the use of the `select()` method which will link the core data types from a POJO to the JavaFX Property-based fields of a UI control. Once the core data type is repackaged as a Property, additional functionality from JavaFX can be chained such as string concatenation.

Because the data in this demonstration app is based on a POJO, an update needs to be made manually. Bi-directional binding works only when the source and the target are both Properties. This app uses a `Track` class with core data type fields like `String: "album"`. If the `Track` class were written using JavaFX properties—say `StringProperty : album`—then a model change would automatically update the UI. A hybrid approach is presented whereby the core data type on one of the POJO fields initializes a separate JavaFX Property field and the update operation must change both fields.

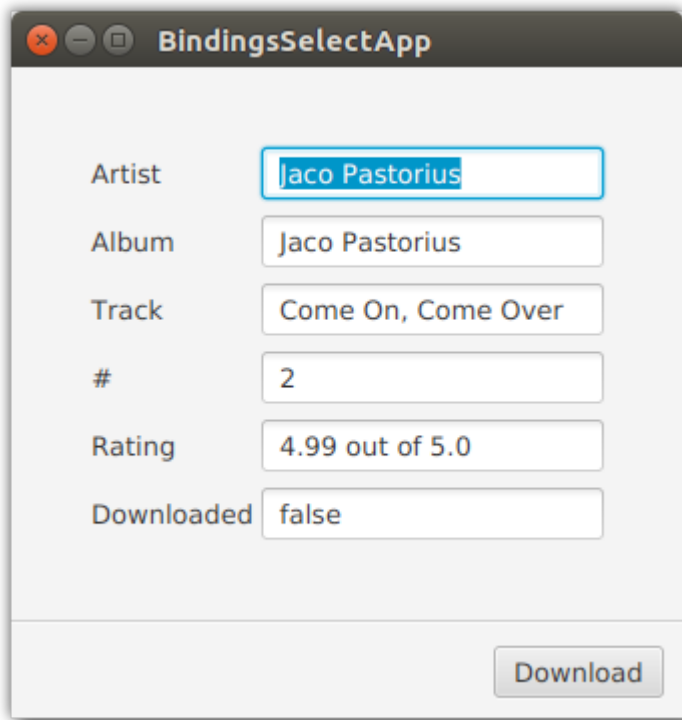


Figure 54. UI Controls Bound to a POJO

8.6.1. The POJOs

Two POJOs are used: Track and Rating. Track contains information about a music clip being played: album, artist, track name.

Track.java (abbreviated)

```
public class Track {  
  
    private String artist;  
    private String album;  
    private String track;  
    private Integer trackNo;  
    private Rating rating;  
    private Boolean downloaded;  
}
```

Rating is a pairing of a value (ex, 3) and a scale (ex, max value of 5). There is a Rating member in a Track which will show the Bindings.select() nesting syntax.

Rating.java (abbreviated)

```
public class Rating {  
  
    private Float value;  
    private Float scale;  
}
```

The constructor, getters, and setters have been left off for brevity and are included in the source download.

In the Application subclass, the model is a single field "currentTrack".

BindingsSelectApp.java

```
public class BindingsSelectApp extends Application {

    private final Track currentTrack = new Track(
        "Jaco Pastorious",
        "Jaco Pastorious",
        "Come On, Come Over",
        2,
        new Rating(4.99f, 5.00f),
        false
    );
```

Referring to the previous screenshot, the currentTrack fields are displayed in the TextFields(). "rating" is supplemented with a formatted String.

8.6.2. UI Code

The TextField controls and the Download Button are also Application subclass fields so that they can be used in both the Application.start() method and a private initBindings() method.

BindingsSelectApp.java (cont.)

```
    private final TextField tfArtist = new TextField();
    private final TextField tfAlbum = new TextField();
    private final TextField tfTrack = new TextField();
    private final TextField tfTrackNo = new TextField();
    private final TextField tfRating = new TextField();
    private final TextField tfDownloaded = new TextField();

    private final Button downloadButton = new Button("Download");

    private final BooleanProperty downloaded = new SimpleBooleanProperty(currentTrack,
"downloaded");
```

"downloaded" is a special JavaFX Property maintained alongside the field of the same name in the currentTrack object. As mentioned earlier, the POJO will need to be updated manually. The BooleanProperty "downloaded" is a convenience that keeps the app from having to modify the tfDownload TextField directly.

The start() method begins by creating the top GridPane container and adding the TextField and Label controls.

BindingsSelectApp.java (cont.)

```
@Override
public void start(Stage primaryStage) throws Exception {

    GridPane gp = new GridPane();

    gp.add(new Label("Artist"), 0, 0);
    gp.add(tfArtist, 1, 0);
    gp.add(new Label("Album"), 0, 1);
    gp.add(tfAlbum, 1, 1);
    gp.add(new Label("Track"), 0, 2);
    gp.add(tfTrack, 1, 2);
    gp.add(new Label("#"), 0, 3);
    gp.add(tfTrackNo, 1, 3);
    gp.add(new Label("Rating"), 0, 4);
    gp.add(tfRating, 1, 4);
    gp.add(new Label("Downloaded"), 0, 5);
    gp.add(tfDownloaded, 1, 5);

    gp.setHgap(4.0d);
    gp.setVgap(8.0d);

    VBox.setVgrow(gp, Priority.ALWAYS);
    VBox.setMargin( gp, new Insets(40.0d) );
}
```

A `ButtonBar` container is used to hold the Download Button. The `ButtonBar` and `GridPane` are added to a `VBox` and separated via a `Separator`.

BindingsSelectApp.java (cont.)

```
ButtonBar buttons = new ButtonBar();

ButtonBar.setButtonData(downloadButton, ButtonBar.ButtonData.OTHER);

buttons.getButtons().add(downloadButton);
buttons.setPadding(new Insets(10.0d) );

VBox vbox = new VBox(
    gp,
    new Separator(),
    buttons
);
```

8.6.3. Bindings

The bindings statements are in a private method "initBindings" which is called from the `Application.start()` method.

BindingsSelectApp.java (cont.)

```
private void initBindings() {

    tfArtist.textProperty().bind( Bindings.select(currentTrack, "artist"));
    tfAlbum.textProperty().bind( Bindings.select(currentTrack, "album"));
    tfTrack.textProperty().bind( Bindings.select(currentTrack, "track"));

    tfTrackNo.textProperty().bind(
        Bindings.select(currentTrack, "trackNo").asString()
    );

    tfRating.textProperty().bind(
        Bindings.concat(
            Bindings.select(currentTrack, "rating", "value").asString(),
            " out of ",
            Bindings.select(currentTrack, "rating", "scale").asString()
        )
    );

    tfDownloaded.textProperty().bind(downloaded.asString());
    downloadButton.disableProperty().bind(downloaded);
}
```

Bindings.select

`Bindings.select` is a static method that creates a typed binding from a plain object or an `ObservableValue`. In this example, a POJO is passed in along with either a field name or a set of field names that form an object path. For the artist, album, and track fields, the value returned from `select()` is a `StringBinding` and is compatible with the `textProperty()` of the `TextFields`. The `trackNo` `select()` call will return an `IntegerBinding` which is not compatible with `textProperty()` so a method `asString()` is added to convert the `IntegerBinding` into a `StringBinding`. `asString()` is also used for the special "downloaded" member variable which returns a `BooleanBinding` that throws a `ClassCastException`.

`tfRating` is bound to a complex expression. The components of `tfRating` are the value (ex "4.99") and the scale ("5.0"). A string constant " out of " is set in the middle of the expression. The joining of expressions is performed by the `concat()` method which returns the formatted string displayed in the UI. Notice that this `select()` call uses a path which is a varargs collection of field names. Passing "rating" then "value" is used for the object path `currentTrack.rating.value`. `currentTrack.rating.scale` is accessed similarly.

There is an additional binding disabling the Downloaded Button if the track has already been downloaded. Like the binding to `tfDownloaded`, the `Bindings.select()` method is skipped for a direct `bind()` call since the member variable "downloaded" is a JavaFX Property. This "downloaded" Property is initialized with the POJO value which is a field on the `currentTrack` object.

Model Update

Since the model is based on the POJO "currentTrack", the fields must be updated manually. In some architectures, this is desired since the POJO represents record state (the state of the data

from the app) and not the screen state (what the user is looking at). This means that a deliberate setter must be made to update record state and that needs to trigger a screen state update.

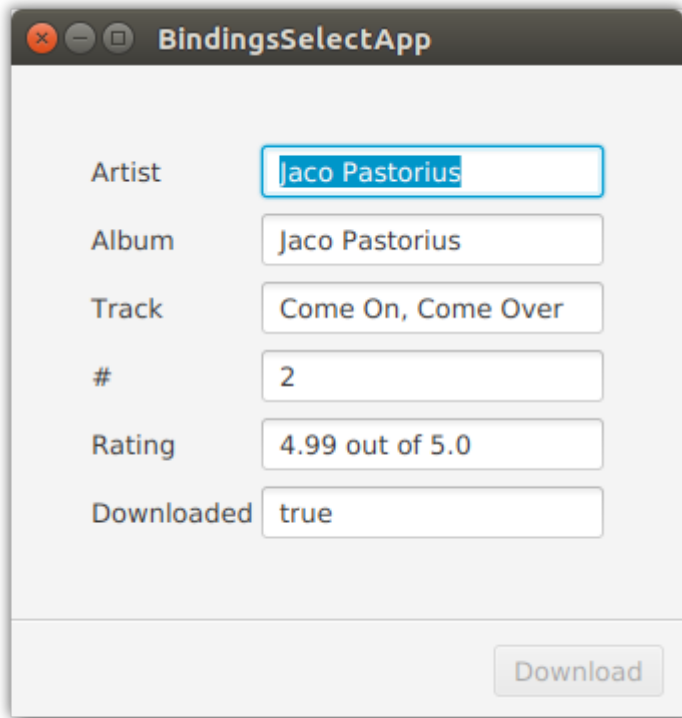


Figure 55. A Model Change Disables the Download Button

In this example, there is only one field that will be modified: downloaded. Pressing the Download Button will call a setter on the special downloaded BooleanProperty of the Application. When the value of the BooleanProperty changes, the UI is updated from the tfDownloaded binding. A ChangeListener is attached to the downloaded BooleanProperty which triggers an update of the model state.

BindingsSelectApp.java (cont.)

```
downloadButton.setOnAction( (evt) -> {
    downloaded.set(true);
});

downloaded.addListener( (obs,ov,nv) -> currentTrack.setDownloaded(true));
```

The Download Button serves as a commit. While the user is limited in this app, they could edit the TextFields and use a Save Button to transfer the values on the screen to the model. Additionally, a Reset Button could discard TextField changes.

The declarative binding of JavaFX UI controls to Properties enforces a consistent style and behavior throughout the application. Similar functionality can be accomplished by directly accessing the controls ("setText()") and retrieving updates from addListener(). However, listeners are often written inconsistently by different developers and do not take advantage of the extra binding functions like contact(), sum(), and when(). Bindings.select() provides a way to bring POJOs used elsewhere in the app into JavaFX.

8.6.4. Source

The complete source code and Gradle project can be found at the link below.

[BindingsApp Source Zip](#)

Chapter 9. Contributing

Placeholder whilst things get built...↵

Chapter 10. License



This work is licensed under a [Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License](https://creativecommons.org/licenses/by-nc-nd/4.0/).