# OpenClawWebChat Interaction


**OpenClawWebChat Interaction**
- Method 1: Access via Local Browser
- Method Two: Access from Other Hosts on the Local Area Network
  1. Modify the Configuration File
  2. Restart the Gateway
  3. Obtain an Access Token
  4. Establish an SSH Tunnel and Access via PC
  5. Accessing via a Local Network PC


## Method 1: Access via Local Browser

Open the terminal and enter the command to open WebChat:

```
openclaw dashboard
```

This command displays the token once, or you can find the `~/.openclaw/openclaw\.json` file, where your token will be configured.

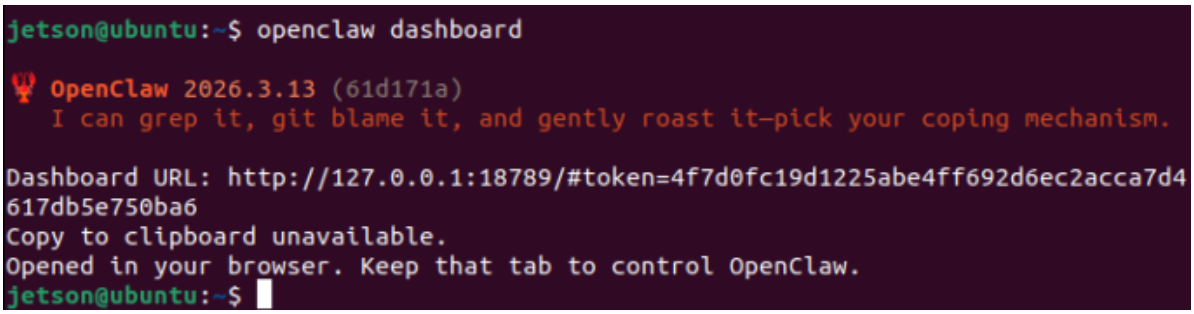


We connect to the motherboard system via desktop or VNC, open a browser, and enter the link given in the Dashboard URL. After opening, you can see the openclaw-tui chat history, and you can send content to openclaw for processing at the bottom.

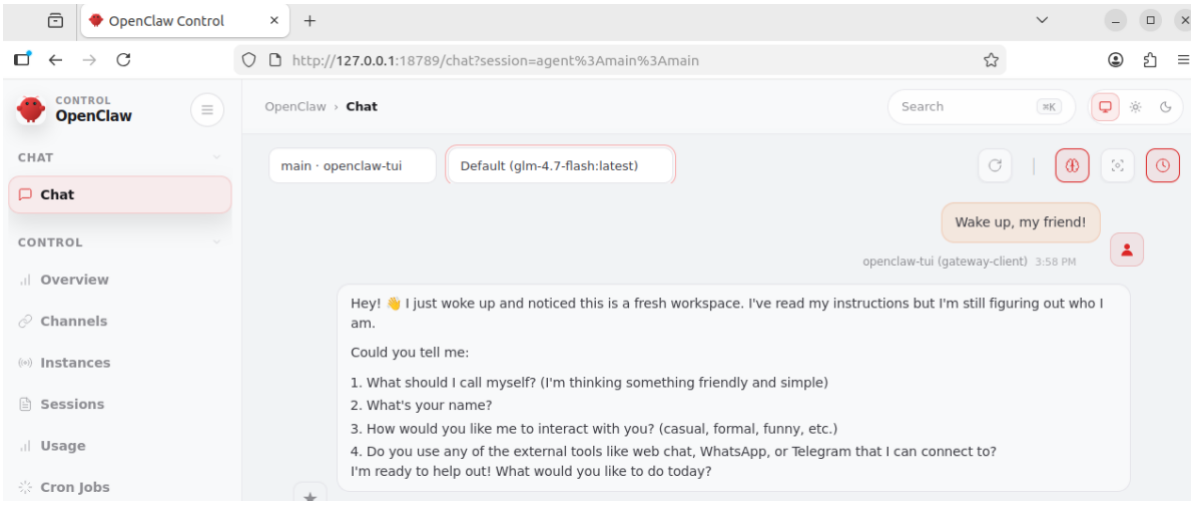


## Method Two: Access from Other Hosts on the Local Area Network

## 1. Modify the Configuration File

Modify the OpenClaw configuration file to allow other devices on the local network to access OpenClaw.

```
openclaw config
```

Here, we select according to the following image (use the up and down arrow keys to select, and press Enter to confirm).

Note: Except for the Token, which can be different from the one in our image, everything else must be the same. The key is the "Gateway bind mode" setting. We need to set it to "LAN" to allow other devices on our local network to access our OpenClaw.

Finally, select "Continue" to confirm and press Enter. This completes the configuration!

```
◇  Workspace directory
   /home/jetson/.openclaw/workspace
Workspace OK: ~/.openclaw/workspace
Sessions OK: ~/.openclaw/agents/main/sessions
Config overwrite: /home/jetson/.openclaw/openclaw.json (sha256 5ac192393317bf690
7ee9d27fb3099183eb0caf44aa3480e6dfff5ebe3eb336e -> 909f5686907abc13f8d03afd72a83
ae85d78a408e5394d262dede54ca2734e0b, backup=/home/jetson/.openclaw/openclaw.json
.bak)
Updated ~/.openclaw/openclaw.json

◆  Select sections to configure
   ○ Workspace
   ○ Model
   ○ Web tools
   ○ Gateway
   ○ Daemon
   ○ Channels
   ○ Skills
   ○ Health check
   ● Continue (Done)
```

## 2. Restart the Gateway

After completing the configuration, you need to restart the OpenClaw Gateway. Open a new terminal window and enter the following command:

```
openclaw gateway restart
```

## 3. Obtain an Access Token

```
openclaw dashboard
```

```
jetson@ubuntu:~$ openclaw dashboard

🦞 OpenClaw 2026.3.13 (61d171a)
   I can grep it, git blame it, and gently roast it—pick your coping mechanism.

Dashboard URL: http://127.0.0.1:18789/#token=4f7d0fc19d1225abe4ff692d6ec2acca7d4
617db5e750ba6
Copy to clipboard unavailable.
Opened in your browser. Keep that tab to control OpenClaw.
jetson@ubuntu:~$
```

## 4. Establish an SSH Tunnel and Access via PC

On a PC connected to the same local area network (LAN), configure the environment to connect to the Jetson device.

Open the Cmd terminal on your computer (using Windows as an example: press Win+R to launch the Run utility, type `cmd`, and then press Enter).

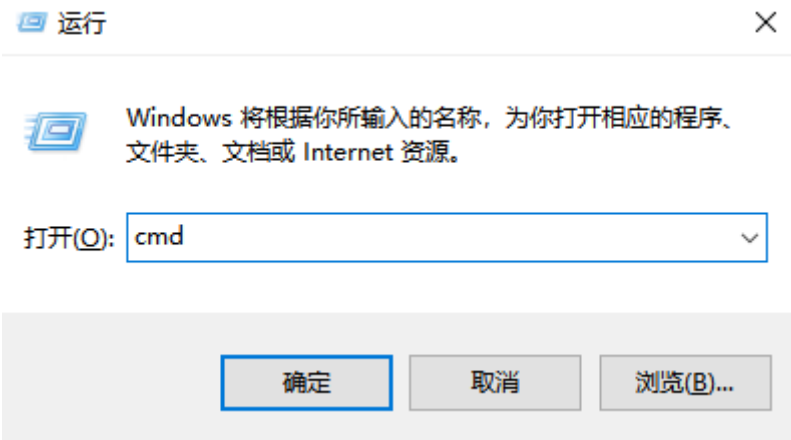


Enter the following command into the console:

```
ssh -L 18789:127.0.0.1:18789 jetson@<jetson-ip-address>
```

Note: You must replace `<jetson-ip-address>` with the actual IP address of your Jetson board.

After pressing Enter, you will be prompted to enter the password for the Jetson board (the default password for the factory image is `yahboom`).

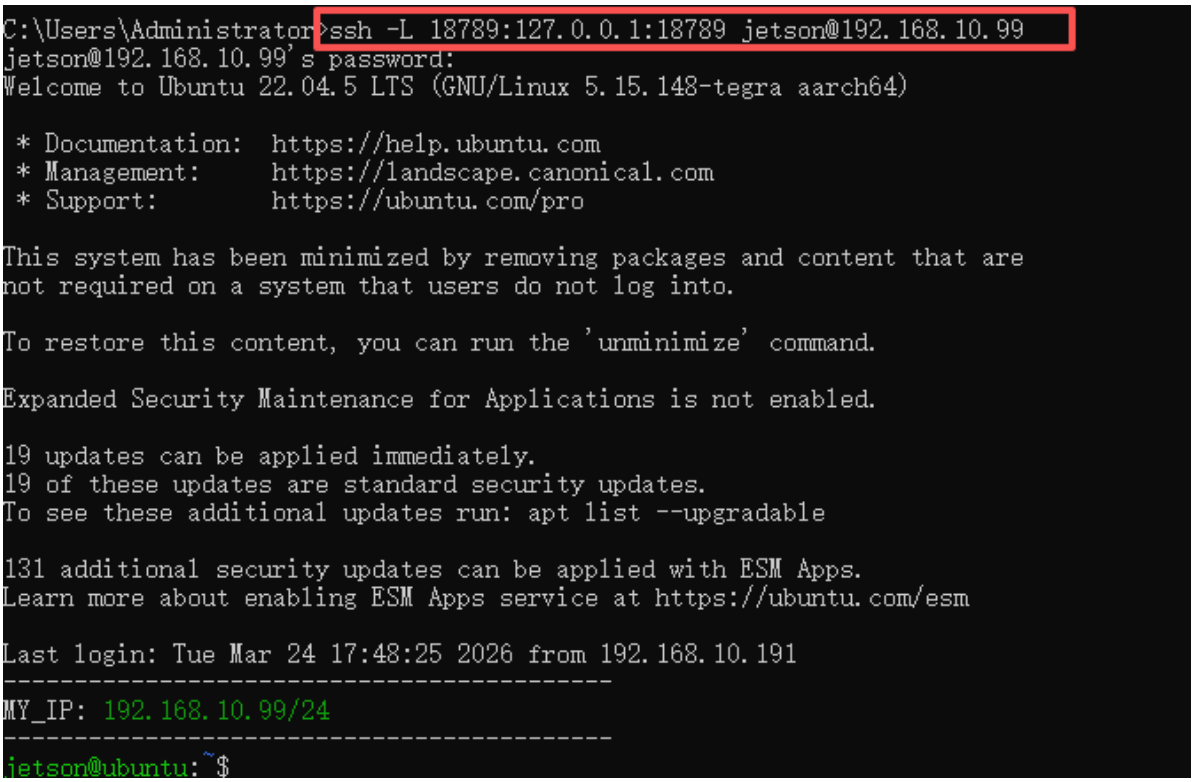


Once this screen appears, it indicates that you have successfully connected to the Jetson.

## 5. Accessing via a Local Network PC

Open a web browser on your PC and enter the full address—including the IP and token—into the address bar (this is the address that was output by the `openclaw onboard` command earlier: `https://127.0.0.1:18789/#token=xxxxxxxxxxxxx`). If this interface appears, it confirms that the deployment was successful!

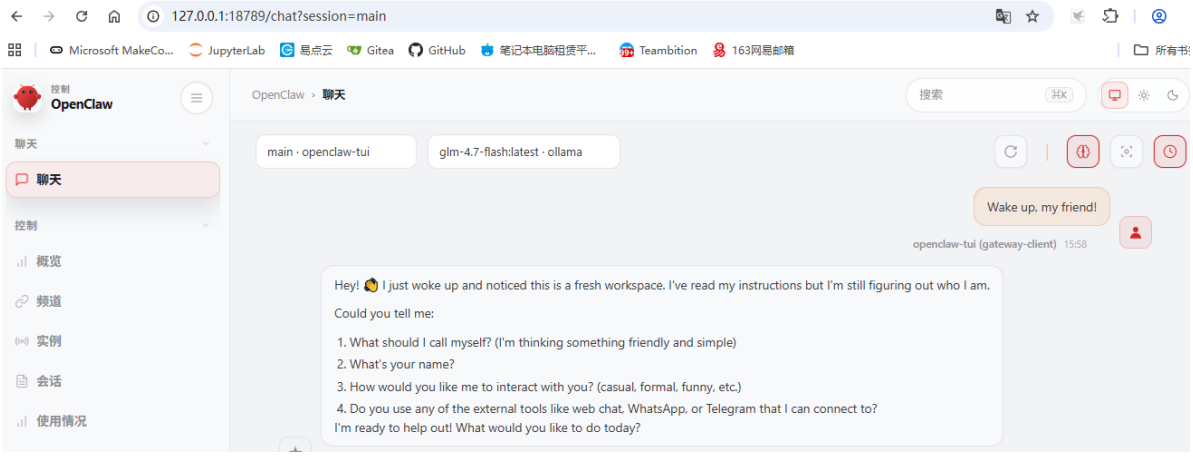


You can now interact with the system by entering text in the input field at the bottom of the page.