Restoring the Factory Image System

Restoring the Factory Image System

1. Formatting the SSD
    1.1. Downloading DiskGenius
    1.2. Using DiskGenius
2. Restoring the Factory Image
    2.1. Installing Win32DiskImager
    2.2. Using Win32DiskImager
3. Description


Note: Users need to prepare an SSD enclosure in advance, install the SSD into the SSD enclosure, and connect it to the computer for formatting and system writing.

1. Formatting the SSD


Before restoring the factory image, the SSD needs to be formatted into exFAT format.

1.1. Downloading DiskGenius

Download URL: https://www.diskgenius.com/

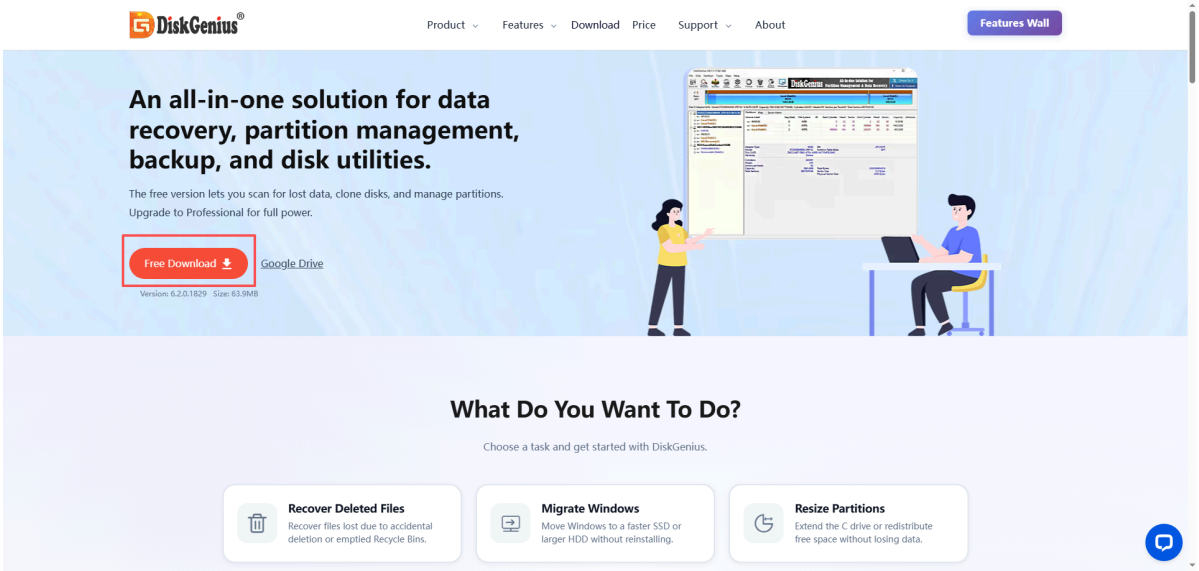



Decompress the downloaded archive to open and use `DiskGenius.exe`:

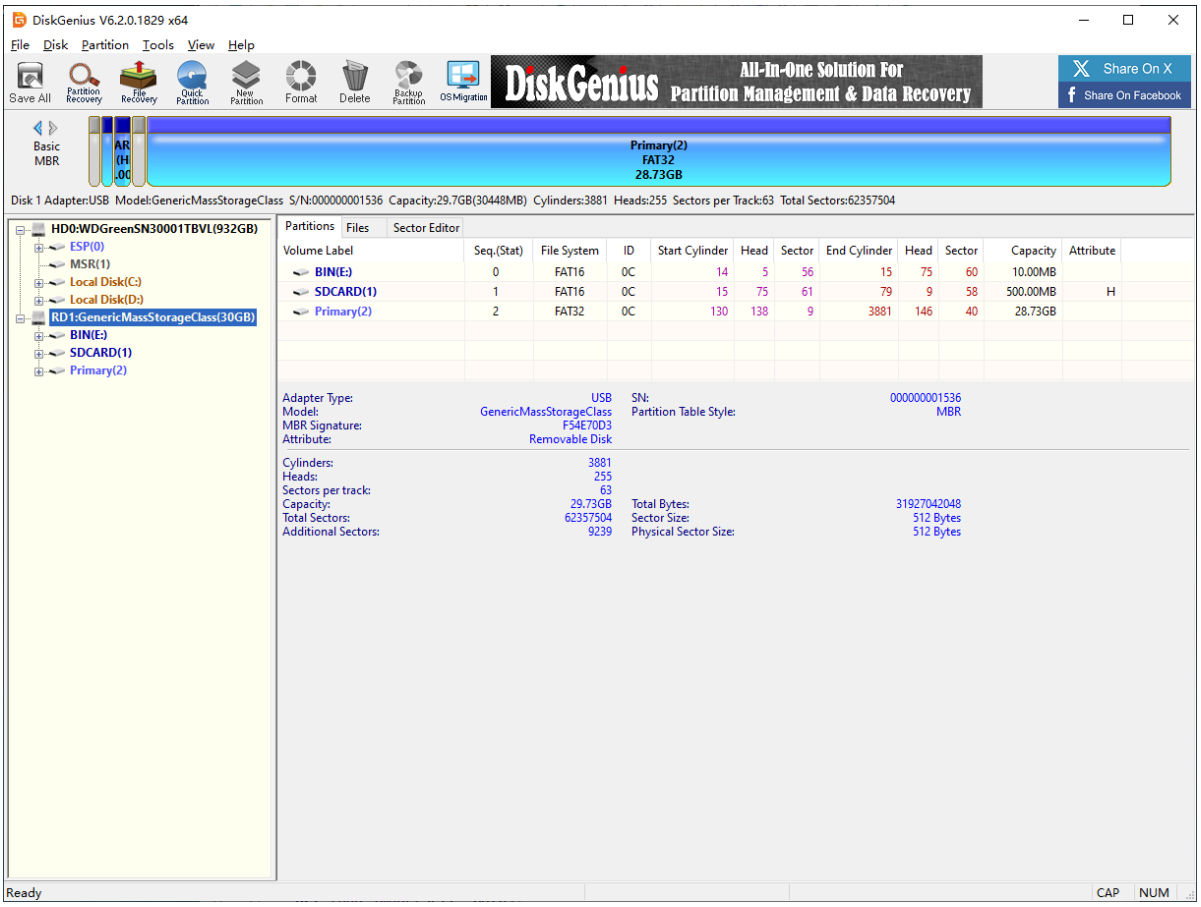



1.2. Using DiskGenius


Deleting a partition will clear the disk data. Confirm that the drive letter is the disk to be formatted before confirming the operation: you can judge by the disk size and the drive letter newly added after the disk is connected

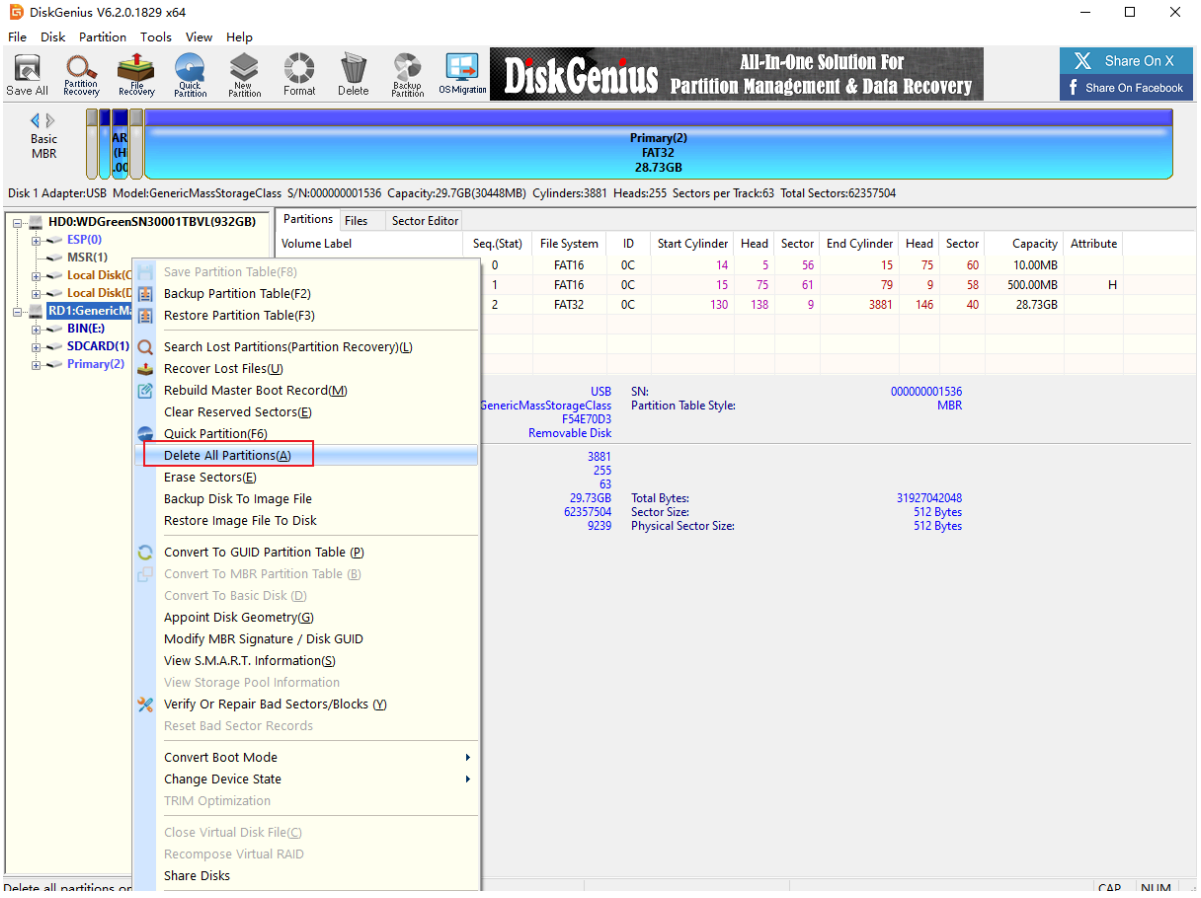


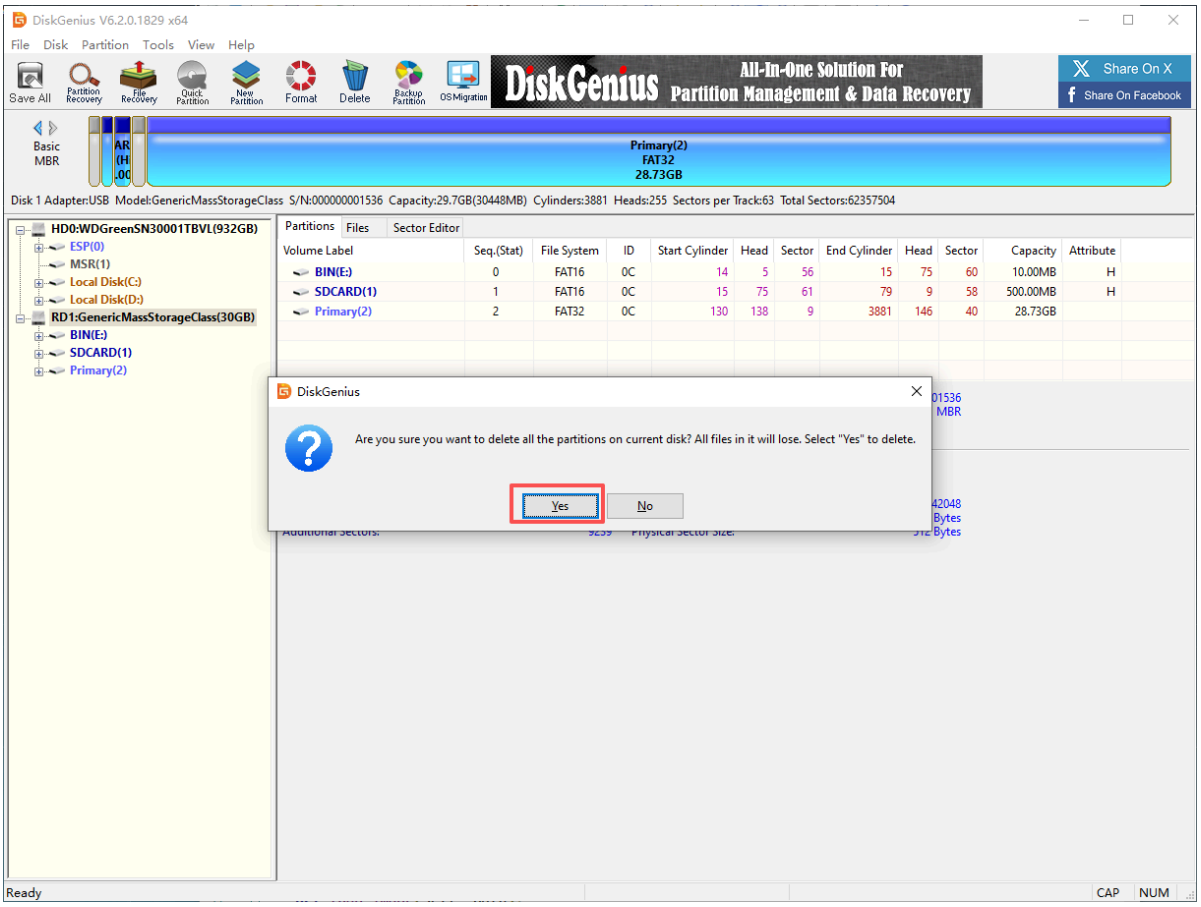
DiskGenius V6.2.0.1829 x64
File Disk Partition Tools View Help
Save All
Partition Recovery
File Recovery
Quick Partition
New Partition
Format
Delete
Backup Partition
OS Migration
DiskGenius All-In-One Solution For Partition Management & Data Recovery
Share On X
Share On Facebook
Basic MBR
Primary(2)
FAT32
28.73GB
Disk 1 Adapter:USB Model:GenericMassStorageClass S/N:000000001536 Capacity:29.7GB(30448MB) Cylinders:3881 Heads:255 Sectors per Track:63 Total Sectors:62357504
HD0:WDGreenSN30001TBVL(932GB)
ESP(0)
MSR(1)
Local Disk(C:)
Local Disk(D:)
RD1:GenericMassStorageClass(30GB)
BIN(E:)
SDCARD(1)
Primary(2)
Partitions
Files
Sector Editor
Volume Label
Seq.(Stat)
File System
ID
Start Cylinder
Head
Sector
End Cylinder
Head
Sector
Capacity
Attribute
BIN(E:) 0 FAT16 0C 14 5 56 15 75 60 10.00MB H
SDCARD(1) 1 FAT16 0C 15 75 61 79 9 58 500.00MB H
Primary(2) 2 FAT32 0C 130 138 9 3881 146 40 28.73GB
DiskGenius
Are you sure you want to delete all the partitions on current disk? All files in it will lose. Select "Yes" to delete.
Yes
No
Ready
CAP
NUM

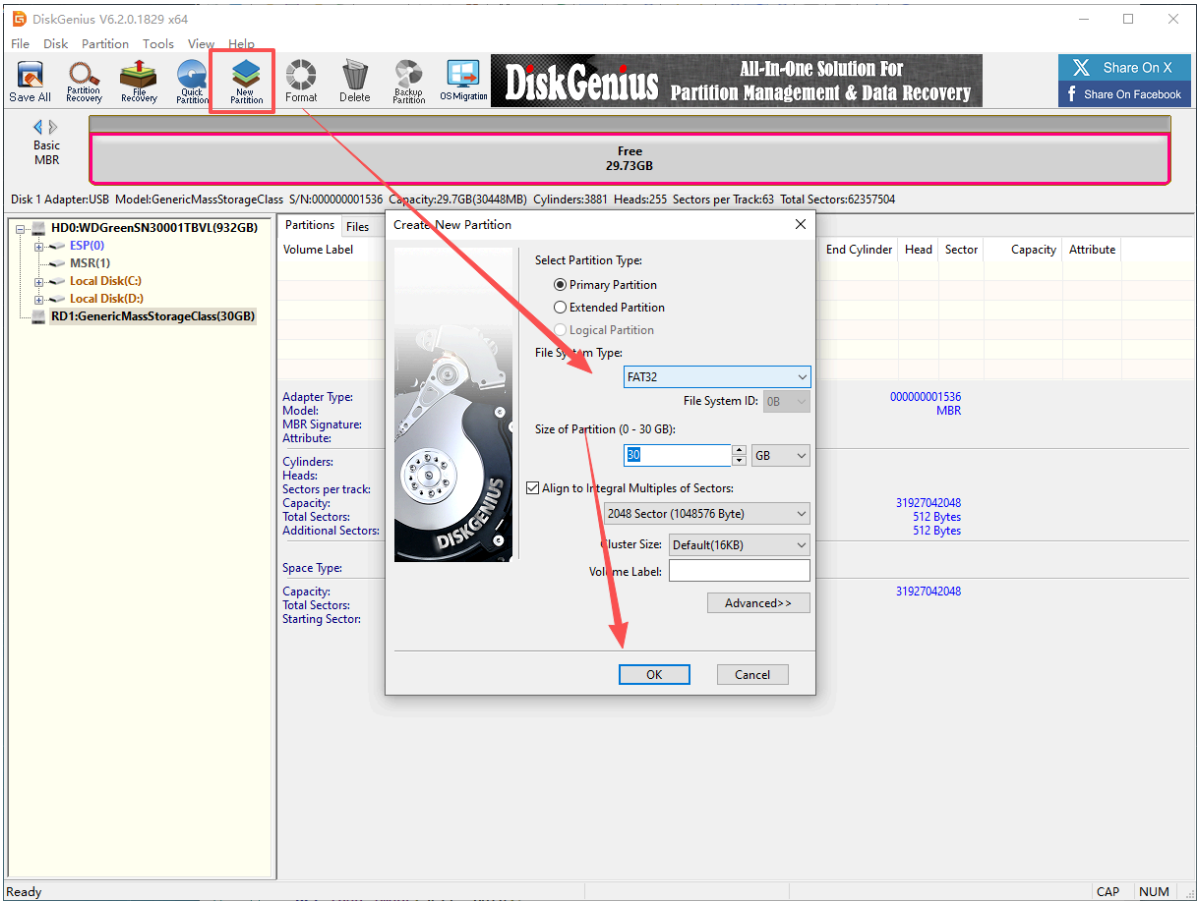
DiskGenius V6.2.0.1829 x64
File Disk Partition Tools View Help
Save All
Partition Recovery
File Recovery
Quick Partition
New Partition
Format
Delete
Backup Partition
OS Migration
DiskGenius All-In-One Solution For Partition Management & Data Recovery
Share On X
Share On Facebook
Basic MBR
Free
29.73GB
Disk 1 Adapter:USB Model:GenericMassStorageClass S/N:000000001536 Capacity:29.7GB(30448MB) Cylinders:3881 Heads:255 Sectors per Track:63 Total Sectors:62357504
HD0:WDGreenSN30001TBVL(932GB)
ESP(0)
MSR(1)
Local Disk(C:)
Local Disk(D:)
RD1:GenericMassStorageClass(30GB)
Partitions
Files
Volume Label
End Cylinder
Head
Sector
Capacity
Attribute
Create New Partition
Select Partition Type:
Primary Partition
Extended Partition
Logical Partition
File System Type:
FAT32
File System ID: 0B
Size of Partition (0 - 30 GB):
30
GB
Align to Integral Multiples of Sectors:
2048 Sector (1048576 Byte)
Cluster Size: Default(16KB)
Volume Label:
Advanced>>
OK
Cancel
Adapter Type:
Model:
MBR Signature:
Attribute:
Cylinders:
Heads:
Sectors per track:
Capacity:
Total Sectors:
Additional Sectors:
Space Type:
Capacity:
Total Sectors:
Starting Sector:
000000001536
MBR
31927042048
512 Bytes
512 Bytes
31927042048
Ready
CAP
NUM

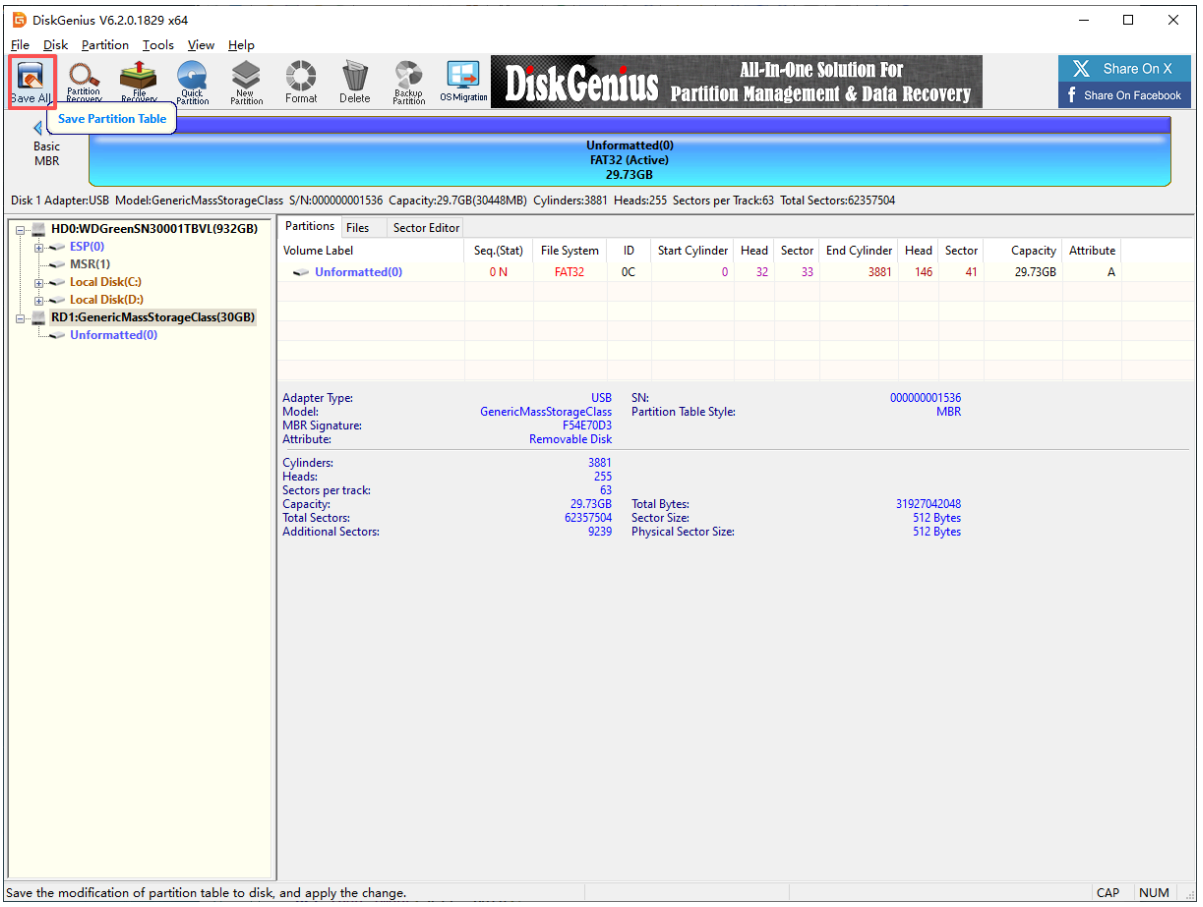
DiskGenius V6.2.0.1829 x64
File Disk Partition Tools View Help
Save All
Partition Recovery
File Recovery
Quick Partition
New Partition
Format
Delete
Backup Partition
OS Migration
DiskGenius All-In-One Solution For Partition Management & Data Recovery
Share On X
Share On Facebook
Save Partition Table
Basic MBR
Unformatted(0)
FAT32 (Active)
29.73GB
Disk 1 Adapter:USB Model:GenericMassStorageClass S/N:000000001536 Capacity:29.7GB(30448MB) Cylinders:3881 Heads:255 Sectors per Track:63 Total Sectors:62357504
HD0:WDGreenSN30001TBVL(932GB)
ESP(0)
MSR(1)
Local Disk(C:)
Local Disk(D:)
RD1:GenericMassStorageClass(30GB)
Unformatted(0)
Partitions Files Sector Editor
Volume Label Seq.(Stat) File System ID Start Cylinder Head Sector End Cylinder Head Sector Capacity Attribute
Unformatted(0) 0 N FAT32 0C 0 32 33 3881 146 41 29.73GB A
Adapter Type: USB
Model: GenericMassStorageClass
MBR Signature: F54E70D3
Attribute: Removable Disk
SN: 000000001536
Partition Table Style: MBR
Cylinders: 3881
Heads: 255
Sectors per track: 63
Capacity: 29.73GB
Total Sectors: 62357504
Additional Sectors: 9239
Total Bytes: 31927042048
Sector Size: 512 Bytes
Physical Sector Size: 512 Bytes
Save the modification of partition table to disk, and apply the change.
CAP
NUM

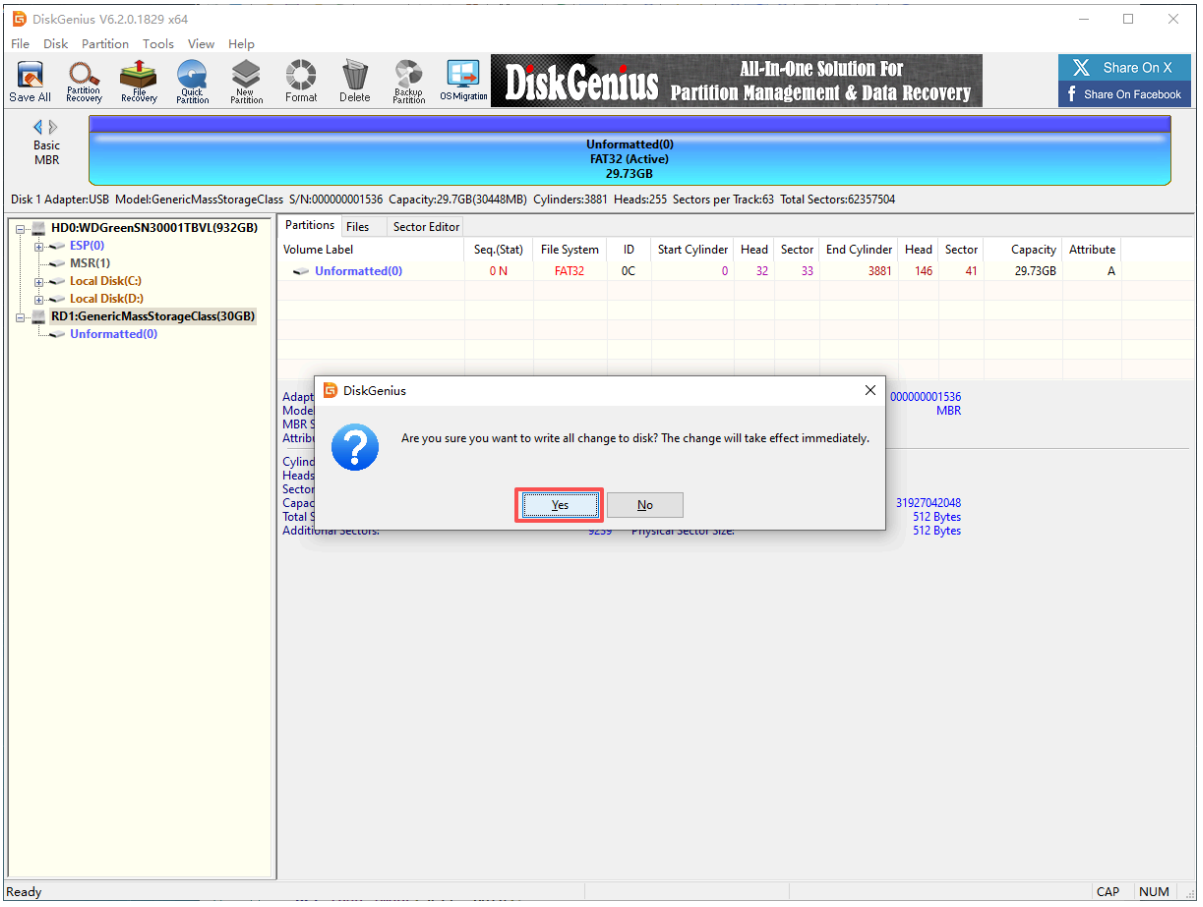
DiskGenius V6.2.0.1829 x64
File Disk Partition Tools View Help
Save All
Partition Recovery
File Recovery
Quick Partition
New Partition
Format
Delete
Backup Partition
OS Migration
DiskGenius All-In-One Solution For Partition Management & Data Recovery
Share On X
Share On Facebook
Basic MBR
Unformatted(0)
FAT32 (Active)
29.73GB
Disk 1 Adapter:USB Model:GenericMassStorageClass S/N:000000001536 Capacity:29.7GB(30448MB) Cylinders:3881 Heads:255 Sectors per Track:63 Total Sectors:62357504
HD0:WDGreenSN30001TBVL(932GB)
ESP(0)
MSR(1)
Local Disk(C:)
Local Disk(D:)
RD1:GenericMassStorageClass(30GB)
Unformatted(0)
Partitions Files Sector Editor
Volume Label Seq.(Stat) File System ID Start Cylinder Head Sector End Cylinder Head Sector Capacity Attribute
Unformatted(0) 0 N FAT32 0C 0 32 33 3881 146 41 29.73GB A
DiskGenius
Are you sure you want to write all change to disk? The change will take effect immediately.
Yes
No
000000001536
MBR
31927042048
512 Bytes
512 Bytes
Ready
CAP
NUM

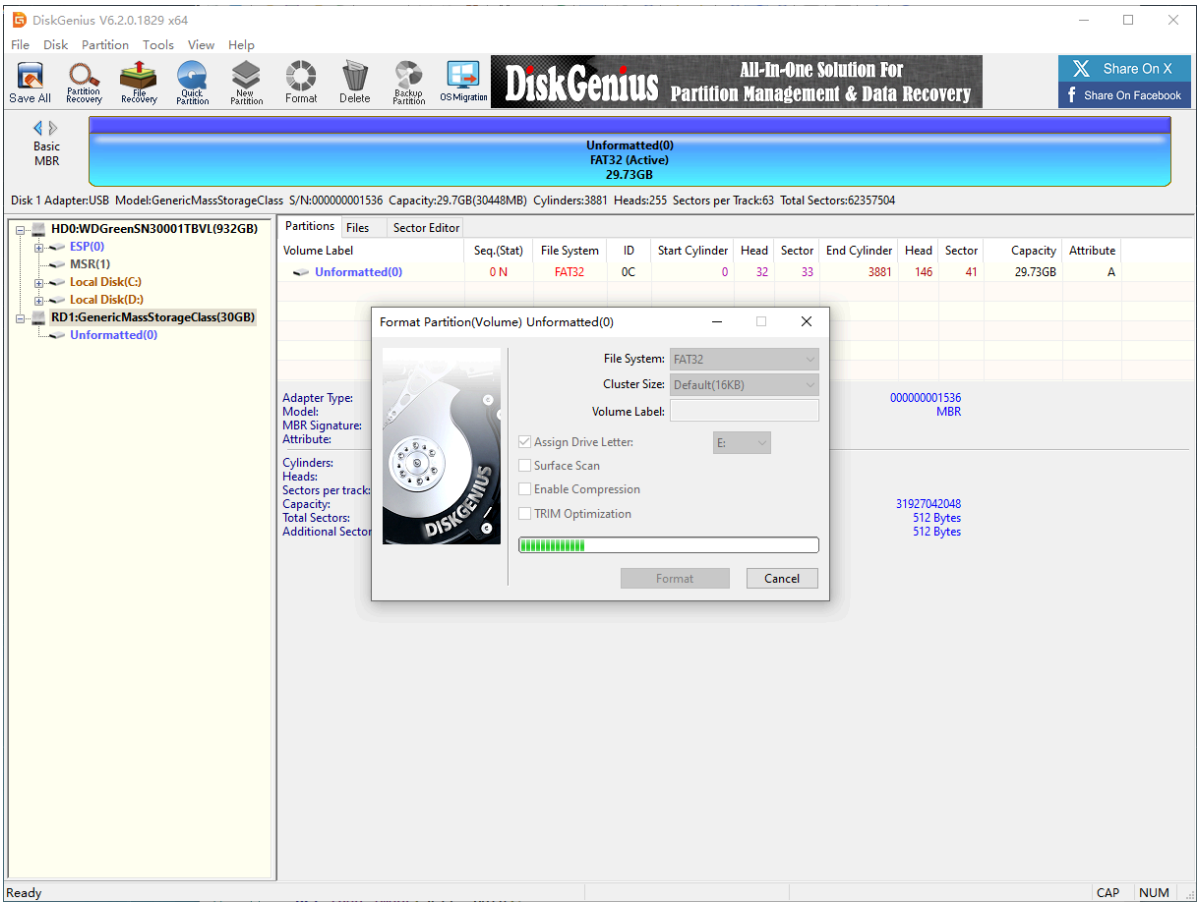

The drive letter can be seen after formatting.


2. Restoring the Factory Image

The factory image system in the materials needs to be downloaded and decompressed locally in advance.


> Note: Close DiskGenius before use. If DiskGenius is running while writing the system, an error will be reported!!

2.1. Installing Win32DiskImager


Download URL: https://sourceforge.net/projects/win32diskimager/

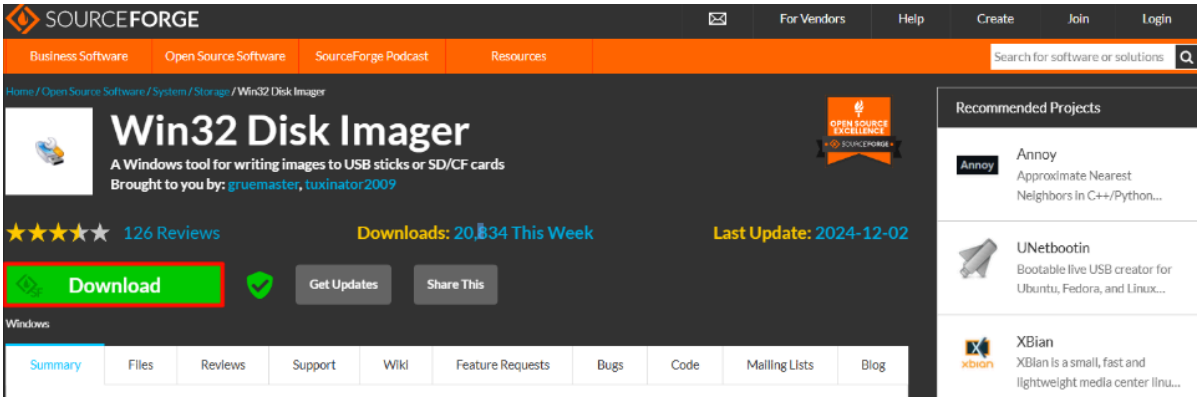


Open the `win32diskimager-1.0.0-install.exe` installation package as an administrator and accept the agreement:

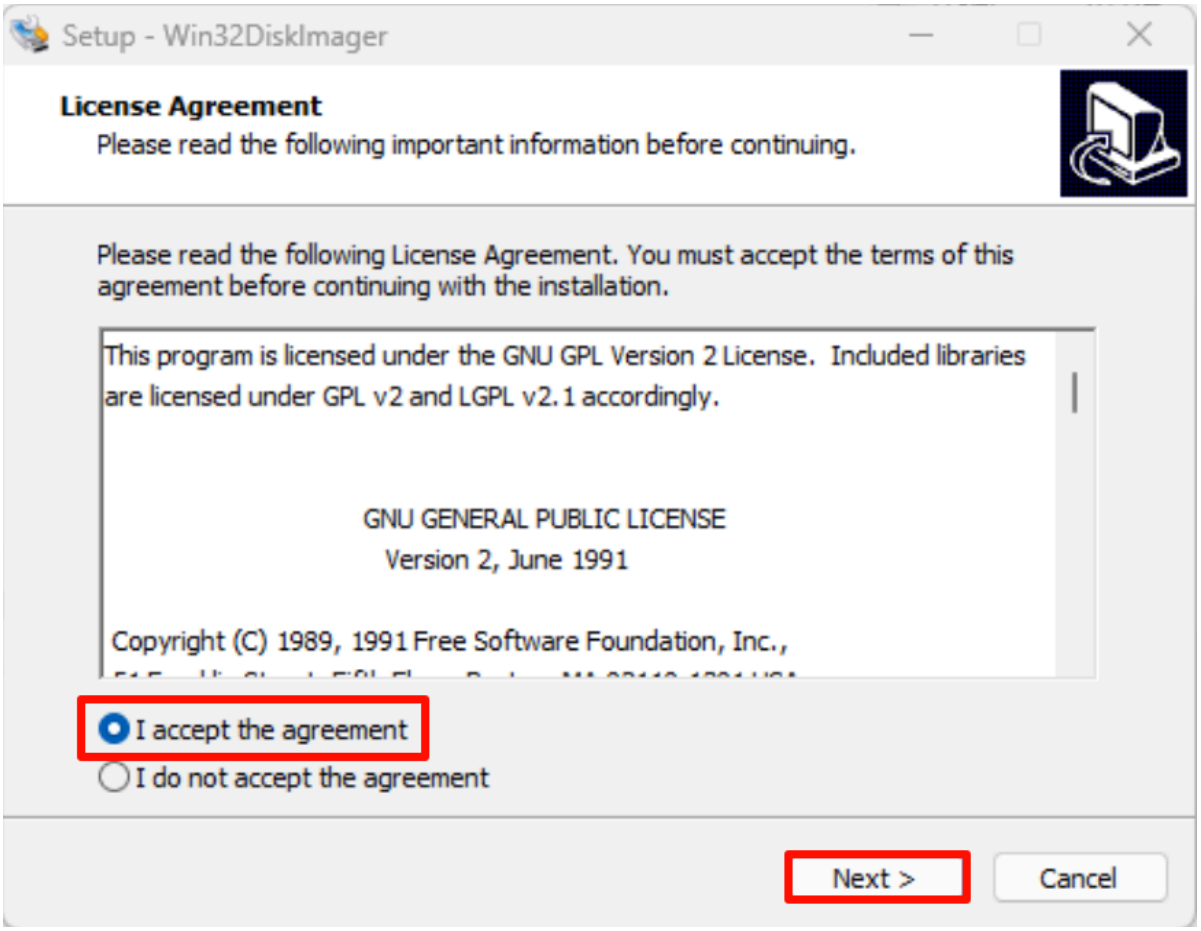


Installation location: The default location is recommended

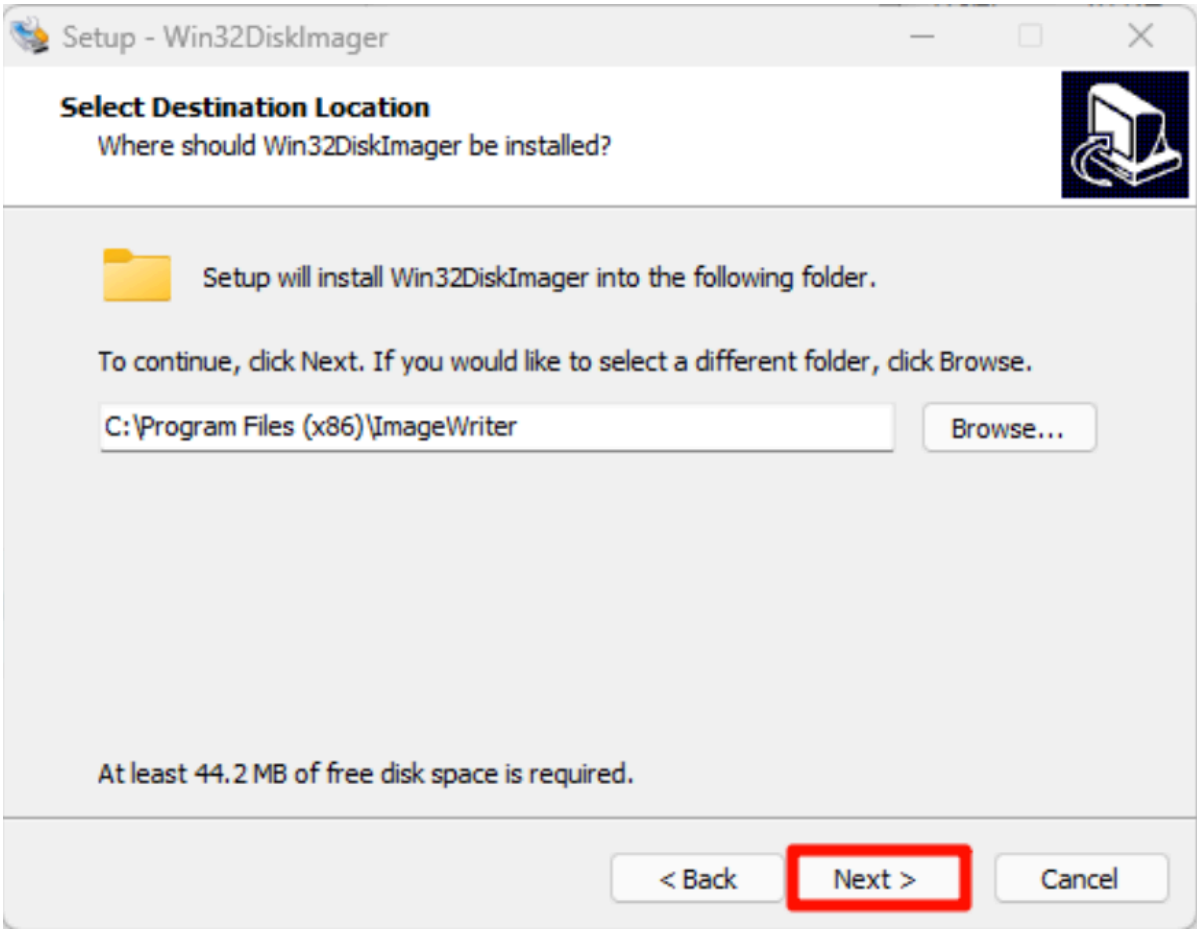


Installation options:

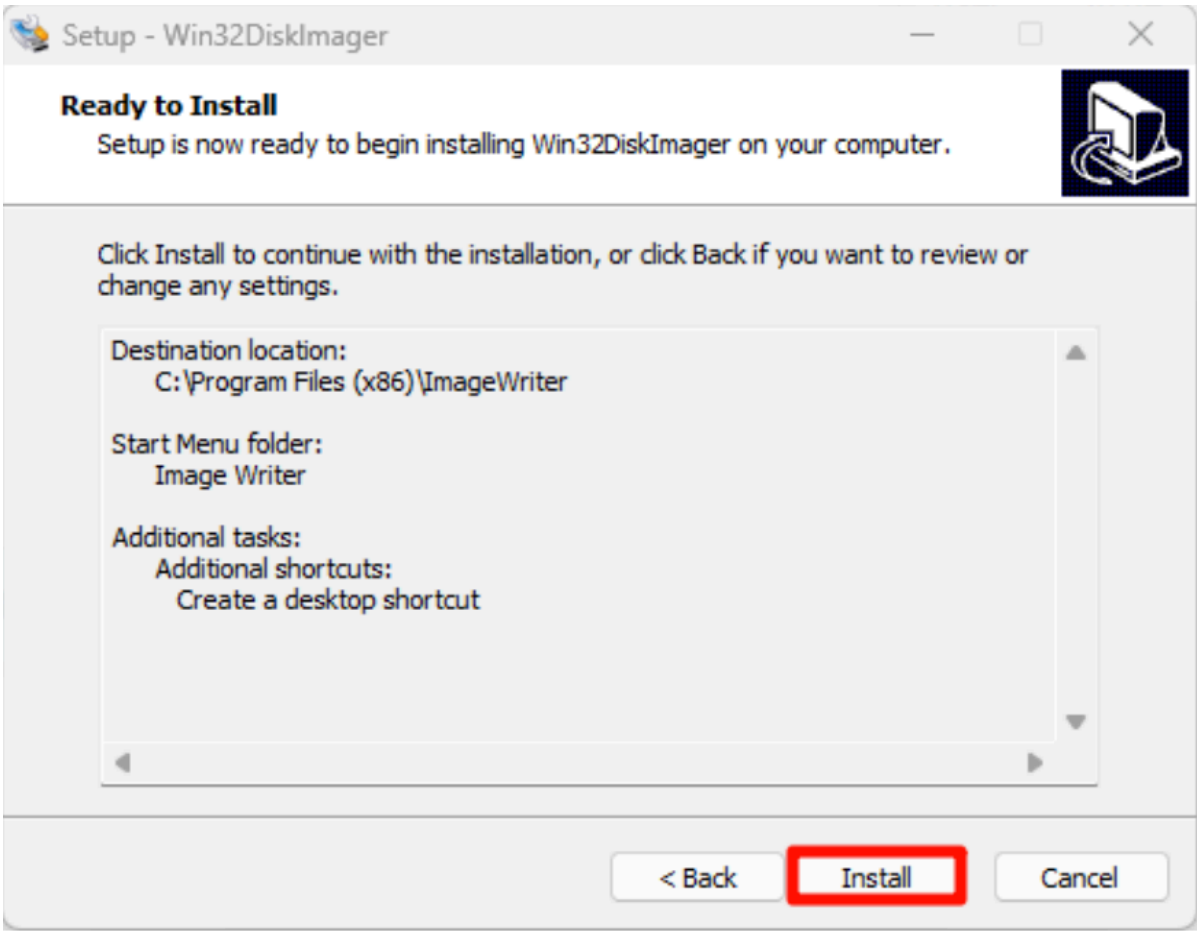


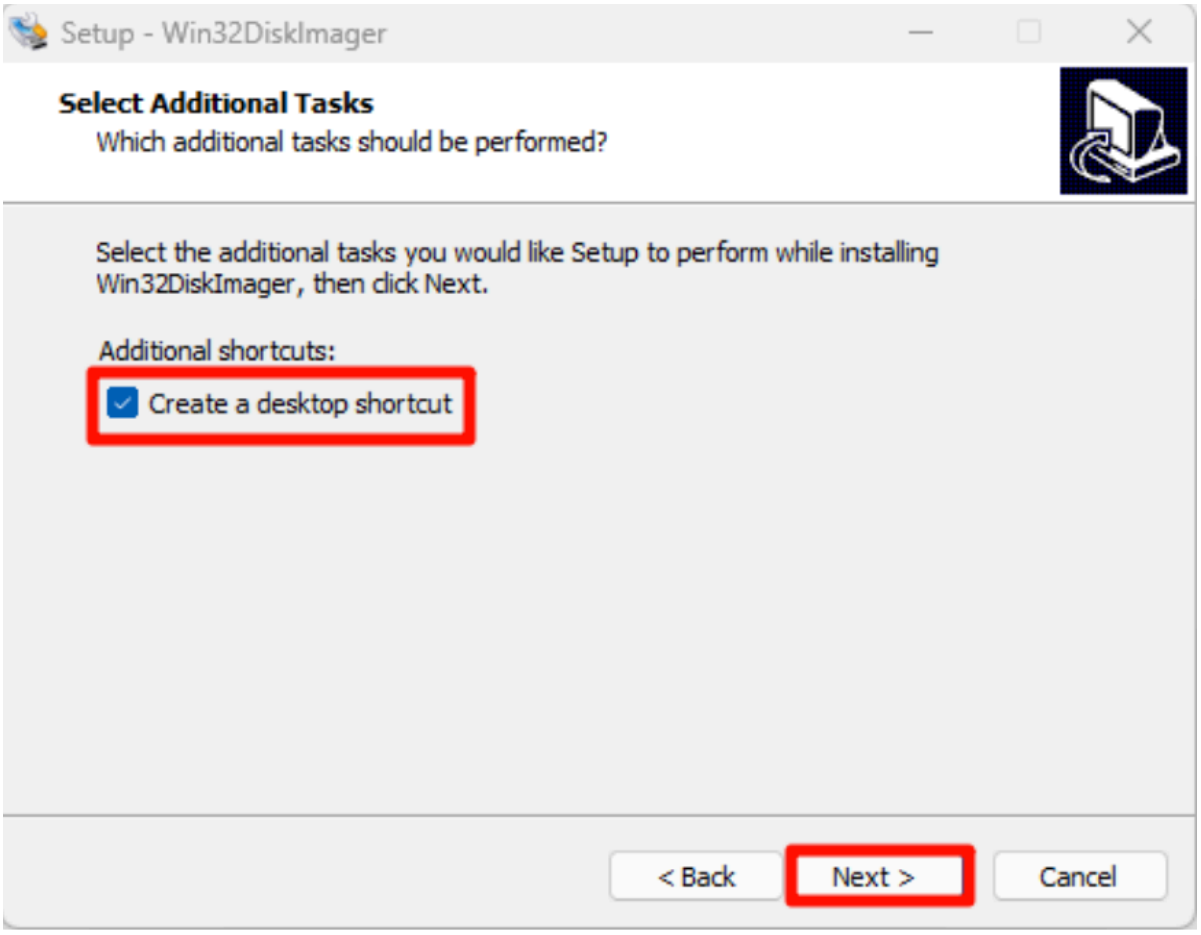

Start the installation:

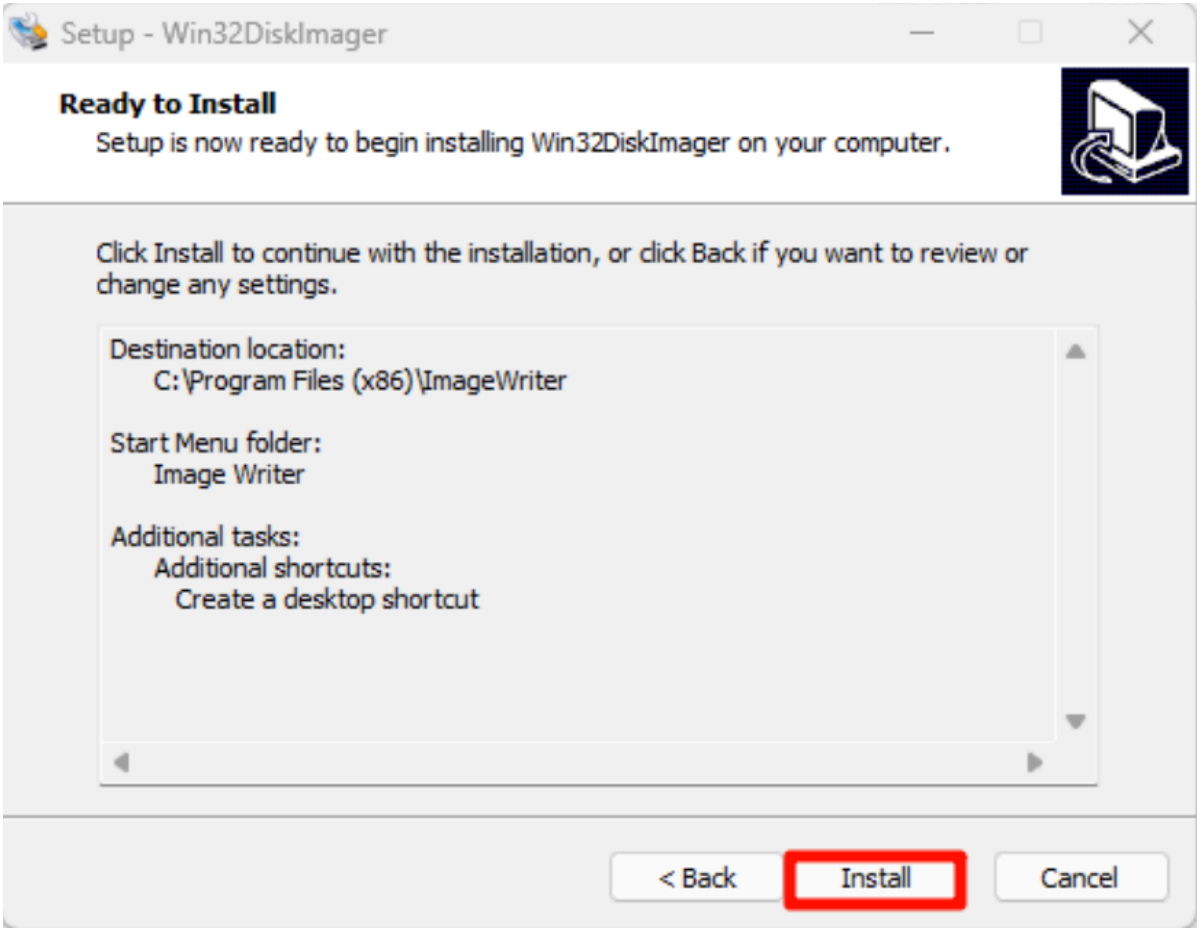

Complete the installation:

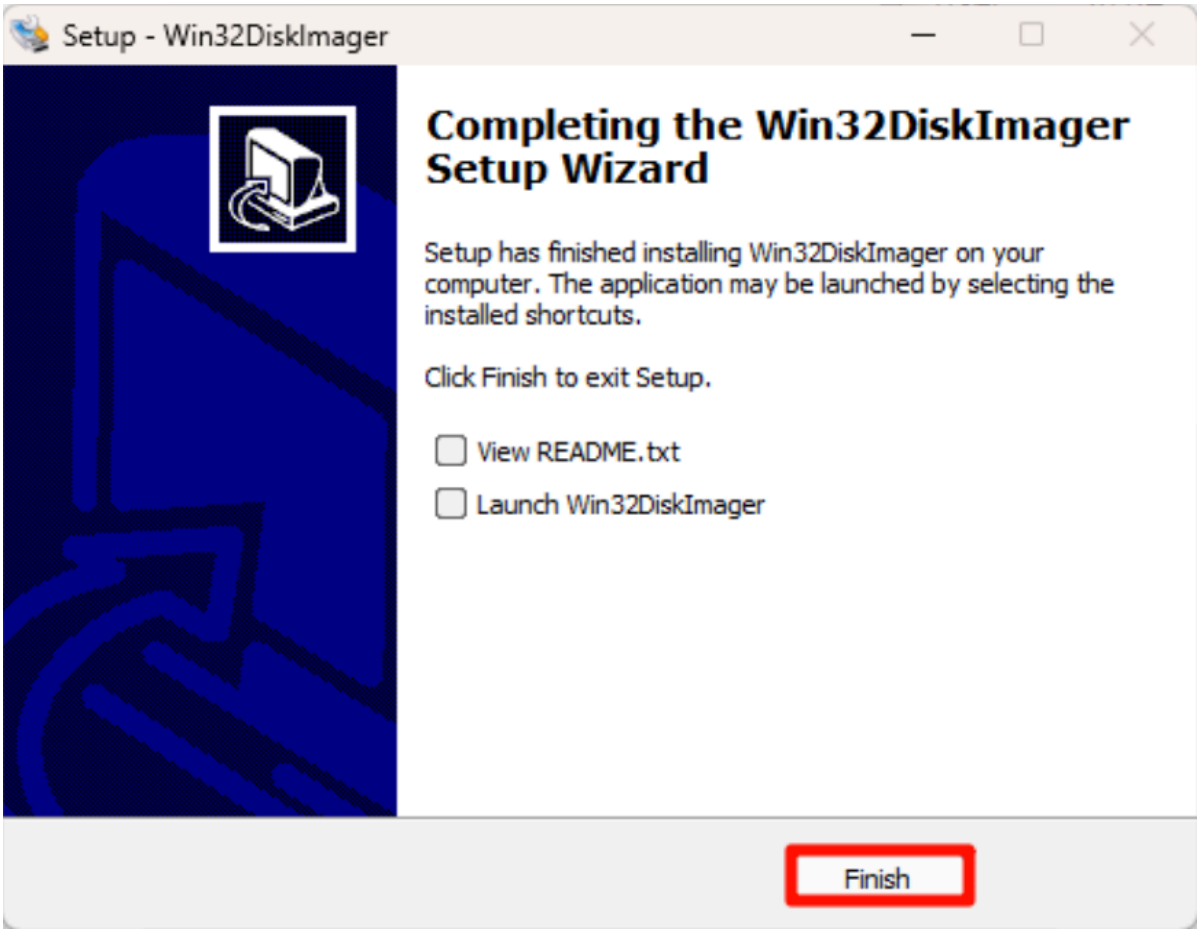


2.2. Using Win32DiskImager


①: Select the factory image file (*.img) in the materials

②: Select the drive letter corresponding to the SSD


③: Write the factory image to the SSD

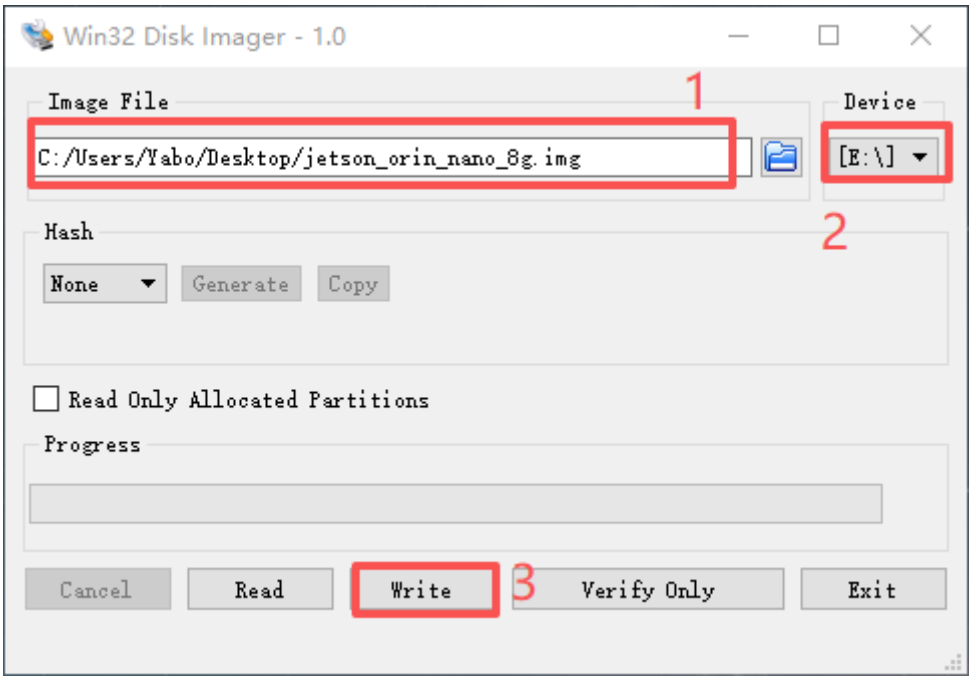


Confirm writing to the system:

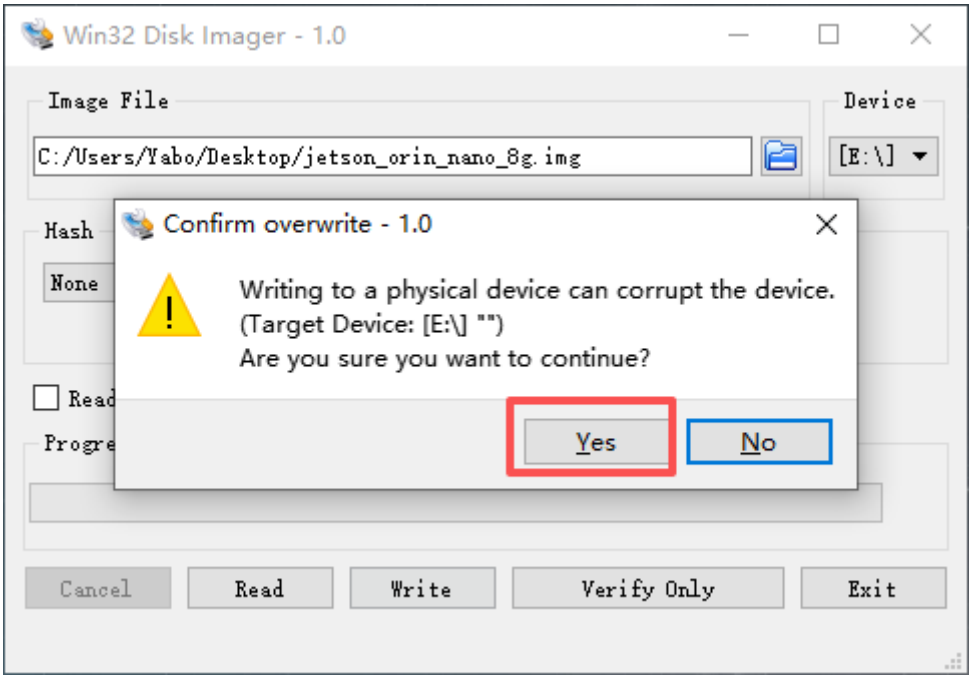

Wait for the system to be written successfully:

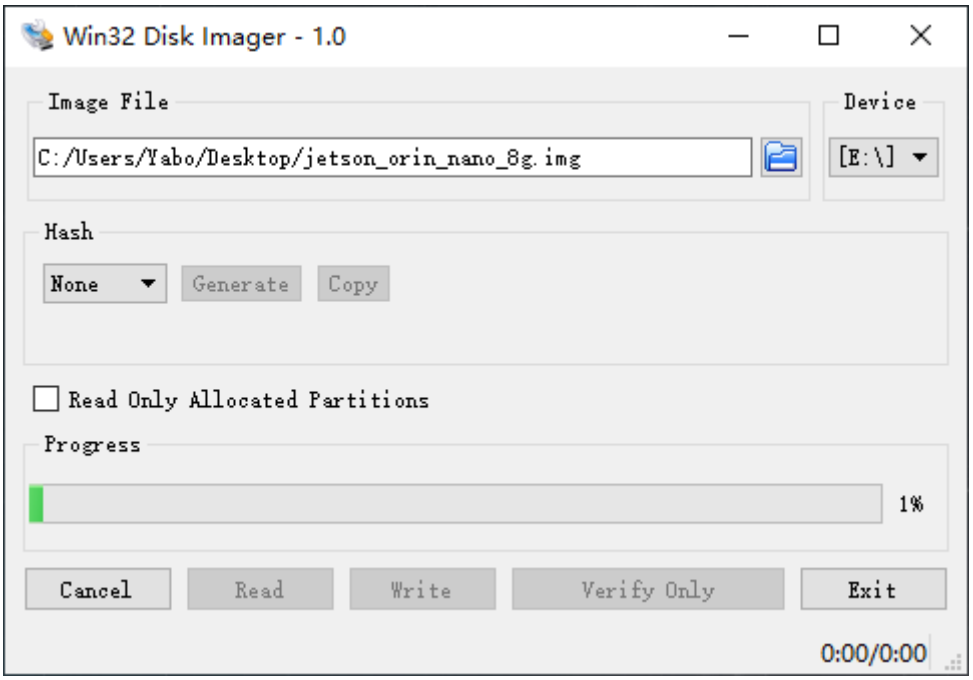

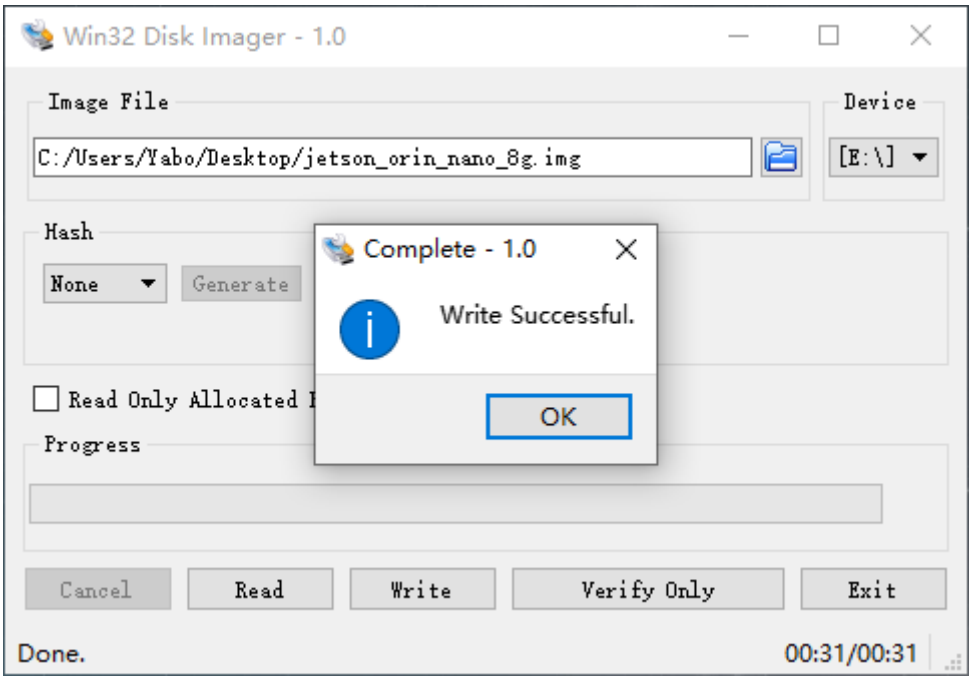

After the system writing is complete, close the program and install the SSD into the Jetson Orin mainboard!

3. Description

Whether the Jetson mainboard can start the system normally depends on the Jetpack version of the system; generally only systems of the same version can start!