

Personalized Wake-up Response

Personalized Wake-up Response

1. Course Content
2. Preparing Audio Files
3. Loading Audio Files

1. Course Content


- Adding audio files to the muto_llm program's audio library allows you to customize the wake-up voice response.

[!NOTE]

- This section of the tutorial is only for users who need to customize their voice response; it does not affect normal use.
- If you do not need to customize your voice response, you can skip this section.

2. Preparing Audio Files

- You can prepare the audio material for the voice reply yourself.
- Alternatively, you can generate the voice using the system's built-in `generate_voice` command. The voice generation model uses the Bailian platform's speech synthesis model, so you need to configure `ALIBABA_API_KEY` according to the tutorial in `02-Configuring API-KEY` of this chapter first.
- Pre-configure Bailian API-KEY

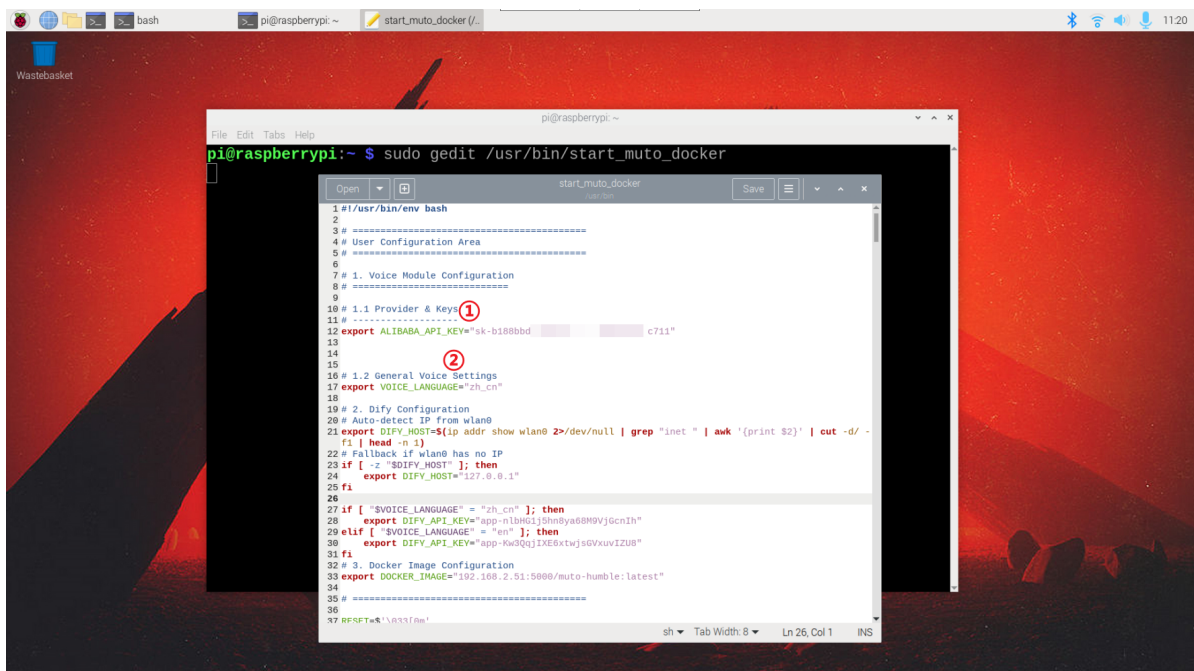

```
pi@raspberrypi: ~  
pi@raspberrypi:~$ sudo gedit /usr/bin/start_muto_docker  
File Edit Tabs Help  
start_muto_docker  
1 #!/usr/bin/env bash  
2  
3 # =====  
4 # User Configuration Area  
5 # =====  
6  
7 # 1. Voice Module Configuration  
8 # =====  
9  
10 # 1.1 Provider & Keys  
11 # -----  
12 export ALIBABA_API_KEY="sk-b188b8bd c711"  
13  
14  
15  
16 # 1.2 General Voice Settings  
17 export VOICE_LANGUAGE="zh_cn"  
18  
19 # 2. Dify Configuration  
20 # Auto-detect IP from wlan0  
21 export DIFY_HOST=$(ip addr show wlan0 2>/dev/null | grep "inet " | awk '{print $2}' | cut -d/ -f1 | head -n 1)  
22 # Fallback if wlan0 has no IP  
23 if [ -z "$DIFY_HOST" ]; then  
24     export DIFY_HOST="127.0.0.1"  
25 fi  
26  
27 if [ "$VOICE_LANGUAGE" = "zh_cn" ]; then  
28     export DIFY_API_KEY="app-m1bkg1j0ndya88h9vj6cn2h"  
29 elif [ "$VOICE_LANGUAGE" = "en" ]; then  
30     export DIFY_API_KEY="app-kw3qgjIXE6xtwjs6VxuvIZU8"  
31 fi  
32 # 3. Docker Image Configuration  
33 export DOCKER_IMAGE="192.168.2.51:5080/muto-humble:latest"  
34  
35 # =====  
36  
37 # =====
```

- Run the command in the terminal

```
generate_voice --text "hello"
```

- Where `--text` is the startup parameter, and "hello" should be replaced with the content of the voice you want to synthesize.

```
root@raspberrypi:~# generate_voice --text "hello"
VoiceInterface initialized with region: china, language: en, STT provider: xunfei, TTS provider: xunfei
Initializing TTS...TTS Provider xunfei
Done.
Setting voice to: Cherry
Generating voice for: hello
Saving to: /root/muto-llm-2.0/packages/voice_module/voice_module/audio/system_sounds/en/sentence_i_am_here/voice_1768903622.wav
Generated audio file: /root/muto-llm-2.0/packages/voice_module/voice_module/audio/system_sounds/en/sentence_i_am_here/voice_1768903622.wav
Playing with aplay...
Playing WAVE '/root/muto-llm-2.0/packages/voice_module/voice_module/audio/system_sounds/en/sentence_i_am_here/voice_1768903622.wav' : Signed 16 bit Little Endian, Rate 16000 Hz, Mono
root@raspberrypi:~#
```

- Audio files will be automatically saved in the `~/generate_voices/` directory.

[!NOTE]

Other optional startup parameters are as follows:

- `--voice`: Speaker, default `Cherry`
- `--language_type`: Language, default `Chinese`
- `--save_path`: Audio file save path, default `~/generate_voices/`
- `--text`: Text to be synthesized audio, default is empty

For available speakers and speech synthesis models, please refer to the dynamic notifications on the Bailian official website: https://bailian.console.aliyun.com/?spm=5176.29619931.j_SEsSjsNv72y.RuRFS2VknO.2.74cd10d73l2Pw5&tab=doc#/doc/?type=model&url=2879134

- Reference Model:

Model availability

We recommend Qwen3-TTS-Flash.

Qwen3-TTS-Flash offers 49 voices and supports multiple languages and dialects.

Qwen-TTS offers up to 7 voices and supports only Chinese and English.

International (Singapore)China (Beijing)	
Model	Version
qwen3-tts-flash Capabilities are identical to qwen3-tts-flash-2025-09-18.	Stable
qwen3-tts-flash-2025-11-27	Snapshot
qwen3-tts-flash-2025-09-18	Snapshot

- Reference Timbre

Qwen3-TTS-Flash

Supported voices vary by models. Set the `voice` request parameter

View supported voices of qwen3-tts-flash-2025-11-27

Name	<code>voice</code> parameter
Cherry	Cherry
Serena	Serena
Serena	Ethan
Chelsie	Chelsie
Momo	Momo
Vivian	Vivian
Moon	Moon


- Supported Languages

Chinese, English, Spanish, Russian, Italian, French, Korean, Japanese, German, Portuguese

3. Loading Audio Files

- muto-llm system audio path:

```
/root/muto-llm-2.0/packages/voice_module/voice_module/audio/system_sounds
```

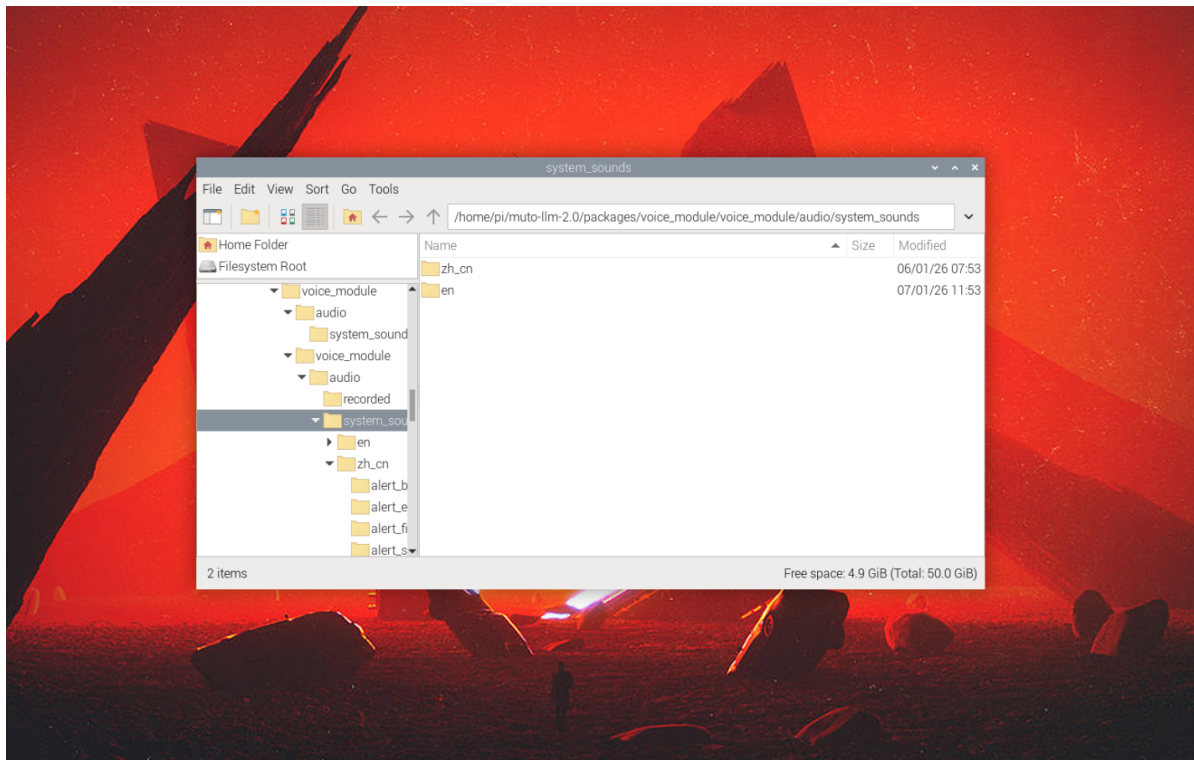

- Where:
- en is the English response voice, suitable for international users. Place the prepared audio file in the following directory:

```
/home/pi/muto-llm-2.0/packages/voice_module/voice_module/audio/system_sounds/en/sentence_i_am_here
```

- When the muto-llm program is launched, the audio file in the corresponding directory will be automatically loaded, and a personalized response voice will be randomly played when the user wakes up.