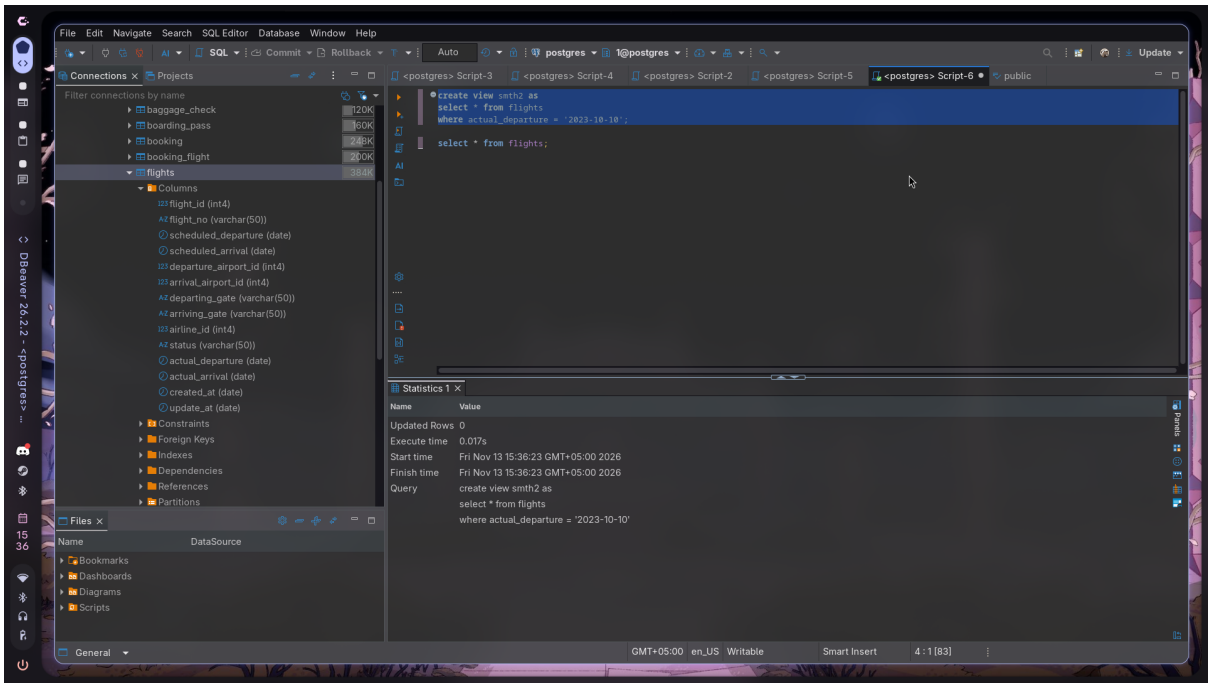
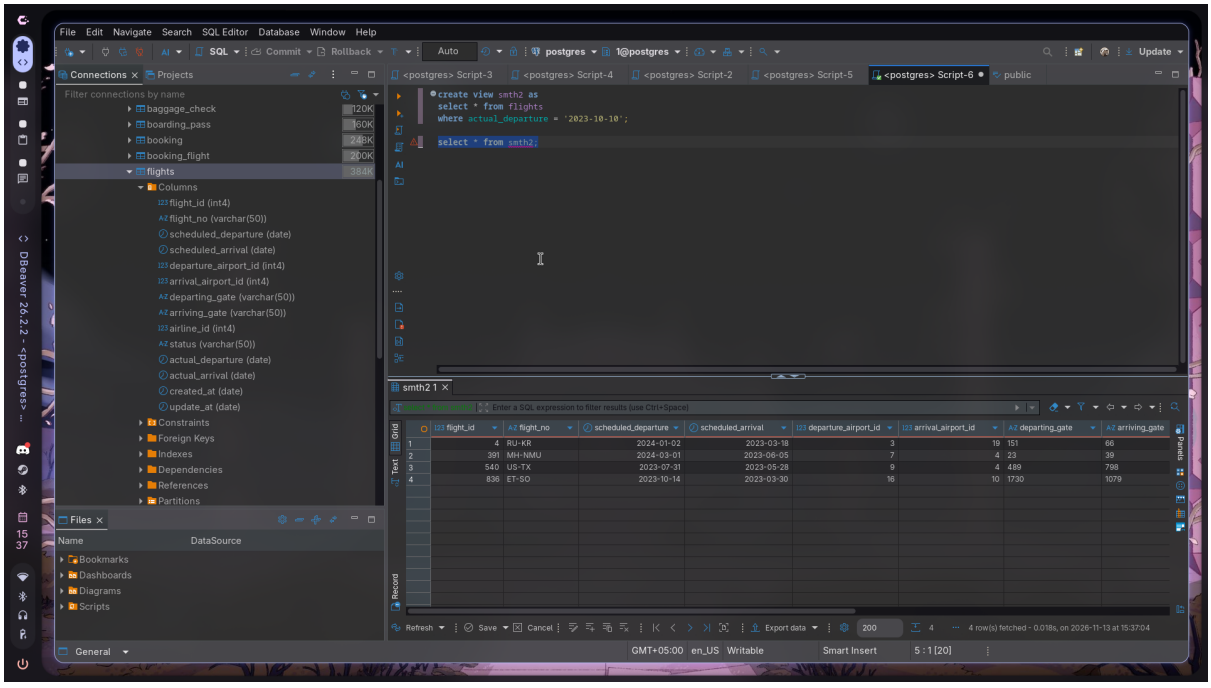
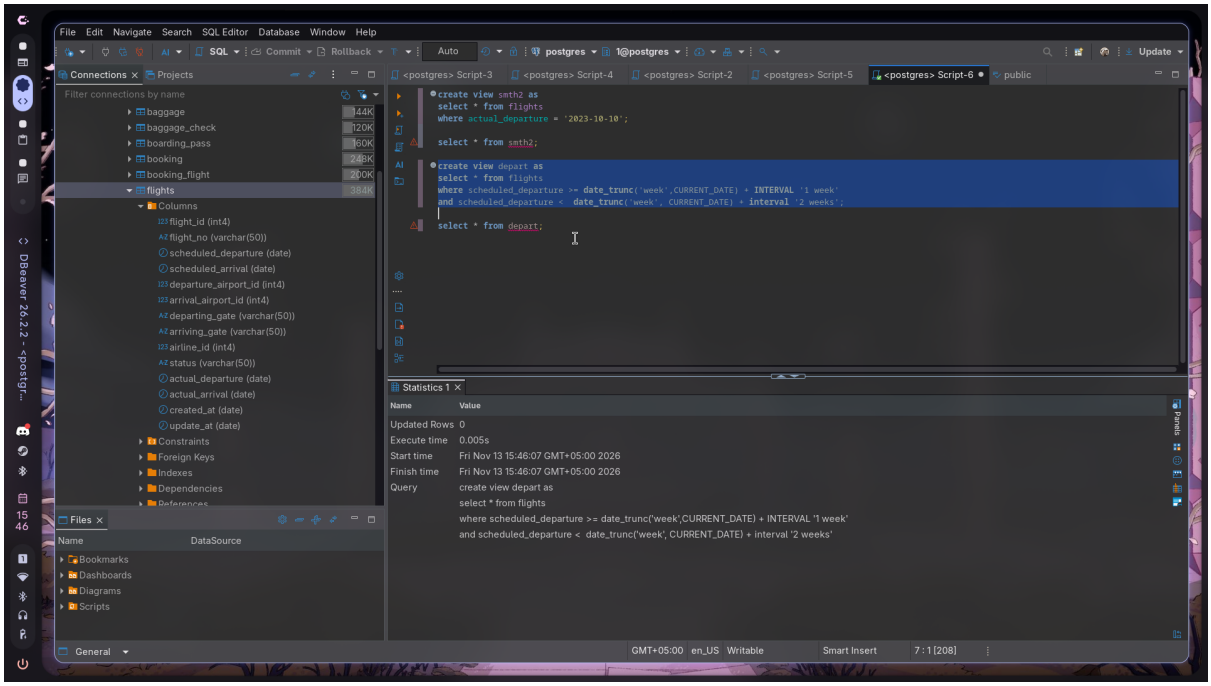
lab8
Bekmurza Alnur

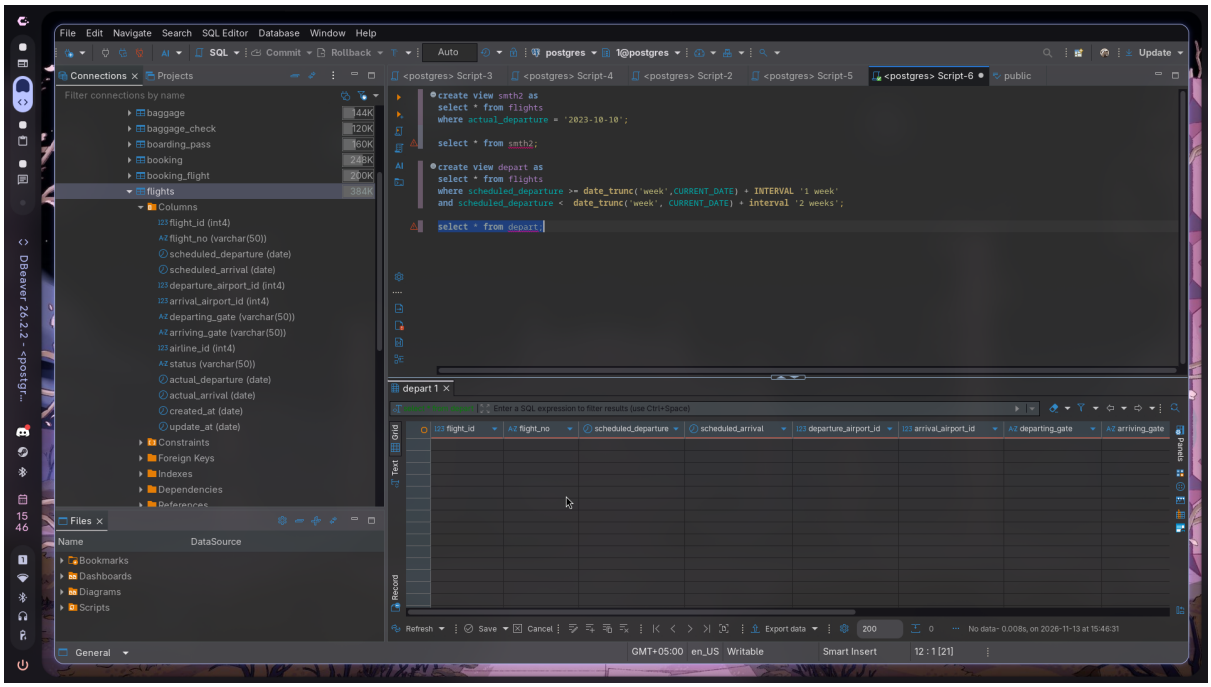
1)



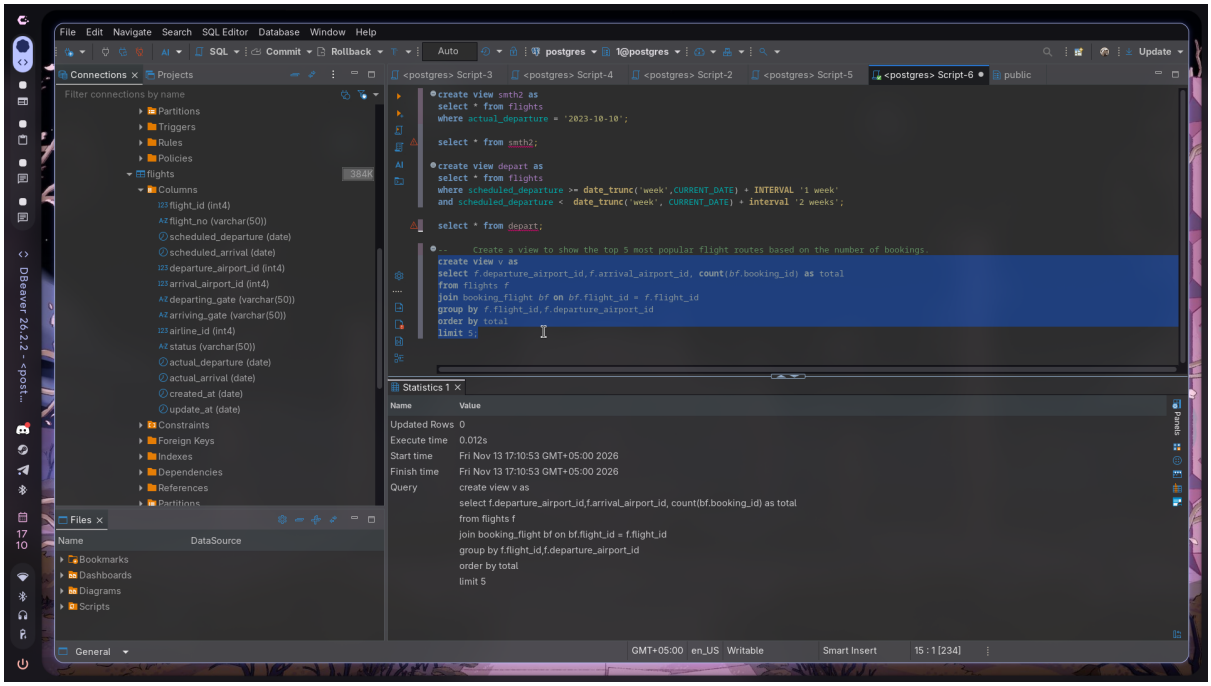


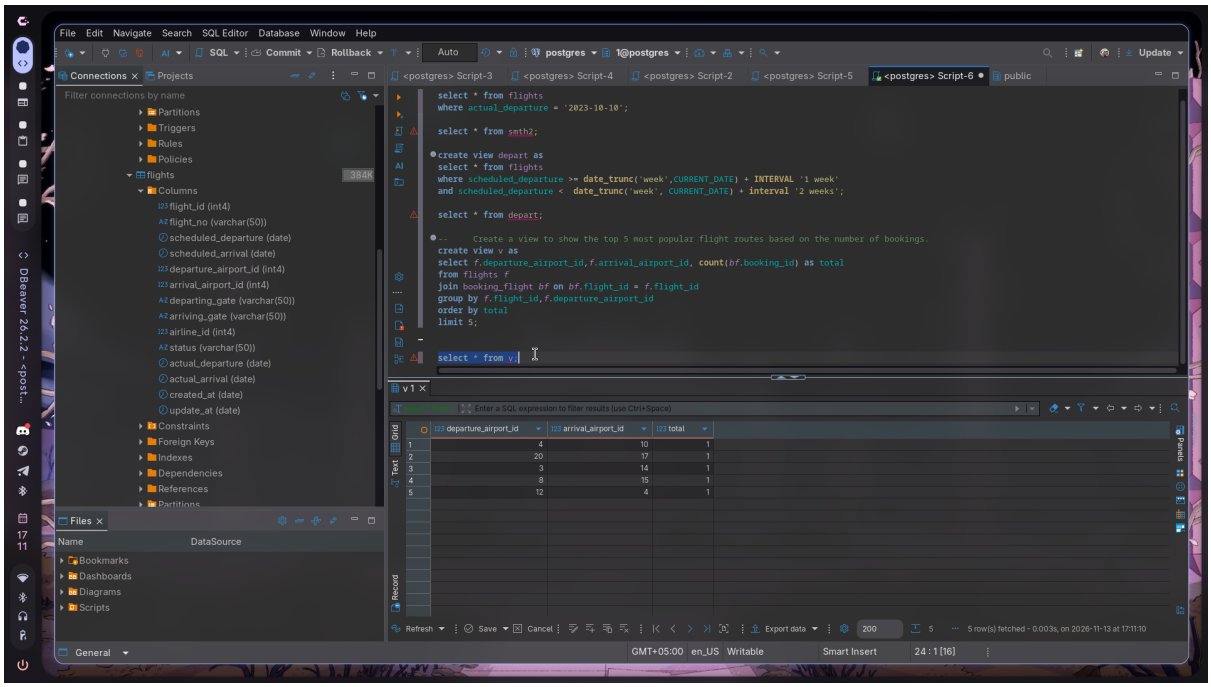
2)


create view smth2 as
select * from flights
where actual_departure = '2023-10-10';
select * from smth2;
create view depart as
select * from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from depart;
Statistics 1
Updated Rows 0
Execute time 0.005s
Start time Fri Nov 13 15:46:07 GMT+05:00 2026
Finish time Fri Nov 13 15:46:07 GMT+05:00 2026
Query create view depart as
select * from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks'

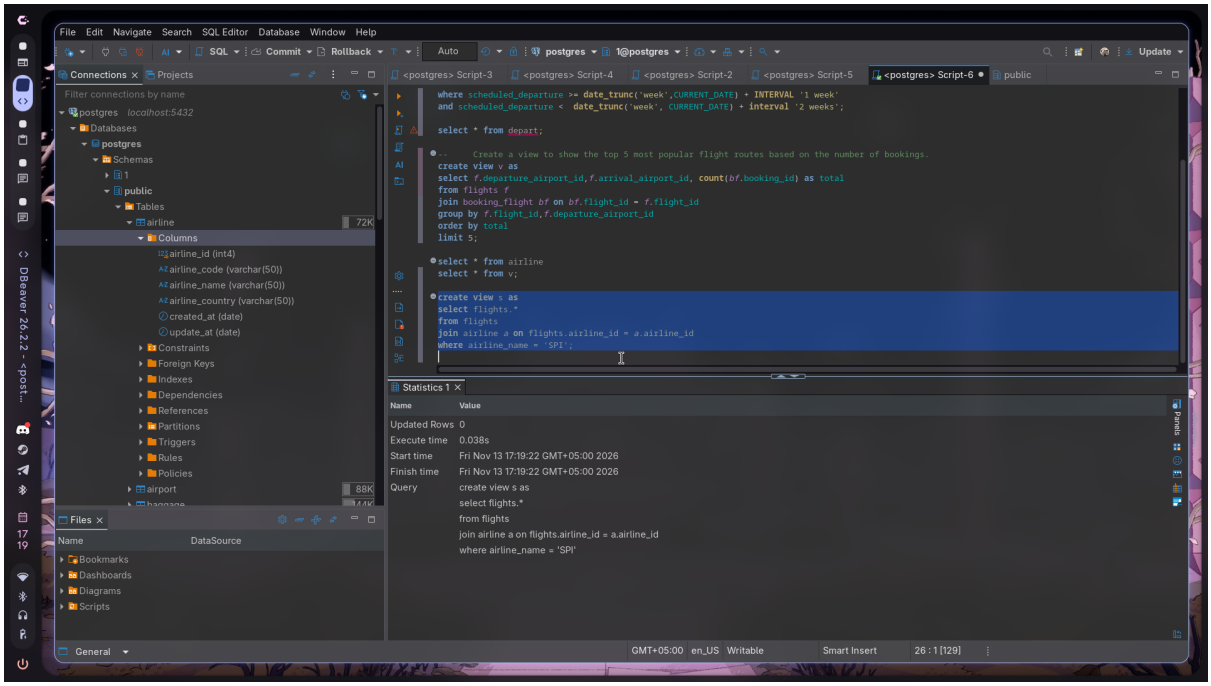

depart 1
flight_id
flight_no
scheduled_departure
scheduled_arrival
departure_airport_id
arrival_airport_id
departing_gate
arriving_gate

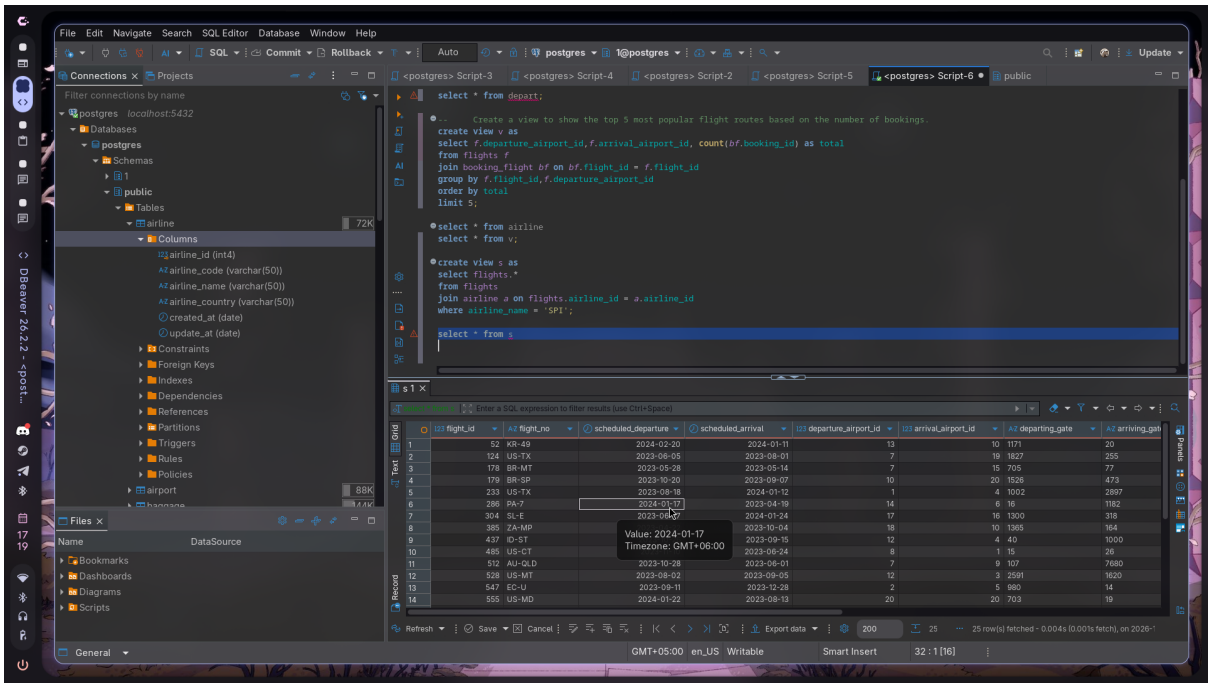
3)


File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
create view smth2 as
select * from flights
where actual_departure = '2023-10-10';
select * from smth2;
create view depart as
select * from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from depart;
-- Create a view to show the top 5 most popular flight routes based on the number of bookings.
create view v as
select f.departure_airport_id,f.arrival_airport_id, count(bf.booking_id) as total
from flights f
join booking_flight bf on bf.flight_id = f.flight_id
group by f.flight_id,f.departure_airport_id
order by total
limit 5;
Statistics 1
Name
Value
Updated Rows 0
Execute time 0.012s
Start time Fri Nov 13 17:10:53 GMT+05:00 2026
Finish time Fri Nov 13 17:10:53 GMT+05:00 2026
Query create view v as
select f.departure_airport_id,f.arrival_airport_id, count(bf.booking_id) as total
from flights f
join booking_flight bf on bf.flight_id = f.flight_id
group by f.flight_id,f.departure_airport_id
order by total
limit 5
Files
Name
DataSource
Bookmarks
Dashboards
Diagrams
Scripts
General
GMT+05:00 en_US Writable Smart Insert 15 : 1 [234]

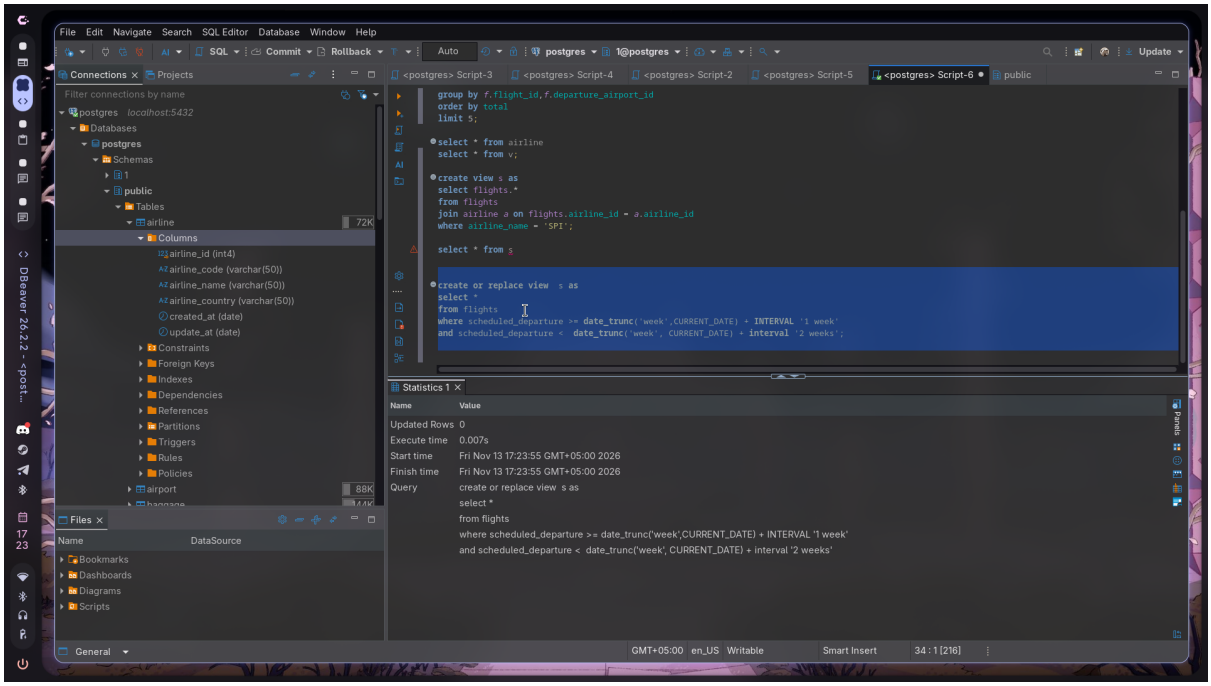

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
select * from flights
where actual_departure = '2023-10-10';
select * from smth2;
create view depart as
select * from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from depart;
-- Create a view to show the top 5 most popular flight routes based on the number of bookings.
create view v as
select f.departure_airport_id,f.arrival_airport_id, count(bf.booking_id) as total
from flights f
join booking_flight bf on bf.flight_id = f.flight_id
group by f.flight_id,f.departure_airport_id
order by total
limit 5;
select * from v;
v 1
departure_airport_id
arrival_airport_id
total
1 4 10 1
2 20 17 1
3 3 14 1
4 8 15 1
5 12 4 1
Refresh Save Cancel Export data
5 row(s) fetched - 0.003s, on 2026-11-13 at 17:11:10
Files
Name
DataSource
Bookmarks
Dashboards
Diagrams
Scripts
General
GMT+05:00 en_US Writable Smart Insert 24 : 1 [16]

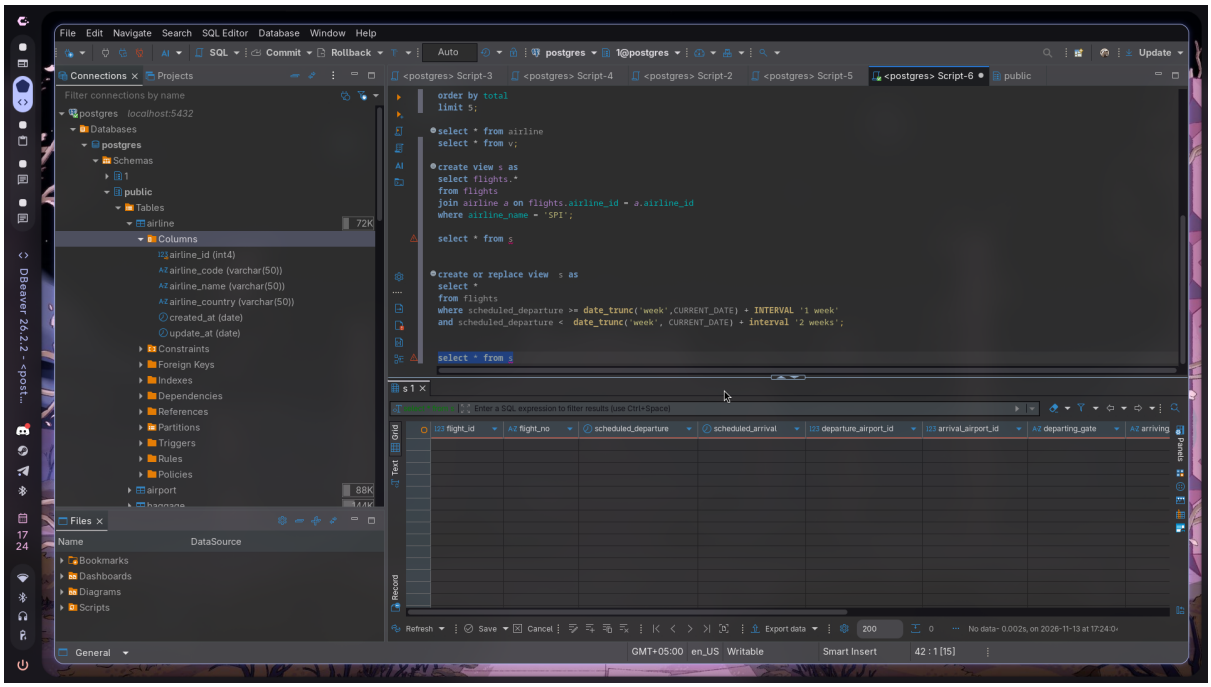
4)


File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
postgres localhost:5432
Databases
postgres
Schemas
public
Tables
airline
Columns
airline_id (int4)
airline_code (varchar(50))
airline_name (varchar(50))
airline_country (varchar(50))
created_at (date)
update_at (date)
Constraints
Foreign Keys
Indexes
Dependencies
References
Partitions
Triggers
Rules
Policies
airport
Files
Bookmarks
Dashboards
Diagrams
Scripts
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from depart;
-- Create a view to show the top 5 most popular flight routes based on the number of bookings.
create view v as
select f.departure_airport_id,f.arrival_airport_id, count(bf.booking_id) as total
from flights f
join booking_flight bf on bf.flight_id = f.flight_id
group by f.flight_id,f.departure_airport_id
order by total
limit 5;
select * from airline
select * from v;
create view s as
select flights.*
from flights
join airline a on flights.airline_id = a.airline_id
where airline_name = 'SPI';
Statistics 1
Name
Value
Updated Rows 0
Execute time 0.038s
Start time Fri Nov 13 17:19:22 GMT+05:00 2026
Finish time Fri Nov 13 17:19:22 GMT+05:00 2026
Query create view s as
select flights.*
from flights
join airline a on flights.airline_id = a.airline_id
where airline_name = 'SPI'
General
GMT+05:00 en_US Writable
Smart Insert
26 : 1 [129]

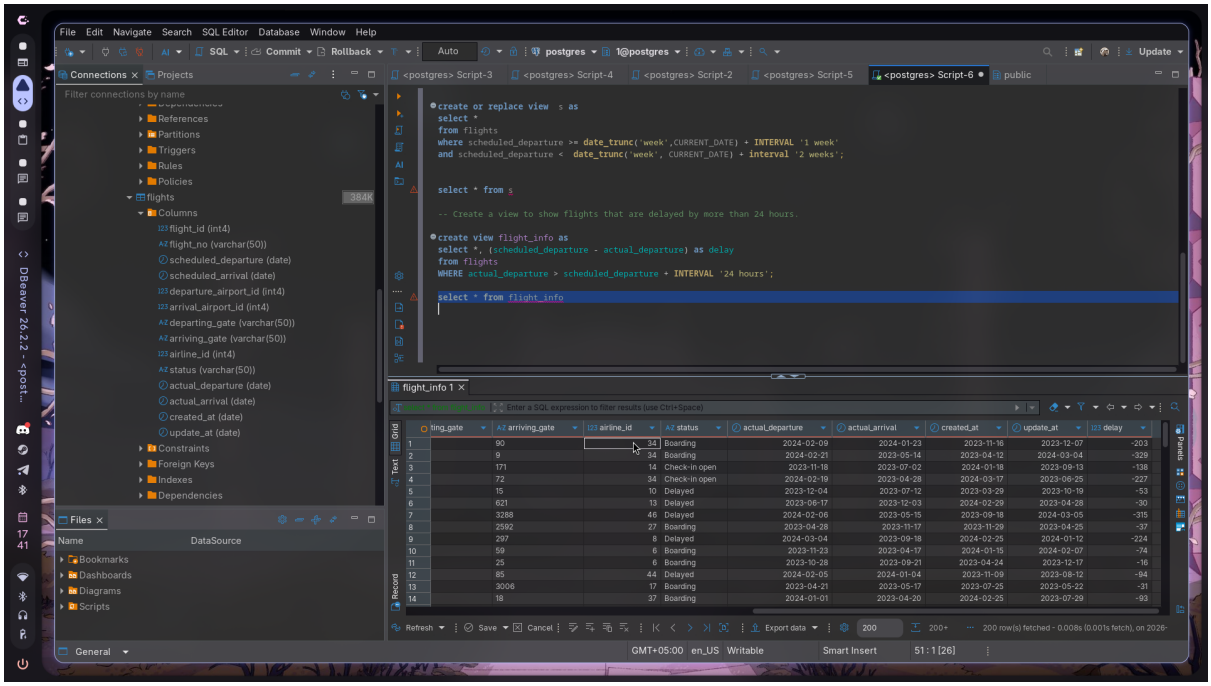

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
postgres localhost:5432
Databases
postgres
Schemas
public
Tables
airline
Columns
airline_id (int4)
airline_code (varchar(50))
airline_name (varchar(50))
airline_country (varchar(50))
created_at (date)
update_at (date)
Constraints
Foreign Keys
Indexes
Dependencies
References
Partitions
Triggers
Rules
Policies
airport
Files
Bookmarks
Dashboards
Diagrams
Scripts
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
select * from depart;
-- Create a view to show the top 5 most popular flight routes based on the number of bookings.
create view v as
select f.departure_airport_id,f.arrival_airport_id, count(bf.booking_id) as total
from flights f
join booking_flight bf on bf.flight_id = f.flight_id
group by f.flight_id,f.departure_airport_id
order by total
limit 5;
select * from airline
select * from v;
create view s as
select flights.*
from flights
join airline a on flights.airline_id = a.airline_id
where airline_name = 'SPI';
select * from s
s 1
flight_id
flight_no
scheduled_departure
scheduled_arrival
departure_airport_id
arrival_airport_id
departing_gate
arriving_gate
1 52 KR-49 2024-02-20 2024-01-11 13 10 1171 20
2 124 US-TX 2023-06-05 2023-08-01 7 19 1827 255
3 178 BR-MT 2023-05-28 2023-05-14 7 15 705 77
4 179 BR-SP 2023-10-20 2023-09-07 10 20 1526 473
5 233 US-TX 2023-08-18 2024-01-12 1 4 1002 2897
6 286 PA-7 2024-01-17 2023-04-19 14 6 16 1182
7 304 SL-E 2023-06-27 2024-01-24 17 16 1300 318
8 385 ZA-MP 2023-10-04 18 10 1365 164
9 437 ID-ST 2023-09-15 12 4 40 1000
10 489 US-OT 2023-06-24 8 1 15 26
11 512 AU-QLD 2023-10-28 2023-06-01 7 9 107 7680
12 528 US-MT 2023-08-02 2023-09-05 12 3 2591 1620
13 547 EC-U 2023-09-11 2023-12-28 2 5 980 14
14 555 US-MD 2024-01-22 2023-08-13 20 20 703 19
Value: 2024-01-17
Timezone: GMT+06:00
Refresh
Save
Cancel
Export data
200
25 row(s) fetched - 0.004s (0.001s fetch), on 2026-
General
GMT+05:00 en_US Writable
Smart Insert
32 : 1 [16]

5)

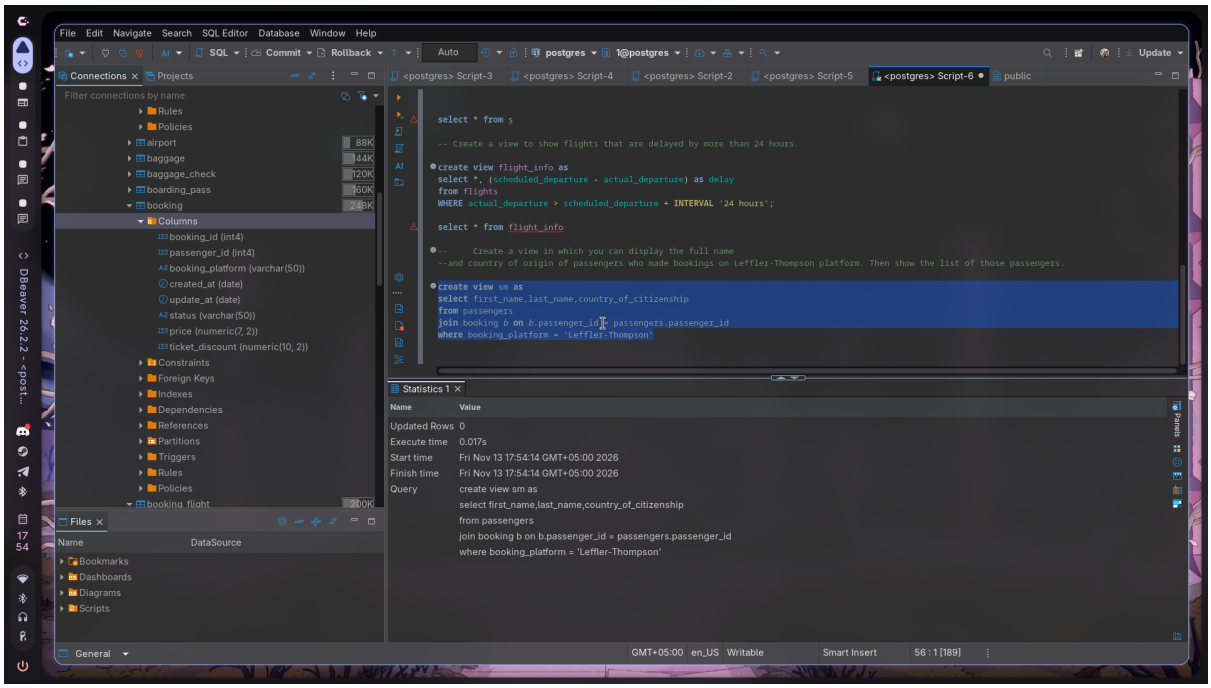

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
postgres localhost:5432
Databases
postgres
Schemas
public
Tables
airline
Columns
airline_id (int4)
airline_code (varchar(50))
airline_name (varchar(50))
airline_country (varchar(50))
created_at (date)
update_at (date)
Constraints
Foreign Keys
Indexes
Dependencies
References
Partitions
Triggers
Rules
Policies
airport
Files
Name
DataSource
Bookmarks
Dashboards
Diagrams
Scripts
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
group by f.flight_id,f.departure_airport_id
order by total
limit 5;
select * from airline
select * from v;
create view s as
select flights.*
from flights
join airline a on flights.airline_id = a.airline_id
where airline_name = 'SPI';
select * from s
create or replace view s as
select *
from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
Statistics 1
Name
Value
Updated Rows 0
Execute time 0.007s
Start time Fri Nov 13 17:23:55 GMT+05:00 2026
Finish time Fri Nov 13 17:23:55 GMT+05:00 2026
Query create or replace view s as
select *
from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks'
General
GMT+05:00 en_US Writable
Smart Insert
34 : 1 [216]

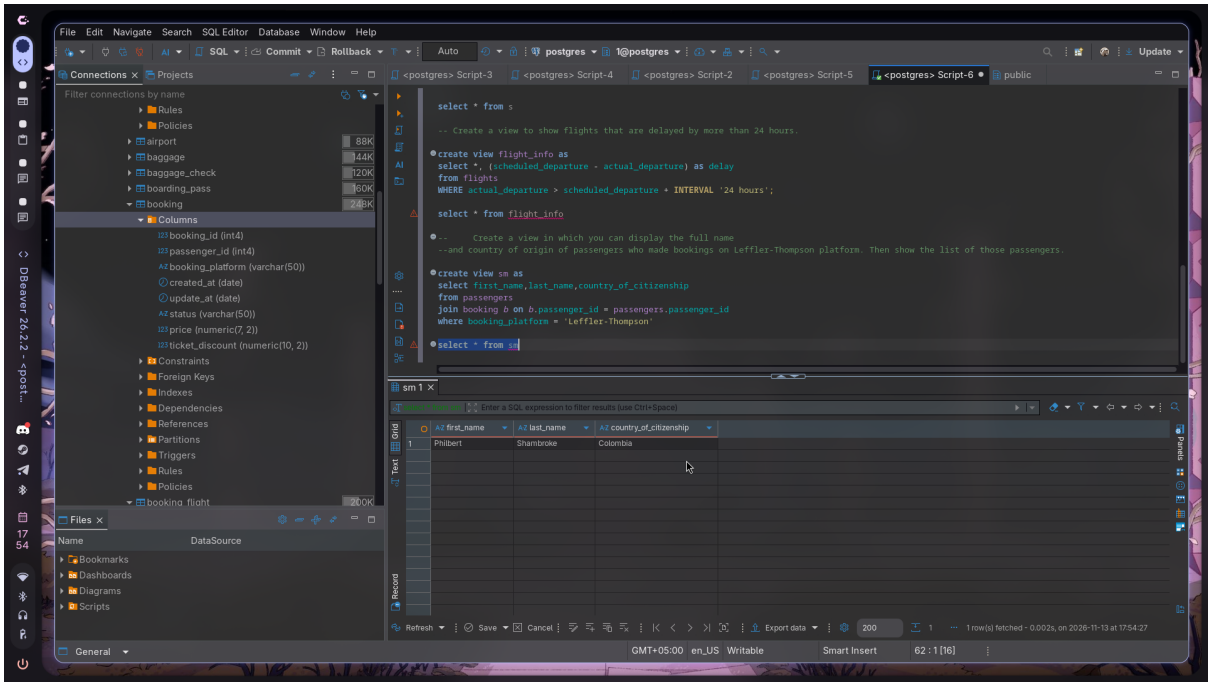

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
postgres localhost:5432
Databases
postgres
Schemas
public
Tables
airline
Columns
airline_id (int4)
airline_code (varchar(50))
airline_name (varchar(50))
airline_country (varchar(50))
created_at (date)
update_at (date)
Constraints
Foreign Keys
Indexes
Dependencies
References
Partitions
Triggers
Rules
Policies
airport
Files
Name
DataSource
Bookmarks
Dashboards
Diagrams
Scripts
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
order by total
limit 5;
select * from airline
select * from v;
create view s as
select flights.*
from flights
join airline a on flights.airline_id = a.airline_id
where airline_name = 'SPI';
select * from s
create or replace view s as
select *
from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from s
s 1
Enter a SQL expression to filter results (use Ctrl+Space)
flight_id
flight_no
scheduled_departure
scheduled_arrival
departure_airport_id
arrival_airport_id
departing_gate
arriving
Refresh
Save
Cancel
Export data
200
General
GMT+05:00 en_US Writable
Smart Insert
42 : 1 [15]

6)

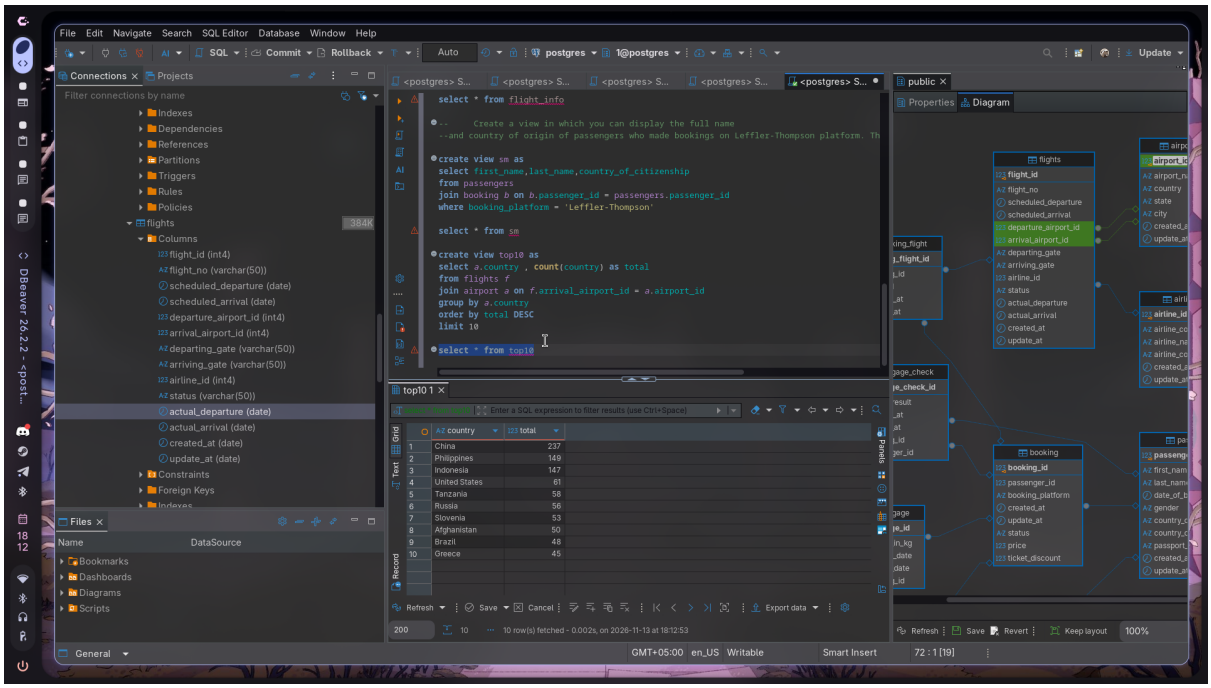

create or replace view s as
select *
from flights
where scheduled_departure >= date_trunc('week',CURRENT_DATE) + INTERVAL '1 week'
and scheduled_departure < date_trunc('week', CURRENT_DATE) + interval '2 weeks';
select * from s
-- Create a view to show flights that are delayed by more than 24 hours.
create view flight_info as
select *, (scheduled_departure - actual_departure) as delay
from flights
WHERE actual_departure > scheduled_departure + INTERVAL '24 hours';
select * from flight_info

7)

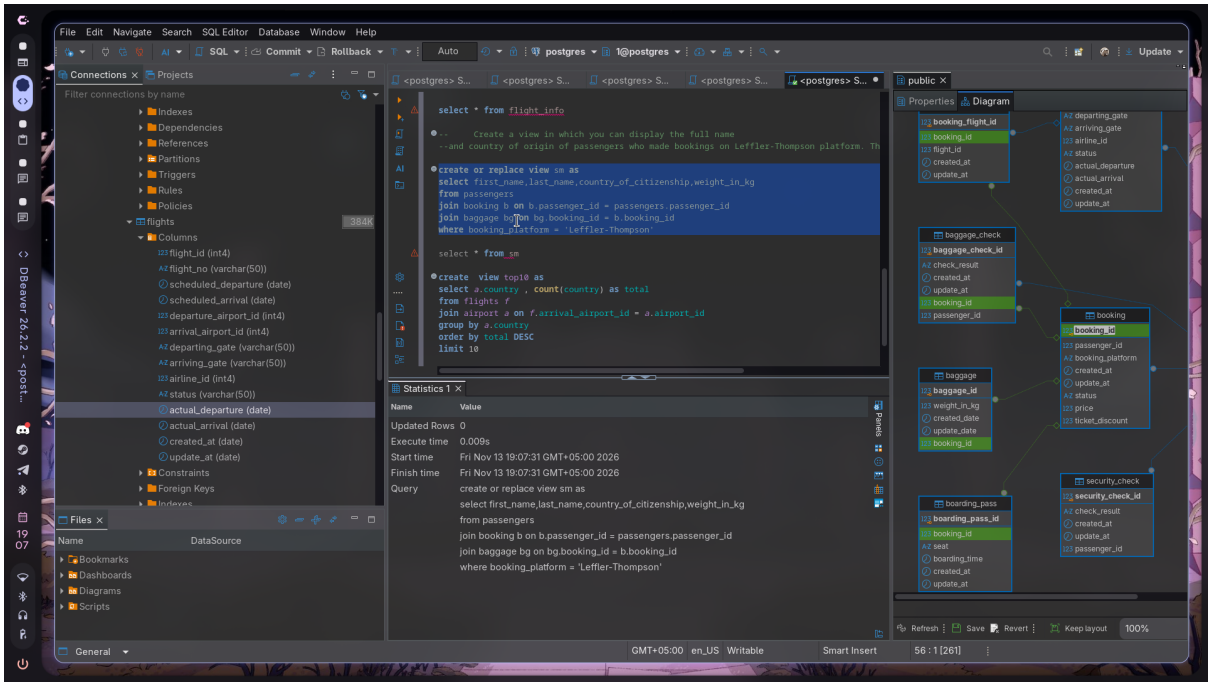

select * from s
-- Create a view to show flights that are delayed by more than 24 hours.
create view flight_info as
select *, (scheduled_departure - actual_departure) as delay
from flights
WHERE actual_departure > scheduled_departure + INTERVAL '24 hours';
select * from flight_info
-- Create a view in which you can display the full name
--and country of origin of passengers who made bookings on Leffler-Thompson platform. Then show the list of those passengers.
create view sm as
select first_name,last_name,country_of_citizenship
from passengers
join booking b on b.passenger_id = passengers.passenger_id
where booking_platform = 'Leffler-Thompson'
Statistics 1
Updated Rows 0
Execute time 0.017s
Start time Fri Nov 13 17:54:14 GMT+05:00 2026
Finish time Fri Nov 13 17:54:14 GMT+05:00 2026
Query create view sm as
select first_name,last_name,country_of_citizenship
from passengers
join booking b on b.passenger_id = passengers.passenger_id
where booking_platform = 'Leffler-Thompson'

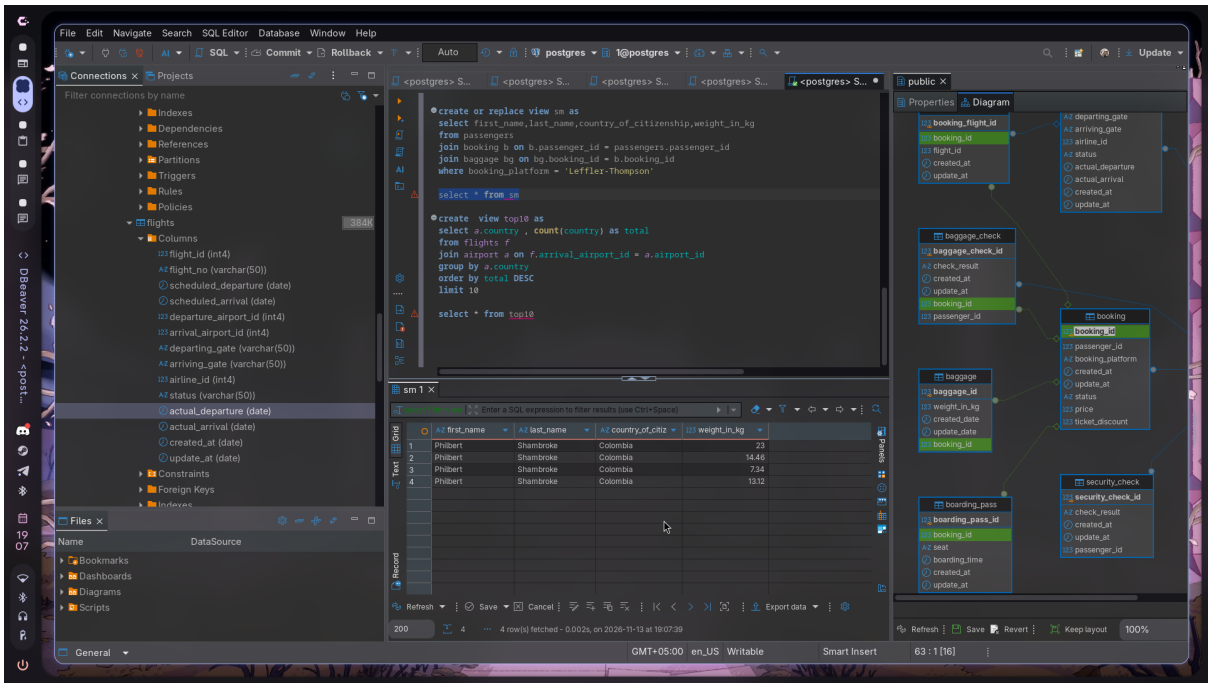

select * from s
-- Create a view to show flights that are delayed by more than 24 hours.
create view flight_info as
select *, (scheduled_departure - actual_departure) as delay
from flights
WHERE actual_departure > scheduled_departure + INTERVAL '24 hours';
select * from flight_info
-- Create a view in which you can display the full name
--and country of origin of passengers who made bookings on Leffler-Thompson platform. Then show the list of those passengers.
create view sm as
select first_name,last_name,country_of_citizenship
from passengers
join booking b on b.passenger_id = passengers.passenger_id
where booking_platform = 'Leffler-Thompson'
select * from sm
first_name
last_name
country_of_citizenship
Philbert
Shambroke
Colombia

8)

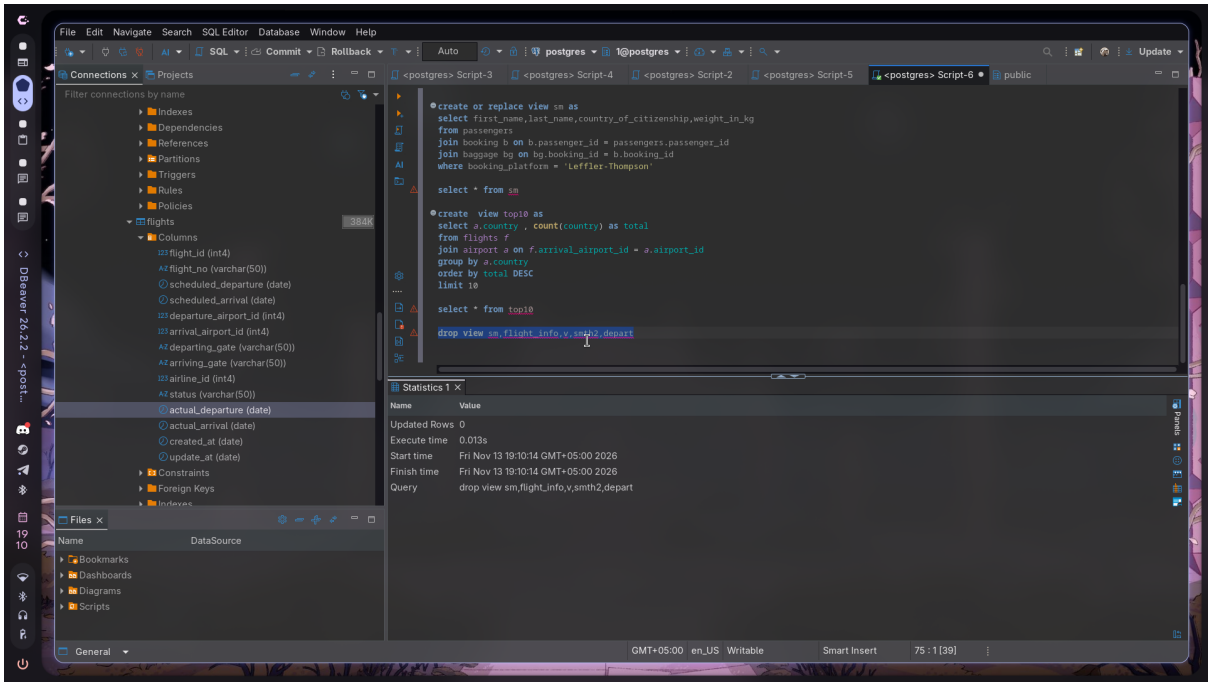

select * from flight_info
-- Create a view in which you can display the full name
--and country of origin of passengers who made bookings on Leffler-Thompson platform.
create view sm as
select first_name,last_name,country_of_citizenship
from passengers
join booking b on b.passenger_id = passengers.passenger_id
where booking_platform = 'Leffler-Thompson'
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
country
total
1 China 237
2 Philippines 149
3 Indonesia 147
4 United States 61
5 Tanzania 58
6 Russia 56
7 Slovenia 53
8 Afghanistan 50
9 Brazil 48
10 Greece 45

9)

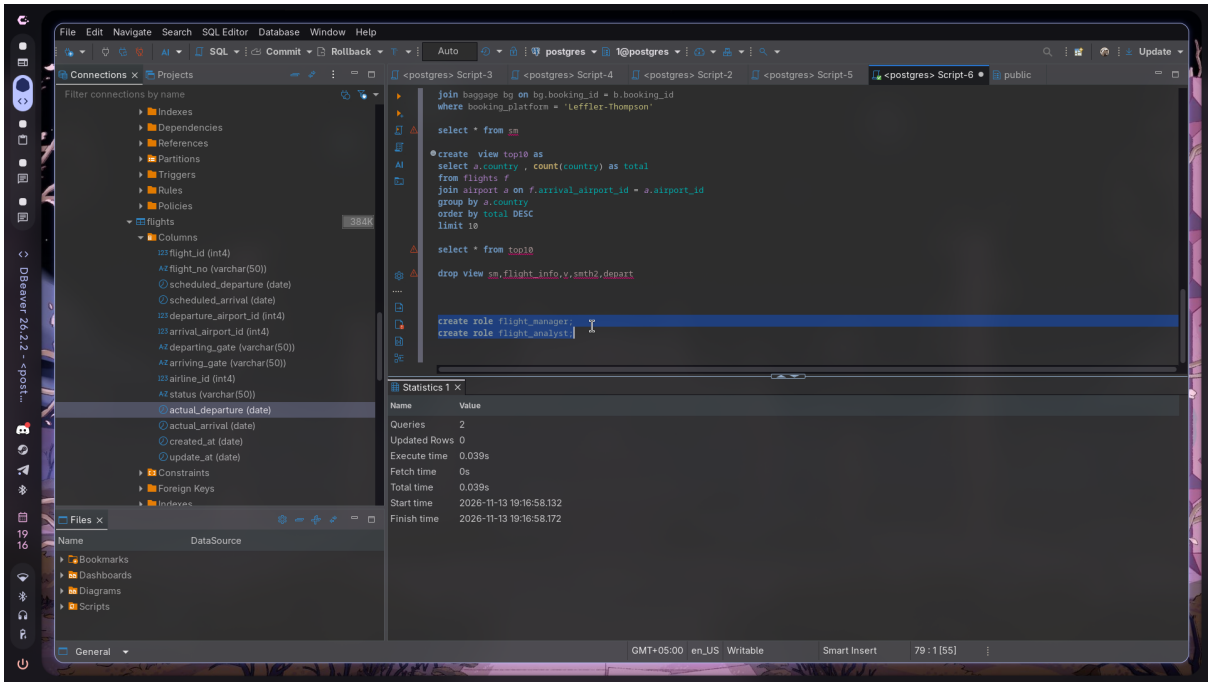

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
flights
Columns
flight_id (int4)
flight_no (varchar(50))
scheduled_departure (date)
scheduled_arrival (date)
departure_airport_id (int4)
arrival_airport_id (int4)
departing_gate (varchar(50))
arriving_gate (varchar(50))
airline_id (int4)
status (varchar(50))
actual_departure (date)
actual_arrival (date)
created_at (date)
update_at (date)
Constraints
Foreign Keys
select * from flight_info
create or replace view sm as
select first_name,last_name,country_of_citizenship,weight_in_kg
from passengers
join booking b on b.passenger_id = passengers.passenger_id
join baggage bg on bg.booking_id = b.booking_id
where booking_platform = 'Leffler-Thompson'
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
Statistics 1
Updated Rows 0
Execute time 0.009s
Start time Fri Nov 13 19:07:31 GMT+05:00 2026
Finish time Fri Nov 13 19:07:31 GMT+05:00 2026
Query create or replace view sm as
select first_name,last_name,country_of_citizenship,weight_in_kg
from passengers
join booking b on b.passenger_id = passengers.passenger_id
join baggage bg on bg.booking_id = b.booking_id
where booking_platform = 'Leffler-Thompson'
Files
Bookmarks
Dashboards
Diagrams
Scripts
public
Properties
Diagram
booking_flight_id
baggage_check
baggage_check_id
booking
baggage
baggage_id
boarding_pass
boarding_pass_id
security_check
security_check_id
Refresh
Save
Revert
Keep layout
100%
General
GMT+05:00 en_US Writable
Smart Insert
56 : 1 [261]

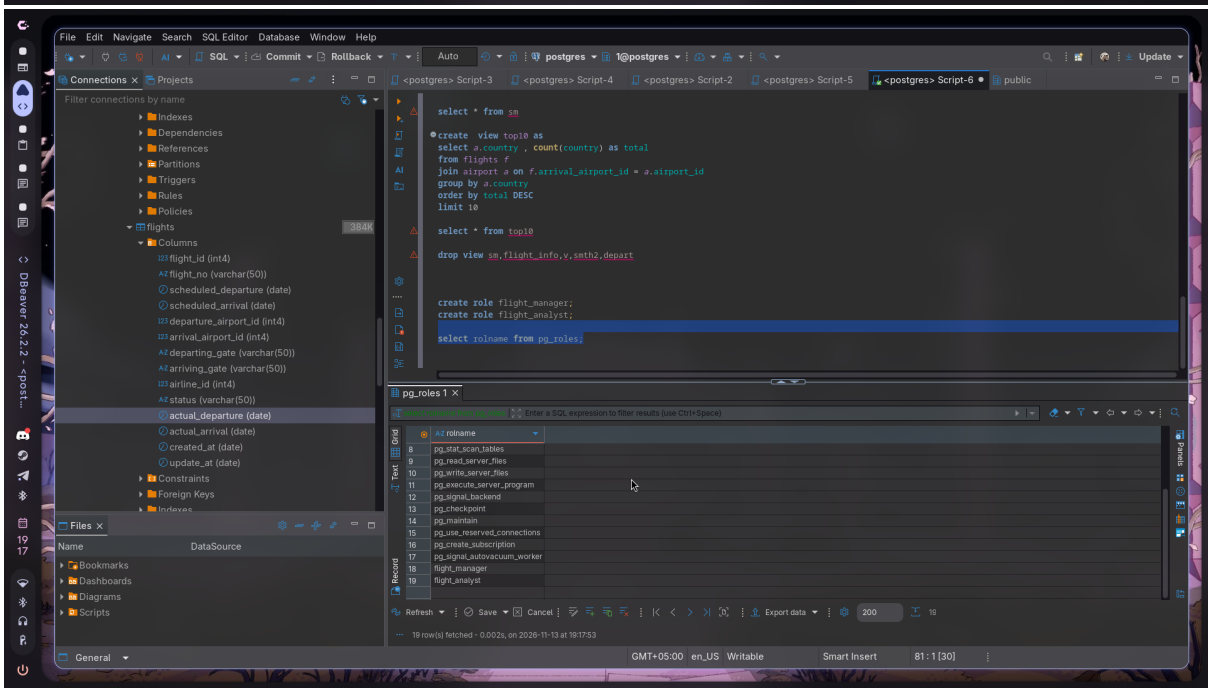

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
flights
Columns
actual_departure (date)
Constraints
Foreign Keys
create or replace view sm as
select first_name,last_name,country_of_citizenship,weight_in_kg
from passengers
join booking b on b.passenger_id = passengers.passenger_id
join baggage bg on bg.booking_id = b.booking_id
where booking_platform = 'Leffler-Thompson'
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
sm 1
first_name
last_name
country_of_citiz
weight_in_kg
1 Philbert Shambroke Colombia 23
2 Philbert Shambroke Colombia 14.46
3 Philbert Shambroke Colombia 7.34
4 Philbert Shambroke Colombia 13.12
Refresh
Save
Cancel
Export data
4 row(s) fetched - 0.002s, on 2026-11-13 at 19:07:39
Files
Bookmarks
Dashboards
Diagrams
Scripts
public
Properties
Diagram
Refresh
Save
Revert
Keep layout
100%
General
GMT+05:00 en_US Writable
Smart Insert
63 : 1 [16]

10)

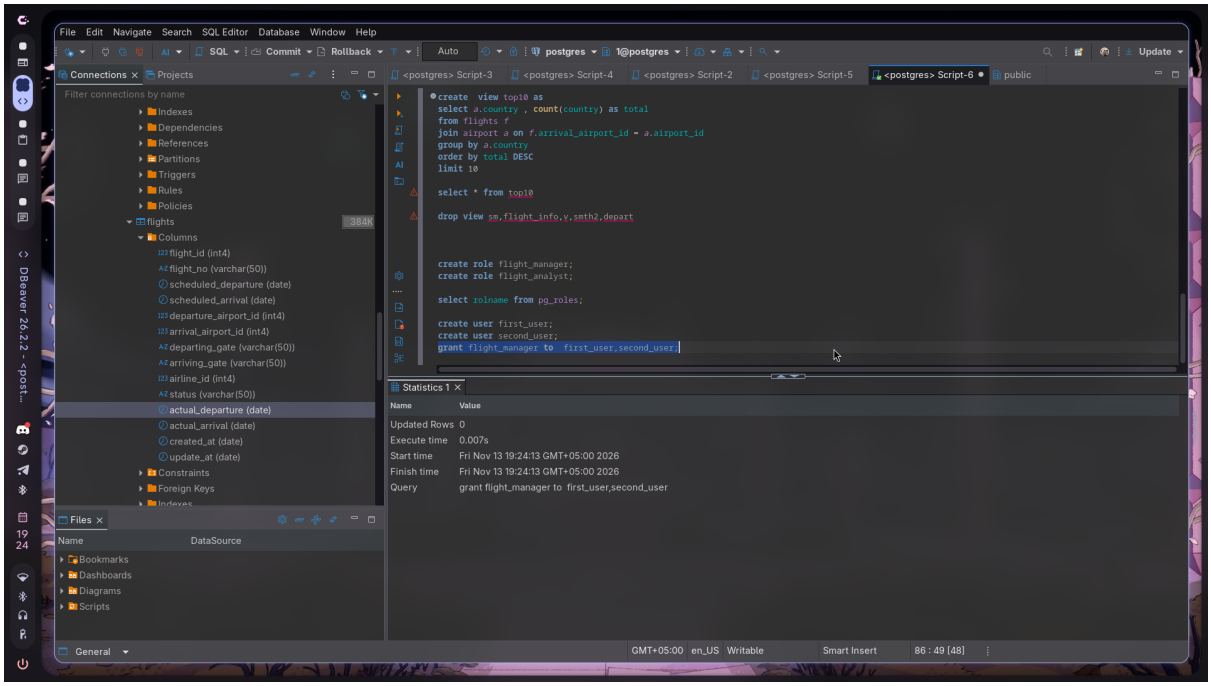

File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
Indexes
Dependencies
References
Partitions
Triggers
Rules
Policies
flights
384K
Columns
flight_id (int4)
flight_no (varchar(50))
scheduled_departure (date)
scheduled_arrival (date)
departure_airport_id (int4)
arrival_airport_id (int4)
departing_gate (varchar(50))
arriving_gate (varchar(50))
airline_id (int4)
status (varchar(50))
actual_departure (date)
actual_arrival (date)
created_at (date)
update_at (date)
Constraints
Foreign Keys
Files
Name
DataSource
Bookmarks
Dashboards
Diagrams
Scripts
<postgres> Script-3
<postgres> Script-4
<postgres> Script-2
<postgres> Script-5
<postgres> Script-6
public
create or replace view sm as
select first_name,last_name,country_of_citizenship,weight_in_kg
from passengers
join booking b on b.passenger_id = passengers.passenger_id
join baggage bg on bg.booking_id = b.booking_id
where booking_platform = 'Leffler-Thompson'
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
drop view sm,flight_info,v,smth2,depart
Statistics 1
Name
Value
Updated Rows 0
Execute time 0.013s
Start time Fri Nov 13 19:10:14 GMT+05:00 2026
Finish time Fri Nov 13 19:10:14 GMT+05:00 2026
Query drop view sm,flight_info,v,smth2,depart
General
GMT+05:00 en_US Writable
Smart Insert
75 : 1 [39]

11)

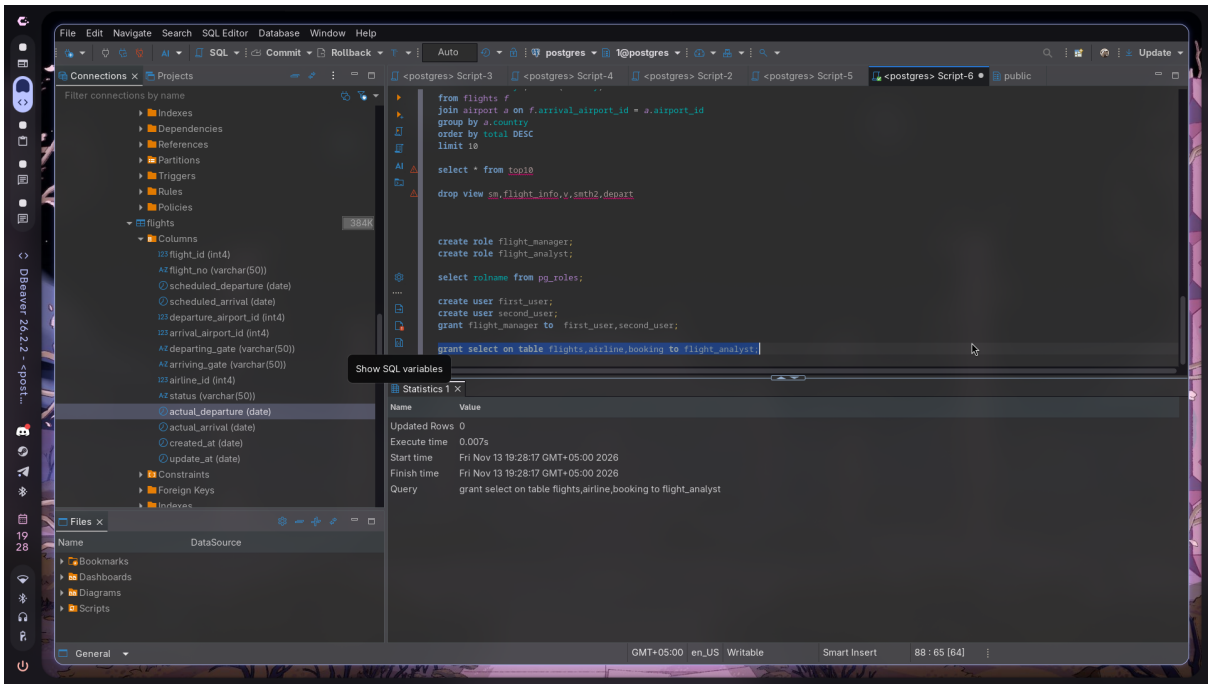

File Edit Navigate Search SQL Editor Database Window Help
join baggage bg on bg.booking_id = b.booking_id
where booking_platform = 'Leffler-Thompson'
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
drop view sm,flight_info,v,smth2,depart
create role flight_manager;
create role flight_analyst;
Statistics 1
Queries 2
Updated Rows 0
Execute time 0.039s
Fetch time 0s
Total time 0.039s
Start time 2026-11-13 19:16:58.132
Finish time 2026-11-13 19:16:58.172


File Edit Navigate Search SQL Editor Database Window Help
select * from sm
create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
drop view sm,flight_info,v,smth2,depart
create role flight_manager;
create role flight_analyst;
select rolname from pg_roles;
pg_roles 1
rolname
pg_stat_scan_tables
pg_read_server_files
pg_write_server_files
pg_execute_server_program
pg_signal_backend
pg_checkpoint
pg_maintain
pg_use_reserved_connections
pg_create_subscription
pg_signal_autovacuum_worker
flight_manager
flight_analyst
19 row(s) fetched - 0.002s, on 2026-11-13 at 19:17:53

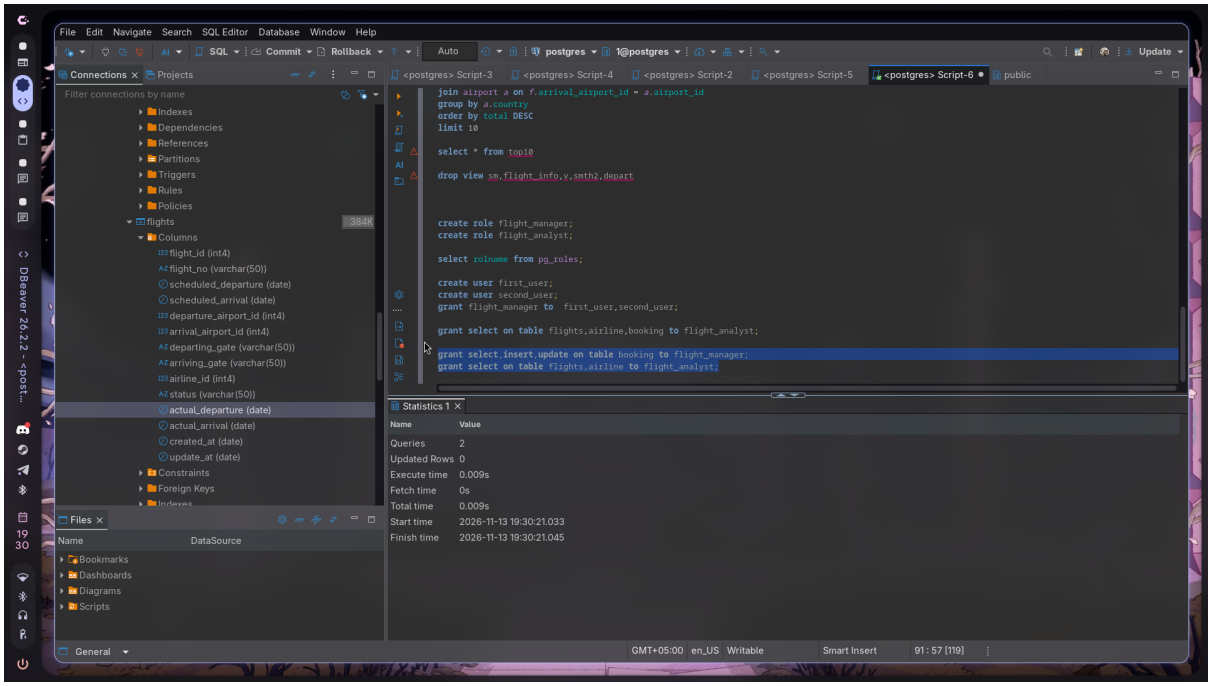
12)


create view top10 as
select a.country , count(country) as total
from flights f
join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
drop view sm,flight_info,v,smth2,depart
create role flight_manager;
create role flight_analyst;
select rolname from pg_roles;
create user first_user;
create user second_user;
grant flight_manager to first_user,second_user;
Statistics 1
Updated Rows 0
Execute time 0.007s
Start time Fri Nov 13 19:24:13 GMT+05:00 2026
Finish time Fri Nov 13 19:24:13 GMT+05:00 2026
Query grant flight_manager to first_user,second_user

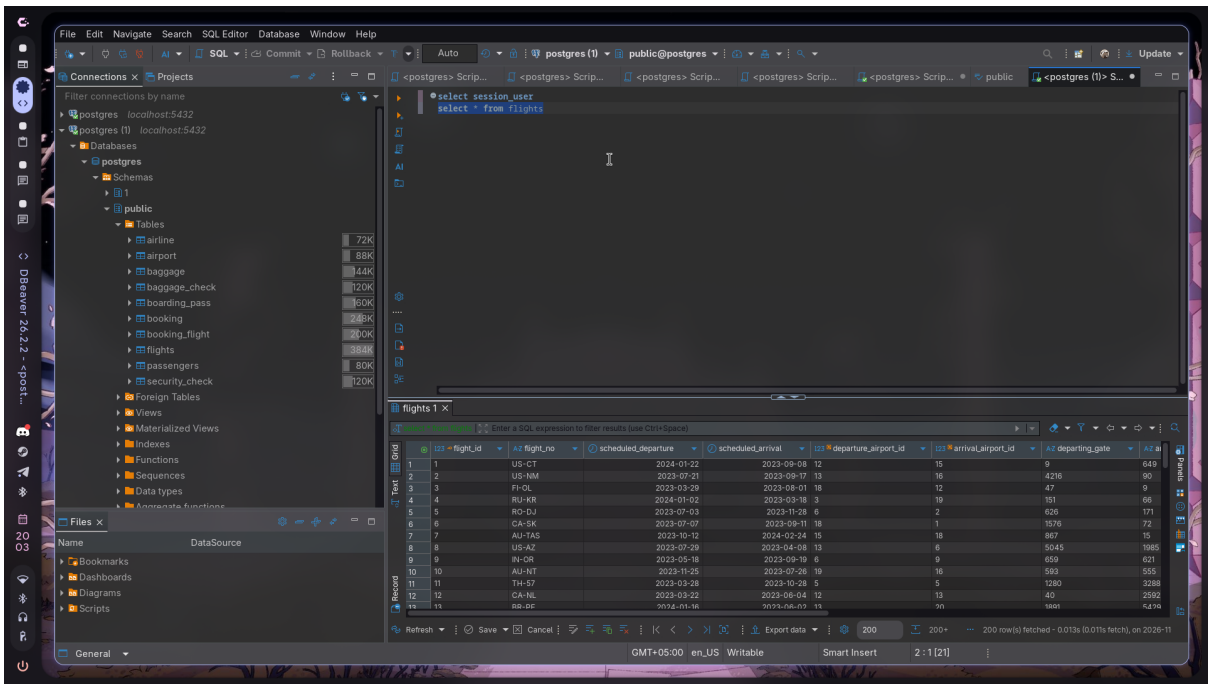
13)

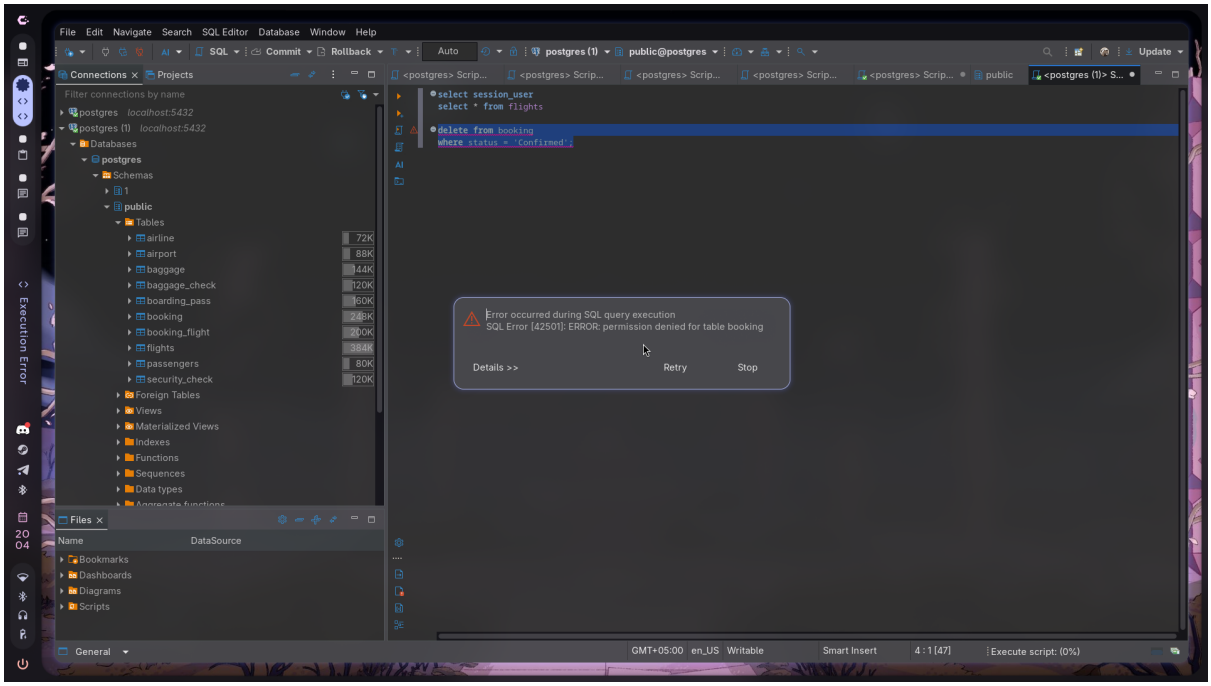

grant select on table flights,airline,booking to flight_analyst;
Show SQL variables
Statistics 1
Updated Rows 0
Execute time 0.007s
Start time Fri Nov 13 19:28:17 GMT+05:00 2026
Finish time Fri Nov 13 19:28:17 GMT+05:00 2026
Query grant select on table flights,airline,booking to flight_analyst

14)

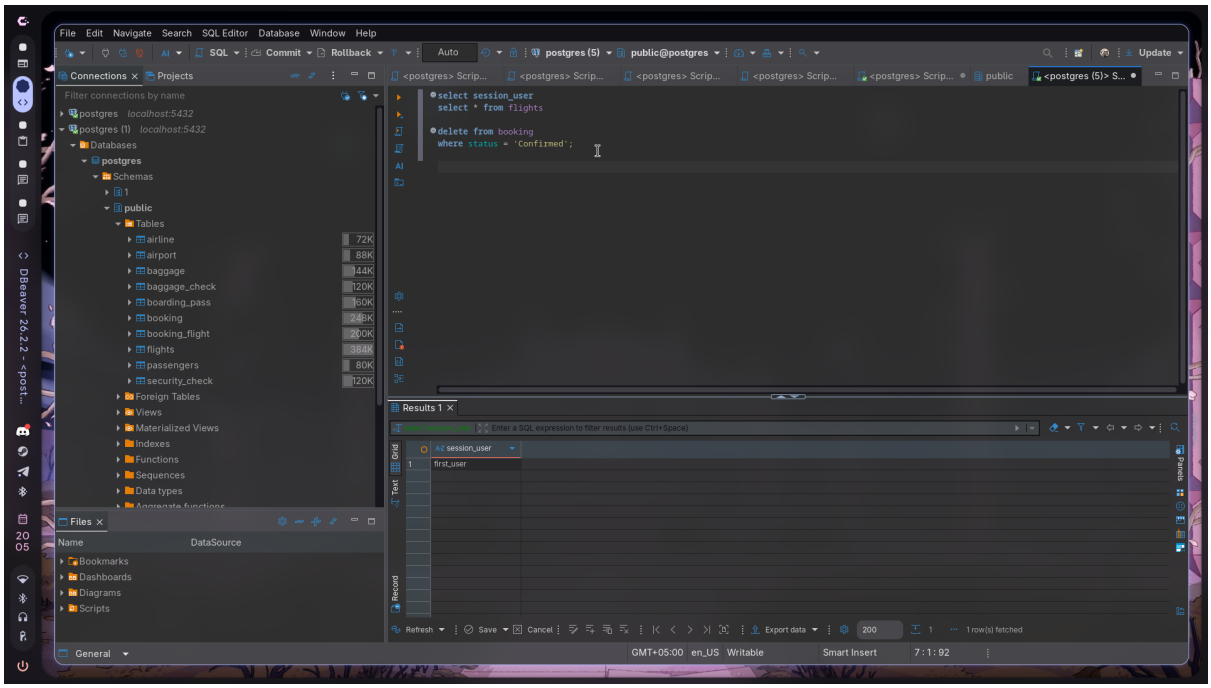

join airport a on f.arrival_airport_id = a.airport_id
group by a.country
order by total DESC
limit 10
select * from top10
drop view sm,flight_info,v,smth2,depart
create role flight_manager;
create role flight_analyst;
select rolname from pg_roles;
create user first_user;
create user second_user;
grant flight_manager to first_user,second_user;
grant select on table flights,airline,booking to flight_analyst;
grant select,insert,update on table booking to flight_manager;
grant select on table flights,airline to flight_analyst;
Statistics 1
Queries 2
Updated Rows 0
Execute time 0.009s
Fetch time 0s
Total time 0.009s
Start time 2026-11-13 19:30:21.033
Finish time 2026-11-13 19:30:21.045

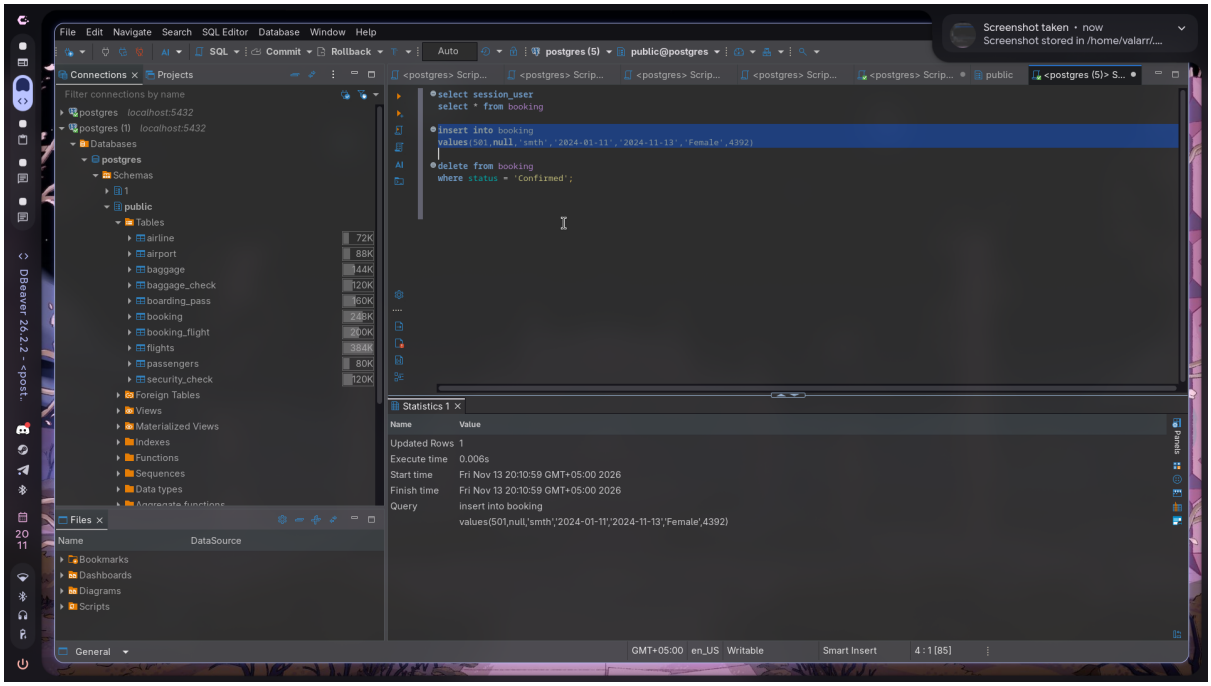
15)

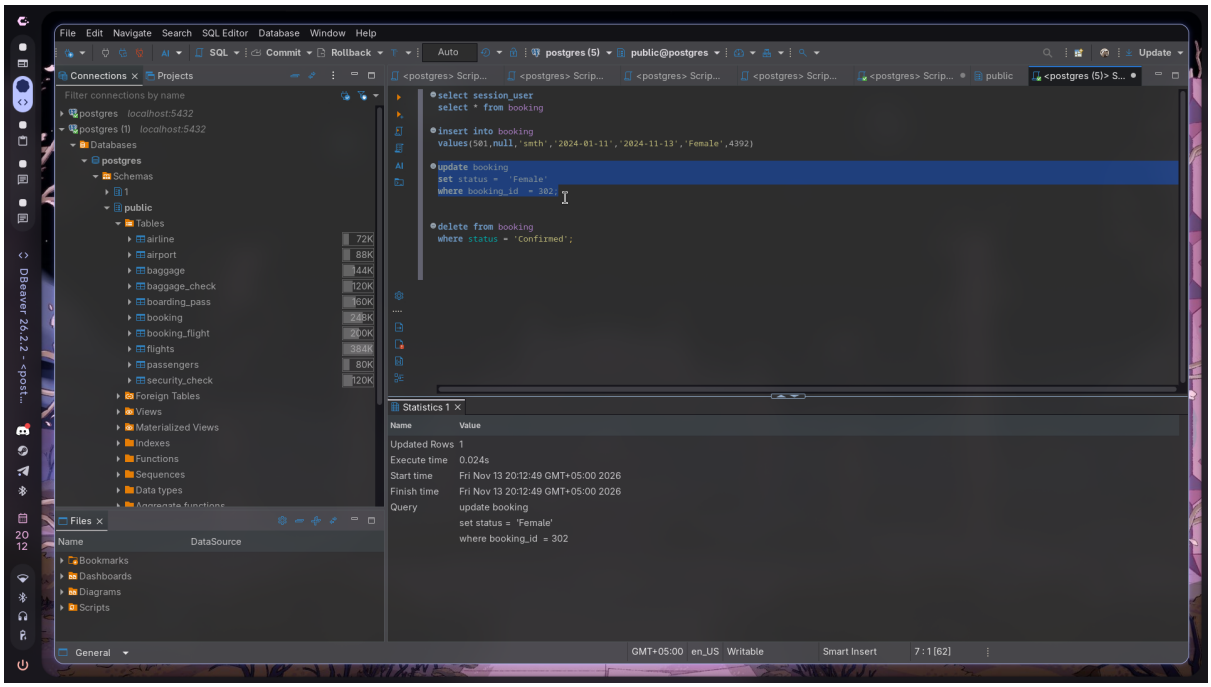

select session_user
select * from flights
flights 1

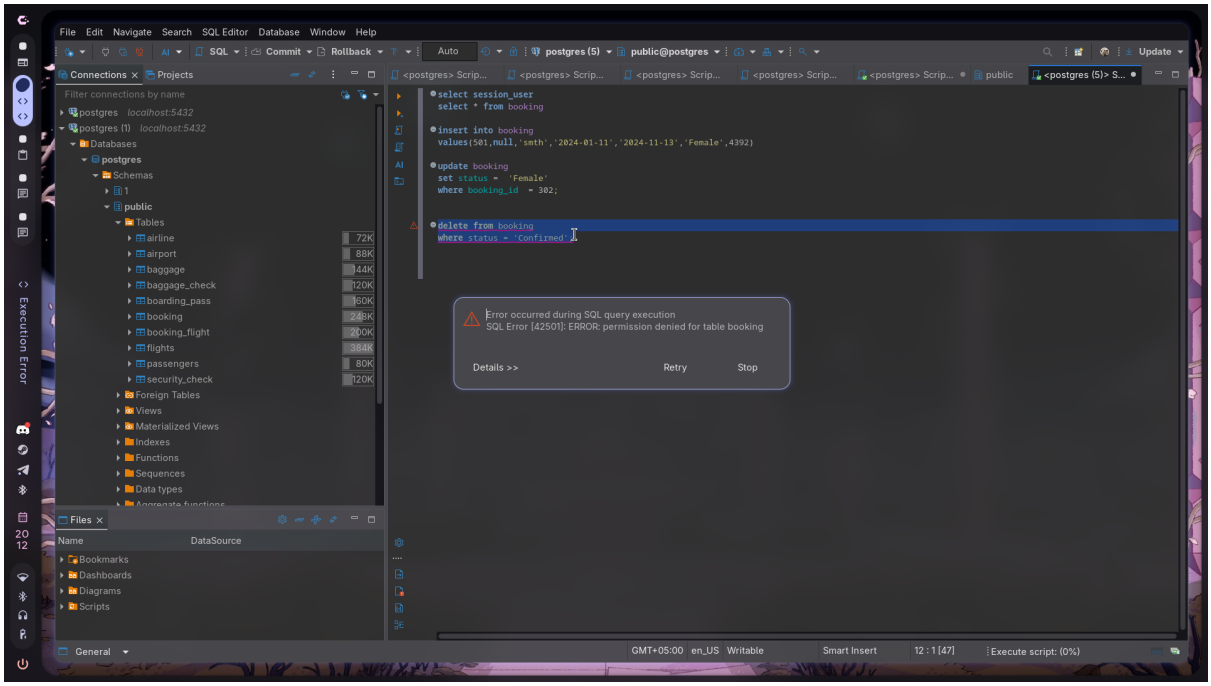

select session_user
select * from flights
delete from booking
where status = 'Confirmed';
Error occurred during SQL query execution
SQL Error [42501]: ERROR: permission denied for table booking
Details >>
Retry
Stop

16)

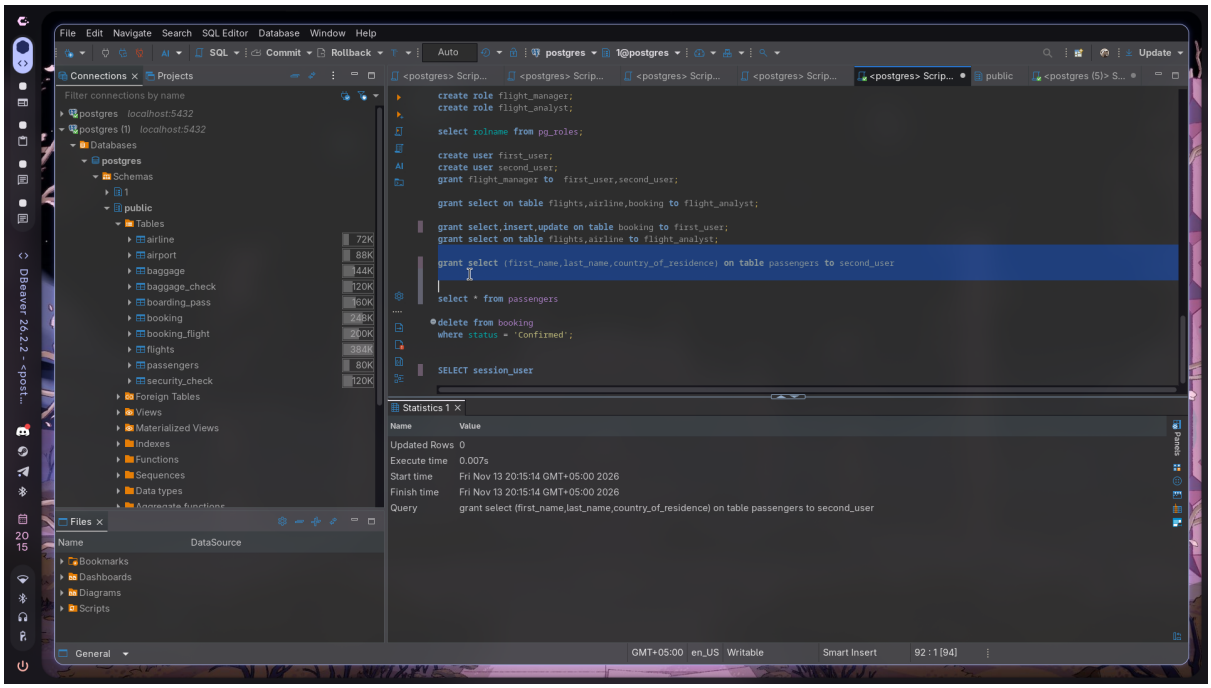

select session_user
select * from flights
delete from booking
where status = 'Confirmed';
Results 1
session_user
first_user


Screenshot taken • now
Screenshot stored in /home/valarr/....
File Edit Navigate Search SQL Editor Database Window Help
select session_user
select * from booking
insert into booking
values(501,null,'smth','2024-01-11','2024-11-13','Female',4392)
delete from booking
where status = 'Confirmed';
Statistics 1
Name Value
Updated Rows 1
Execute time 0.006s
Start time Fri Nov 13 20:10:59 GMT+05:00 2026
Finish time Fri Nov 13 20:10:59 GMT+05:00 2026
Query insert into booking
values(501,null,'smth','2024-01-11','2024-11-13','Female',4392)
GMT+05:00 en_US Writable Smart Insert 4 : 1 [85]

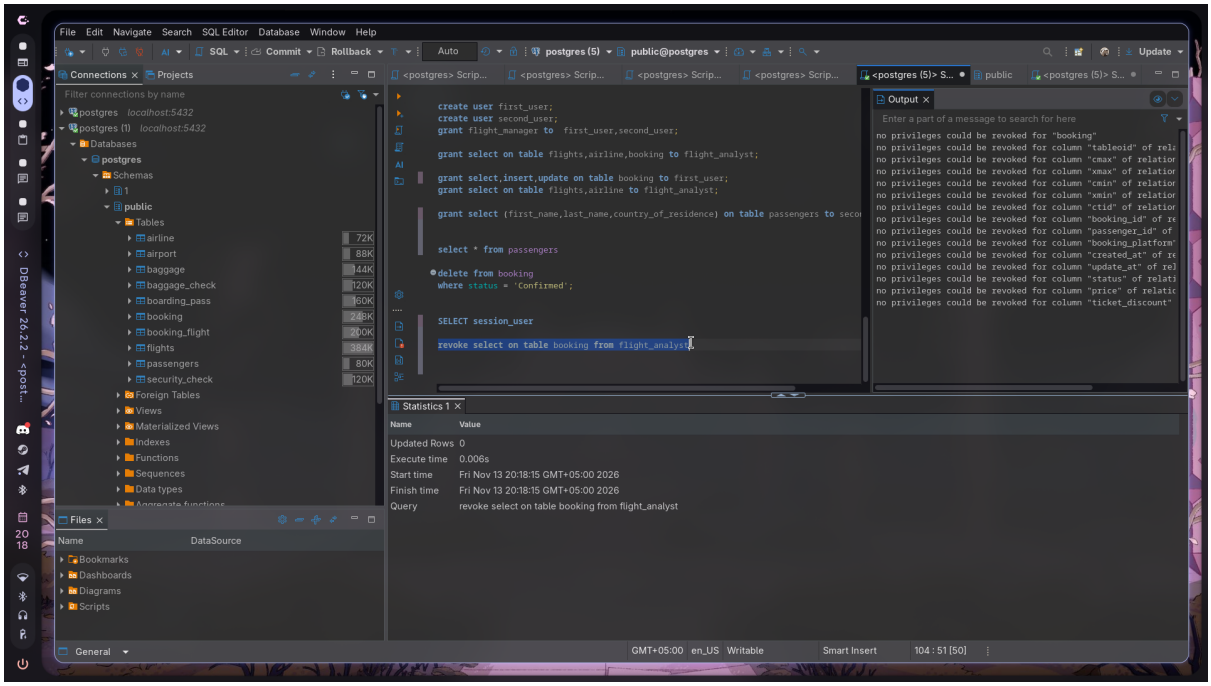

File Edit Navigate Search SQL Editor Database Window Help
select session_user
select * from booking
insert into booking
values(501,null,'smth','2024-01-11','2024-11-13','Female',4392)
update booking
set status = 'Female'
where booking_id = 302
delete from booking
where status = 'Confirmed';
Statistics 1
Name Value
Updated Rows 1
Execute time 0.024s
Start time Fri Nov 13 20:12:49 GMT+05:00 2026
Finish time Fri Nov 13 20:12:49 GMT+05:00 2026
Query update booking
set status = 'Female'
where booking_id = 302
GMT+05:00 en_US Writable Smart Insert 7 : 1 [62]


File Edit Navigate Search SQL Editor Database Window Help
select session_user
select * from booking
insert into booking
values(501,null,'smth','2024-01-11','2024-11-13','Female',4392)
update booking
set status = 'Female'
where booking_id = 302;
delete from booking
where status = 'Confirmed';
Error occurred during SQL query execution
SQL Error [42501]: ERROR: permission denied for table booking
Details >>
Retry
Stop

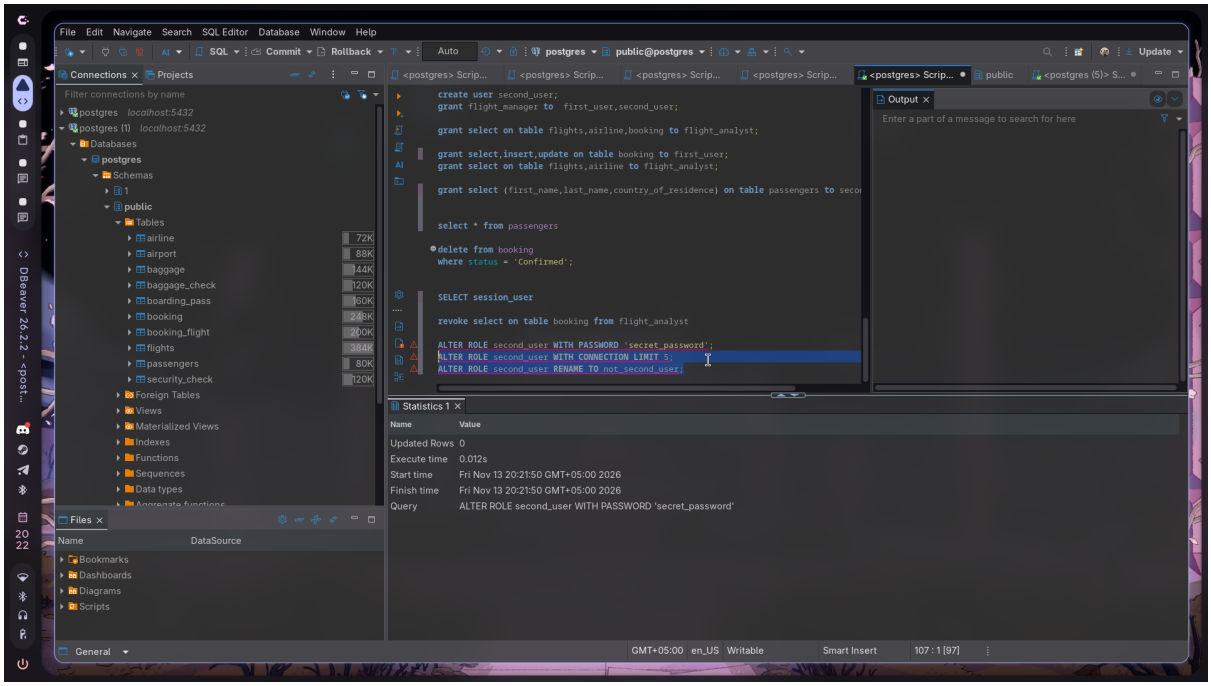
17)


File Edit Navigate Search SQL Editor Database Window Help
create role flight_manager;
create role flight_analyst;
select rolname from pg_roles;
create user first_user;
create user second_user;
grant flight_manager to first_user,second_user;
grant select on table flights,airline,booking to flight_analyst;
grant select,insert,update on table booking to first_user;
grant select on table flights,airline to flight_analyst;
grant select (first_name,last_name,country_of_residence) on table passengers to second_user
select * from passengers
delete from booking
where status = 'Confirmed';
SELECT session_user
Statistics 1
Name Value
Updated Rows 0
Execute time 0.007s
Start time Fri Nov 13 20:15:14 GMT+05:00 2026
Finish time Fri Nov 13 20:15:14 GMT+05:00 2026
Query grant select (first_name,last_name,country_of_residence) on table passengers to second_user

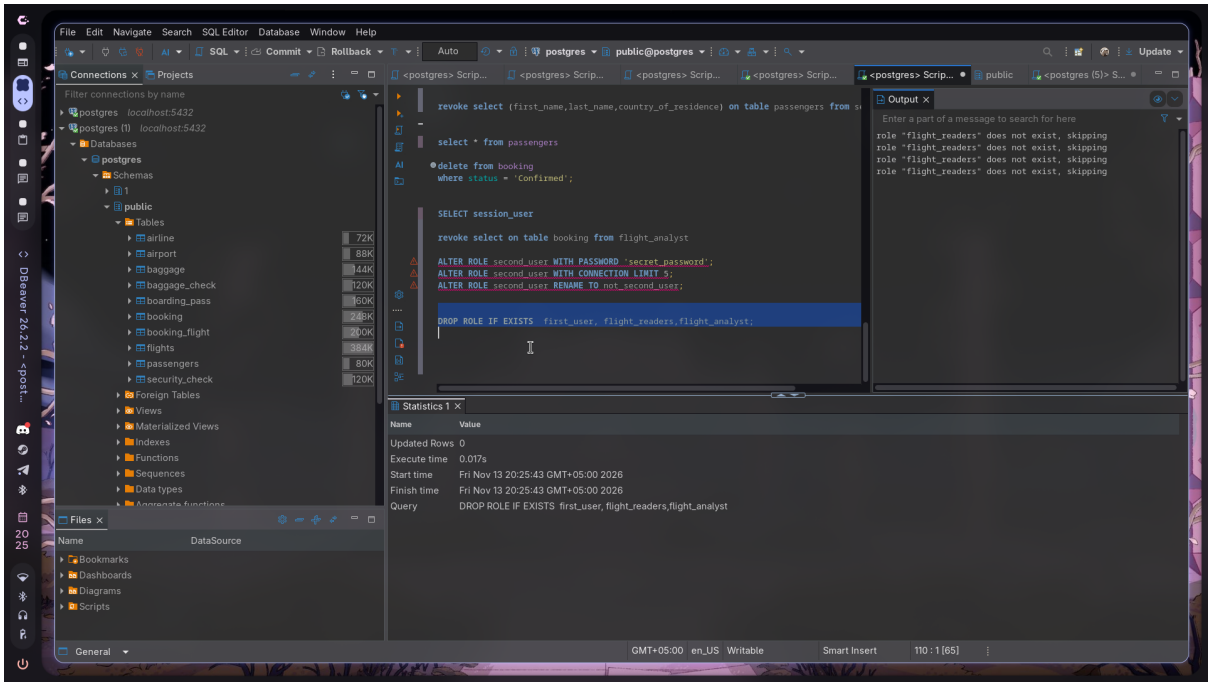
18)


create user first_user;
create user second_user;
grant flight_manager to first_user,second_user;
grant select on table flights,airline,booking to flight_analyst;
grant select,insert,update on table booking to first_user;
grant select on table flights,airline to flight_analyst;
grant select (first_name,last_name,country_of_residence) on table passengers to seco
select * from passengers
delete from booking
where status = 'Confirmed';
SELECT session_user
revoke select on table booking from flight_analyst;
Statistics 1
Name Value
Updated Rows 0
Execute time 0.006s
Start time Fri Nov 13 20:18:15 GMT+05:00 2026
Finish time Fri Nov 13 20:18:15 GMT+05:00 2026
Query revoke select on table booking from flight_analyst

19)


create user second_user;
grant flight_manager to first_user,second_user;
grant select on table flights,airline,booking to flight_analyst;
grant select,insert,update on table booking to first_user;
grant select on table flights,airline to flight_analyst;
grant select (first_name,last_name,country_of_residence) on table passengers to seco
select * from passengers
delete from booking
where status = 'Confirmed';
SELECT session_user
revoke select on table booking from flight_analyst
ALTER ROLE second_user WITH PASSWORD 'secret_password';
ALTER ROLE second_user WITH CONNECTION LIMIT 5;
ALTER ROLE second_user RENAME TO not_second_user;
Statistics 1
Name Value
Updated Rows 0
Execute time 0.012s
Start time Fri Nov 13 20:21:50 GMT+05:00 2026
Finish time Fri Nov 13 20:21:50 GMT+05:00 2026
Query ALTER ROLE second_user WITH PASSWORD 'secret_password'

20)


File Edit Navigate Search SQL Editor Database Window Help
Connections
Projects
Filter connections by name
postgres localhost:5432
postgres (1) localhost:5432
Databases
postgres
Schemas
public
Tables
airline 72K
airport 88K
baggage 144K
baggage_check 120K
boarding_pass 160K
booking 248K
booking_flight 200K
flights 384K
passengers 80K
security_check 120K
Foreign Tables
Views
Materialized Views
Indexes
Functions
Sequences
Data types
revoke select (first_name,last_name,country_of_residence) on table passengers from
select * from passengers
delete from booking
where status = 'Confirmed';
SELECT session_user
revoke select on table booking from flight_analyst
ALTER ROLE second_user WITH PASSWORD 'secret_password';
ALTER ROLE second_user WITH CONNECTION LIMIT 5;
ALTER ROLE second_user RENAME TO not_second_user;
DROP ROLE IF EXISTS first_user, flight_readers,flight_analyst;
Output
Enter a part of a message to search for here
role "flight_readers" does not exist, skipping
role "flight_readers" does not exist, skipping
role "flight_readers" does not exist, skipping
role "flight_readers" does not exist, skipping
Statistics 1
Name Value
Updated Rows 0
Execute time 0.017s
Start time Fri Nov 13 20:25:43 GMT+05:00 2026
Finish time Fri Nov 13 20:25:43 GMT+05:00 2026
Query DROP ROLE IF EXISTS first_user, flight_readers,flight_analyst
Files
Name DataSource
Bookmarks
Dashboards
Diagrams
Scripts
General
GMT+05:00 en_US Writable
Smart Insert
110 : 1 [65]