


Monday, June 22, 2026 5:25 PM

On utilise GodotRE pour recover le fichier exporter en .exe :
<https://github.com/GDRETools/gdsdecomp>

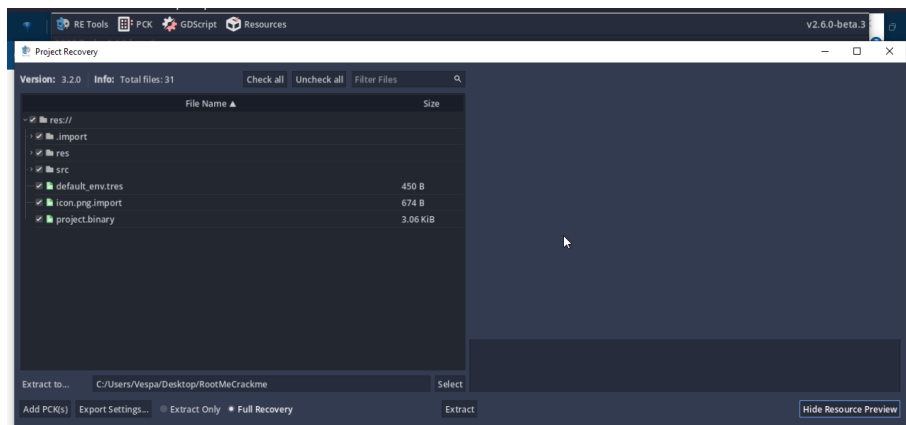

On trouve des fichiers en .gd. Dans le fichier [FlagLabel.gd](#) je trouve ce code :

```
func_ready(): var key = [66, 121, 84, 51, 99, 48, 100, 51] var enc = [153, 222, 192, 159, 131, 148, 211, 161, 167, 165, 116, 167, 203, 149, 132, 153, 174, 218, 187, 83, 204, 163, 110, 117, 187, 237, 135, 150, 147, 148, 151, 118, 118, 231, 168, 133, 150, 163, 149, 166, 150]
hidden_content = "" for i in range(len(enc)): hidden_content += char(enc[i] - key[i % len(key)])
```

En c ça nous donne :

```
#include <stdio.h>
#include <string.h>
```

```
int main () {
```

```
printf("Crack Godot by AL1P\n");
```

```
unsigned char key [] = {66, 121, 84, 51, 99, 48, 100, 51};
```

```
unsigned char byte [] = {153, 222, 192, 159, 131, 148, 211, 161, 167, 165, 116, 167, 203, 149, 132, 153,
174, 218, 187, 83, 204, 163, 110, 117, 187, 237, 135, 150, 147, 148, 151, 118, 118, 231, 168, 133, 150,
163, 149, 166, 150};
```

```
int lenght = sizeof(byte);
```

```
int KeyLen = sizeof(key);
```

```
for(int i = 0; i < KeyLen; i++){
    printf("%c", key[i]);
}
printf("\n");
```

```
for(int i = 0; i < lenght; i++){
    printf("%c", byte[i]);
}
printf("\n");
```

```
for(int i = 0; i < lenght; i++){
```

```
byte[i] = byte[i] - key[ i % KeyLen];
```

3

```
for (int j = 0; j < lenght; j++){
```

```
printf("%c", byte[j]);
}
```

```
printf("\n");
```

```
return 0;
}
```

Et on trouve :

```
[adelachata@adelachata-20251204 godot-bytecode]$ gcc godot.c -o godot
[adelachata@adelachata-20251204 godot-bytecode]$ ./godot
Crack Godot by AL1P'
ByT3c0d3
██████████ 00000 Snu04 0000v稅 00000
Well done, the flag is
ByT3c0d3C4nTR3s1sT
[adelachata@adelachata-20251204 godot-bytecode]$
```

Byt3c0d3C4nTR3s1sT

d3bug_m0d3_On_Flutt3r_1s_d4ng3r0u5