

Thm - 0x41haz

jeudi 22 mai 2025 22:08


```
(alice@kali)-[~/Desktop/thm/malware_analysis/0x41haz]
$ file 0x41haz-1640335532346.0x41haz
0x41haz-1640335532346.0x41haz: ELF 64-bit MSB *unknown arch 0x3e00* (SYSV)
```

On doit changer le Sixième bits en 0x01

<https://hexed.it/>

```
~Untitled-1 - 0x41haz-1640335532...
00000000  7F 45 4C 46 02 01 00 00 00 00 00 00 00 00 00 00  ELF.
00000010  03 00 3E 00 01 00 00 00 80 10 00 00 00 00 00 00  >.....C
00000020  40 00 00 00 00 00 00 60 31 00 00 00 00 00 00 00  @.....1
00000030  00 00 00 00 40 00 38 00 0B 00 40 1C 00 1B 00 00  ...@.8...@
00000040  06 00 00 00 04 00 00 40 00 00 00 00 00 00 00 00  .....@
00000050  40 00 00 00 00 00 00 40 00 00 00 00 00 00 00 00  @.....@
00000060  68 02 00 00 00 00 68 02 00 00 00 00 00 00 00 00  h.....h
00000070  08 00 00 00 00 00 00 03 00 00 00 04 00 00 00 00  .....h
```

Ensuite dans ghidra :

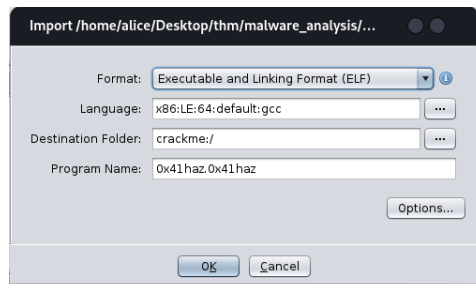

```
Project File Name: 0x41haz.0x41haz
Last Modified: Thu May 22 22:12:38 CEST 2025
Readonly: false
Program Name: 0x41haz.0x41haz
Language ID: x86:LE:64:default (3.0)
Compiler ID: gcc
Processor: x86
Endian: Little
Address Size: 64
Minimum Address: 00100000
Maximum Address: _elfSectionHeaders: 000006ff
# of Bytes: 5473
# of Memory Blocks: 30
# of Instructions: 14
# of Defined Data: 76
# of Functions: 17
# of Symbols: 36
# of Data Types: 31
# of Data Type Categories: 2
Created With Ghidra Version: 11.0
Date Created: Thu May 22 22:12:38 CEST 2025
ELF File Type: shared object
ELF Note[GNU BuildId]: 6c9f2e85b644f12b91136ffb8e4c038f1dc6dcd
ELF Note[required kernel ABI]: Linux 3.2.0
ELF Original Image Base: 0x0
ELF Prelinked: false
ELF Comment[0]: GCC: (Debian 10.3.0-9) 10.3.0
Executable Format: Executable and Linking Format (ELF)
Executable Location: /home/alice/Desktop/thm/malware_analysis/0x41haz/0x41haz.0x41haz
Executable MD5: 2e280b1159d9e77e25846ead77984a0b
Executable SHA256: e267eb08bd8cfdadc64322758aef9893e79fb718d49e8204cf33a06bdb9e3ce5
FSRL: file:///home/alice/Desktop/thm/malware_analysis/0x41haz/0x41haz.0x41haz
Preferred Root Namespace Category:
Relocatable: true
Required Library [ 0]: libc.so.6
```

String Search [Debugger: crackme/0x41haz.0x41haz]									
Edit Help									
String Search - 15 items - [0x41haz.0x41haz, Minimum size = 5, Align = 1]									
...	Loc...	Label	Code Unit	String View	Str...	Le...	Is Word		
	001002a8	s_lib64/ld...	ds "/lib64/ld-linux-x86-...	"lib64/ld-linux-x86-64.so.2"	string	28	true		
	00100430		utf8 u8"strlen"	"strlen"	string	7	true		
	00100437		utf8 u8"__cxa_finalize"	"__cxa_finalize"	string	15	true		
	00100446		utf8 u8"__libc_start_main"	"__libc_start_main"	string	18	true		
	00100458		utf8 u8"libc.so.6"	"libc.so.6"	string	10	false		
	00100462		utf8 u8"GLIBC_2.2.5"	"GLIBC_2.2.5"	string	12	false		
	0010046e		utf8 u8"__ITM_deregisterT...	"__ITM_deregisterTMCloneTable"	string	28	true		
	0010048a		utf8 u8"__gmon_start_..."	"__gmon_start_..."	string	15	true		
	00100499		utf8 u8"__ITM_registerTMC...	"__ITM_registerTMCloneTable"	string	26	true		
	00102008	s_=====...	ds "=====..."	"=====..."	string	72	true		
	00102050	s_It'sjus...	ds "It's jus a simple bi...	"It's jus a simple binary\n"	string	27	true		
	0010206b	s_Tell_Me...	ds "Tell Me the Password :"	"Tell Me the Password :"	string	23	true		
	00102088	s_Is it cor...	ds "Is it correct , I do..."	"Is it correct , I don't think so."	string	34	true		
	001020ef	s_Well_Do...	ds "Well Done !!"	"Well Done !!"	string	13	true		
	0010215f		db 36h (byte[23][14])	":*3\$!"	string	6	false		

Je comprends rien a ghidra donc je vais utiliser un autre outils : r2

```
(alice@kali)-[~/Desktop/thm/malware_analysis/0x41haz]
$ r2 0x41haz.0x41haz
WARN: Relocs has not been applied. Please use '-e bin.relocs.apply=true' or '-e bin.cache=true' next time
[0x00001080]>
[0x00001080]> help

Welcome to radare2!

* Type '?' for the root list of commands.
* Append the '?' to any command to list the sub-commands.
* Prefix the command with '~' to avoid evaluating special chars
* The '@' modifier can be used for temporal seeks
* The '-' represents the internal grep. System pipes also work '|'.
* Multiple commands can be chained with ';'.
```

```
* Run external scripts with the '.' source command (r2, r2js, python, ...)
* Use the '?*~...' command to inspect all the commands in visual mode

Use the 'e' command to change the configuration options.
* Run 'edit' to tweak your ~/.radare2rc script

Basic commands:

* s [addr] - seek to a different address
* px, pd - print hexadecimal, disassembly (pdf/pdr the whole function)
* wx, wa - write hexpairs, write assembly (w - write string)
* aaa, af - analyze the whole program or function
* /, /x - search for strings or hexadecimal patterns
* f-... - search for strings or hexadecimal patterns
* q - quit (alias for "D or exit)
```

```
[0x00001165]> pdf
; DATA XREF from entry0 @ 0x109d(r)
219: int main (int argc, char **argv, char **envp);
afv: vars(6:sp[0xc..0x48])
0x00001165 55          push rbp
0x00001166 4889e5      mov rbp, rsp
0x00001169 4883ec40    sub rsp, 0x40
0x0000116d 48b8324040.. movabs rax, 0x6667243532404032 ; '20025$gf'
0x00001177 488945ea    mov qword [var_16h], rax
0x0000117b c745f27354.. mov dword [var_eh], 0x40265473 ; 'sT@'
0x00001182 66c745f64c00 mov word [var_ah], 0x4c ; 'L'
0x00001188 488d3d790e.. lea rdi, str_nHey__Can_You_Crackme___n ; 0x2008 ; "=====
\nHey , Can You Crackme ?\n====="; const char *s
0x0000118f e89cfeffff call sym.imp.puts ; int puts(const char *s)
0x00001194 488d3db50e.. lea rdi, str.Its_jus_a_simple_binary__n ; 0x2050 ; "It's jus a simpl
e binary \n"; const char *s
0x0000119b e890feffff call sym.imp.puts ; int puts(const char *s)
; main to see what we get
0x000011a0 488d3dc40e.. lea rdi, str.Tell_Me_the_Password_ ; 0x200b ; "Tell Me the Password
"; const char *s
0x000011a7 e884feffff call sym.imp.puts ; int puts(const char *s)
0x000011ac 488d45c0    lea rax, [s]
```