




CLIP Encoder & Selector

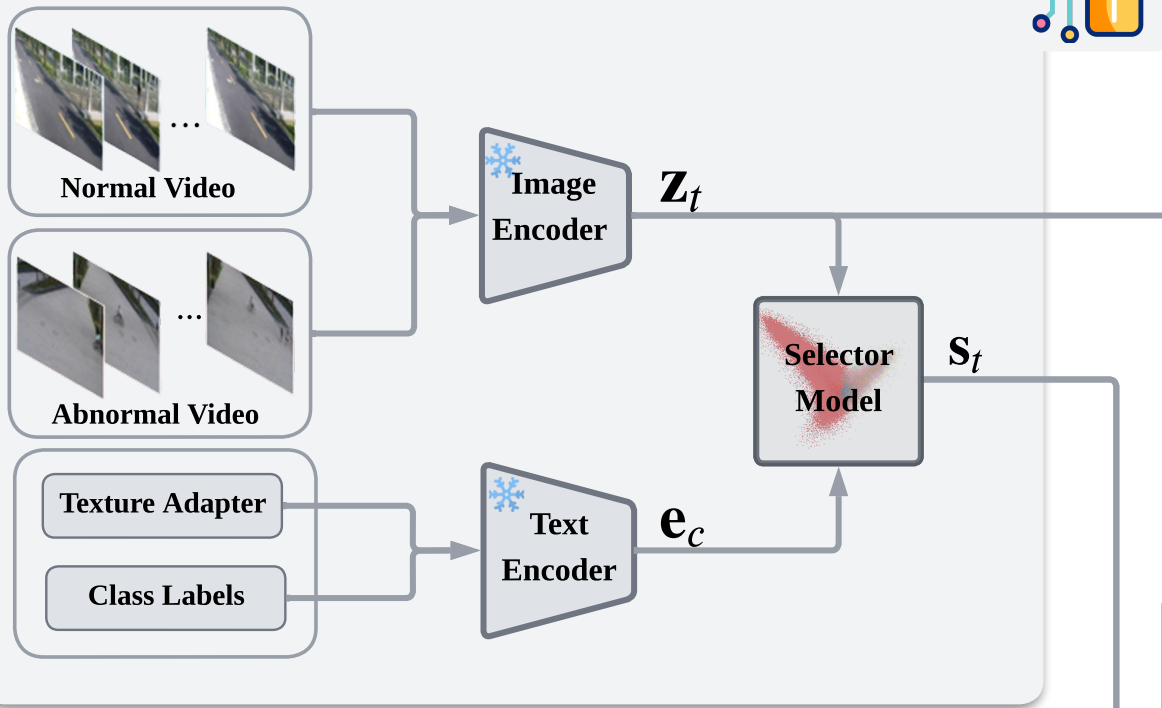

State-Space Temporal Model

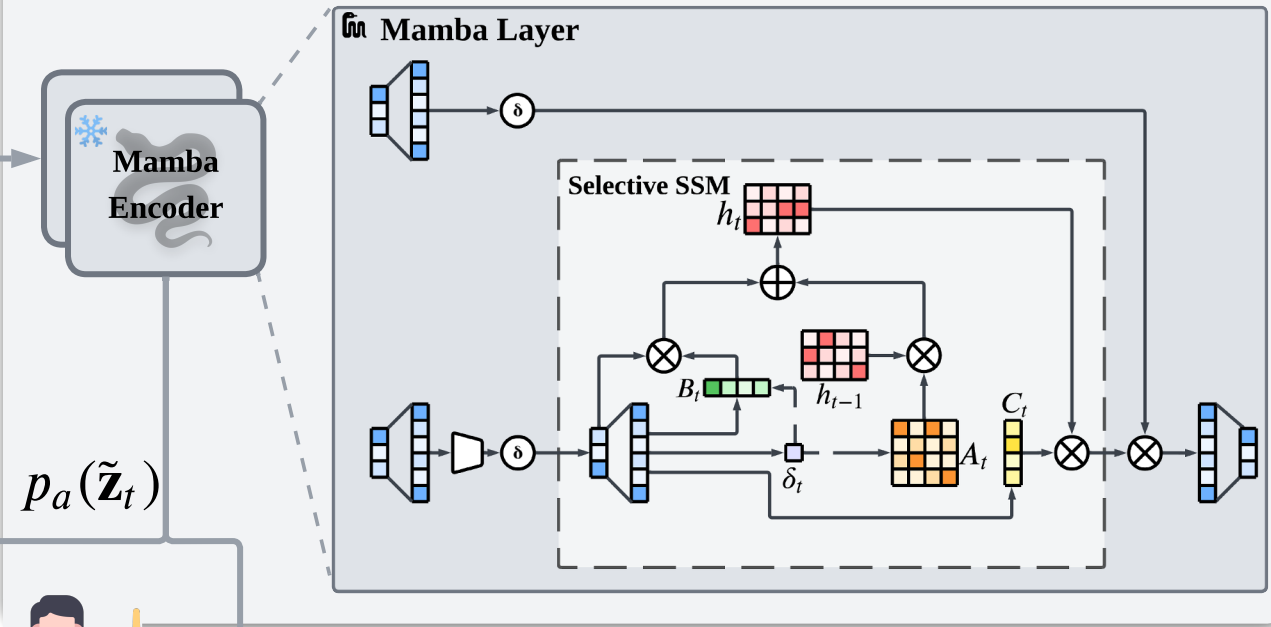


Anomaly Detection

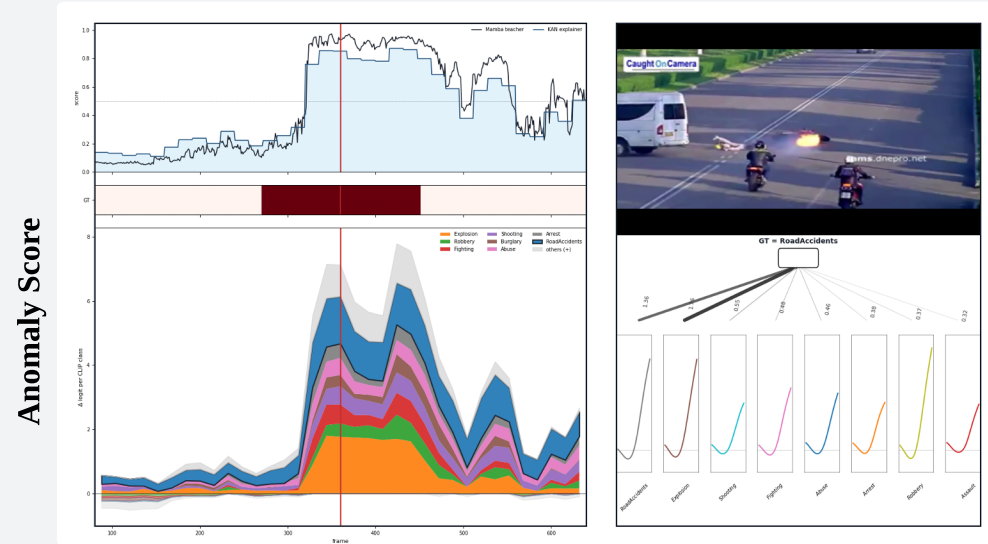


Distillation Protocol

$$\mathcal{L}_{\text{distill}}(\phi) = \frac{1}{|B|} \sum_{t \in B} \left(g_{\phi}(\text{sg}(\mathbf{s}_t)) - \text{sg}(p_a(\tilde{\mathbf{z}}_t)) \right)^2$$

Kolmogorov-Arnold Network Surrogate

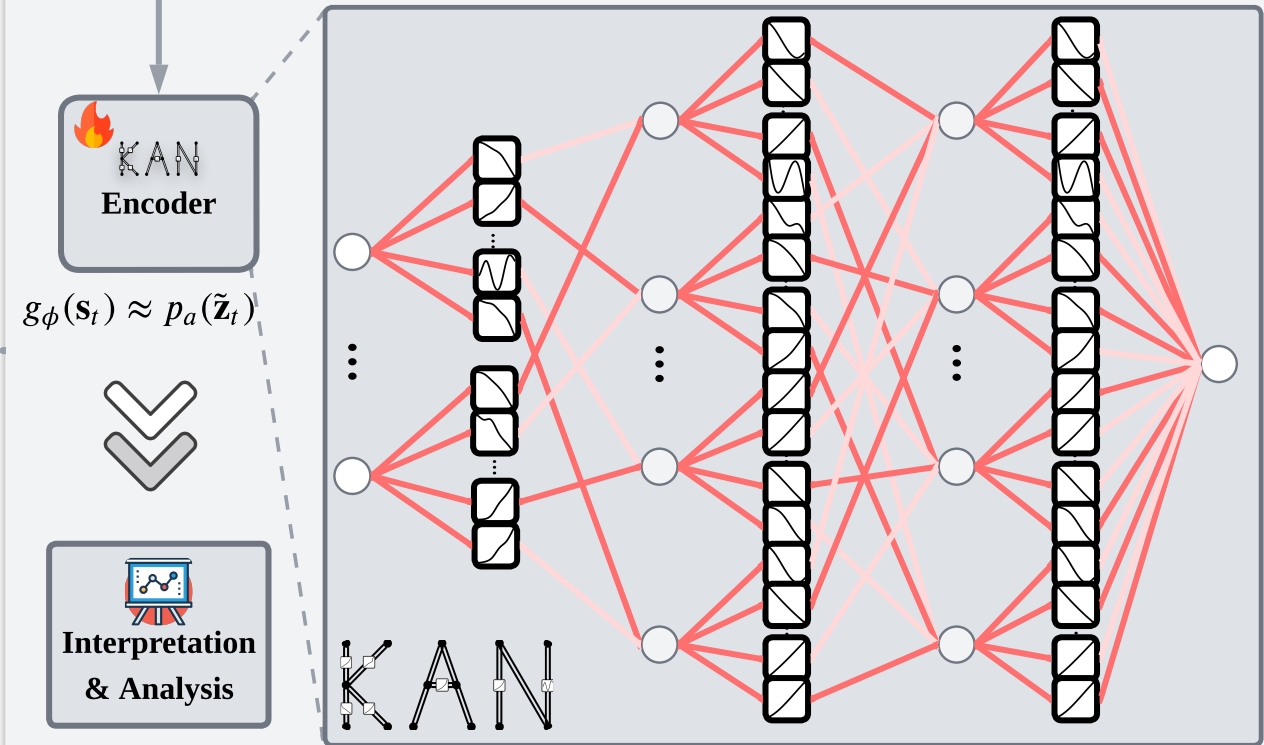

Archetype Glossary

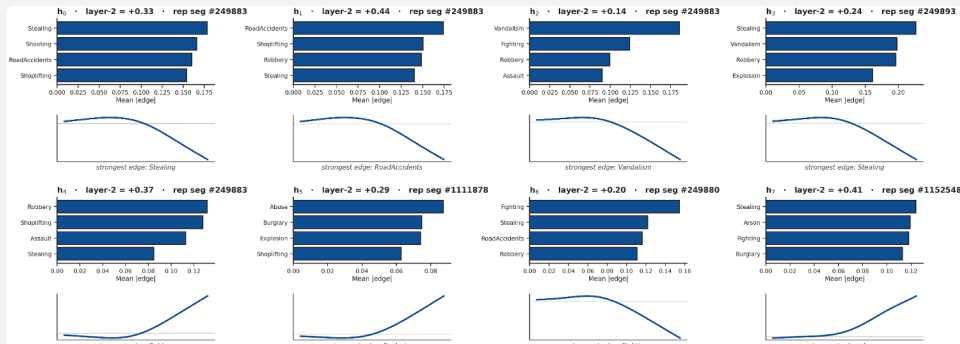

$$p_{c|a}(\tilde{\mathbf{z}}_t) = \text{softmax}(\mathbf{s}_t) \quad p_{a,c}(\tilde{\mathbf{z}}_t) = p_a(\tilde{\mathbf{z}}_t) * p_{c|a}(\tilde{\mathbf{z}}_t)$$