Lab 4 plus

*Lab 4 plus is a combination of Lab 4 and an extra activity on ARP.

Packet Tracer Simulation – Exploration of ARP and Switch Table Communications

Objectives

- To explore ARP and switching operations.

Introduction

The topology is given to you. All IP addresses have been assigned to all devices. Please follow each step in sequence.

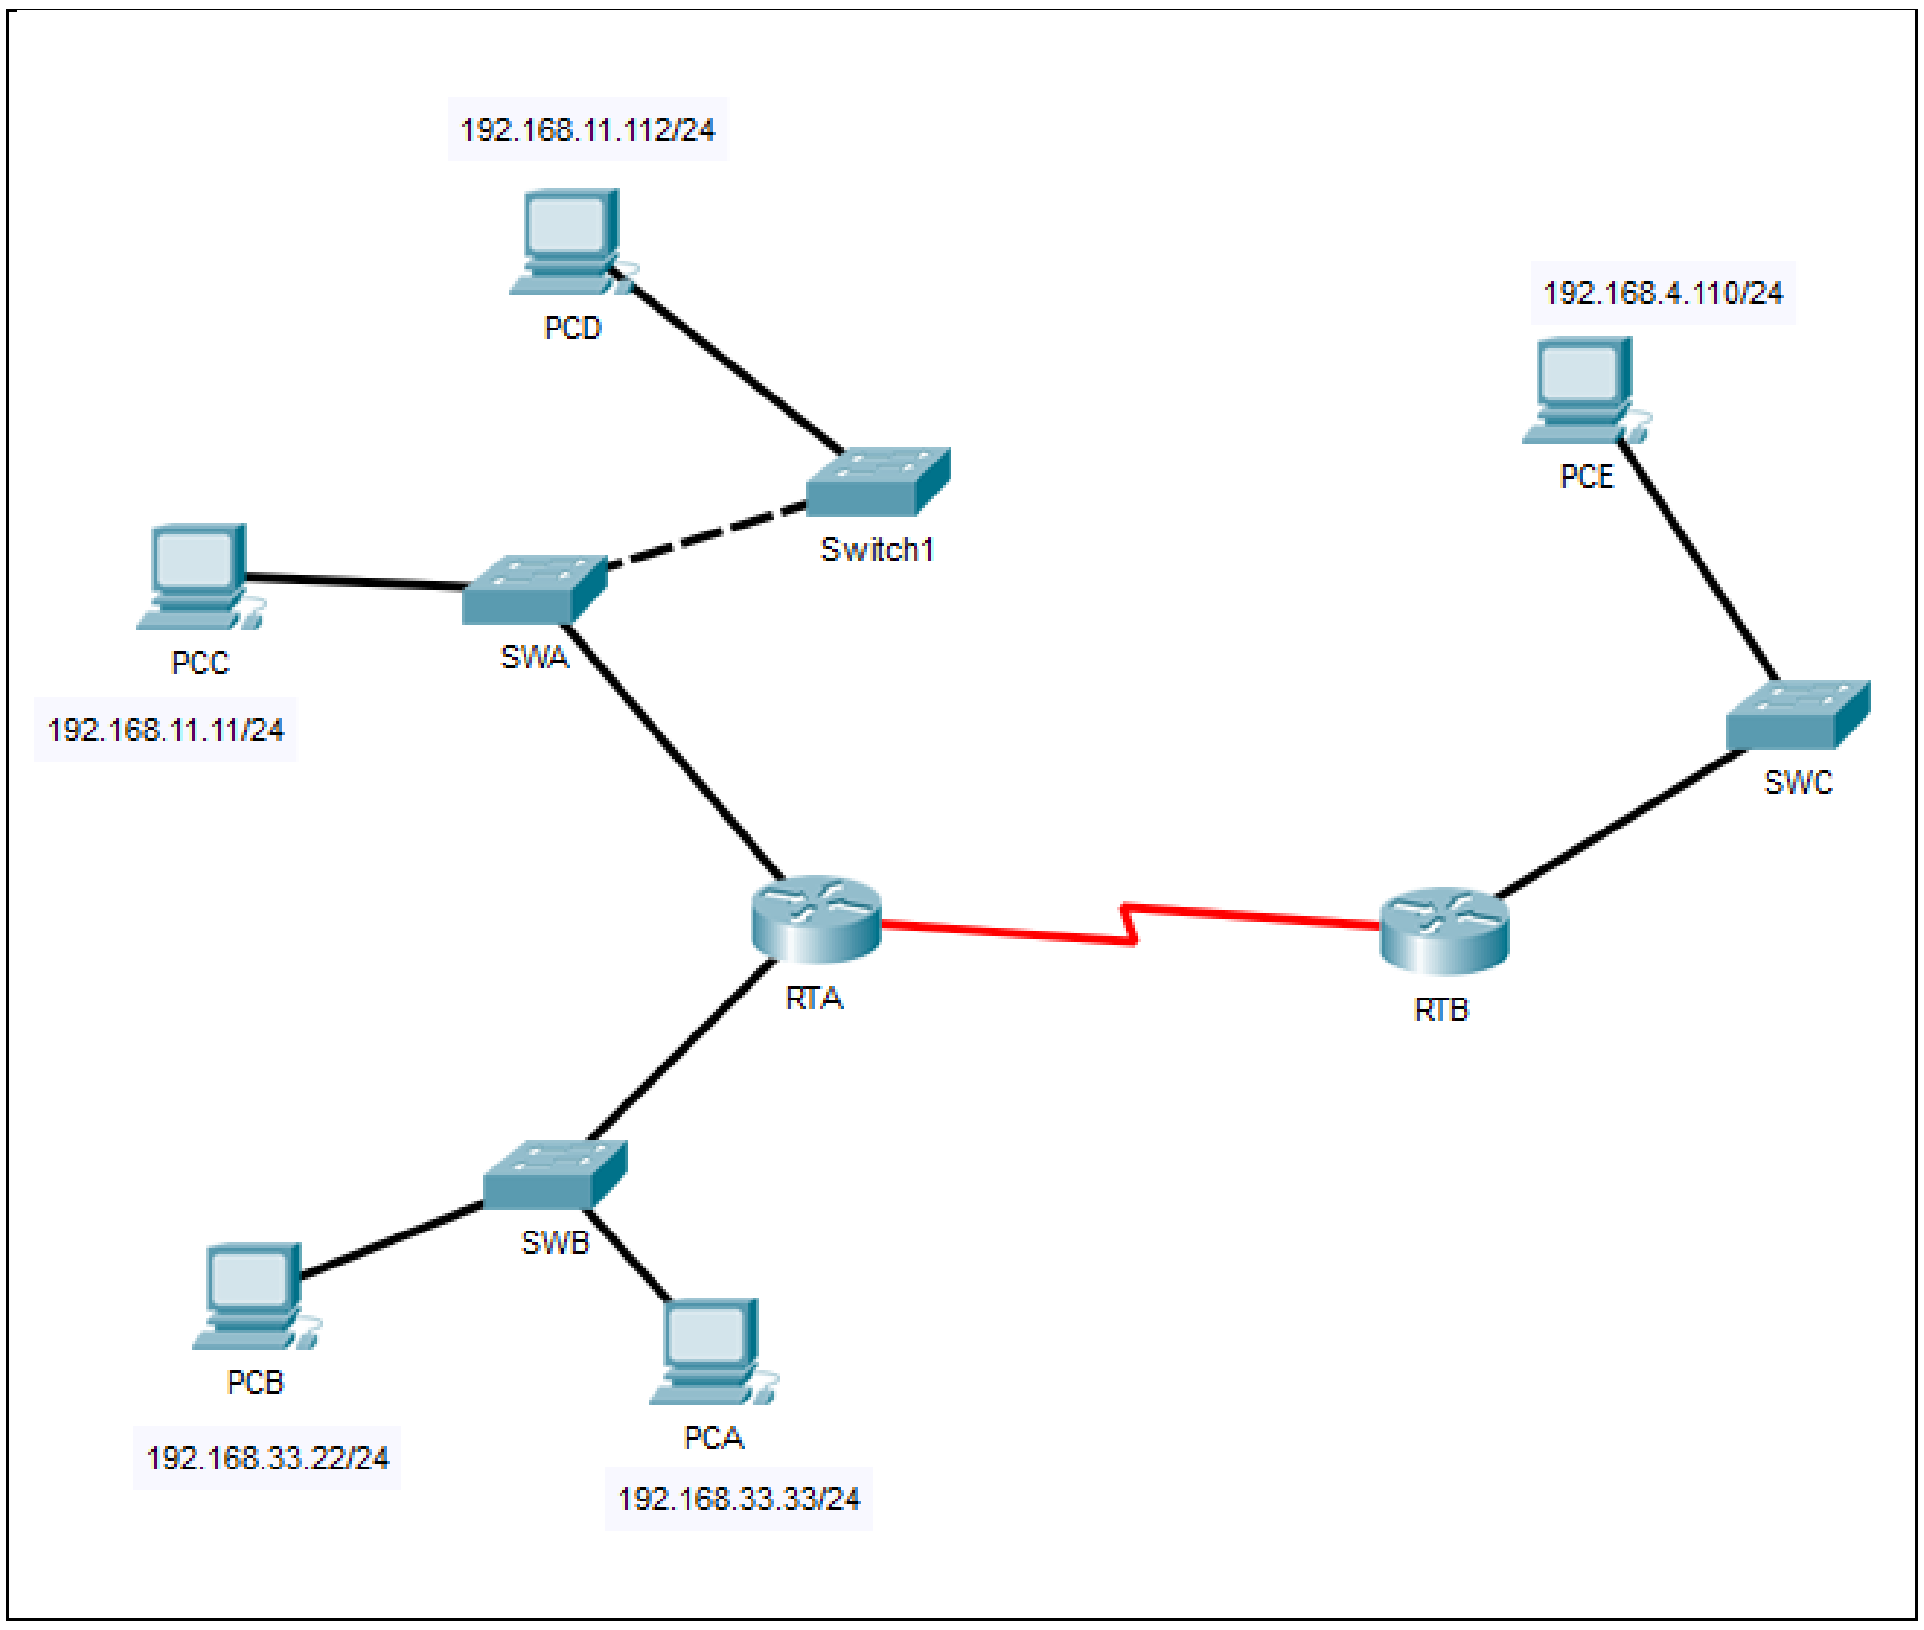

Figure 1

Part 1: Review the topology

Step 1: Open the ***Lab_4_ARP.pkt***, and Perform the following tasks.

a. At Router RTA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTA>enable
RTA#show arp
```

```
RTA>enable
RTA#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.11.1            -   0002.4A00.0E91  ARPA   FastEthernet1/0
Internet  192.168.33.1            -   000C.CF0C.593A  ARPA   FastEthernet0/0
```

b. At Router RTB, enter the CLI. At the command prompt type the commands as in Figure 2. Snap the results after the last command and paste it here.

```
RTB>enable
RTB#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.4.1             -   0001.977A.B614  ARPA   FastEthernet0/0
```

c. At Switches SWA, SWAB and SWC, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
```

```
SWA#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0002.4a00.0e91    DYNAMIC     Fa0/1
   1    000c.8546.7d85    DYNAMIC     Fa1/1
```

```
SWB#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    000c.cf0c.593a    DYNAMIC     Fa0/1
```

```
SWC#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0001.977a.b614    DYNAMIC     Fa0/1
```

d. At PCA, click on the PC icon, and then choose Desktop-Command Prompt. At the command prompt type **`arp -a`** and click enter. Snap the results after the last command and paste it here. Do this to all PCs in the topology.

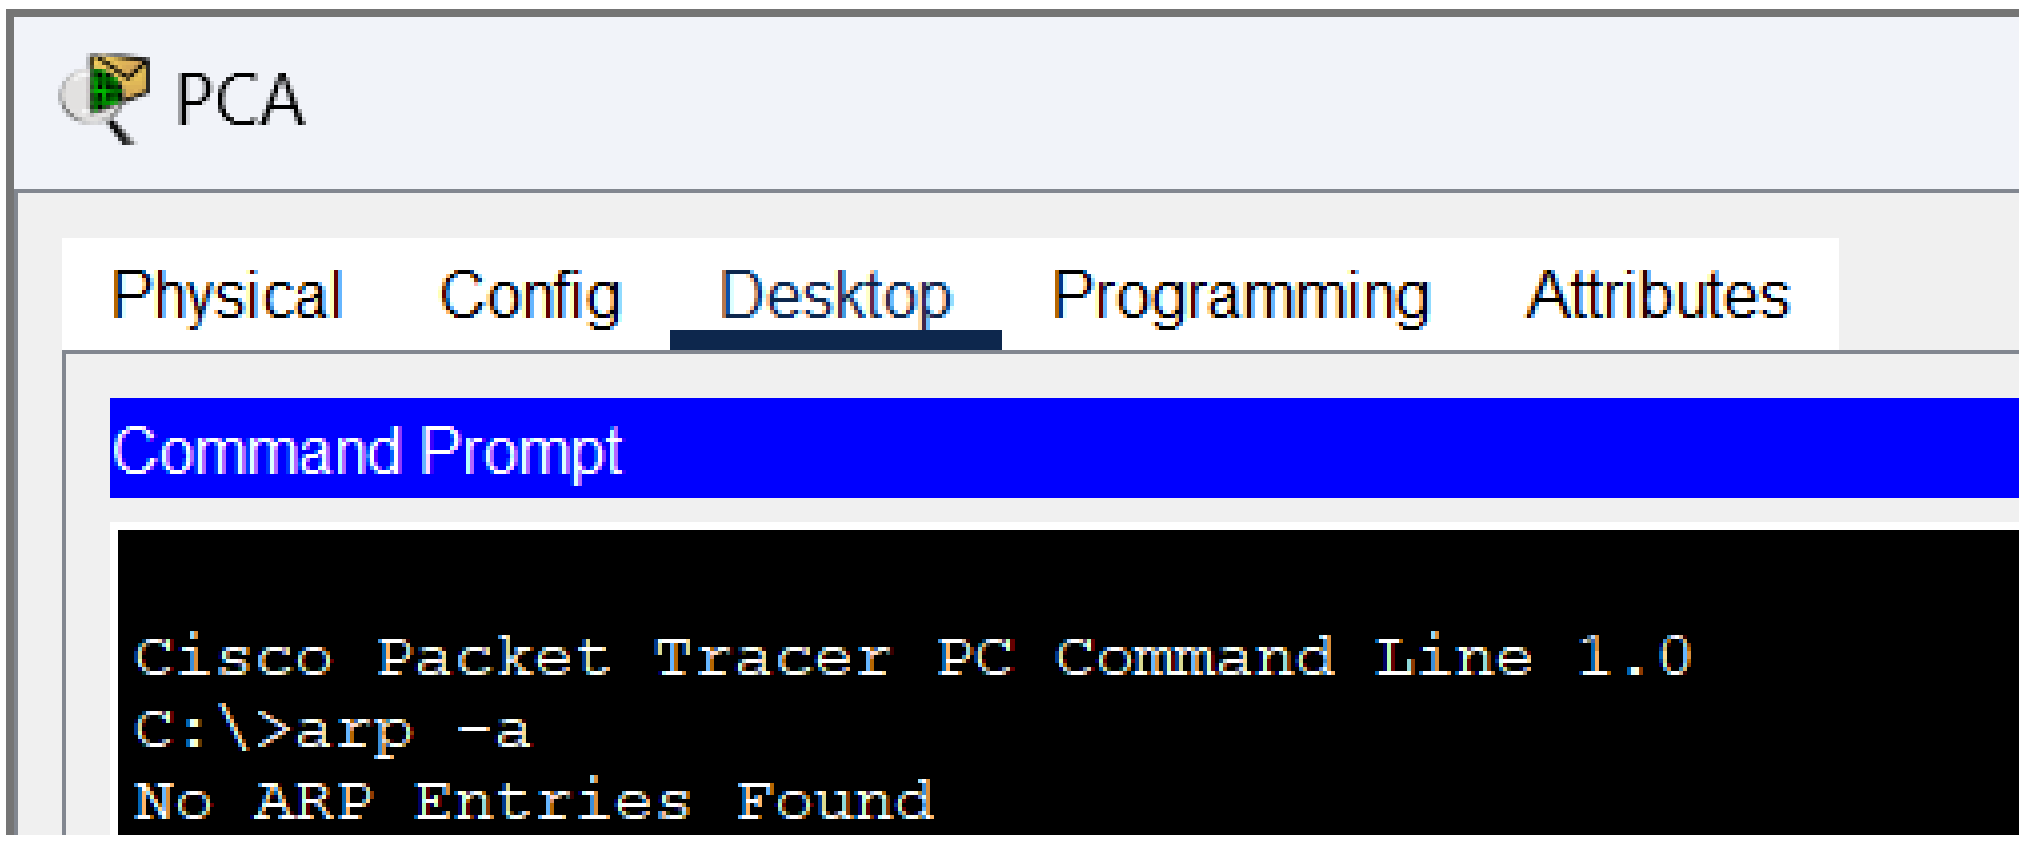

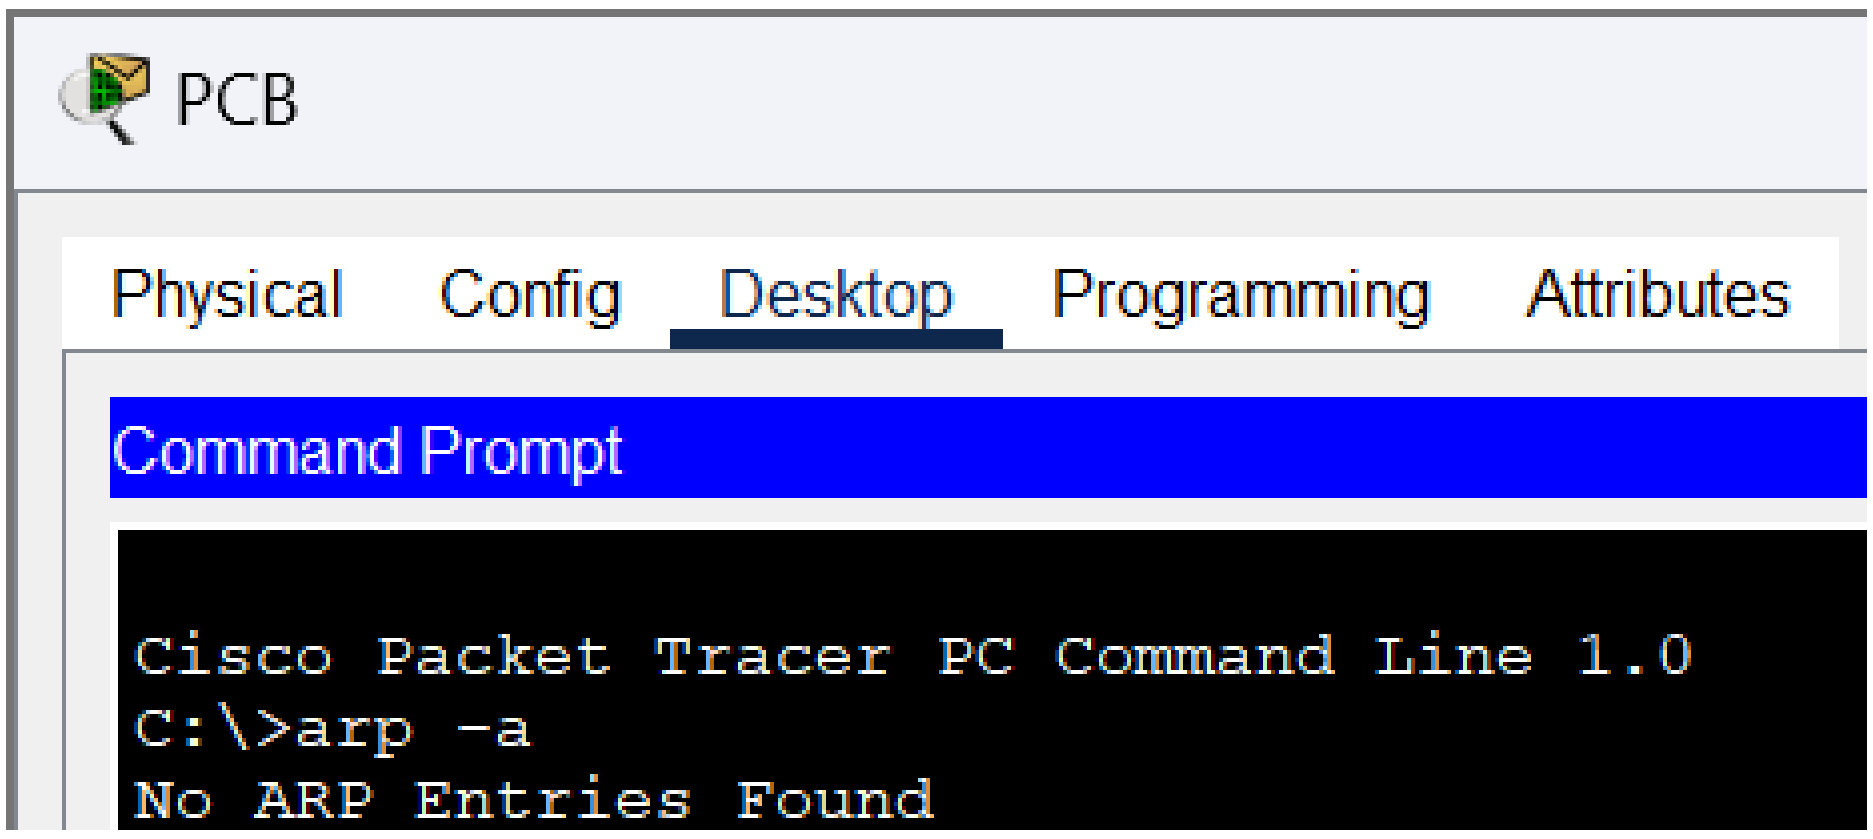

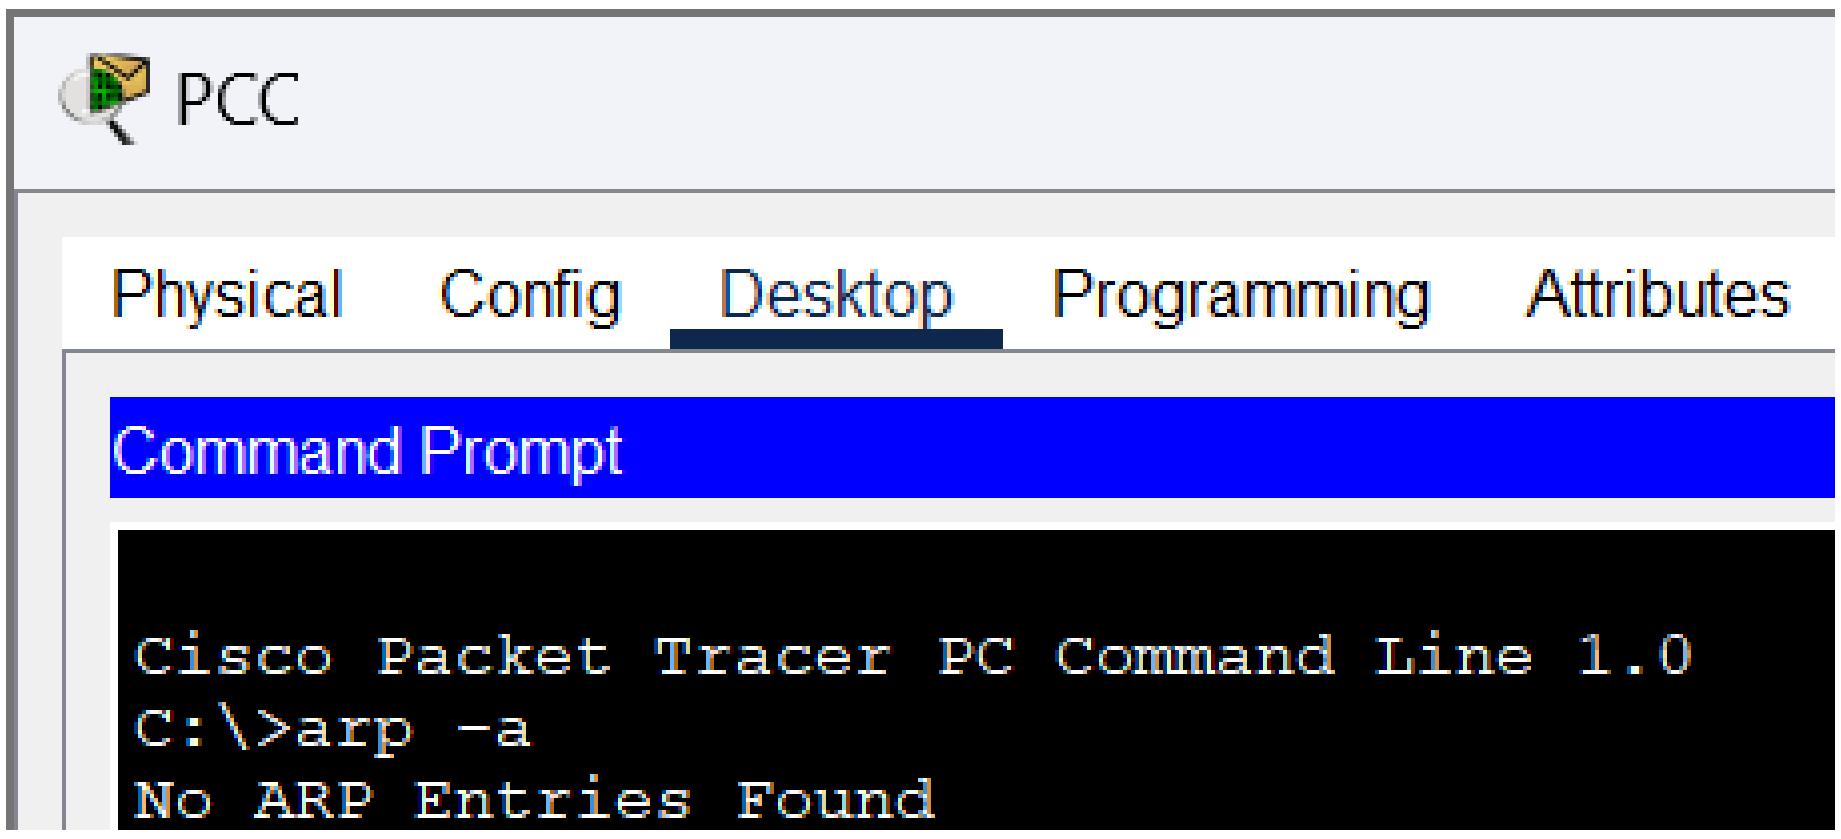

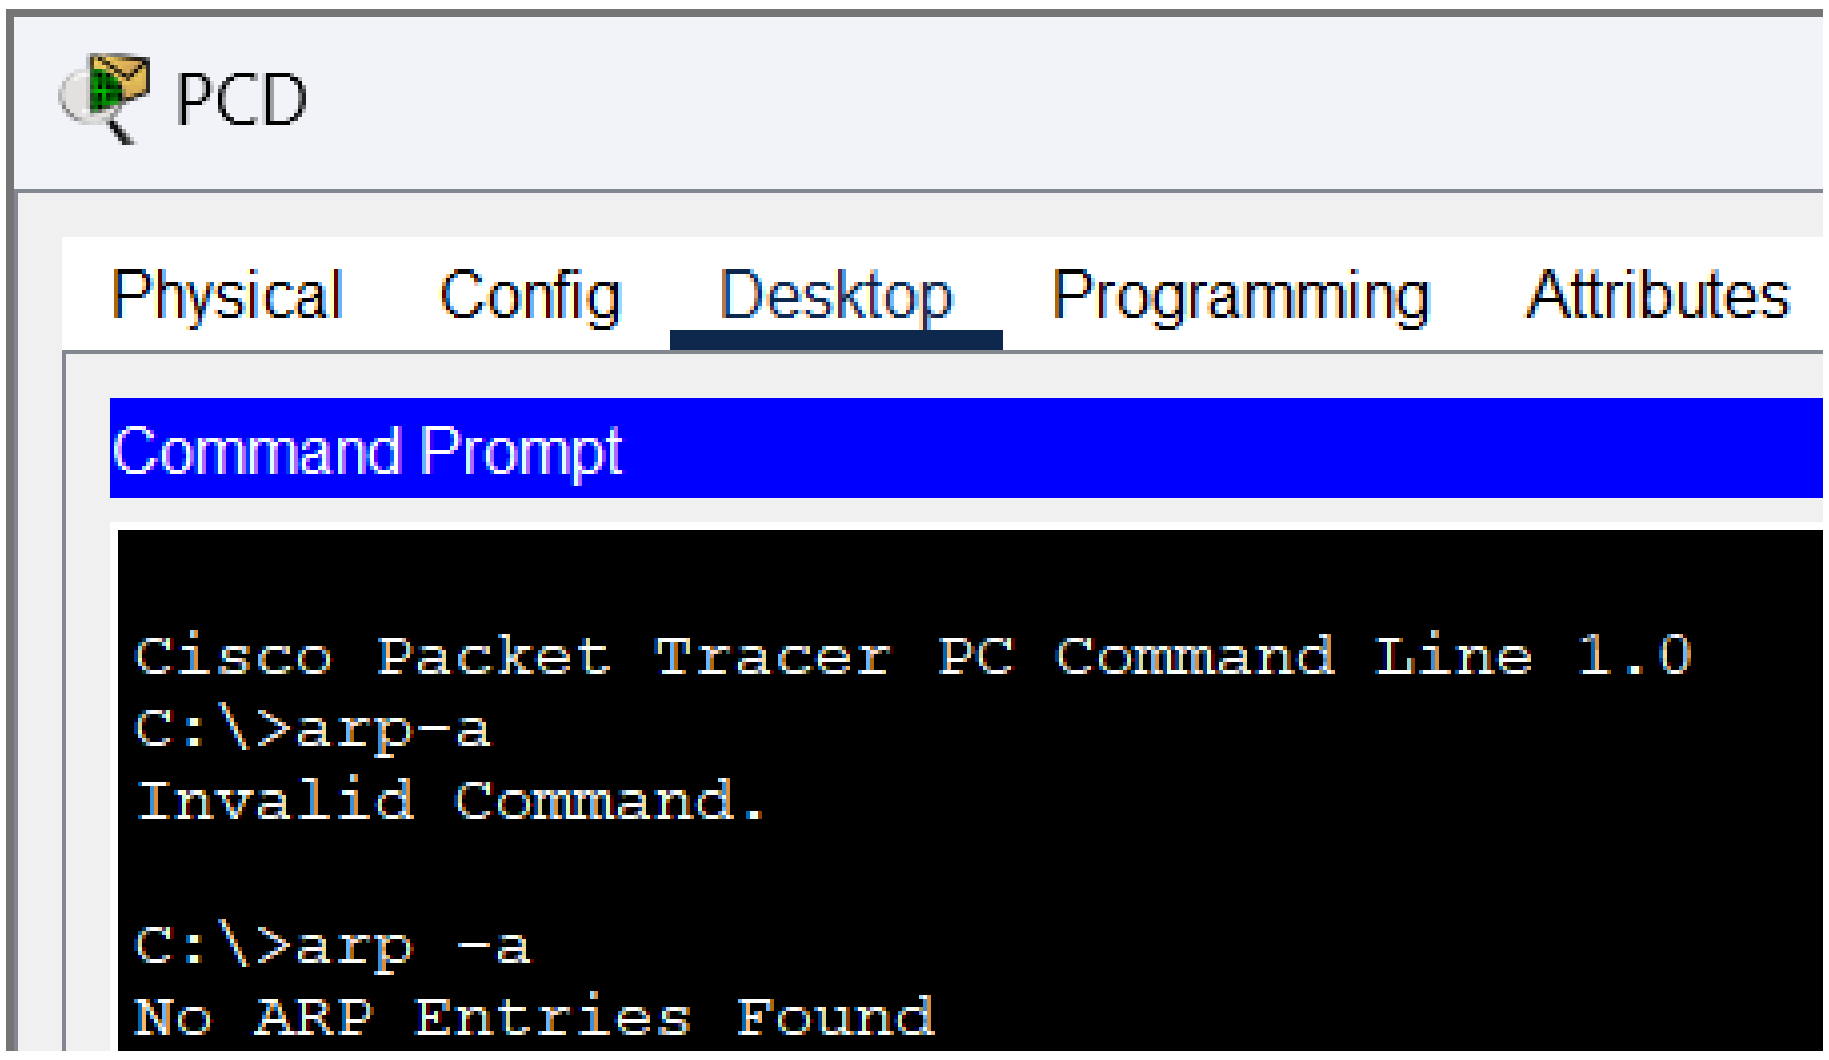

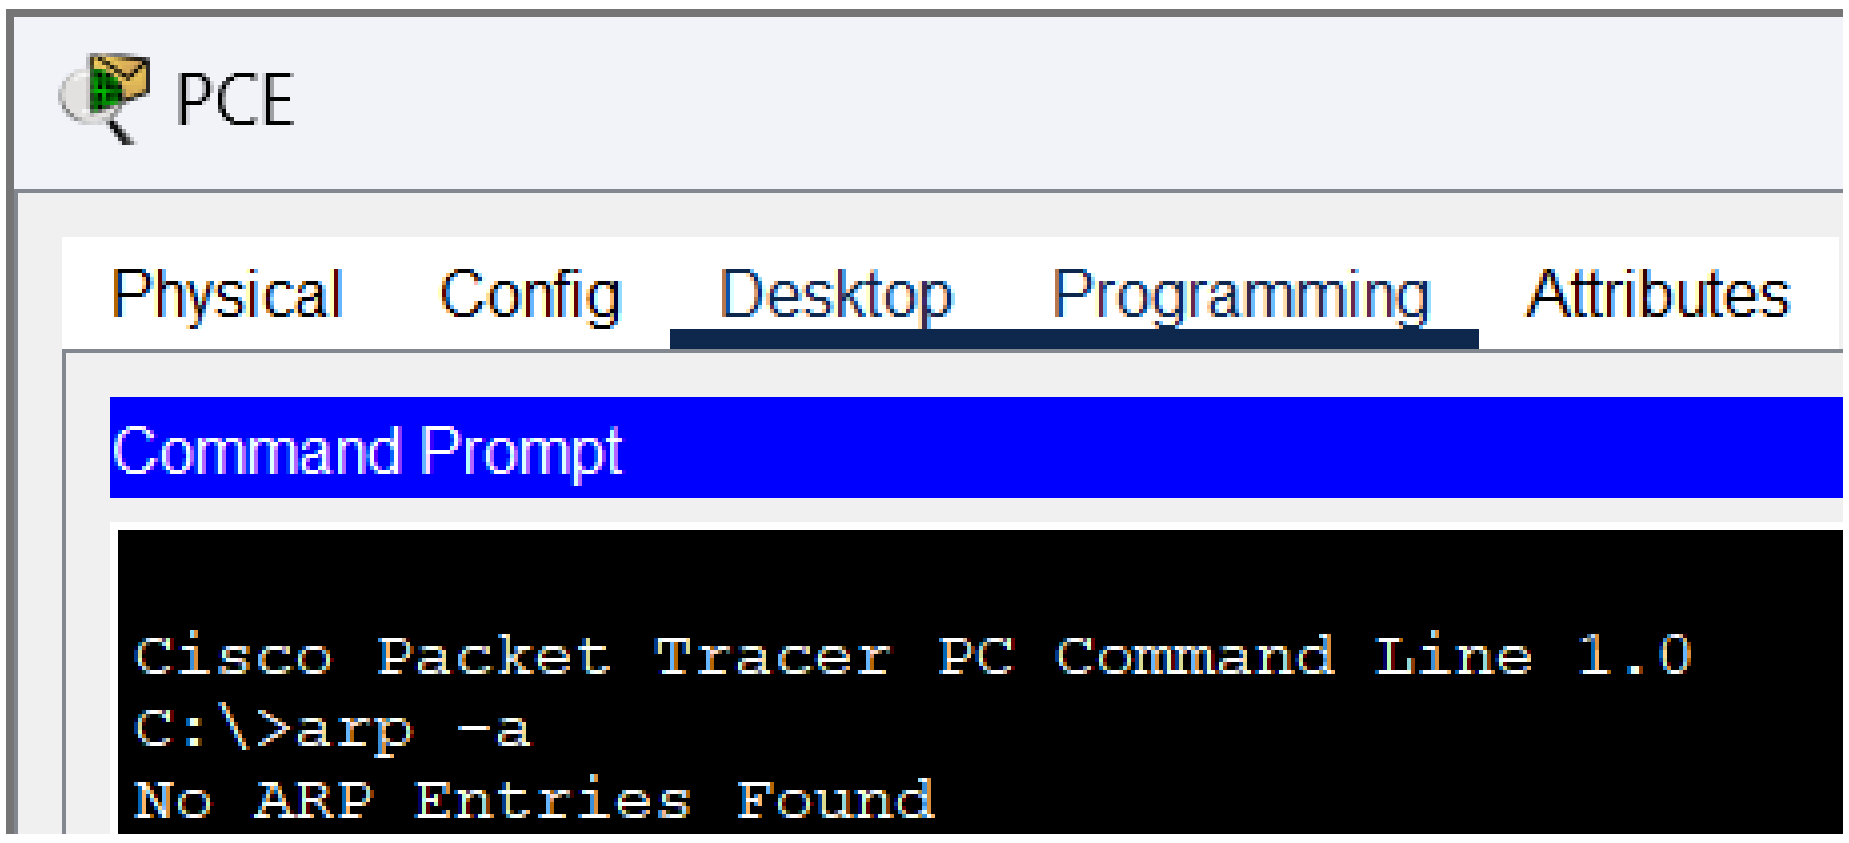

e. What are your thoughts on the results?

The PC have not communicated with other devices.

Part 2: Generate Network Traffic

Step 1: Generate traffic between PCA and PCB.

In the command prompt Perform the following tasks task to reduce the amount of network traffic viewed in the simulation.

a. Click **PCA** and click the Desktop tab > Command Prompt.
b. Enter the **ping 192.168.33.22** command. This may take a few seconds.

```
C:\>ping 192.168.33.22

Pinging 192.168.33.22 with 32 bytes of data:

Reply from 192.168.33.22: bytes=32 time<1ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128
Reply from 192.168.33.22: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.33.22:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms
```

c. In the Command prompt of PCA, type **arp –a**. Paste the result of this command here.

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.33.22         0060.47ea.a746        dynamic
```

d. In the Command prompt of PCB, type **arp –a**. Paste the result of this command here

```
C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.33.33         0002.1755.9a06        dynamic
```

e. In the Command prompt of PCC, PCD abd PCE, type **arp –a**. Paste the result of this command here.

PCC

```
C:\>arp -a
No ARP Entries Found
```

PCD

```
C:\>arp -a
No ARP Entries Found
```

PCE

```
C:\>arp -a
No ARP Entries Found
```

Step 2: Generate traffic between PCC to all other PC except PCA.

a. Click **PCC** and click the Desktop tab > Command Prompt.
b. Enter the **ping 192.168.33.22** command (ping to PCB). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.33.22

Pinging 192.168.33.22 with 32 bytes of data:

Request timed out.
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127
Reply from 192.168.33.22: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.33.22:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
```

c. Enter the **ping 192.168.11.112** command (ping to PCD). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.11.112

Pinging 192.168.11.112 with 32 bytes of data:

Reply from 192.168.11.112: bytes=32 time<1ms TTL=128
Reply from 192.168.11.112: bytes=32 time<1ms TTL=128
Reply from 192.168.11.112: bytes=32 time<1ms TTL=128
Reply from 192.168.11.112: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.11.112:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
  192.168.11.112        0001.6462.0278        dynamic
```

d. Enter the **ping 192.168.4.110** command (ping to PCE). Then type **arp –a**. Paste the result after these commands here.

```
C:\>ping 192.168.4.110

Pinging 192.168.4.110 with 32 bytes of data:

Request timed out.
Reply from 192.168.4.110: bytes=32 time=10ms TTL=126
Reply from 192.168.4.110: bytes=32 time=8ms TTL=126
Reply from 192.168.4.110: bytes=32 time=1ms TTL=126

Ping statistics for 192.168.4.110:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 10ms, Average = 6ms

C:\>arp -a
  Internet Address      Physical Address      Type
  192.168.11.1          0002.4a00.0e91        dynamic
  192.168.11.112        0001.6462.0278        dynamic
```

e. Discuss the results you got from all the commands on PCC.

PCB is in a different subnet from PCC. When PCC ping PCB, the ARP table shows the internet address of the default gateway, 192.168.11.1. This shows that the packets are forwarded to RTA.

PCD is of the same subnet as PCC. When PCC ping PCD, , the ARP table shows the internet address of PCD, 192.168.11.112. PCB communicate directly with PCD.

PCB is in a different subnet from PCC. When PCC ping PCB, no new internet address are added to the ARP table. The packets are sent to the default gateway, 192.168.11.1. This shows that the packets are forwarded to RTA.

f. At Router RTA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTA>enable
RTA#show arp
```

```
RTA>en
RTA#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.11.1            -   0002.4A00.0E91  ARPA   FastEthernet1/0
Internet  192.168.11.11           2   00D0.D39A.C0D9  ARPA   FastEthernet1/0
Internet  192.168.33.1            -   000C.CF0C.593A  ARPA   FastEthernet0/0
Internet  192.168.33.22           2   0060.47EA.A746  ARPA   FastEthernet0/0
```

g. At Router RTB, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
RTB>enable
RTB#show arp
```

```
RTB>en
RTB#show arp
Protocol  Address          Age (min)  Hardware Addr   Type   Interface
Internet  192.168.4.1             -   0001.977A.B614  ARPA   FastEthernet0/0
Internet  192.168.4.110           2   0060.702D.7C08  ARPA   FastEthernet0/0
```

Step 3: Switch MAC address table.

a. At Switch SWA, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWA>enable
SWA#show arp

SWA#show mac-address-table
```

```
SWA#show arp

SWA#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0002.4a00.0e91    DYNAMIC     Fa0/1
   1    000c.8546.7d85    DYNAMIC     Fa1/1
```

b. At Switch SWB, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWB>enable
SWB#show arp

SWB#show mac-address-table
```

```
SWB#show arp

SWB#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    000c.cf0c.593a    DYNAMIC     Fa0/1
```

c. At Switches SWC and Switch1, enter the CLI. At the command prompt type the following commands. Snap the results after the last command and paste it here.

```
SWC>enable
SWC#show arp

SWC#show mac-address-table
```

```
SWC#show arp

SWC#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0001.977a.b614    DYNAMIC     Fa0/1
```

```
Switch>en
Switch#show arp

Switch#show mac-address-table
          Mac Address Table
-------------------------------------------

Vlan    Mac Address       Type        Ports
----    -----------       --------    -----

   1    0005.5e95.187b    DYNAMIC     Fa0/1
```

d. Do switches use arp table? (Y/N)

No

e. Explain your answer in (d) **Hint: the answer may surprise you. Google for the explanation. It is not part of NetComm syllabi, it is just for knowledge.*

Switches operate at data link layer and uses MAC addresses. ARP table is for the network layer.

f. What information does the command ***show mac-address-table*** gives?

It gives the VLAN associated with the MAC address, MAC address of the connected devices, type of entry and port where the corresponding MAC address is connected.

Part 3: Attach wireless lab results.

In this part, you will use ***Lab_4_Wireless.pka*** file.

Step1: Change the filename of the pka file.

a. Change the Lab 4 filename to include your name. **Example: Lab4AliAhmad.pkt*

b. Go through the instructions. As you complete the tasks, you will see the bottom right hand corner of the pkt file increase in completion percentage, until you get 100/100.

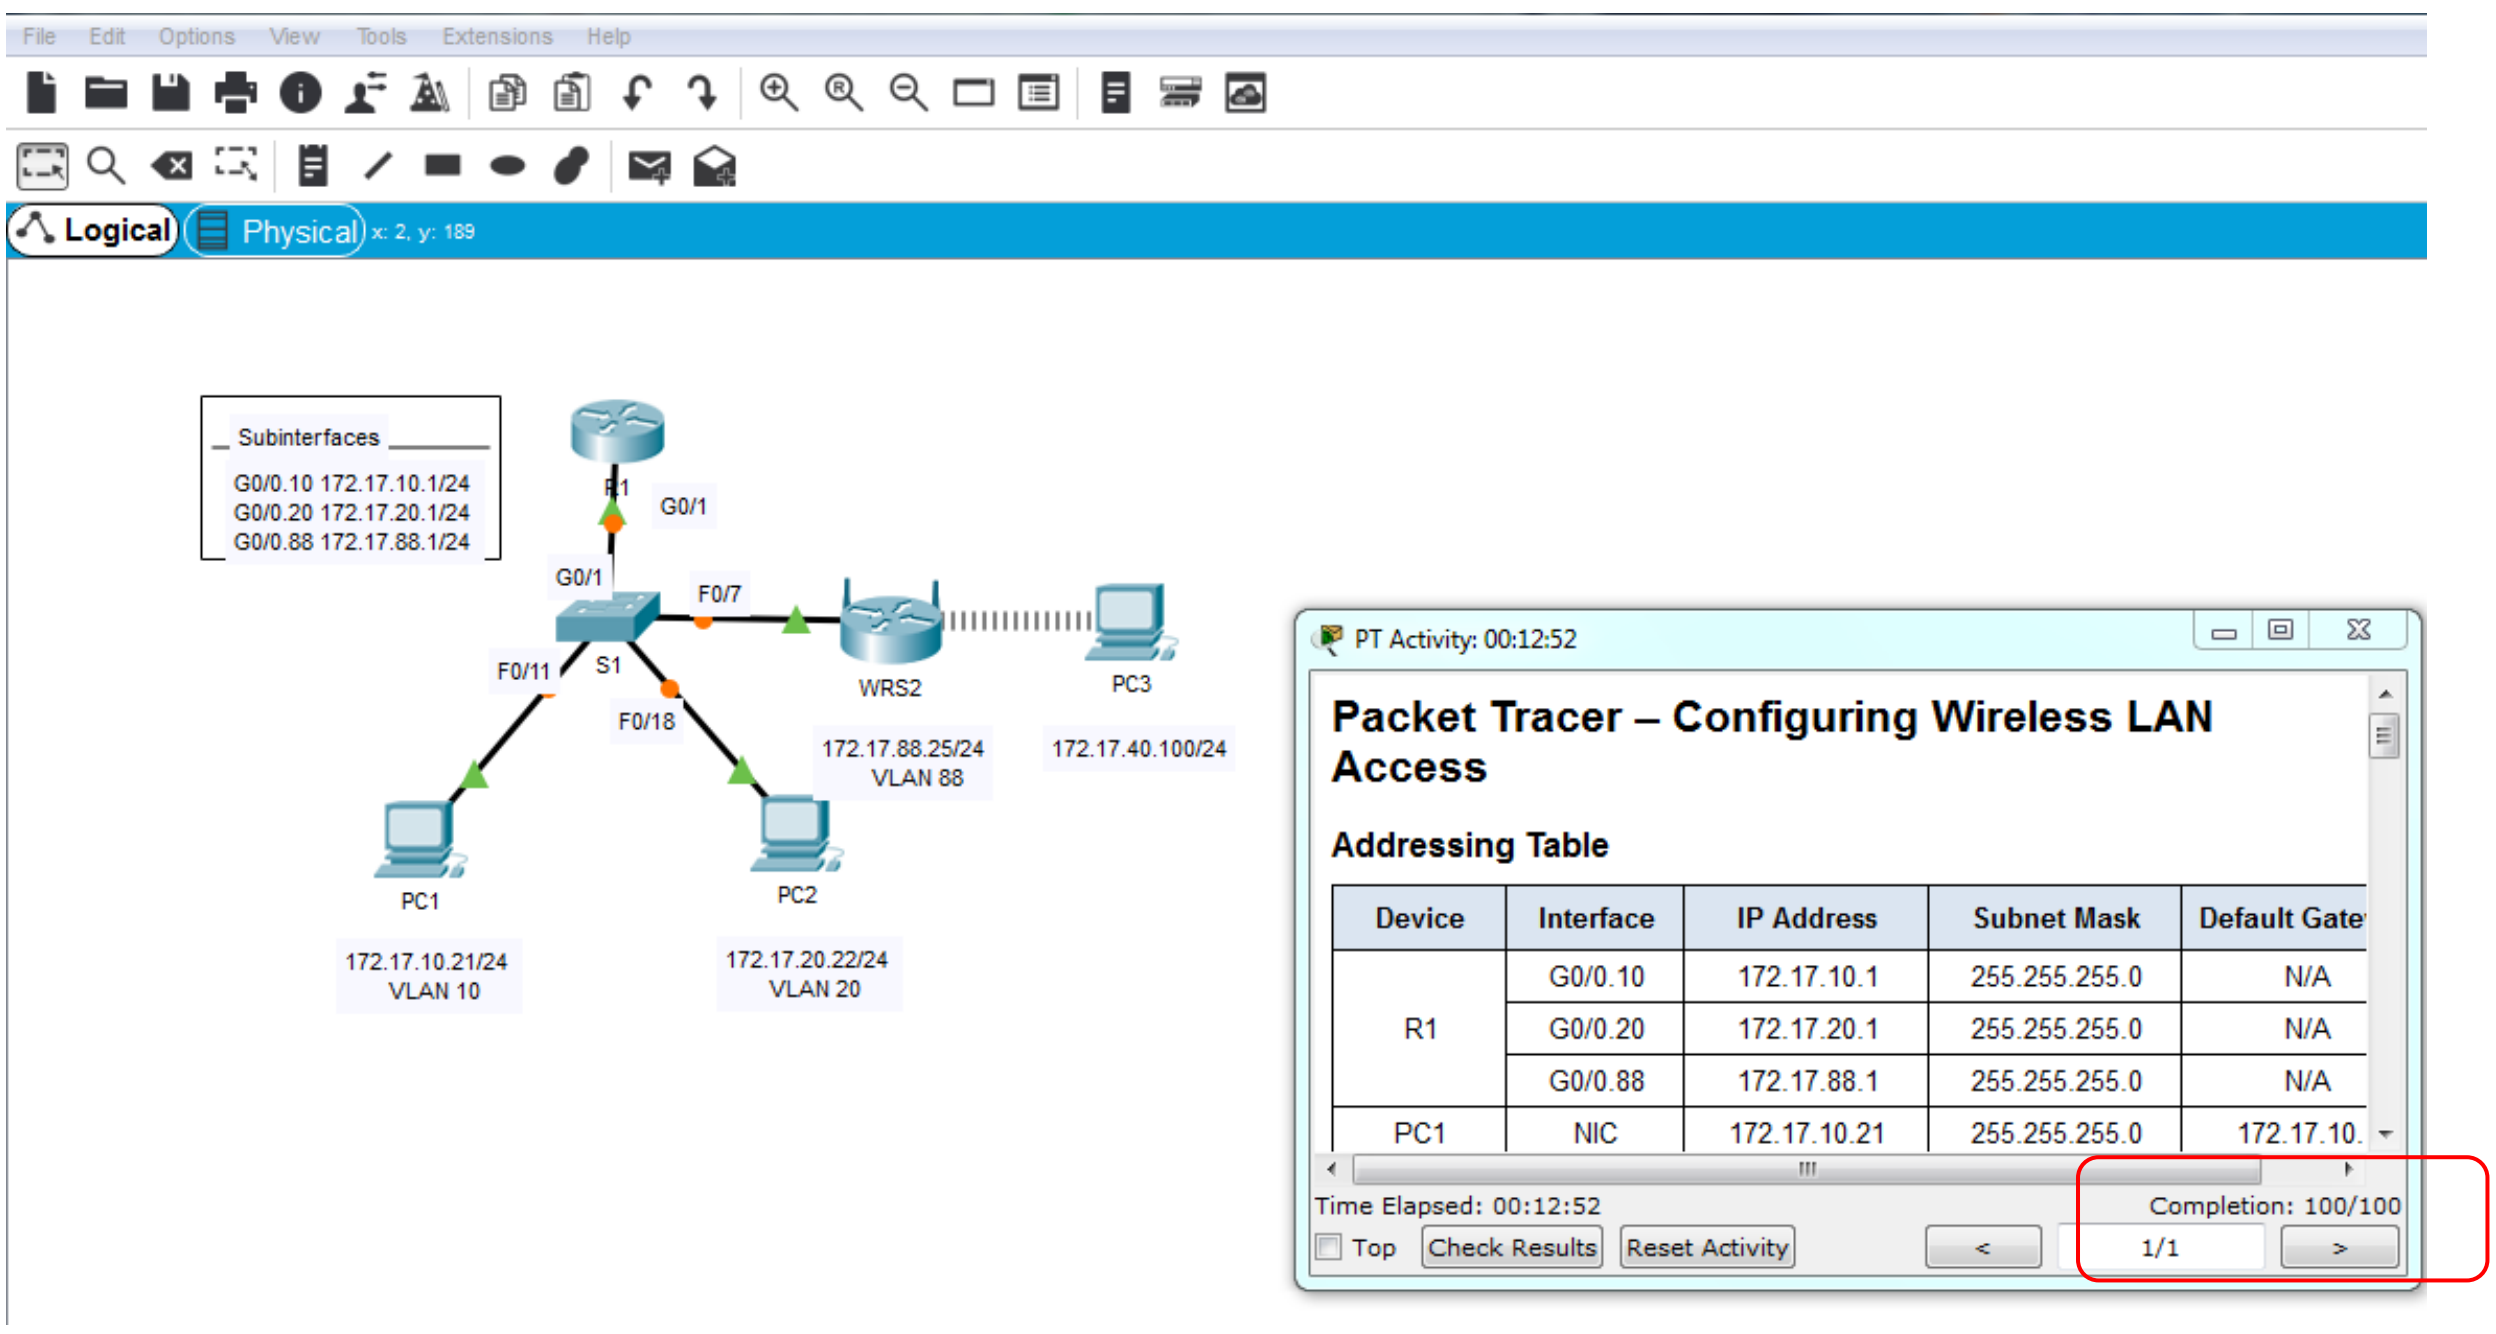

c. Once you have completed fully, capture the screen (which includes the filename, the topology and the activity wizard showing completion) and paste it here.

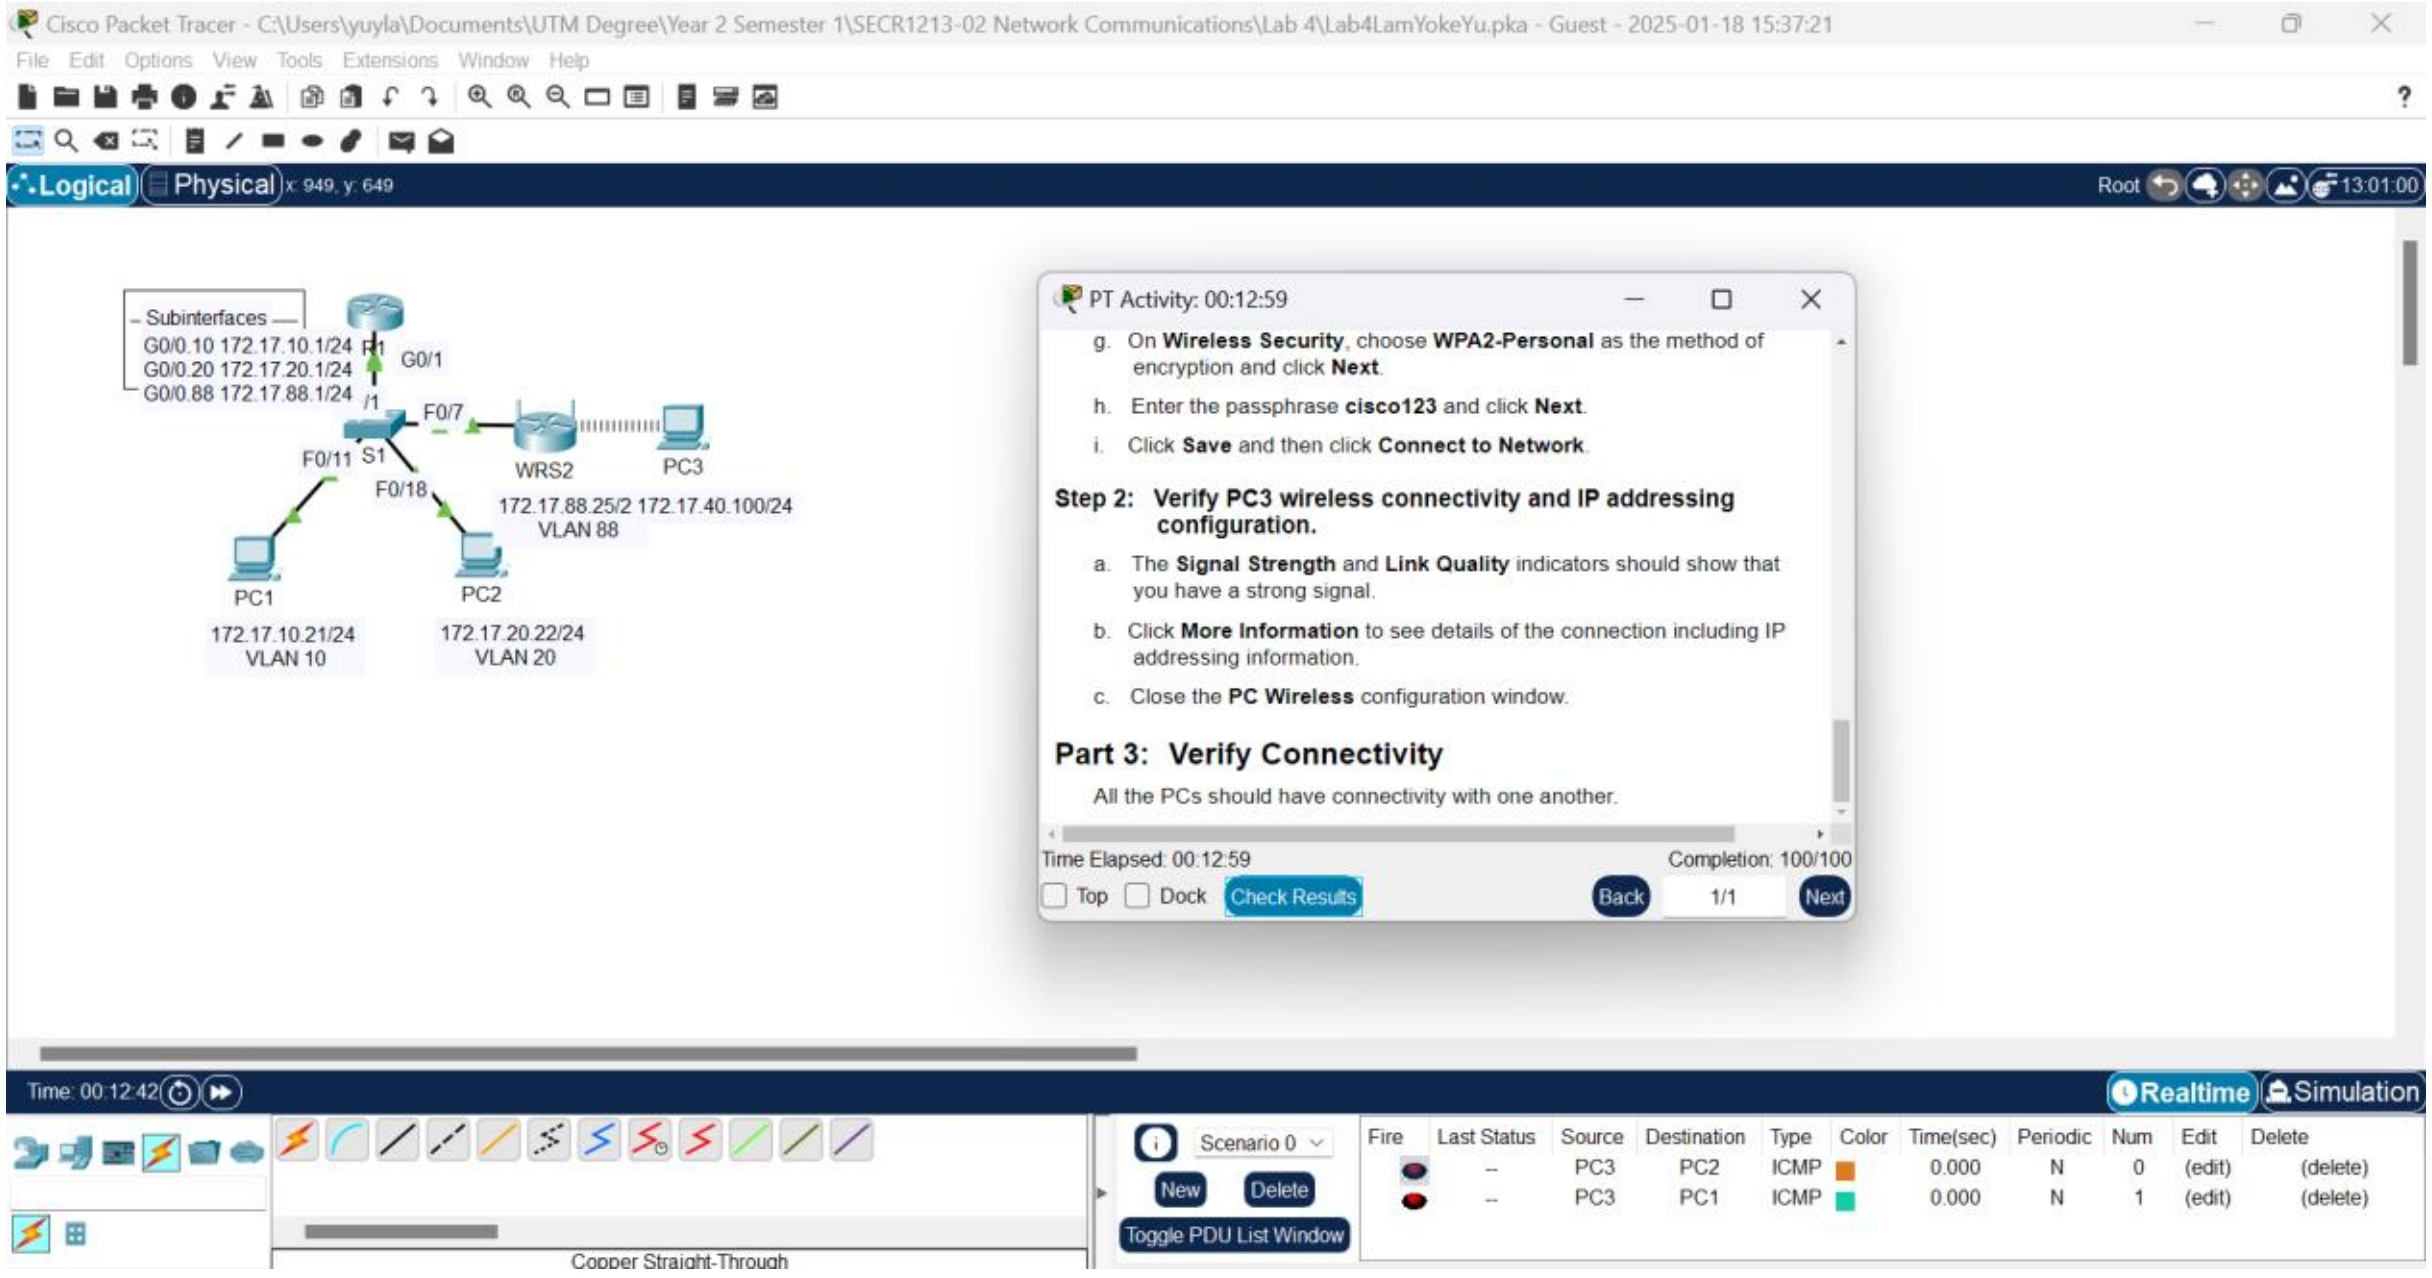
Cisco Packet Tracer - C:\Users\yuyla\Documents\UTM Degree\Year 2 Semester 1\SECR1213-02 Network Communications\Lab 4\Lab4LamYokeYu.pka - Guest - 2025-01-18 15:37:21
PT Activity: 00:12:59
g. On Wireless Security, choose WPA2-Personal as the method of encryption and click Next.
h. Enter the passphrase cisco123 and click Next.
i. Click Save and then click Connect to Network.
Step 2: Verify PC3 wireless connectivity and IP addressing configuration.
a. The Signal Strength and Link Quality indicators should show that you have a strong signal.
b. Click More Information to see details of the connection including IP addressing information.
c. Close the PC Wireless configuration window.
Part 3: Verify Connectivity
All the PCs should have connectivity with one another.
Time Elapsed: 00:12:59
Completion: 100/100
Check Results
Subinterfaces
G0/0.10 172.17.10.1/24
G0/0.20 172.17.20.1/24
G0/0.88 172.17.88.1/24
G0/1
F0/7
F0/11
F0/18
S1
WRS2
PC3
172.17.88.25/2 172.17.40.100/24
VLAN 88
PC1
172.17.10.21/24
VLAN 10
PC2
172.17.20.22/24
VLAN 20
Realtime
Simulation
Scenario 0
Toggle PDU List Window
Fire | Last Status | Source | Destination | Type | Color | Time(sec) | Periodic | Num | Edit | Delete
-- | PC3 | PC2 | ICMP | 0.000 | N | 0 | (edit) | (delete)
-- | PC3 | PC1 | ICMP | 0.000 | N | 1 | (edit) | (delete)
Copper Straight-Through