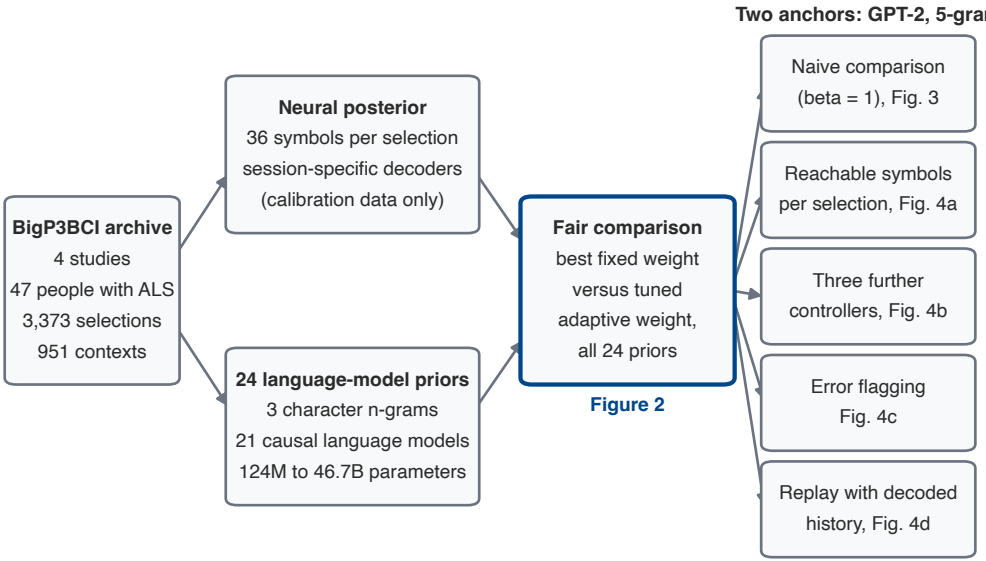
Two anchors: GPT-2, 5-gram
BigP3BCI archive
4 studies
47 people with ALS
3,373 selections
951 contexts
Neural posterior
36 symbols per selection
session-specific decoders
(calibration data only)
24 language-model priors
3 character n-grams
21 causal language models
124M to 46.7B parameters
Fair comparison
best fixed weight
versus tuned
adaptive weight,
all 24 priors
Naive comparison
(beta = 1), Fig. 3
Reachable symbols
per selection, Fig. 4a
Three further
controllers, Fig. 4b
Error flagging
Fig. 4c
Replay with decoded
history, Fig. 4d

Figure 2