


USANDO COMANDOS EN LINUX

COMANDO mkdir

Sirve para la creación de una carpeta.

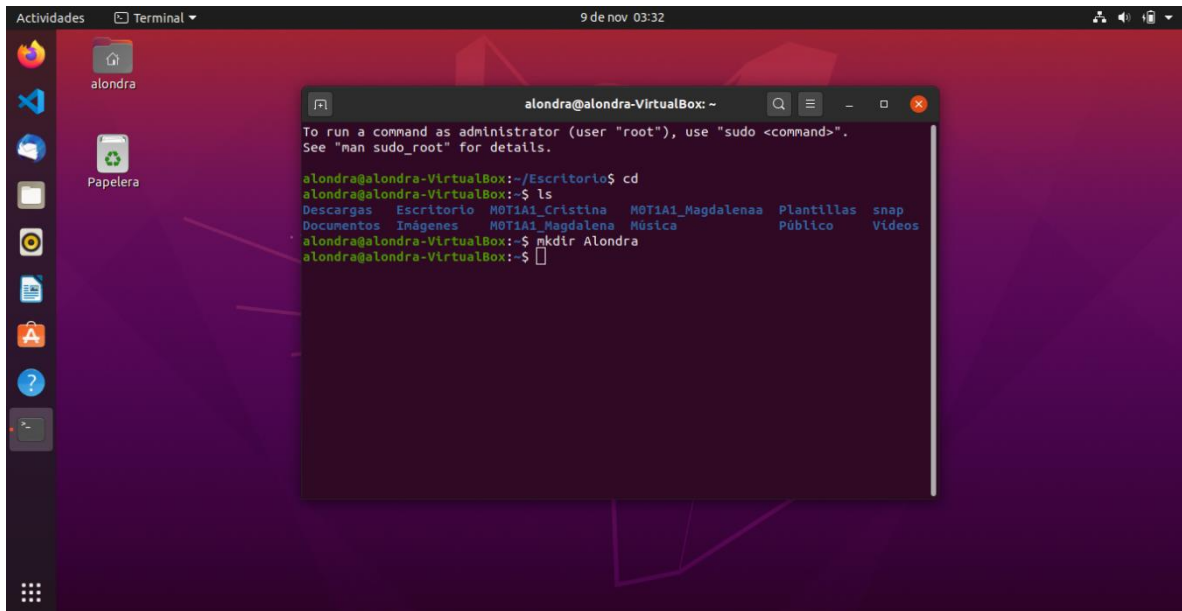


The screenshot shows a Linux desktop environment with a terminal window open. The terminal displays the following commands and output:

```
alondra@alondra-VirtualBox: ~  
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
  
alondra@alondra-VirtualBox:~/Escritorio$ cd  
alondra@alondra-VirtualBox:~$ ls  
Descargas  Escritorio  MOT1A1_Cristina  MOT1A1_Magdalena  Plantillas  snap  
Documentos  Imágenes  MOT1A1_Magdalena  Música  Público  Videos  
alondra@alondra-VirtualBox:~$ mkdir Alondra  
alondra@alondra-VirtualBox:~$
```

Comando touch

Se usa principalmente para crear archivos vacíos y cambiar marcas de tiempo de archivos o carpetas.

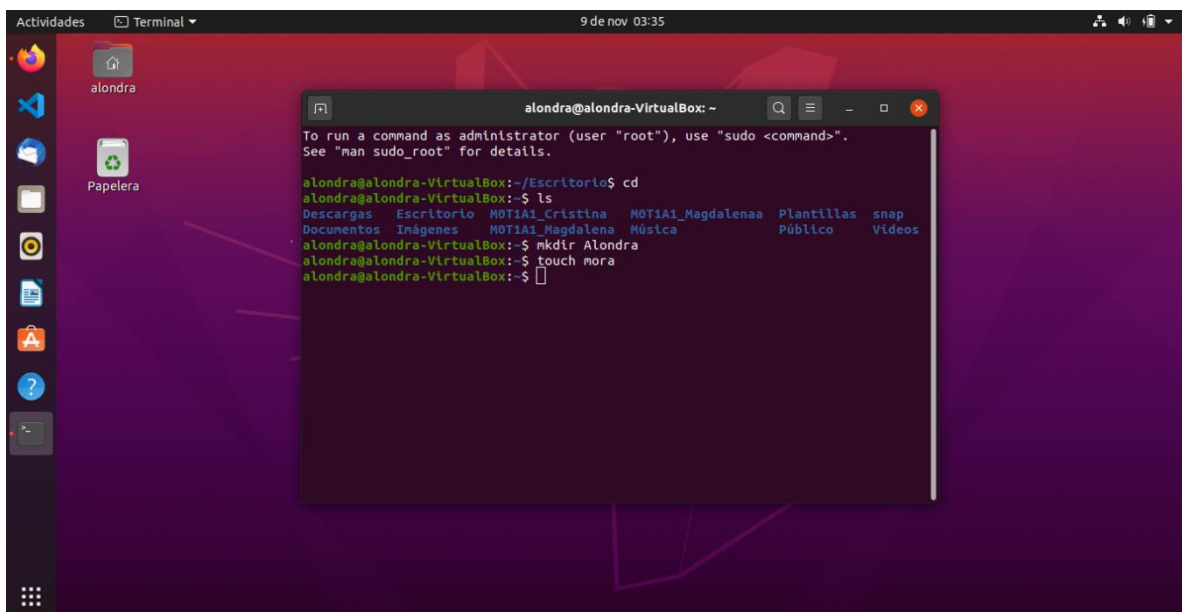


The screenshot shows a Linux desktop environment with a terminal window open. The terminal displays the following commands and output:

```
alondra@alondra-VirtualBox: ~  
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
  
alondra@alondra-VirtualBox:~/Escritorio$ cd  
alondra@alondra-VirtualBox:~$ ls  
Descargas  Escritorio  MOT1A1_Cristina  MOT1A1_Magdalena  Plantillas  snap  
Documentos  Imágenes  MOT1A1_Magdalena  Música  Público  Videos  
alondra@alondra-VirtualBox:~$ mkdir Alondra  
alondra@alondra-VirtualBox:~$ touch mora  
alondra@alondra-VirtualBox:~$
```

Comando ls

Permite listar el contenido de un directorio. Si no se especifica un argumento para el parámetro directorio, por defecto se listará el contenido del directorio donde nos encontremos ubicados.

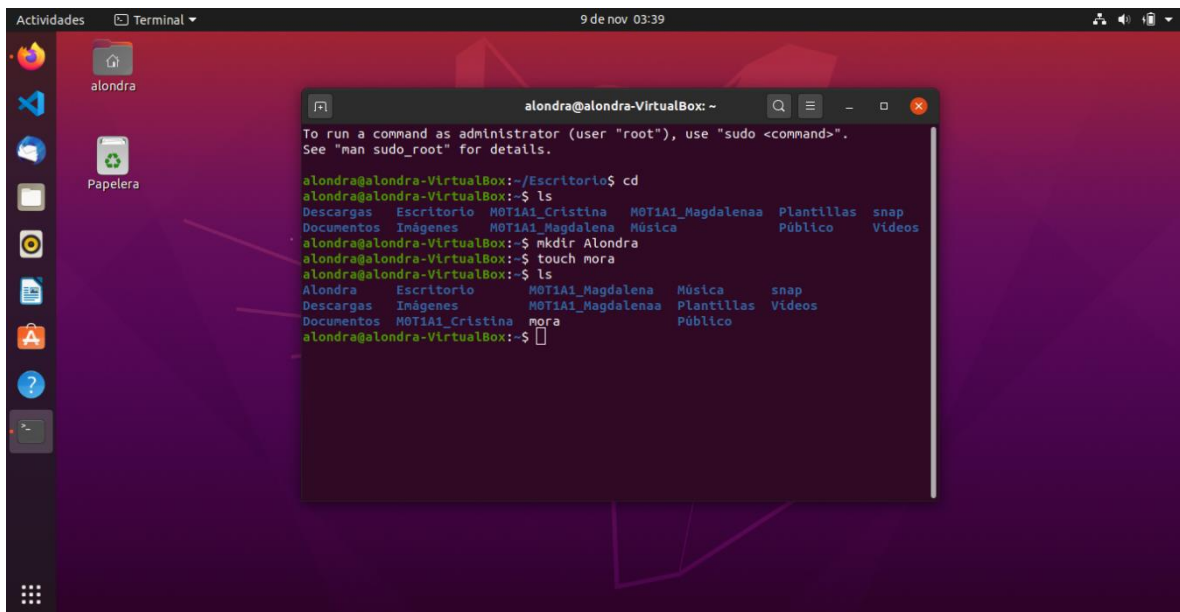


The screenshot shows a Linux desktop environment with a terminal window open. The terminal displays the following commands and output:


```
alondra@alondra-VirtualBox: ~  
To run a command as administrator (user "root"), use "sudo <command>".  
See "man sudo_root" for details.  
  
alondra@alondra-VirtualBox:~/Escritorio$ cd  
alondra@alondra-VirtualBox:~$ ls  
Descargas  Escritorio  MOT1A1_Cristina  MOT1A1_Magdalena  Plantillas  snap  
Documentos  Imágenes  MOT1A1_Magdalena  Música  Público  Videos  
alondra@alondra-VirtualBox:~$ mkdir Alondra  
alondra@alondra-VirtualBox:~$ touch mora  
alondra@alondra-VirtualBox:~$ ls  
Alondra  Escritorio  MOT1A1_Magdalena  Música  snap  
Descargas  Imágenes  MOT1A1_Magdalena  Plantillas  Videos  
Documentos  MOT1A1_Cristina  mora  Público  
alondra@alondra-VirtualBox:~$
```

Comando cp


Permite copiar enlaces.

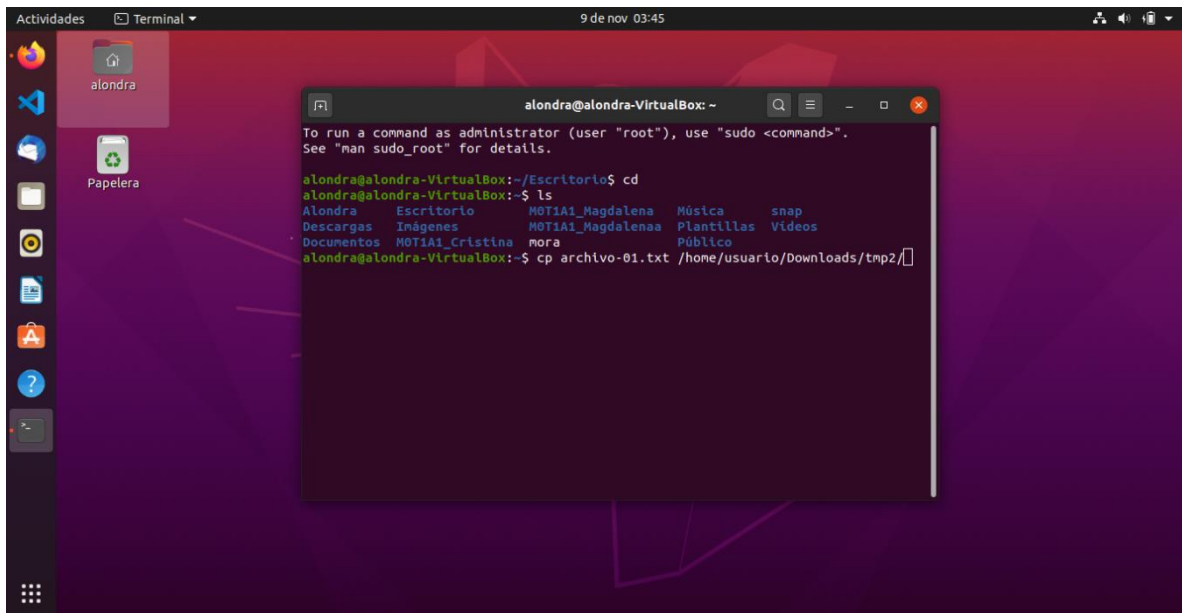

Comando mv

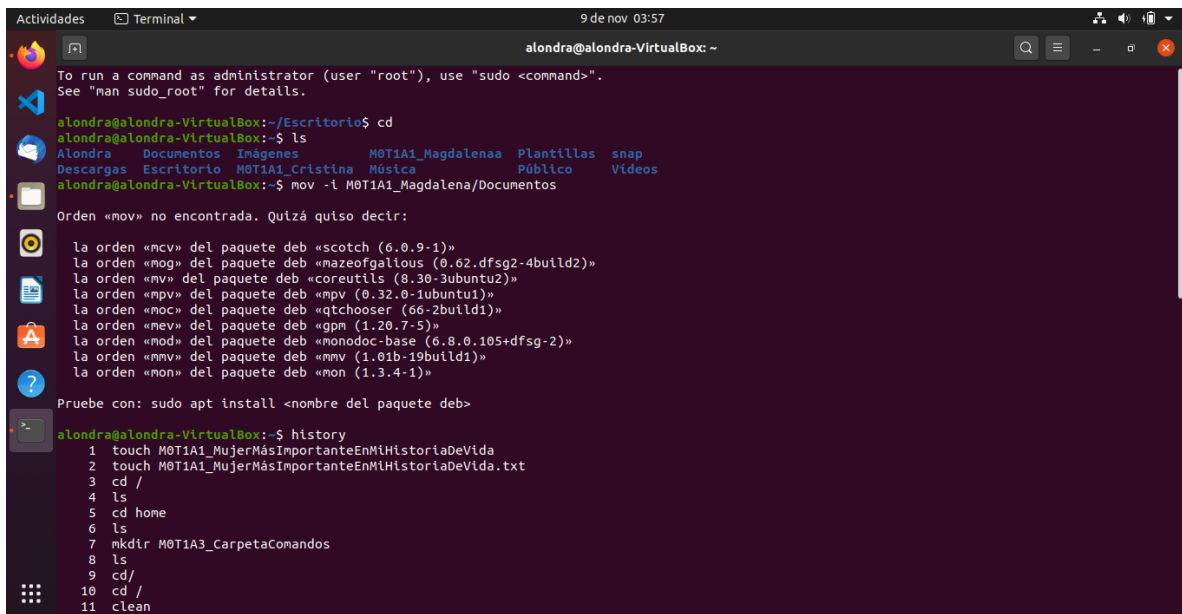

historial

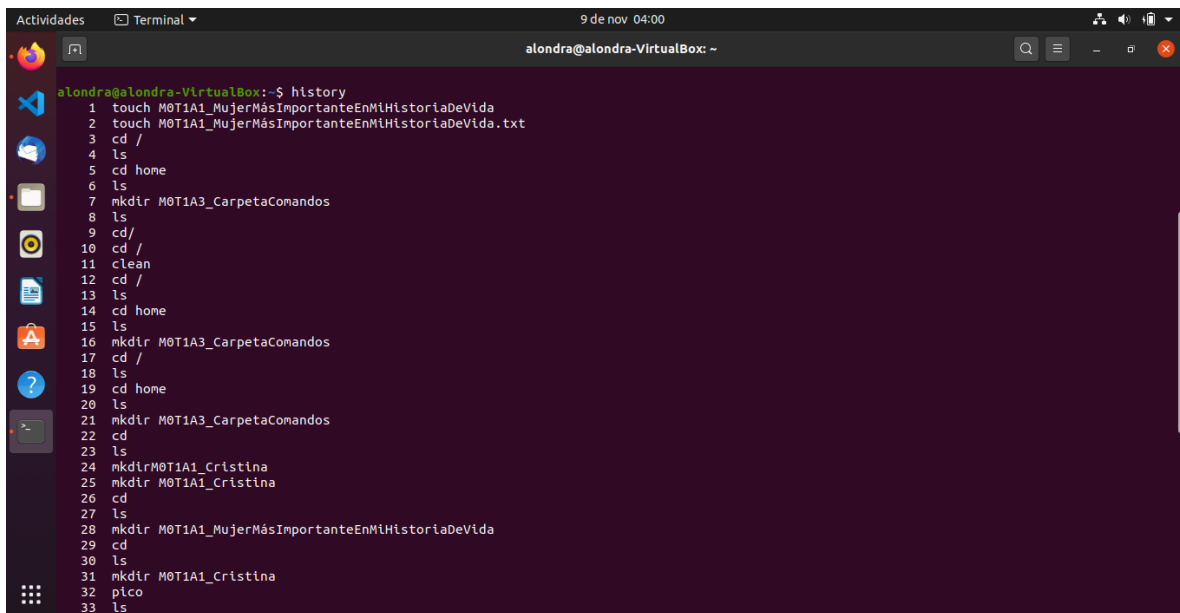

The image shows a terminal window titled "alondra@alondra-VirtualBox: ~" with a dark purple background. The terminal displays the output of the "history" command, which lists 33 previous commands. The commands include file creation, directory navigation, directory creation, and file removal. The window has a standard Linux desktop environment with a sidebar on the left containing application icons and a top bar with system information.

```
alondra@alondra-VirtualBox:~$ history
1 touch M0T1A1_MujerMÁSImportanteEnMiHistoriaDeVida
2 touch M0T1A1_MujerMÁSImportanteEnMiHistoriaDeVida.txt
3 cd /
4 ls
5 cd home
6 ls
7 mkdir M0T1A3_CarpetaComandos
8 ls
9 cd /
10 cd /
11 clean
12 cd /
13 ls
14 cd home
15 ls
16 mkdir M0T1A3_CarpetaComandos
17 cd /
18 ls
19 cd home
20 ls
21 mkdir M0T1A3_CarpetaComandos
22 cd
23 ls
24 mkdir M0T1A1_Cristina
25 mkdir M0T1A1_Cristina
26 cd
27 ls
28 mkdir M0T1A1_MujerMÁSImportanteEnMiHistoriaDeVida
29 cd
30 ls
31 mkdir M0T1A1_Cristina
32 plco
33 ls
```