

Universal Local Error and Realized Amplification for the First-Order EDM Predictor

Nicolas Brosse

CREST, ENSAE Paris, Institut Polytechnique de Paris
nicolas.brosse@ensae.fr

Arnak S. Dalalyan

CREST, ENSAE Paris, Institut Polytechnique de Paris
arnak.dalalyan@ensae.fr

Abstract

We analyze the first-order deterministic diffusion sampler of Karras et al. (2022), termed EDM, in 2-Wasserstein distance by separating two sources of error: local discretization error and its amplification by subsequent learned steps. We prove that local error admits a universal bound: for any data distribution with finite second moment, the one-step discretization error is quadratic in the step size, with an explicit constant that does not depend on the data distribution. Error propagation, in contrast, depends on the learned network. At high noise levels, we exploit the network parametrization of EDM to derive an explicit contraction criterion. At low noise levels, we measure propagation through the amplification realized on the distributions transported by the sampler; this realized amplification can be arbitrarily smaller than the worst-case Lipschitz constant. This analysis yields an $O(e^{\Lambda_K}/K)$ global discretization error for K sampling steps, where Λ_K is the low-noise log-amplification. Experiments on a one-dimensional Gaussian mixture show how measured amplification accounts for slower error decay on finite sampling grids. Diagnostics on a pretrained CIFAR-10 model illustrate related stability mechanisms without certifying the global assumptions.

1 Introduction

A deterministic diffusion sampler generates samples by discretizing the probability flow from noise to data using a trained denoising network. Its accuracy depends both on the errors introduced at each step and on how subsequent steps propagate them. Controlling these two mechanisms is essential for understanding accuracy at a limited number of network evaluations.

Figure 1 illustrates the distinction even with an exact denoiser. On a Gaussian mixture, the sum of local discretization biases approaches first-order decay, while the final Wasserstein error decreases at orders 0.58–0.60 over the tested range. Propagating each bias through the measured amplification of the subsequent steps recovers this slower decay. This rate is preasymptotic: it shows that local accuracy alone need not describe the behavior on finite sampling grids.

Existing Wasserstein analyses control local error and propagation under various structural assumptions. Beyler and Bach (2025) analyze deterministic and stochastic samplers on the Gaussian smoothing path, using bounded support in their local estimates and a global Lipschitz envelope of the learned map for propagation. Gao and Zhu (2025) obtain contraction under strong log-concavity; other approaches use weaker geometric conditions (Gentiloni Silveri and Ocello 2025; Bruno and Sabanis 2025). We ask whether local error can be bounded without such assumptions on the data law, and how much worst-case stability estimates can overstate propagation.

We study the first-order deterministic EDM predictor of (Karras et al. 2022), equivalently the DDIM update of Song et al. (2021) in the variance-exploding parametrization. Our main result is

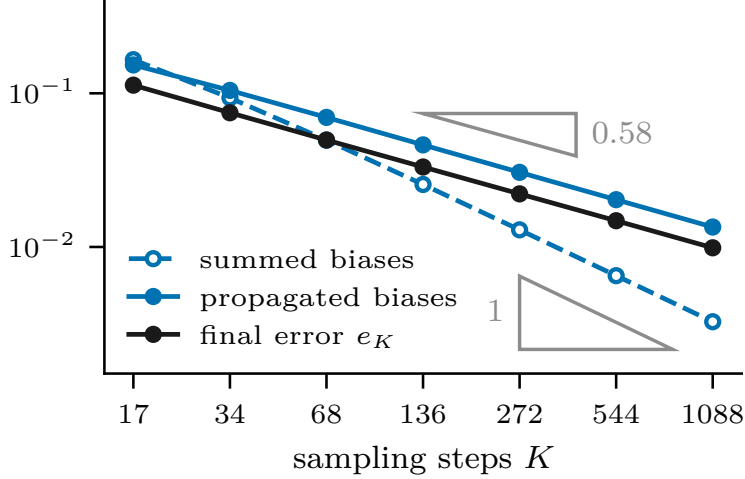


Figure 1: Local accuracy and accumulated error. For a four-Gaussian mixture with oracle denoising and exact initialization, summed local biases approach first-order decay, while final error decreases at orders 0.58–0.60 over the tested range. Propagating each bias through the measured amplification of the later steps (solid blue) recovers the slower decay of the error; see Section 7.1.

a universal local discretization bound. We combine it with propagation measured on the exact and sampler laws, keeping separate what follows from Gaussian smoothing and what requires control of the learned dynamics.

Our analysis has three parts.

1. **Universal local error.** We express the acceleration of the exact probability flow through conditional moments of Gaussian noise and bound its $\mathbb{L}_2$ norm for every Borel data law. The bound has an explicit constant and a sharp noise exponent. For data with finite second moment, it yields a quadratic one-step discretization bound without support, smoothness, or log-concavity assumptions (Lemma 3). The key observation is that the relevant conditional moments are controlled by Gaussian noise moments, independently of the geometry of the data distribution.
2. **Realized propagation.** EDM preconditioning provides an explicit sufficient condition for high-noise contraction. At lower noise, we retain the amplification of the Wasserstein distance between the two transported laws and derive directional and worst-case upper bounds. A smooth construction shows that realized amplification can remain nonexpansive while the worst-case majorants become arbitrarily large (Proposition 10). The directional bound measures expansion along an optimal coupling of the exact and sampler laws, avoiding a supremum over all spatial locations and directions.
3. **Global error control.** We separate initialization, discretization, learning, and terminal smoothing errors (Theorem 11). At fixed positive noise endpoints, the discretization contribution is $O(K^{-1}e^{\Lambda_K})$, where Λ_K accumulates the positive logarithms of the realized low-noise amplification factors. A uniform bound on Λ_K gives first-order decay; logarithmic growth gives the rates in Corollary 12. High-noise contraction damps early errors, while EDM preconditioning expresses the learning contribution through the excess risk of a normalized regression problem.

The propagation estimate is a posteriori: we do not derive an amplification envelope from training or architecture. Experiments on the Gaussian mixture examine its explanatory value and the gap to worst-case bounds. Diagnostics on a pretrained CIFAR-10 model illustrate related mechanisms without certifying the global stability assumptions. The analysis covers the deterministic predictor; Heun corrections and stochastic churn remain outside its scope. Appendix H provides detailed comparisons with prior work.

2 Setting and One-Step Decomposition

This section introduces deterministic diffusion sampling and the first-order EDM predictor studied in this paper. We write $\mathcal{P}_2(\mathbb{R}^d)$ for the set of Borel probability measures on $\mathbb{R}^d$ with finite second moment and $f_{\#}\mu$ for the pushforward of μ by a measurable map f . A hat marks a learned object. For a random vector Y and a measurable vector-valued function f , respectively, we use the notation $\|Y\|_{\mathbb{L}_2} := (\mathbb{E}[\|Y\|^2])^{1/2}$ and $\|f\|_{\mathbb{L}_2(\mu)} := (\int \|f(x)\|^2 \mu(dx))^{1/2}$. For a more detailed introduction to the underlying mathematical framework, see Holderrieth and Erives (2025); complements specific to our setting are provided in Appendix B.

Let $q \in \mathcal{P}_2(\mathbb{R}^d)$ be the target distribution. For independent vectors $X_0 \sim q$ and $Z \sim \mathcal{N}(0, \mathbf{I}_d)$, set

$$X_\sigma = X_0 + \sigma Z, \quad \text{and} \quad \mu_\sigma = \text{Law}(X_\sigma).$$

The mapping $\sigma \mapsto \mu_\sigma$, for $\sigma \in (0, \infty)$ defines a smooth curve in $\mathcal{P}_2(\mathbb{R}^d)$ starting from the target distribution $q = \mu_0$. In addition, at high noise levels $\bar{\sigma}$, the normalized variable $X_{\bar{\sigma}}/\bar{\sigma}$ has a distribution close to $\mathcal{N}(0, \mathbf{I}_d)$. This motivates using $\mathcal{N}(0, \bar{\sigma}^2 \mathbf{I}_d)$ as the latent distribution for generative modeling. The same curve can be realized by solving an ordinary differential equation based on the velocity field

$$v_\sigma(x) = (x - D_\sigma(x))/\sigma = -\sigma \nabla \log p_\sigma(x) \quad (1)$$

where $D_\sigma(x) = \mathbb{E}[X_0 | X_\sigma = x]$ is the posterior-mean denoiser and p_σ is the density of μ_σ . More precisely, for every compact interval $I \subset (0, \infty)$, and for every $(\sigma_0, x) \in I \times \mathbb{R}^d$, the differential equation

$$\frac{dx_r}{dr} = v_r(x_r), \quad r \in I, \quad x_{\sigma_0} = x$$

has a unique solution on the whole interval I . Denote its solution map by $\Psi_{\sigma, \sigma_0} : \mathbb{R}^d \rightarrow \mathbb{R}^d$, so that

$$\frac{d}{d\sigma} \Psi_{\sigma, \sigma_0}(x) = v_\sigma(\Psi_{\sigma, \sigma_0}(x)), \quad \Psi_{\sigma_0, \sigma_0}(x) = x. \quad (2)$$

For every $\sigma, \sigma_0 \in I$, the map Ψ_{σ, σ_0} is a diffeomorphism of $\mathbb{R}^d$, with inverse $\Psi_{\sigma_0, \sigma}$. In addition, for all $\sigma_0, \sigma_1, \sigma_2 \in I$, $\Psi_{\sigma_2, \sigma_0} = \Psi_{\sigma_2, \sigma_1} \circ \Psi_{\sigma_1, \sigma_0}$. This flow transports the heat-regularized laws:

$$\mu_\sigma = (\Psi_{\sigma, \sigma_0})_{\#} \mu_{\sigma_0}, \quad \sigma, \sigma_0 \in I. \quad (3)$$

The main idea behind flow matching, DDIM, EDM and their multiple variants is to choose a small value $\underline{\sigma} > 0$, a large value $\bar{\sigma}$, to approximate $\Psi_{\underline{\sigma}, \bar{\sigma}}$ by some map $\hat{\Psi}$ based on the training data, and then to define the generative model as $\hat{\Psi}_{\#} \mathcal{N}(0, \bar{\sigma}^2 \mathbf{I}_d)$.

To be more precise, fix a schedule $\bar{\sigma} = \sigma_0 > \dots > \sigma_K = \underline{\sigma} > 0$, and assume that we have a trained version $\hat{D}_\sigma$ of the posterior mean denoiser D_σ at each noise level $\sigma \in \{\sigma_0, \dots, \sigma_K\}$. Set $\mu_j = \mu_{\sigma_j}$, $a_j = (\sigma_j - \sigma_{j+1})/\sigma_j \in (0, 1)$, and $\Psi_j = \Psi_{\sigma_{j+1}, \sigma_j}$, so that $\mu_{j+1} = (\Psi_j)_{\#} \mu_j$. In eq. (2), freezing the velocity at the starting noise level σ_j and using (1), gives the one-step oracle and learned EDM predictors

$$\Phi_j(x) = (1 - a_j)x + a_j D_{\sigma_j}(x), \quad (4)$$

$$\hat{\Phi}_j(x) = (1 - a_j)x + a_j \hat{D}_{\sigma_j}(x). \quad (5)$$

For $\hat{\mu}_0 = \mathcal{N}(0, \sigma_0^2 \mathbf{I}_d)$, the sampler laws and errors are

$$\hat{\mu}_{j+1} = (\hat{\Phi}_j)_{\#} \hat{\mu}_j, \quad e_j = W_2(\hat{\mu}_j, \mu_j). \quad (6)$$

With these notations, the triangle inequality and the canonical coupling give

$$W_2(\hat{\mu}_K, q) \leq e_K + \sigma_K \sqrt{d}. \quad (7)$$

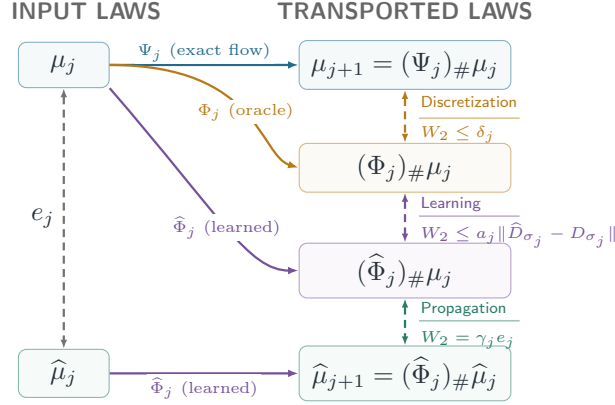


Figure 2: One-step Wasserstein error decomposition. Solid arrows correspond to pushforwards, whereas dashed links are W_2 distances.

Therefore, the main goal is to understand the behavior of the final error e_K . The deployed output $(\hat{D}_{\sigma_K})_{\#}\hat{\mu}_K$, obtained by one additional denoising step, is treated in Appendix F.6.

We complete this section by providing a simple one-step recursion for the accumulated error e_j . Its proof follows straightforwardly from the triangle inequality. Let us define the local discretization bias by

$$\delta_j = \|\Psi_j(X_{\sigma_j}) - \Phi_j(X_{\sigma_j})\|_{\mathbb{L}_2}, \quad (8)$$

and the realized amplification factor

$$\gamma_j = \frac{W_2((\hat{\Phi}_j)_{\#}\mu_j, (\hat{\Phi}_j)_{\#}\hat{\mu}_j)}{W_2(\mu_j, \hat{\mu}_j)}, \quad (9)$$

with the convention that $\gamma_j = 1$ if $W_2(\mu_j, \hat{\mu}_j) = 0$. For every $j = 0, \dots, K-1$,

$$e_{j+1} \leq \gamma_j e_j + \delta_j + a_j \|\hat{D}_{\sigma_j} - D_{\sigma_j}\|_{\mathbb{L}_2(\mu_j)}, \quad (10)$$

see Figure 2 for a visual representation.

3 Universal Local Error

The one-step decomposition in eq. (10) separates error propagation, discretization bias, and denoiser approximation. This section bounds the local discretization bias δ_j . We show that its second-order behavior follows from a universal bound on the acceleration of the exact flow. Proofs are provided in Appendix C.

To compare samplers with different numbers of steps, we keep the endpoints $\underline{\sigma}$ and $\bar{\sigma}$ fixed and refine the grid between them. The EDM schedule places noise levels uniformly in the transformed variable $\eta = \sigma^{1/\rho_{\text{EDM}}}$, which we call the numerical clock, see Figure 3. To ease notation, we write $\rho = 1/\rho_{\text{EDM}}$; thus the commonly used EDM choice $\rho_{\text{EDM}} = 7$ corresponds to $\rho = 1/7$. By the chain rule, the flow in the clock $\eta = \sigma^\rho$ satisfies

$$\frac{dx}{d\eta} = w_\eta(x), \quad w_\eta(x) = \frac{\eta^{\frac{1}{\rho}-1}}{\rho} v_{\eta^{1/\rho}}(x). \quad (11)$$

Definition 1 (Refinement family $\mathfrak{G}$). *Fix $\rho > 0$, $0 < \underline{\sigma} < \bar{\sigma}$, and a positive integer $K_\circ$. Set $\underline{\eta} = \underline{\sigma}^\rho$ and $\bar{\eta} = \bar{\sigma}^\rho$. For $K \in \mathcal{K} = \{K_\circ 2^r : r \in \mathbb{N}\}$, set $h_K = (\bar{\eta} - \underline{\eta})/K$ and let $G_K := \{\eta_j = \bar{\eta} - j h_K : 0 \leq j \leq K\}$. The family of nested grids is $\mathfrak{G} = \{G_K : K \in \mathcal{K}\}$.*

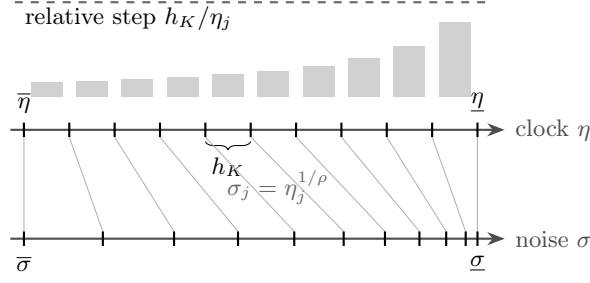


Figure 3: A member G_K of the refinement family with $\rho = 1/2$ and $K = 10$.

In the asymptotic results throughout this paper, when we assume K goes to infinity, the target q , the denoisers $(\widehat{D}_\sigma)_{\sigma \in [\underline{\sigma}, \bar{\sigma}]}$, and the initial distribution $\widehat{\mu}_0 = \mathcal{N}(0, \bar{\sigma}^2 \mathbf{I}_d)$ are held fixed. These schedules share their endpoints and are nested: $G_K \subset G_{K'}$ if $K, K' \in \mathcal{K}$ and $K < K'$. Their relative clock increments satisfy

$$h_K/\eta_j \leq h_K/\underline{\eta} =: \theta_K \longrightarrow 0, \quad (12)$$

as $K \rightarrow \infty$. We add the subscript K when comparing quantities on different schedules, for example $\delta_{j,K}$ and $\gamma_{j,K}$. A bound is uniform under refinement if its constant is independent of K .

Acceleration in the numerical clock. Define

$$\mathcal{A}_\rho(\sigma, x) = [\partial_\eta w_\eta(x) + \nabla_x w_\eta(x) w_\eta(x)]_{\eta=\sigma^\rho}. \quad (13)$$

We refer to this quantity as the acceleration field, expressed in terms of the noise level, since along an exact trajectory x_η solution to (11), the chain rule yields $d^2 x_\eta / d\eta^2 = \mathcal{A}_\rho(\eta^{1/\rho}, x_\eta)$. Controlling this acceleration in $\mathbb{L}_2$ therefore controls second-order remainders along the flow. The key fact is that such a bound can be obtained independently of the target distribution.

Theorem 2 (Universal $\mathbb{L}_2$ bound). *For every $\rho > 0$ and every Borel probability measure q on $\mathbb{R}^d$,*

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2} \leq B_{d,\rho} \sigma^{1-2\rho}, \quad \forall \sigma > 0 \quad (14)$$

with $B_{d,\rho} = \rho^{-2} \sqrt{d} [1 - \rho + 4(d+3)]$.

The proof expresses the acceleration as $\sigma^{1-2\rho}/\rho^2$ times a combination of conditional moments of Z given $X_\sigma = x$. Jensen's inequality then bounds the relevant terms by Gaussian moments, independently of q . The exponent $1 - 2\rho$ is sharp over all target distributions; see Prop. 28 in Appendix C.6. Whether the dimension dependence $O_\rho(d^{3/2})$ is sharp remains open.

Local bias of EDM. The numerical clock determines the noise levels at which the predictor is evaluated. The oracle predictor is given by eq. (4). If $\rho \neq 1$, this is generally different from an Euler step¹ for w_η . We bound its bias using Theorem 2 at $\rho = 1$.

Lemma 3. *Let $q \in \mathcal{P}_2(\mathbb{R}^d)$ and let $\sigma_0 > \dots > \sigma_K > 0$ be any schedule. For every $j = 0, \dots, K-1$, the bias defined in eq. (8) satisfies*

$$\delta_j \leq \Delta_j = B_{d,1} \left[(\sigma_j - \sigma_{j+1}) - \sigma_{j+1} \log \frac{\sigma_j}{\sigma_{j+1}} \right]. \quad (15)$$

¹See Remark 19 in Appendix B.3.

The proof is based on a second-order expansion. Indeed, the integral remainder along the exact flow, together with Theorem 2, implies

$$\delta_j \leq B_{d,1} \int_{\sigma_{j+1}}^{\sigma_j} \frac{s - \sigma_{j+1}}{s} ds = \Delta_j.$$

This bound holds for every noise schedule and depends on the target distribution only through the dimension.

On the refinement family $\mathfrak{G}$, expanding in the relative clock increment h_K/η_j and setting $\sigma_j = \eta_j^{1/\rho}$ yields

$$\Delta_{j,K} = \frac{B_{d,1}}{2\rho^2} h_K^2 \sigma_j^{1-2\rho} \left[1 + O_\rho\left(\frac{h_K}{\eta_j}\right) \right]. \quad (16)$$

Thus the bound on the local bias is quadratic in the clock step, with a noise dependence $\sigma_j^{1-2\rho}$. In particular, $\rho = 1/2$, or $\rho_{\text{EDM}} = 2$, makes the leading bound independent of the noise level. This choice balances the universal bound across noise scales; it need not minimize the actual local bias on practical grids. The mixture experiment in Section 7, for example, ranks the clocks in the reverse order when measured biases are compared (Table 4). For the commonly used choice $\rho = 1/7$, or $\rho_{\text{EDM}} = 7$, the leading bound instead contains $\sigma_j^{5/7}$ and is largest at high noise. The contraction mechanism studied in Section 5 can reduce the contribution of these early biases to the final error.

4 EDM Preconditioning

We now examine how the learned network enters the other two terms of eq. (10). The EDM parametrization expresses the denoiser approximation error as a normalized regression error and provides an explicit sufficient condition for contraction of the learned predictor. Proofs and complements are provided in Appendix D. We first state the standing assumption under which the learned sampler laws and Wasserstein errors introduced in Section 2 are well defined.

Assumption 4. *On every schedule in $\mathfrak{G}$, each $\widehat{\Phi}_j$ is locally Lipschitz and has at most linear growth: for some $A_j < \infty$, $\|\widehat{\Phi}_j(x)\| \leq A_j(1 + \|x\|)$ for all $x \in \mathbb{R}^d$.*

Since the initial distribution has finite second moment, this assumption ensures that $\widehat{\mu}_j \in \mathcal{P}_2(\mathbb{R}^d)$ and $e_j < \infty$.

EDM parametrization. For the remainder of the analysis, we assume that the target distribution is centered, $\mathbb{E}[X_0] = 0$, and write $\tau_q^2 = \mathbb{E}\|X_0\|^2/d > 0$. Set $\alpha(\sigma) = \tau_q^2/(\sigma^2 + \tau_q^2)$ and

$$\beta(\sigma) = \sigma\tau_q c_{\text{in}}(\sigma), \quad c_{\text{in}}(\sigma) = (\sigma^2 + \tau_q^2)^{-1/2}. \quad (17)$$

These are the coefficients c_{skip} , c_{out} , and c_{in} of (Karras et al. 2022, Sec. 5). Writing $\alpha_j = \alpha(\sigma_j)$, $\beta_j = \beta(\sigma_j)$, and $c_j = c_{\text{in}}(\sigma_j)$, the learned denoiser is

$$\widehat{D}_{\sigma_j}(x) = \alpha_j x + \beta_j \widehat{F}_j(c_j x), \quad (18)$$

where $\widehat{F}_j = \widehat{F}_{\sigma_j}$ is the network evaluated at noise level σ_j . Substituting this expression into eq. (5) gives

$$\widehat{\Phi}_j(x) = (1 - a_j(1 - \alpha_j))x + a_j\beta_j \widehat{F}_j(c_j x). \quad (19)$$

Our analysis uses this form without imposing a particular network architecture.

Normalized regression error. The exact denoiser can be written in the same form, which defines its normalized residual function F_σ :

$$D_\sigma(x) = \alpha(\sigma)x + \beta(\sigma)F_\sigma(c_{\text{in}}(\sigma)x).$$

We write $F_j = F_{\sigma_j}$. Define the normalized input and regression target by $\tilde{X}_\sigma = c_{\text{in}}(\sigma)X_\sigma$ and $\mathcal{T}_\sigma = (X_0 - \alpha(\sigma)X_\sigma)/\beta(\sigma)$. Then $F_\sigma(\tilde{X}_\sigma) = \mathbb{E}[\mathcal{T}_\sigma \mid \tilde{X}_\sigma]$. Thus F_σ is the optimal predictor of $\mathcal{T}_\sigma$ from $\tilde{X}_\sigma$ under squared loss. Let

$$\mathcal{R}(\sigma) = \|\hat{F}_\sigma(\tilde{X}_\sigma) - F_\sigma(\tilde{X}_\sigma)\|_{\mathbb{L}_2}, \quad \mathcal{R}_j = \mathcal{R}(\sigma_j).$$

The orthogonality of conditional expectation yields

$$\mathcal{R}_j^2 = \|\hat{F}_j(\tilde{X}_{\sigma_j}) - \mathcal{T}_{\sigma_j}\|_{\mathbb{L}_2}^2 - \|F_j(\tilde{X}_{\sigma_j}) - \mathcal{T}_{\sigma_j}\|_{\mathbb{L}_2}^2. \quad (20)$$

Consequently, $\mathcal{R}_j^2$ is the excess population risk of the normalized regression problem. Moreover,

$$\|\hat{D}_{\sigma_j} - D_{\sigma_j}\|_{\mathbb{L}_2(\mu_j)} = \beta_j \mathcal{R}_j, \quad (21)$$

so the learning term in eq. (10) is exactly $a_j \beta_j \mathcal{R}_j$. The choice of coefficients gives $\mathbb{E}\|\mathcal{T}_\sigma\|^2/d = 1$, which motivates measuring the regression error relative to $\sqrt{d}$.

Assumption 5. *There is $C_{\text{res}} \geq 0$ such that $\mathcal{R}(\sigma) \leq \sqrt{d} C_{\text{res}}$, for all $\sigma \in [\underline{\sigma}, \bar{\sigma}]$.*

The first term on the right-hand side of (20) can be estimated from noisy validation pairs. The second term, the Bayes risk, is generally unknown, so the excess risk cannot be recovered from the prediction loss. The prediction loss upper-bounds $\mathcal{R}_j^2$, but checking that C_{res} is small over all noise levels remains difficult in practice.

EDM stability margin. The same parametrization yields a sufficient condition for contraction. Suppose $\hat{F}_j$ is globally $L_{F,j}$ -Lipschitz with respect to its normalized input, and define

$$b_j = 1 - \alpha_j - \beta_j c_j L_{F,j} = c_j^2(\sigma_j^2 - \sigma_j \tau_q L_{F,j}). \quad (22)$$

Since $1 - a_j(1 - \alpha_j) > 0$, eq. (19) implies

$$\text{Lip}(\hat{\Phi}_j) \leq 1 - a_j b_j. \quad (23)$$

Thus $b_j > 0$ is equivalent to $L_{F,j} < \sigma_j/\tau_q$ and certifies strict contraction. High noise, therefore, permits larger network Lipschitz constants while retaining this contraction guarantee. When $b_j \leq 0$, the bound does not certify strict contraction; the learned predictor may nevertheless contract the laws it transports.

Assembled recursion. Combining the bound from Lemma 3 with (21), we obtain

$$e_{j+1} \leq \gamma_j e_j + \Delta_j + a_j \beta_j \mathcal{R}_j. \quad (24)$$

Under Assumption 5, the learning contribution is at most $a_j \beta_j \sqrt{d} C_{\text{res}}$.

To summarize this section, the residual $\mathcal{R}_j$ controls the learning term, while a positive margin b_j certifies contraction. The recursion itself requires no contraction assumption. The next section combines this contraction certificate at high noise with control of the amplification accumulated over the remaining steps.

5 High-Noise Contraction and Realized Amplification

We now control the propagation term in eq. (24). At high noise, the EDM margin provides a sufficient condition for contraction. Over the remaining steps, we retain the realized amplification. Its cumulative value is the quantity used in the global bound; directional and worst-case estimates provide upper bounds on it. Proofs and complements are provided in Appendix E.

High-noise contraction. Fix $\sigma_{\text{hi}} > 0$ and define

$$K_{\text{hi}} = \max\{j \in \{0, \dots, K\} : \sigma_j \geq \sigma_{\text{hi}}\}, \quad (25)$$

with $K_{\text{hi}} = 0$ if the set is empty. Steps $j < K_{\text{hi}}$ form the high-noise block; the remaining steps form the low-noise block.

Assumption 6 (High-noise transport contraction). *There is $b_{\text{hi}} \in (0, 1)$, independent of K , such that on every $G_K \in \mathfrak{G}$, for $j < K_{\text{hi}}$,*

$$W_2((\hat{\Phi}_j)_{\#}\mu_j, (\hat{\Phi}_j)_{\#}\hat{\mu}_j) \leq (1 - b_{\text{hi}}a_j)e_j. \quad (26)$$

Proposition 7. *If, on every schedule, each high-noise network $\hat{F}_j$ is globally $L_{F,j}$ -Lipschitz in its normalized input and $b_j \geq b_{\text{hi}}$ for some $b_{\text{hi}} \in (0, 1)$ independent of K , then Assumption 6 holds.*

This follows by applying (23) to an optimal coupling. For the oracle with $\text{supp } q \subseteq B(0, R)$, the transport assumption holds above $\sigma_{\text{hi}} = R/\sqrt{1 - b_{\text{hi}}}$ (Appendix D.2).

Realized amplification. On the remaining steps, we impose no contraction assumption. We now accumulate the logarithms of the realized factors γ_j .

Definition 8 (Low-noise log-amplification). *Set $\bar{\gamma}_j = \max\{1, \gamma_j\}$. On $G_K \in \mathfrak{G}$, define $\Lambda_K = \sum_{j=K_{\text{hi}}}^{K-1} \log \bar{\gamma}_j$.*

Under Assumption 4, $\Lambda_K < \infty$ on each schedule, and $\prod_{i=r}^s \bar{\gamma}_i \leq e^{\Lambda_K}$ whenever $K_{\text{hi}} \leq r \leq s < K$. Thus e^{Λ_K} bounds propagation over any part of the low-noise block. Its growth under refinement enters the global error bound. The estimates below provide alternative ways to control this same quantity.

Directional bound. Write $\ell_j = \sigma_j - \sigma_{j+1} = a_j\sigma_j$ and $\hat{v}_\sigma(x) = (x - \hat{D}_\sigma(x))/\sigma$. For a low-noise step, let (U_j, V_j) optimally couple $(\mu_j, \hat{\mu}_j)$, and set $\mathbf{v}_j = \hat{v}_{\sigma_j}(U_j) - \hat{v}_{\sigma_j}(V_j)$. Define the positive directional expansion rate and the squared secant ratio by

$$\mathcal{E}_{j,+}^{\text{OT}} = \frac{(\mathbb{E} \langle V_j - U_j, \mathbf{v}_j \rangle)_+}{e_j^2}, \quad Q_j^{\text{OT}} = \frac{\mathbb{E} \|\mathbf{v}_j\|^2}{e_j^2}. \quad (27)$$

Set both to zero when $e_j = 0$. The first quantity measures expansion along the displacement in the optimal coupling; the second controls the quadratic correction from the finite step.

Proposition 9. *For every low-noise step,*

$$\gamma_j^2 \leq 1 + 2\ell_j \mathcal{E}_{j,+}^{\text{OT}} + \ell_j^2 Q_j^{\text{OT}}, \quad (28)$$

$$\log \bar{\gamma}_j \leq \ell_j \mathcal{E}_{j,+}^{\text{OT}} + \frac{1}{2} \ell_j^2 Q_j^{\text{OT}}. \quad (29)$$

Consequently, for any choice of optimal couplings,

$$\Lambda_K \leq \Lambda_K^{\text{dir}} := \sum_{j=K_{\text{hi}}}^{K-1} \left(\ell_j \mathcal{E}_{j,+}^{\text{OT}} + \frac{1}{2} \ell_j^2 Q_j^{\text{OT}} \right). \quad (30)$$

The proof pushes the optimal input coupling through $\widehat{\Phi}_j$ and expands $\|\widehat{\Phi}_j(U_j) - \widehat{\Phi}_j(V_j)\|^2$ using $\widehat{\Phi}_j(x) = x - \ell_j \widehat{v}_{\sigma_j}(x)$. Unlike Λ_K , the directional bound uses the transported input coupling, which need not be optimal for the output laws. Therefore, its cost only upper-bounds the Wasserstein distance defining γ_j .

Worst-case bounds. A direct upper bound replaces each γ_j by the Lipschitz constant of the map:

$$\Lambda_K \leq \Lambda_K^{\text{map}} := \sum_{j=K_{\text{hi}}}^{K-1} \log \max\{1, \text{Lip}(\widehat{\Phi}_j)\}. \quad (31)$$

A field-level bound instead uses the global one-sided expansion rate

$$\mathcal{L}_j^{\text{os}} = \sup_{x \neq y} \frac{-\langle x - y, \widehat{v}_{\sigma_j}(x) - \widehat{v}_{\sigma_j}(y) \rangle}{\|x - y\|^2}. \quad (32)$$

For continuously differentiable fields, this equals $\sup_x \lambda_{\max}(-\text{Sym} \nabla \widehat{v}_{\sigma_j}(x))$. Replacing the directional quantities by their global bounds gives

$$\Lambda_K^{\text{field}} := \sum_{j=K_{\text{hi}}}^{K-1} \left(\ell_j(\mathcal{L}_j^{\text{os}})_+ + \frac{1}{2} \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2 \right). \quad (33)$$

Both worst-case bounds maximize over space, rather than depend on the particular laws $(\mu_j, \widehat{\mu}_j)$. If every low-noise field is globally Lipschitz, then

$$\Lambda_K \leq \Lambda_K^{\text{dir}} \leq \Lambda_K^{\text{field}}, \quad \Lambda_K \leq \Lambda_K^{\text{map}} \leq \Lambda_K^{\text{field}}, \quad (34)$$

see Corollary 29. The directional and map majorants are not ordered in general: each one can serve to bound Λ_K uniformly under refinement. A sufficient condition, through the field majorant, is given in Remark 31.

Strict separation from worst-case stability. The worst-case bounds can be arbitrarily larger than the realized amplification. For the following proposition only, we allow an alternative initialization $\widehat{\mu}_0 = \nu_0^\varepsilon$, fixed across refinements for each ε , instead of the Gaussian initialization in Section 2.

Proposition 10. *Let $d = 1$, $q = \mathcal{N}(0, \tau_q^2)$ with $\tau_q > 0$, and $\sigma_{\text{hi}} > \bar{\sigma}$. There is C , depending only on $\tau_q, \underline{\sigma}, \bar{\sigma}$, such that for each $\varepsilon \in (0, 2\tau_q)$ there are a smooth denoiser family $\widehat{D}^\varepsilon$ satisfying Assumption 4 and eq. (18), and an initialization ν_0^ε , with the following properties:*

- (a) $W_2(\nu_0^\varepsilon, \mu_{\bar{\sigma}}) \leq C\varepsilon$ and $\mathcal{R}_{j,K}^\varepsilon \leq C\varepsilon$;
- (b) $\gamma_{j,K}^\varepsilon \leq 1$, hence $\Lambda_K^\varepsilon = 0$ for every K ;
- (c) as K tends to infinity along $\mathcal{K}$, we have $\lim_K \Lambda_K^{\text{map}, \varepsilon} = \lim_K \Lambda_K^{\text{field}, \varepsilon} = \frac{\bar{\sigma} - \sigma}{\varepsilon} + O(1)$, where $O(1)$ is independent of ε .

The construction combines an $O(\varepsilon)$ oscillation with slope $O(\varepsilon^{-1})$ and an $O(\varepsilon)$ translation of the initial law. The learned steps do not amplify the realized discrepancy, although their worst-case majorants diverge as $\varepsilon \rightarrow 0$. This is a separation across denoisers: for each fixed ε , both worst-case majorants have finite limits under refinement. The role of initialization is essential to this example; Section 7.2 examines the default Gaussian one.

6 Global Error Bound

We now combine the local error bound with the propagation controls of Section 5. Proofs and explicit constants are provided in Appendix F. In the high-noise block, the kernel $\Pi_{r,k} = \prod_{i=r}^{k-1} (1 - b_{\text{hi}} a_i)$ damps errors introduced at earlier steps. In the low-noise block, every partial product of amplification factors is bounded by e^{Λ_K} . Empty products are set to one.

To express the accumulated discretization bound, define, for $0 < s_1 \leq s_0$ and $b \geq 0$, the scale function

$$\Xi_\rho(b; s_1, s_0) = \int_{s_1}^{s_0} \left(\frac{s_1}{s}\right)^b s^{-\rho} ds. \quad (35)$$

The factor $(s_1/s)^b$ represents damping, while $s^{-\rho}$ comes from summing the local biases on the clock-uniform grid. Thus Ξ_ρ is nonincreasing in b .

Theorem 11 (Global bound). *Let Assumptions 4 to 6 hold and $\rho \in (0, 1]$. Fix $\theta_{\text{hi}}, \theta_{\text{lo}} \in (0, 1)$. There are $C_\star < \infty$, depending only on ρ and $\max(\theta_{\text{hi}}, \theta_{\text{lo}})$, and an effective margin $b_{\text{eff}} \in (0, b_{\text{hi}})$, depending only on $\rho, \theta_{\text{hi}}, b_{\text{hi}}$, with $b_{\text{eff}} \rightarrow b_{\text{hi}}$ as $\theta_{\text{hi}} \rightarrow 0$, such that for every $G_K \in \mathfrak{G}$ with $h_K \leq \min\{\theta_{\text{hi}}\sigma_{\text{hi}}^\rho, \theta_{\text{lo}}\sigma_{\text{lo}}^\rho\}$,*

$$W_2(\hat{\mu}_K, q) \leq e^{\Lambda_K} [\Pi_{0,K_{\text{hi}}} e_0 + \text{Disc}_K + \text{Learn}_K] + \sigma_K \sqrt{d}, \quad (36)$$

where

$$\begin{aligned} \text{Disc}_K &= C_\star B_{d,1} h_K [\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0)], \\ \text{Learn}_K &= \sqrt{d} C_{\text{res}} \tau_q \left[\frac{1 - \Pi_{0,K_{\text{hi}}}}{b_{\text{hi}}} + \log\left(1 + \frac{2\sigma_{K_{\text{hi}}}}{\tau_q}\right) \right]. \end{aligned}$$

The four contributions are initialization, discretization (undamped low-noise and damped high-noise biases), learning, and terminal smoothing bias.

Role of high-noise contraction. At fixed endpoints, both scale functions are uniformly bounded under refinement. The discretization contribution is therefore $O(h_K e^{\Lambda_K})$. High-noise contraction reduces its prefactor by damping early biases. For $b_{\text{eff}} > 1 - \rho$,

$$\Xi_\rho(b_{\text{eff}}; \sigma, \sigma_0) \leq \frac{\sigma^{1-\rho}}{b_{\text{eff}} + \rho - 1},$$

so the high-noise scale function is bounded independently of σ_0 at fixed $\sigma_{K_{\text{hi}}}$. For $\rho = 1/7$, this requires $b_{\text{eff}} > 6/7$, which follows from $b_{\text{hi}} > 6/7$ on sufficiently fine meshes; see Remark 37.

Since $0 < \Pi_{0,K_{\text{hi}}} \leq 1$, Learn_K also admits an upper bound independent of σ_0 at fixed $\sigma_{K_{\text{hi}}}$. Under the light-tail assumptions, the canonical initialization error is $O(\sigma_0^{-1})$; see Proposition 44.

Rates under refinement. With fixed endpoints and clock, $h_K = O(K^{-1})$. The resulting discretization rate therefore depends on the growth of Λ_K .

Corollary 12. *In the setting of Theorem 11, suppose*

$$\exists \omega \in [0, 1) \text{ s.t. } \sup_{G_K \in \mathfrak{G}} (\Lambda_K - \omega \log K) < \infty. \quad (37)$$

Then the discretization term in (36) is $O(K^{-(1-\omega)})$. For the oracle denoiser with exact initialization $\hat{\mu}_0 = \mu_{\bar{\sigma}}$, we have $W_2(\hat{\mu}_K, q) \leq \underline{\sigma} \sqrt{d} + O(K^{-(1-\omega)})$.

A uniform bound on Λ_K gives $\omega = 0$ and first-order decay of the discretization contribution. Refinement alone does not remove learning error, initialization mismatch, or the terminal smoothing bias. The envelope (37) is an asymptotic assumption, not a consequence of a finite-range fit. Even when Λ_K is uniformly bounded, first-order behavior may emerge only beyond practical step counts (Section 7.1).

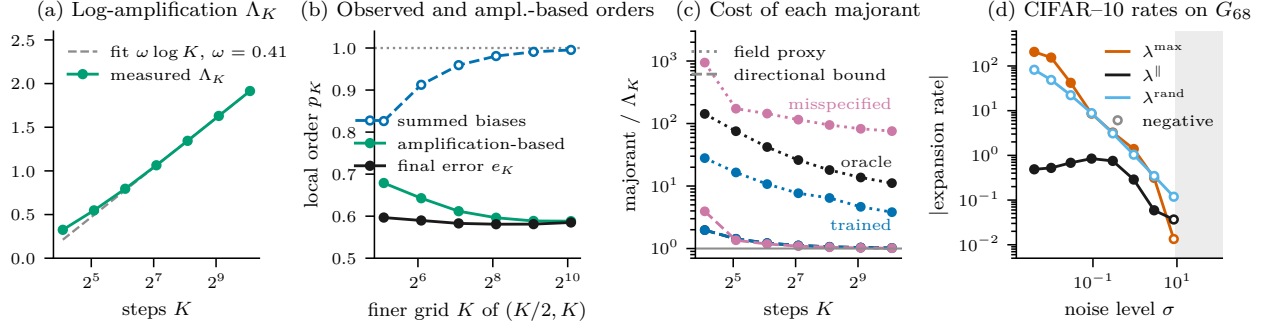


Figure 4: 1D mixture (a–c) and pretrained CIFAR–10 EDM model (d). **(a)** Oracle with exact initialization: measured Λ_K and its fit $\omega \log K$. **(b)** Local orders (38) of the final error e_K and of the summed local biases, against the amplification-based order $1 - (\Lambda_K - \Lambda_{K/2}) / \log 2$ computed from (a): the biases converge at first order, the error does not. **(c)** Directional majorant (dashed) and finite-domain field proxy (dotted) divided by Λ_K , from the canonical Gaussian initialization; trained networks as the median over three seeds. **(d)** Energy-weighted rates (41), maximized over nine nodes t , on the coarse–fine segments of G_{68} : worst direction $\lambda^{\max}$, displacement $\lambda^{\parallel}$ and random direction λ^{rand} , in absolute value; open markers are negative rates, and shading marks where the 90th-percentile empirical margin (40) is positive.

7 Numerical Experiments

We examine whether realized amplification explains the observed discretization error, how closely its majorants track it, and whether related stability mechanisms appear in an image model. On a one-dimensional Gaussian mixture, we evaluate the law-level quantities by quadrature. On CIFAR–10, we study local diagnostics of the learned field. Additional results and numerical checks are in Appendix G.

7.1 Amplification and the Finite-Grid Rate

We use a centered mixture of four narrow Gaussians ($\tau_q = 0.5$), with the oracle denoiser and exact initialization $\mu_{\bar{\sigma}}$. The error relative to the exact terminal law is therefore due only to discretization. Each law is represented by $M = 65,536$ quantiles. Matching quantiles gives the optimal coupling in one dimension, allowing us to evaluate $e_{j,K}$, $\gamma_{j,K}$ and Λ_K on grids ranging from $K = 17$ to $K = 1088$.

Local accuracy and final error. For a quantity C_K , define its order between successive grids by

$$p_K(C) = \frac{\log(C_{K/2}/C_K)}{\log 2}. \quad (38)$$

The summed local biases approach first-order decay, whereas the final error has orders between 0.58 and 0.60. Over the same range, Λ_K grows approximately logarithmically, with fitted slope $\omega \simeq 0.41$ (Figure 4a).

An error proportional to $K^{-1}e^{\Lambda_K}$ would have order $1 - (\Lambda_K - \Lambda_{K/2}) / \log 2$. This amplification-based order agrees with the observed one on the two finest grid pairs (Figure 4b). Thus measured amplification accounts for the slower decay on these grids.

Interpretation and scope. This agreement is a posteriori: Λ_K is computed from the transported laws, rather than predicted from the denoiser. Moreover, the slower decay is preasymptotic. For this oracle, Λ_K is uniformly bounded under refinement (Remark 46), so Corollary 12 gives an eventual first-order bound.

The measured local biases also provide a quantitative check of the propagation analysis. With exact initialization and oracle denoising, eq. (10) unrolls into

$$e_{K,K} \leq \sum_{j=0}^{K-1} \tilde{\delta}_{j,K} \prod_{k=j+1}^{K-1} \gamma_{k,K}, \quad (39)$$

where the local biases $\tilde{\delta}_{j,K}$ are evaluated by quadrature. The resulting bound overestimates the error by 35–40%. Additional comparisons with the universal local bound and the high-noise initialization control are reported in Appendix G.

7.2 Directional Bounds Track Realized Amplification

We compare Λ_K with Λ_K^{dir} and a finite-domain proxy of Λ_K^{field} . We use the canonical Gaussian initialization and five denoisers: the oracle, three trained EDM-preconditioned multilayer perceptrons, and a misspecified posterior mean. We do not evaluate Λ_K^{map} .

At $K = 1088$, the directional majorant exceeds Λ_K by at most 2.2% for every denoiser. For the oracle, the field proxy is much larger: 143 times Λ_K on the coarsest grid and 11.1 times on the finest (Figure 4c). These differences become more pronounced after exponentiation in the global error bound.

The oracle illustrates why the directional bound is tighter. Its velocity expands in narrow bands between the modes, while the discrepancy between the laws lies mostly where the predictor contracts. The field supremum includes these expanding regions regardless of where the discrepancy lies; the directional bound weights them through the actual coupling.

7.3 Stability Mechanisms in an Image Model

We use the class-conditional CIFAR-10 EDM checkpoint of Karras et al. (2022) on nested grids G_K , with $\sigma \in [0.002, 80]$, $\rho_{\text{EDM}} = 7$, and 1280 latent variables. The diagnostics use Jacobian–vector products and the checkpoint’s $\sigma_{\text{data}} = 0.5$ in place of τ_q (Appendix G.1).

High noise. We probe the EDM contraction margin by replacing the global constant $L_{F,j}$ in eq. (22) with an empirical Jacobian norm. Let $\tilde{S}_F^{[p]}(\sigma)$ be the p -quantile of power-iteration estimates of $\|\nabla \hat{F}_\sigma\|_{\text{op}}$ at 128 noised test images, and set

$$b_{\text{probe}}^{[p]}(\sigma) = 1 - \alpha(\sigma) - \beta(\sigma)c_{\text{in}}(\sigma)\tilde{S}_F^{[p]}(\sigma). \quad (40)$$

The empirical margin $b_{\text{probe}}^{[0.9]}$ becomes positive at $\sigma = 8.9$ and exceeds 6/7, the supercritical threshold in Remark 37, above $\sigma = 40.8$ (Figure 4d). These probes suggest that the EDM certificate is most informative near the high-noise end of the schedule. They do not bound the global Lipschitz constant or establish a valid contraction threshold.

Low noise. To examine directional expansion, we pair trajectories on G_K and G_{2K} from the same latent variable. At a common noise level, let x and y be the coarse and fine states and set $\zeta = y - x$. For a unit direction u , define

$$\lambda^u(t) = -u^\top \text{Sym} \nabla \hat{v}_{\sigma_j}(x + t\zeta) u, \quad t \in [0, 1]. \quad (41)$$

We compare rates along the displacement ($\lambda^\parallel$), in the most expanding direction (λ^{max}), and in a random direction (λ^{rand}); aggregation details are in Appendix G.

At $\sigma = 0.004$, the random direction contracts ($\lambda^{\text{rand}} = -82$), while the displacement expands ($\lambda^{\parallel} = +0.49$). The worst-direction rate is 424 times the displacement rate (Figure 4d). Thus random directions can miss expansion along the discrepancy, while worst directions can substantially overstate it.

These are local diagnostics along synchronously coupled coarse and fine trajectories. They illustrate the importance of direction, but do not estimate Λ_K , which compares the exact and sampler laws through optimal transport. Refinement results and sensitivity to individual trajectories are given in Appendix G.4.

8 Discussion and Limitations

Gaussian smoothing gives a universal local discretization bound for the first-order EDM predictor, while the global estimate separates this error from its amplification by the learned dynamics. The mixture experiment shows why this distinction matters on finite grids: accumulated local biases and final error can decrease at different rates.

The remaining difficulty is to control realized amplification from accessible properties of the trained model. Our bound is a posteriori, the CIFAR-10 diagnostics do not certify global stability, and the $O(d^{3/2})$ local constant limits quantitative use in high dimension. A central next step is a computable propagation certificate that retains the advantage of distribution-dependent control.

Acknowledgments

This project has received funding from the European Research Council (ERC) under the European Union’s Horizon Europe research and innovation programme (grant agreement No. 101201229) and from ANR through the Hi! PARIS Cluster 2030 project (ANR-23-IACL-0005) under the France 2030 investment plan.

AI Use Statement

We made use of generative AI tools (large language models and coding assistants) throughout this project: to develop and check proofs, to write and test the code of the numerical experiments, and to draft and edit the text. The research questions, the modelling choices and assumptions, and the overall direction of the work are our own. We carefully read every result and proof, corrected or rewrote them where needed. The figures, the generated tables and the measured values quoted in the main text are generated automatically from the saved experiment outputs available in the public code repository, rather than typed by hand. We take full responsibility for the content of this paper.

References

- Ambrosio, L., N. Gigli, and G. Savaré (2008). *Gradient Flows in Metric Spaces and in the Space of Probability Measures*. 2nd ed. Basel: Birkhäuser.
- Arsenyan, V., E. Vardanyan, and A. Dalalyan (2025). “Assessing the Quality of Denoising Diffusion Models in Wasserstein Distance: Noisy Score and Optimal Bounds”. In: *Advances in Neural Information Processing Systems*. Vol. 38. arXiv: 2506.09681.
- Benton, J., G. Deligiannidis, and A. Doucet (2024a). “Error Bounds for Flow Matching Methods”. In: *Transactions on Machine Learning Research*. arXiv: 2305.16860.
- Benton, J. et al. (2024b). “Nearly d -Linear Convergence Bounds for Diffusion Models via Stochastic Localization”. In: *International Conference on Learning Representations*. arXiv: 2308.03686.

- Beyler, E. and F. Bach (2025). *Convergence of Deterministic and Stochastic Diffusion-Model Samplers: A Simple Analysis in Wasserstein Distance*. arXiv: 2508.03210.
- Brosse, N. and A. S. Dalalyan (2026). *Boundary-layer asymptotics for Gaussian-smoothed singular measures*. arXiv: 2607.04514.
- Bruno, S. and S. Sabanis (2025). “Wasserstein Convergence of Score-based Generative Models under Semiconvexity and Discontinuous Gradients”. In: *Transactions on Machine Learning Research*. arXiv: 2505.03432.
- Chen, H.-B. and J. Niles-Weed (2022). “Asymptotics of Smoothed Wasserstein Distances”. In: *Potential Analysis* 56.4, pp. 571–595.
- Chen, H., H. Lee, and J. Lu (2023). “Improved Analysis of Score-Based Generative Modeling: User-Friendly Bounds under Minimal Smoothness Assumptions”. In: *Proceedings of the 40th International Conference on Machine Learning*. Vol. 202. Proceedings of Machine Learning Research. PMLR, pp. 4735–4763.
- Chen, S., G. Daras, and A. G. Dimakis (2023a). “Restoration-Degradation Beyond Linear Diffusions: A Non-Asymptotic Analysis for DDIM-Type Samplers”. In: *Proceedings of the 40th International Conference on Machine Learning*. Vol. 202. Proceedings of Machine Learning Research. PMLR, pp. 4462–4484. arXiv: 2303.03384.
- Chen, S. et al. (2023b). “Sampling Is as Easy as Learning the Score: Theory for Diffusion Models with Minimal Data Assumptions”. In: *International Conference on Learning Representations*. arXiv: 2209.11215.
- Chen, S. et al. (2023c). “The Probability Flow ODE is Provably Fast”. In: *Advances in Neural Information Processing Systems*. arXiv: 2305.11798.
- Chen, Y., E. Vanden-Eijnden, and J. Xu (2025). *Lipschitz-Guided Design of Interpolation Schedules in Generative Models*. arXiv: 2509.01629.
- Conforti, G., A. Durmus, and M. Gentiloni Silveri (2025). “KL Convergence Guarantees for Score Diffusion Models under Minimal Data Assumptions”. In: *SIAM Journal on Mathematics of Data Science* 7.1, pp. 86–109.
- De Bortoli, V. (2022). “Convergence of Denoising Diffusion Models under the Manifold Hypothesis”. In: *Transactions on Machine Learning Research*. arXiv: 2208.05314.
- Dytso, A., M. Cardone, and I. Zieder (2023a). “Meta Derivative Identity for the Conditional Expectation”. In: *IEEE Transactions on Information Theory* 69.7, pp. 4284–4302.
- Dytso, A., H. V. Poor, and S. Shamai (2023b). “Conditional Mean Estimation in Gaussian Noise: A Meta Derivative Identity With Applications”. In: *IEEE Transactions on Information Theory* 69.3, pp. 1883–1898.
- Efron, B. (2011). “Tweedie’s Formula and Selection Bias”. In: *Journal of the American Statistical Association* 106.496, pp. 1602–1614.
- Gao, X., H. M. Nguyen, and L. Zhu (2025). “Wasserstein Convergence Guarantees for a General Class of Score-Based Generative Models”. In: *Journal of Machine Learning Research* 26.43, pp. 1–54.
- Gao, X. and L. Zhu (2025). “Convergence Analysis for General Probability Flow ODEs of Diffusion Models in Wasserstein Distances”. In: *Proceedings of The 28th International Conference on Artificial Intelligence and Statistics*. Vol. 258. Proceedings of Machine Learning Research. PMLR, pp. 1009–1017. arXiv: 2401.17958.
- Gentiloni Silveri, M. and A. Ocello (2025). “Beyond Log-Concavity and Score Regularity: Improved Convergence Bounds for Score-Based Generative Models in W_2 -Distance”. In: *Proceedings of the 42nd International Conference on Machine Learning*. Vol. 267. Proceedings of Machine Learning Research. PMLR, pp. 55631–55656. arXiv: 2501.02298.
- Hartman, P. (1982). *Ordinary Differential Equations*. 2nd ed. Boston: Birkhäuser.
- Holderrieth, P. and E. Erives (2025). *An Introduction to Flow Matching and Diffusion Models*. arXiv: 2506.02070.

- Kahouli, K. et al. (2025). *Disentangling Total-Variance and Signal-to-Noise-Ratio Improves Diffusion Models*. arXiv: 2502.08598.
- Karras, T. et al. (2022). “Elucidating the Design Space of Diffusion-Based Generative Models”. In: *Advances in Neural Information Processing Systems*. Vol. 35. arXiv: 2206.00364.
- Koike, Y. (2026). *Wasserstein bounds for denoising diffusion probabilistic models via the Föllmer process*. arXiv: 2605.18069.
- Kremling, G. et al. (2025). *Non-asymptotic error bounds for probability flow ODEs under weak log-concavity*. arXiv: 2510.17608.
- Kwon, D., Y. Fan, and K. Lee (2022). “Score-Based Generative Modeling Secretly Minimizes the Wasserstein Distance”. In: *Advances in Neural Information Processing Systems*. Vol. 35. arXiv: 2212.06359.
- Lee, H., J. Lu, and Y. Tan (2023). “Convergence of Score-Based Generative Modeling for General Data Distributions”. In: *Proceedings of the 34th International Conference on Algorithmic Learning Theory*. Vol. 201. Proceedings of Machine Learning Research. PMLR, pp. 946–985. arXiv: 2209.12381.
- Li, G. and Y. Yan (2024). “Adapting to Unknown Low-Dimensional Structures in Score-Based Diffusion Models”. In: *Advances in Neural Information Processing Systems*. arXiv: 2405.14861.
- Li, G. et al. (2024a). *A Sharp Convergence Theory for the Probability Flow ODEs of Diffusion Models*. arXiv: 2408.02320.
- Li, G. et al. (2024b). “Towards Non-Asymptotic Convergence for Diffusion-Based Generative Models”. In: *International Conference on Learning Representations*. arXiv: 2306.09251.
- Li, S. and D. Zeng (2026). “Mitigating the Contractivity Trap in Diffusion ODEs via Stein Stabilization”. In: *Proceedings of the 43rd International Conference on Machine Learning*. arXiv: 2606.07835.
- Liang, J., Z. Huang, and Y. Chen (2025). “Low-Dimensional Adaptation of Diffusion Models: Convergence in Total Variation”. In: *Proceedings of Thirty Eighth Conference on Learning Theory*. Vol. 291. Proceedings of Machine Learning Research. PMLR, pp. 3723–3729. arXiv: 2501.12982.
- Lu, C. et al. (2022). “DPM-Solver: A Fast ODE Solver for Diffusion Probabilistic Model Sampling in Around 10 Steps”. In: *Advances in Neural Information Processing Systems*. arXiv: 2206.00927.
- Lyu, Z. and Z. Huang (2026). *Load-Reserve Wasserstein Propagation for Isotropic Diffusion Samplers*. arXiv: 2603.19670.
- Meng, C. et al. (2021). “Estimating High Order Gradients of the Data Distribution by Denoising”. In: *Advances in Neural Information Processing Systems*. arXiv: 2111.04726.
- Sabour, A., S. Fidler, and K. Kreis (2024). “Align Your Steps: Optimizing Sampling Schedules in Diffusion Models”. In: *Proceedings of the 41st International Conference on Machine Learning*. arXiv: 2404.14507.
- Song, J., C. Meng, and S. Ermon (2021). “Denoising Diffusion Implicit Models”. In: *International Conference on Learning Representations*. arXiv: 2010.02502.
- Stéphanovitch, A. (2026). *Lipschitz regularity in Flow Matching and Diffusion Models: sharp sampling rates and functional inequalities*. arXiv: 2604.06065.
- Strasman, S. et al. (2025). “An Analysis of the Noise Schedule for Score-Based Generative Models”. In: *Transactions on Machine Learning Research*. arXiv: 2402.04650.
- Tang, C. et al. (2026). *Wasserstein Convergence of ODE-Based Samplers in Decentralized Diffusion Model via Velocity Field Decomposition*. arXiv: 2606.15835.
- Villani, C. (2003). *Topics in Optimal Transportation*. Vol. 58. Graduate Studies in Mathematics. Providence, RI: American Mathematical Society.
- Wainwright, M. J. (2026). *Denoising growth complexity: Data geometry and certified schedules for diffusion sampling*. arXiv: 2607.26285.
- Wang, Y., Y. He, and M. Tao (2024). “Evaluating the Design Space of Diffusion-Based Generative Models”. In: *Advances in Neural Information Processing Systems*. Vol. 37. arXiv: 2406.12839.

- Williams, C. et al. (2024). “Score-Optimal Diffusion Schedules”. In: *Advances in Neural Information Processing Systems*.
- Zhou, Y. (2026). *Score Accuracy Along the Forward Diffusion Does Not Certify Numerical Stability in Diffusion Sampling*. arXiv: 2607.08757.

Appendix Contents

A	Notation Index	18
B	Setting and One-Step Decomposition	20
B.1	Posterior Identities and the Exact σ -Flow	20
B.2	The Refinement Family	26
B.3	From η -Euler to the EDM Predictor	26
B.4	Proof of the One-Step Decomposition	28
B.5	Three One-Step Decompositions	28
C	Universal Local Error	29
C.1	Clock Change and the Score–Hessian Form	29
C.2	The Noise-Moment Identity	30
C.3	Proof of the Universal Bound	34
C.4	Proof of the Local Bias Bound	35
C.5	The Leading-Order Local Bias and the Clock	35
C.6	Gaussian Laws and Sharpness	36
D	EDM Preconditioning	39
D.1	Complements on the EDM Margin	39
D.2	High-Noise Contraction for the Oracle	39
E	Propagation	40
E.1	The Split Index	40
E.2	Low-Noise Majorants: Proofs	40
E.3	Geometric Reading of the Directional Rate	43
E.4	The Strict Separation from Worst-Case Stability	44
F	The Global Wasserstein Bound	47
F.1	Explicit Form of the Global Bound	48
F.2	High-Noise Block	48
F.3	Summation of the Local Biases	49
F.4	Low-Noise Block and Proof of the Global Bound	51
F.5	Initialization Error at the Top Noise Level	52
F.6	From the Positive-Noise Iterate to the Deployed Sample	53
G	Numerical Experiments	54
G.1	Experimental Definitions and Implementation	54
G.2	Full Figures and Tables	60
G.3	Supplementary Results: One-Dimensional Audit	63
G.4	Analytic Controls	64
G.5	Supplementary CIFAR–10 Diagnostics	66
G.6	Numerical Reliability and Sensitivity Checks	66
G.7	Code and Data Availability	69
H	Comparison with Prior Wasserstein Analyses	69
H.1	Closest Comparison: Beyler–Bach	69
H.2	A Structural Wasserstein Route: Gao–Zhu	70
H.3	Score Accuracy Does Not Imply Stability	71

Appendix A collects the notation. Appendices B to G follow Sections 2 to 7 and contain all proofs, with the comparisons with prior work placed next to the results they concern; Appendix H compares our analysis in detail with the closest Wasserstein analyses.

A Notation Index

This appendix collects the general notation and the recurring problem-specific symbols; each problem-specific symbol is defined precisely at the place indicated in the last column.

General notation. The symbols $\mathbb{E}$, $\text{Law}(U)$, $\text{Cov}(U \mid V)$, $\mathcal{N}(m, \Sigma)$ and $\text{supp } \lambda$ denote expectation, the law of U , conditional covariance, a Gaussian law and the support of a measure; Id is the identity map and $\mathbf{I}_d$ the $d \times d$ identity matrix, $\lambda_{\max}(A)$ the largest eigenvalue of a symmetric matrix and $\preceq$ the Loewner order. We write $\langle x, y \rangle$ and $\|x\|$ for the Euclidean inner product and norm, $\|A\|_{\text{op}}$ for the operator norm of a matrix, $\text{Sym}(A) = \frac{1}{2}(A + A^\top)$ for its symmetric part, $B(m, r)$ for the Euclidean ball of center m and radius r , and $r_+ = \max\{r, 0\}$ for the positive part of a scalar. For a vector-valued map f , ∇f is its Jacobian, $\nabla \cdot f$ its divergence and $\text{Lip}(f)$ its global Lipschitz constant. For $1 \leq p < \infty$ and a measure λ , $\|f\|_{\mathbb{L}_p(\lambda)} = (\int \|f(x)\|^p \lambda(dx))^{1/p}$; the measure is omitted for a random variable on the underlying probability space, so that $\|U\|_{\mathbb{L}_p} = (\mathbb{E} \|U\|^p)^{1/p}$. A subscript on a Landau symbol records allowed dependence of its implicit constant, as in $O_\rho(\cdot)$.

Finally, $\mathcal{P}_2(\mathbb{R}^d)$ is the set of Borel probability measures with finite second moment, $f_\# \lambda$ the pushforward of λ by a measurable map f , and

$$W_2^2(\lambda, \lambda') = \inf_{\pi \in \mathcal{C}(\lambda, \lambda')} \int \|x - y\|^2 \pi(dx, dy)$$

the quadratic Wasserstein distance, where $\mathcal{C}(\lambda, \lambda')$ is the set of couplings and $\mathcal{C}_{\text{opt}}(\lambda, \lambda')$ the set of optimal ones. $\mathbb{N} = \{0, 1, \dots\}$, and δ_m is the Dirac mass at m . For a scalar-valued map f , ∇f and $\nabla^2 f$ are its gradient and Hessian. For matrices, $A^\top$, $\text{tr } A$ and $\|A\|_F$ are the transpose, trace and Frobenius norm, and $\lambda_{\min}(A)$ the smallest eigenvalue of a symmetric matrix. The set $\mathbb{S}_+^d$ is the cone of symmetric positive-semidefinite $d \times d$ matrices, $A \preceq B$ means $B - A \in \mathbb{S}_+^d$, and $A > 0$ means that a symmetric matrix is positive definite.

Decorations and indices. A hat marks a learned object ($\widehat{D}$, $\widehat{\Phi}$, $\widehat{v}$, $\widehat{F}$, $\widehat{\mu}_j$), and the exact counterpart is undecorated. A tilde marks the value returned by a numerical routine or measured by quadrature for the object written without it (Appendix G). The superscripts OT and sync name the coupling along which a quantity is evaluated: an optimal coupling of the exact and sampler laws, or the synchronous coupling of two nested grids driven by the same latent variable. The index j denotes a schedule level or the step starting there, and K the number of steps; the index K is written only when several grids are compared.

symbol	meaning	defined in
$q, X_0, Z, X_\sigma, \mu_\sigma$	data law, clean variable, standard Gaussian noise, noisy variable, and noisy law	Section 2
$p_\sigma, \pi_{x,\sigma}, D_\sigma, s_\sigma, v_\sigma, \Psi_{\sigma,\sigma_0}$	noisy density, posterior kernel, exact denoiser, score, probability-flow velocity, and exact flow map	eqs. (1) and (2)
$\sigma, \bar{\sigma}$	terminal and initial noise levels, fixed under refinement	Section 2
$\sigma_j, a_j, \Psi_j, \Phi_j, \hat{\Phi}_j$	noise level, relaxation coefficient, exact flow step, oracle predictor, and learned predictor	eqs. (4) and (5)
ℓ_j	noise step $\sigma_j - \sigma_{j+1} = a_j \sigma_j$	Section 5
$\mu_j, \hat{\mu}_0, \hat{\mu}_j, e_j$	exact law μ_{σ_j} , initial sampling law $\mathcal{N}(0, \bar{\sigma}^2 \mathbf{I}_d)$, sampler law, and its W_2 -error against μ_j	eq. (6)
$\eta, \rho, \rho_{\text{EDM}}, w_\eta$	numerical clock $\eta = \sigma^\rho$, clock exponent, EDM exponent $\rho_{\text{EDM}} = 1/\rho$, and clock velocity	Section 3
$\underline{\eta}, \bar{\eta}, h_K, G_K, \mathfrak{G}$	clock endpoints, clock mesh, schedule, and refinement family	Definition 1
θ_K	relative mesh $h_K/\underline{\eta}$ of G_K	eq. (12)
δ_j, Δ_j	local discretization bias and its universal bound	eqs. (8) and (15)
$\mathcal{A}_\rho, B_{d,\rho}$	clock acceleration and acceleration constant; $B_{d,1}$ is the constant at $\rho = 1$ that enters Δ_j	eq. (13), Theorem 2
$\gamma_j, \bar{\gamma}_j, \Lambda_K$	realized amplification factor, its truncation from below at one, and the cumulative low-noise log-amplification	eq. (9), Definition 8
ω	growth exponent of a logarithmic envelope $\Lambda_K \leq \omega \log K + O(1)$	eq. (37)
τ_q	root-mean-square scale of the centered target, $\tau_q^2 = \mathbb{E} \ X_0\ ^2 / d$	Section 4
α_j, β_j, c_j	EDM coefficients $\alpha(\sigma_j), \beta(\sigma_j), c_{\text{in}}(\sigma_j)$, that is $c_{\text{skip}}, c_{\text{out}}, c_{\text{in}}$	eq. (17)
$F_\sigma, \hat{F}_j, \mathcal{R}_j, C_{\text{res}}$	exact and learned normalized residual branches, residual error, and its uniform constant	Section 4
$\sigma_{\text{hi}}, K_{\text{hi}}$	high-noise threshold and split index	eq. (25)
$L_{F,j}, L_{\text{hi}}$	Lipschitz constant of $\hat{F}_j$ in normalized input, and its envelope on the high-noise block	Section 4, Appendix F
b_j, b_{hi}	EDM stability margin and its uniform lower bound	eq. (22), Assumption 6
$\Pi_{r,k}, \Xi_\rho$	high-noise contraction kernel $\prod_{i=r}^{k-1} (1 - b_{\text{hi}} a_i)$ and scale function	Section 6, eq. (35)
$\kappa, \theta_{\text{hi}}, b_{\text{eff}}$	finite-mesh damping factor, relative-mesh bound on the high-noise block, and effective exponent $b_{\text{hi}} \kappa(\theta_{\text{hi}})$	eq. (86), Proposition 39
$\theta_{\text{lo}}, C_{\rho,\theta}, C_\star, \Upsilon$	relative-mesh bound on the low-noise block, constants of the bias sums, and learning scale	Theorem 11, proposition 43, and lemma 41
$\text{Disc}_K, \text{Learn}_K$	discretization and learning terms of the global bound	Theorem 11
$\zeta^\pi, \mathcal{E}_j^\pi, \mathcal{E}_{j,+}^\pi, Q_j^\pi$	displacement, signed and positive directional rates, and squared secant ratio along a coupling π	eq. (27)
$A_{j,K}^\pi$	root-mean-square amplification of the predictor along a coupling π	eqs. (96) and (101)
$\mathcal{L}_j^{\text{os}}$	global one-sided expansion rate of $\hat{v}_{\sigma_j}$	eq. (32)
$\Lambda_K^{\text{dir}}, \Lambda_K^{\text{map}}, \Lambda_K^{\text{field}}$	transport-directional, map-level and field-level majorants of Λ_K	eqs. (30), (31) and (33)
$\ell_{\text{max},K}$	largest noise step of G_K	Remark 31

Notation specific to a numerical estimator is introduced only in Section 7 and appendix G.

B Setting and One-Step Decomposition

This appendix complements Section 2. It constructs the exact probability flow for every Borel data law, records the clock convention and the refinement family, relates the EDM predictor to explicit Euler in the numerical clock, and proves the one-step decomposition, which it compares with the two other possible orderings.

B.1 Posterior Identities and the Exact σ -Flow

We record here the posterior identities and the exact probability-flow construction used in Section 2, and prove the flow properties stated there. All statements are made at positive noise, and all flow statements on compact subintervals of $(0, \infty)$; no regularity at $\sigma = 0$ and no moment of q is assumed. The material is classical in substance, but the paper needs it in a form that holds for every Borel data law and for integrands that are unbounded in X_0 , which is why it is recorded with proofs. It is organized in three blocks.

- Appendix B.1.1: Gaussian smoothing and the posterior kernel. The identity (45) for unbounded, jointly dependent integrands and the finiteness of all posterior moments are what Lemma 21 uses to differentiate posterior averages in Appendix C, and what makes the pointwise denoiser D_σ well defined without a moment of q .
- Appendix B.1.2: Tweedie's formula, which identifies the probability-flow velocity with the denoiser residual and the score, and the linear growth of the denoiser on positive-noise intervals.
- Appendix B.1.3: the weak transport identity and the construction, by characteristics, of the exact flow maps Ψ_{σ, σ_0} of eq. (2) that push μ_{σ_0} to μ_σ , used in the one-step decomposition.

The probability flow. The velocity eq. (1) drives the increasing-noise curve $(\mu_\sigma)_{\sigma>0}$ through the continuity equation $\partial_\sigma \mu_\sigma + \nabla \cdot (v_\sigma \mu_\sigma) = 0$ on $(0, \infty) \times \mathbb{R}^d$, with q as its narrow initial trace (Remark 17). The pointwise posterior construction, the Tweedie identity (Lemma 14), the weak form of the continuity equation (Proposition 16), and the flow properties stated in Section 2 (Proposition 18) are established below.

B.1.1 Gaussian Smoothing and Posterior Moment Identities

Let q be a Borel probability measure on $\mathbb{R}^d$. Let $X_0 \sim q$, let $Z \sim \mathcal{N}(0, \mathbf{I}_d)$, and assume that X_0 and Z are independent. For $\sigma > 0$, set

$$X_\sigma = X_0 + \sigma Z, \quad \mu_\sigma = \text{Law}(X_\sigma).$$

Then μ_σ is absolutely continuous with respect to Lebesgue measure, with density

$$p_\sigma(x) = \int_{\mathbb{R}^d} \phi_\sigma(x - y) q(dy), \quad \phi_\sigma(x) = (2\pi\sigma^2)^{-d/2} \exp\left(-\frac{\|x\|^2}{2\sigma^2}\right). \quad (42)$$

Lemma 13 (Gaussian smoothing and posterior kernel). *In this setting, for every $\sigma > 0$, the density p_σ is strictly positive and*

$$(x, \sigma) \longmapsto p_\sigma(x)$$

belongs to $C^\infty(\mathbb{R}^d \times (0, \infty))$. Moreover, for every $x \in \mathbb{R}^d$ and $\sigma > 0$,

$$\pi_{x, \sigma}(dy) = \frac{\phi_\sigma(x - y)}{p_\sigma(x)} q(dy)$$

defines a probability kernel, and this kernel is a regular conditional distribution of X_0 given X_σ . That is, for every bounded measurable $f : \mathbb{R}^d \rightarrow \mathbb{R}$,

$$\int_{\mathbb{R}^d} f(y) \pi_{x,\sigma}(dy) = \mathbb{E}[f(X_0) \mid X_\sigma = x] \quad (43)$$

for μ_σ -almost every x . Consequently, writing

$$\langle \varphi \rangle_\sigma(x) = \int_{\mathbb{R}^d} \varphi(x, y) \pi_{x,\sigma}(dy) \quad (44)$$

for measurable $\varphi : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$, one has

$$\langle \varphi \rangle_\sigma(X_\sigma) = \mathbb{E}[\varphi(X_\sigma, X_0) \mid X_\sigma] \quad \text{almost surely} \quad (45)$$

whenever φ is either nonnegative or satisfies $\varphi(X_\sigma, X_0) \in \mathbb{L}_1$; the integrand may therefore be unbounded and may depend on the conditioning point as well as on X_0 . Taking $\varphi(x, y) = f(y)$ shows in particular that eq. (43) holds for every measurable f that is nonnegative or satisfies $f(X_0) \in \mathbb{L}_1$. Since $\pi_{x,\sigma}$ is a genuine conditional distribution, the conditional Jensen inequality applies to it in the usual way, under the same integrability proviso. Finally, for each fixed (x, σ) , all polynomial moments under $\pi_{x,\sigma}$ are finite.

Proof. Strict positivity follows from $\phi_\sigma(x - y) > 0$ for all $x, y \in \mathbb{R}^d$ and $q(\mathbb{R}^d) = 1$.

Let $\mathcal{Q} \subset \mathbb{R}^d \times (0, \infty)$ be compact. On $\mathcal{Q}$, every derivative

$$\partial_\sigma^m \partial_x^\alpha \phi_\sigma(x - y)$$

is a polynomial in $x - y$ and σ^{-1} , multiplied by $\phi_\sigma(x - y)$. Since σ is bounded away from zero on $\mathcal{Q}$, this derivative is uniformly bounded in $(x, \sigma, y) \in \mathcal{Q} \times \mathbb{R}^d$. Differentiation under the integral sign is therefore justified by dominated convergence, and p_σ is smooth.

The definition of $\pi_{x,\sigma}$ gives a probability measure because $p_\sigma(x)$ is the normalizing constant. To identify the conditional law, let f, g be bounded measurable. Then

$$\mathbb{E}[f(X_0)g(X_\sigma)] = \int_{\mathbb{R}^d} \int_{\mathbb{R}^d} f(y)g(x)\phi_\sigma(x - y) dx q(dy).$$

Equivalently,

$$\mathbb{E}[f(X_0)g(X_\sigma)] = \int_{\mathbb{R}^d} g(x) \left(\int_{\mathbb{R}^d} f(y) \pi_{x,\sigma}(dy) \right) p_\sigma(x) dx.$$

This proves the conditional-law identity.

We extend it to eq. (45). For $\varphi(x, y) = g(x)h(y)$ with g, h bounded measurable, the identity just proved and pulling out the X_σ -measurable factor $g(X_\sigma)$ give $\langle \varphi \rangle_\sigma(X_\sigma) = \mathbb{E}[\varphi(X_\sigma, X_0) \mid X_\sigma]$ almost surely. Such products generate the product σ -algebra, so the functional monotone class theorem extends the identity to all bounded measurable φ ; monotone convergence applied to $\varphi \wedge n$ extends it to $\varphi \geq 0$, and splitting $\varphi = \varphi^+ - \varphi^-$ to $\varphi(X_\sigma, X_0) \in \mathbb{L}_1$. The Jensen claim is the conditional Jensen inequality for the probability measure $\pi_{x,\sigma}$.

Finally, for every integer $k \geq 0$, the function

$$y \mapsto \|y\|^k \phi_\sigma(x - y)$$

is bounded on $\mathbb{R}^d$. Hence its integral against the finite measure q is finite, which gives all polynomial moments of $\pi_{x,\sigma}$. $\square$

The kernel $\pi_{x,\sigma}$ is defined for every x , not only μ_σ -almost everywhere. Using it as the version of the conditional law of X_0 given $X_\sigma = x$, define for every $x \in \mathbb{R}^d$ and $\sigma > 0$

$$D_\sigma(x) = \int_{\mathbb{R}^d} y \pi_{x,\sigma}(dy), \quad N_\sigma(x) = \int_{\mathbb{R}^d} \frac{x-y}{\sigma} \pi_{x,\sigma}(dy), \quad s_\sigma(x) = \nabla \log p_\sigma(x). \quad (46)$$

Thus D_σ is the posterior mean denoiser, N_σ is the posterior mean of the injected noise, and s_σ is the score of the noisy law. When X_0 is integrable, these definitions coincide with the usual conditional expectations

$$D_\sigma(x) = \mathbb{E}[X_0 \mid X_\sigma = x], \quad N_\sigma(x) = \mathbb{E}[Z \mid X_\sigma = x],$$

for the chosen version: applying eq. (43) to $f(y) = y$ componentwise makes D_σ a version of $\mathbb{E}[X_0 \mid X_\sigma = \cdot]$, and since $N_\sigma(x) = (x - D_\sigma(x))/\sigma$ by eq. (46) while $Z = (X_\sigma - X_0)/\sigma$, this makes $N_\sigma(X_\sigma)$ a version of $\mathbb{E}[Z \mid X_\sigma]$. The pointwise definitions in eq. (46) are useful because they are meaningful for every Borel input law q after Gaussian smoothing.

The coupled path $\sigma \mapsto X_\sigma = X_0 + \sigma Z$ has pathwise velocity Z . We define the corresponding Eulerian velocity by conditioning this pathwise velocity on the current position:

$$v_\sigma(x) = \mathbb{E}[Z \mid X_\sigma = x] = N_\sigma(x). \quad (47)$$

This velocity field is canonical for the Gaussian coupling $X_\sigma = X_0 + \sigma Z$. It is not meant to be the unique velocity field generating the marginal curve $(\mu_\sigma)_{\sigma>0}$.

Conditioning the identity $X_\sigma = X_0 + \sigma Z$ on $X_\sigma = x$ gives

$$x = D_\sigma(x) + \sigma N_\sigma(x). \quad (48)$$

Consequently,

$$v_\sigma(x) = N_\sigma(x) = \frac{x - D_\sigma(x)}{\sigma}. \quad (49)$$

B.1.2 Tweedie's Formula and Linear Growth of the Denoiser

Lemma 14 (Tweedie identity). *Let q be a Borel probability measure on $\mathbb{R}^d$, and let the Gaussian smoothing, posterior denoiser, score and velocity be defined as in Lemma 13 and eq. (47). For every $x \in \mathbb{R}^d$ and every $\sigma > 0$,*

$$s_\sigma(x) = \frac{D_\sigma(x) - x}{\sigma^2} = -\frac{1}{\sigma} N_\sigma(x).$$

Consequently, by eq. (49), $v_\sigma(x) = -\sigma s_\sigma(x)$.

Proof. Differentiating (42) with respect to x gives

$$\nabla_x p_\sigma(x) = \int_{\mathbb{R}^d} \frac{y-x}{\sigma^2} \phi_\sigma(x-y) q(dy).$$

Dividing by $p_\sigma(x)$, we obtain

$$s_\sigma(x) = \frac{1}{\sigma^2} \left(\int_{\mathbb{R}^d} y \pi_{x,\sigma}(dy) - x \right) = \frac{D_\sigma(x) - x}{\sigma^2}.$$

The identity $s_\sigma(x) = -\sigma^{-1} N_\sigma(x)$ follows from eq. (48), and the velocity representation then follows from eq. (49). $\square$

The identities above show that a single population vector field can be written in four equivalent coordinates: as the conditional velocity of the Gaussian coupling, as the posterior noise predictor, as the residual of the posterior mean denoiser, and as the score. The conditional-velocity representation is conceptually important: it shows that the denoising oracle is not only a pointwise posterior regression object, but also the Eulerian velocity of the heat-regularized curve $(\mu_\sigma)_{\sigma>0}$ associated with the canonical coupling $X_\sigma = X_0 + \sigma Z$, which Appendix B.1.3 makes precise.

The exact-flow construction of Appendix B.1.3 is carried out only on compact positive-noise intervals. The following estimate is the only global-in-space input it needs to rule out finite-time explosion of characteristics.

Lemma 15 (Linear growth of the denoiser and the velocity on positive-noise intervals). *Let q be a Borel probability measure on $\mathbb{R}^d$ and let $0 < \sigma_- < \sigma_+ < \infty$. There exists $C < \infty$, depending only on q, σ_-, σ_+ , such that*

$$\|D_\sigma(x)\| \leq C(1 + \|x\|), \quad x \in \mathbb{R}^d, \quad \sigma \in [\sigma_-, \sigma_+]. \quad (50)$$

Consequently,

$$\|v_\sigma(x)\| \leq C(1 + \|x\|), \quad x \in \mathbb{R}^d, \quad \sigma \in [\sigma_-, \sigma_+]. \quad (51)$$

Proof. The Gaussian prefactor cancels in the posterior mean, so

$$D_\sigma(x) = \frac{\int_{\mathbb{R}^d} y \exp\left(-\|x - y\|^2 / (2\sigma^2)\right) q(dy)}{\int_{\mathbb{R}^d} \exp\left(-\|x - y\|^2 / (2\sigma^2)\right) q(dy)}.$$

Choose $r_0 > 0$ such that $c_0 = q(B(0, r_0)) > 0$, and denote the denominator, an unnormalized version of p_σ , by $\bar{p}_\sigma(x) = \int_{\mathbb{R}^d} \exp\left(-\|x - y\|^2 / (2\sigma^2)\right) q(dy)$. For $y \in B(0, r_0)$, one has $\|x - y\| \leq \|x\| + r_0$. Therefore

$$\bar{p}_\sigma(x) \geq c_0 \exp\left(-\frac{(\|x\| + r_0)^2}{2\sigma^2}\right). \quad (52)$$

Let $r_x = 2\|x\| + r_0$. On the region $\{\|y\| \leq r_x\}$, the contribution to the numerator is bounded in norm by $r_x \bar{p}_\sigma(x)$. On the complementary region, write $u = \|y\| - r_x \geq 0$, so that $\|x - y\| \geq \|y\| - \|x\| = \|x\| + r_0 + u$. Hence

$$\|y\| \exp\left(-\frac{\|x - y\|^2}{2\sigma^2}\right) \leq (r_x + u) \exp\left(-\frac{(\|x\| + r_0)^2}{2\sigma^2}\right) \exp\left(-\frac{u^2}{2\sigma^2}\right).$$

Since $u \exp(-u^2/(2\sigma^2)) \leq \sigma \leq \sigma_+$, integration over $\{\|y\| > r_x\}$ gives

$$\int_{\{\|y\| > r_x\}} \|y\| \exp\left(-\frac{\|x - y\|^2}{2\sigma^2}\right) q(dy) \leq (r_x + \sigma_+) \exp\left(-\frac{(\|x\| + r_0)^2}{2\sigma^2}\right).$$

Combining this estimate with (52), we obtain

$$\|D_\sigma(x)\| \leq r_x + \frac{r_x + \sigma_+}{c_0} \leq C(1 + \|x\|), \quad x \in \mathbb{R}^d, \quad \sigma \in [\sigma_-, \sigma_+].$$

This proves (50). Since $v_\sigma(x) = (x - D_\sigma(x))/\sigma$ and $\sigma \geq \sigma_-$, the velocity bound (51) follows. $\square$

B.1.3 The Continuity Equation and the Exact Flow Maps

The velocity v_σ of Appendix B.1.2 drives the heat-regularized curve in two senses: weakly, through the continuity equation, and pathwise, through the flow of its characteristics. The second statement produces the exact maps Ψ_{σ, σ_0} of eq. (2).

Proposition 16 (Weak transport identity). *Let q be a Borel probability measure on $\mathbb{R}^d$, let $X_0 \sim q$, and let $X_\sigma = X_0 + \sigma Z$ with $Z \sim \mathcal{N}(0, \mathbf{I}_d)$ independent of X_0 . For every $f \in C_c^\infty(\mathbb{R}^d)$, the map $\sigma \mapsto \int_{\mathbb{R}^d} f \, d\mu_\sigma$ is differentiable on $(0, \infty)$, and*

$$\frac{d}{d\sigma} \int_{\mathbb{R}^d} f(x) \mu_\sigma(dx) = \int_{\mathbb{R}^d} \nabla f(x) \cdot v_\sigma(x) \mu_\sigma(dx). \quad (53)$$

Equivalently, in density form,

$$\partial_\sigma p_\sigma + \nabla_x \cdot (p_\sigma v_\sigma) = 0 \quad \text{on } (0, \infty) \times \mathbb{R}^d. \quad (54)$$

Proof. Since $X_\sigma = X_0 + \sigma Z$, differentiation under the expectation gives

$$\frac{d}{d\sigma} \mathbb{E}[f(X_\sigma)] = \mathbb{E}[\nabla f(X_\sigma) \cdot Z].$$

The differentiation is justified because $f \in C_c^\infty(\mathbb{R}^d)$, ∇f is bounded, and Z is integrable. Since $\nabla f(X_\sigma)$ is X_σ -measurable,

$$\mathbb{E}[\nabla f(X_\sigma) \cdot Z] = \mathbb{E}[\nabla f(X_\sigma) \cdot \mathbb{E}[Z \mid X_\sigma]].$$

Using the definition of v_σ , we obtain eq. (53).

The density p_σ is smooth by Lemma 13, and

$$p_\sigma v_\sigma = -\sigma p_\sigma s_\sigma = -\sigma \nabla p_\sigma$$

is smooth as well. Hence the weak identity is equivalent to the pointwise continuity equation (54). $\square$

Remark 17 (Initial trace). *The curve $(\mu_\sigma)_{\sigma>0}$ starts from the data law: $\mu_\sigma \rightarrow q$ narrowly as $\sigma \downarrow 0$. Indeed, $X_\sigma = X_0 + \sigma Z \rightarrow X_0$ almost surely, so $\mathbb{E}[f(X_\sigma)] \rightarrow \mathbb{E}[f(X_0)]$ for every bounded continuous f by dominated convergence.*

We now prove that the velocity field generates a global flow on every compact positive-noise interval and that this flow transports the heat-regularized laws.

Proposition 18 (Exact probability flow on the σ -clock). *Let q be a Borel probability measure on $\mathbb{R}^d$, let the posterior velocity v_σ be defined from its Gaussian smoothing as above, and let $I = [\sigma_-, \sigma_+] \Subset (0, \infty)$. The vector field $(\sigma, x) \mapsto v_\sigma(x)$ is the restriction to $I \times \mathbb{R}^d$ of a C^∞ vector field on $(0, \infty) \times \mathbb{R}^d$. Moreover, for every compact set $\mathcal{Q} \subset \mathbb{R}^d$,*

$$\sup_{\sigma \in I} \sup_{x \in \mathcal{Q}} \left(\|v_\sigma(x)\| + \|\nabla_x v_\sigma(x)\|_{\text{op}} \right) < \infty, \quad (55)$$

and, by Lemma 15, there exists $C_I < \infty$ such that

$$\|v_\sigma(x)\| \leq C_I(1 + \|x\|), \quad (\sigma, x) \in I \times \mathbb{R}^d. \quad (56)$$

Consequently, for every $\sigma_0 \in I$ and every $x \in \mathbb{R}^d$, the ODE

$$\frac{dx_r}{dr} = v_r(x_r), \quad r \in I,$$

has a unique solution on the whole interval I . Denote its solution map by $\Psi_{\sigma, \sigma_0} : \mathbb{R}^d \rightarrow \mathbb{R}^d$, so that

$$\frac{d}{d\sigma} \Psi_{\sigma, \sigma_0}(x) = v_\sigma(\Psi_{\sigma, \sigma_0}(x)), \quad \Psi_{\sigma_0, \sigma_0}(x) = x.$$

For every $\sigma, \sigma_0 \in I$, the map Ψ_{σ, σ_0} is a C^∞ -diffeomorphism of $\mathbb{R}^d$, with inverse $\Psi_{\sigma_0, \sigma}$. In particular, for all $\sigma_0, \sigma_1, \sigma_2 \in I$,

$$\Psi_{\sigma_2, \sigma_0} = \Psi_{\sigma_2, \sigma_1} \circ \Psi_{\sigma_1, \sigma_0}, \quad \Psi_{\sigma_0, \sigma_0} = \text{Id}. \quad (57)$$

The heat-regularized laws are transported by this flow, that is, eq. (3) holds. If $q \in \mathcal{P}_2(\mathbb{R}^d)$, then $\mu_\sigma \in \mathcal{P}_2(\mathbb{R}^d)$ for every $\sigma > 0$, and $(\Psi_{\sigma, \sigma_0})_\#$ maps $\mathcal{P}_2(\mathbb{R}^d)$ into itself.

Proof. By Lemma 13, the map $(\sigma, x) \mapsto p_\sigma(x)$ is C^∞ on $(0, \infty) \times \mathbb{R}^d$, and $p_\sigma(x) > 0$ for every $\sigma > 0$ and every $x \in \mathbb{R}^d$. Hence $s_\sigma(x) = \nabla \log p_\sigma(x)$ is C^∞ on $(0, \infty) \times \mathbb{R}^d$. By the Tweedie identity (Lemma 14), $v_\sigma(x) = -\sigma s_\sigma(x)$ is C^∞ on $(0, \infty) \times \mathbb{R}^d$. Since $I \times \mathcal{Q}$ is compact for every compact $\mathcal{Q} \subset \mathbb{R}^d$, continuity of v and $\nabla_x v$ gives (55). The global linear-growth estimate (56) is (51) of Lemma 15.

We now construct the flow. Since v is continuous in σ and locally Lipschitz in x , uniformly on compact subsets of $I \times \mathbb{R}^d$, the Picard–Lindelöf theorem gives a unique maximal solution through every $(\sigma_0, x) \in I \times \mathbb{R}^d$; see (Hartman 1982, Ch. II, Sec. 1, Thm. 1.1). It remains to show that the maximal solution is defined on all of I .

Let y_r be such a maximal trajectory, with $y_{\sigma_0} = x$. By (56),

$$\|\dot{y}_r\| \leq C_I(1 + \|y_r\|)$$

as long as the trajectory is defined. Therefore, for every r in the maximal interval of existence,

$$1 + \|y_r\| \leq 1 + \|x\| + C_I \left| \int_{\sigma_0}^r (1 + \|y_u\|) du \right|.$$

Grönwall's lemma gives

$$1 + \|y_r\| \leq \exp(C_I|r - \sigma_0|)(1 + \|x\|)$$

as long as the solution is defined. Hence the trajectory remains bounded on the finite interval I . By the continuation criterion for ODEs, a maximal solution in $I \times \mathbb{R}^d$ can fail to extend only by leaving every compact set; see (Hartman 1982, Ch. II, Sec. 3, Cor. 3.1–3.2). Thus the solution is defined on all of I .

We denote the solution map by Ψ_{σ, σ_0} . The flow identities (57) follow from uniqueness. Since v is C^∞ , the classical smooth-dependence theorem for ODEs implies that $x \mapsto \Psi_{\sigma, \sigma_0}(x)$ is C^∞ ; see (Hartman 1982, Ch. V, Sec. 3–4). Moreover,

$$\Psi_{\sigma, \sigma_0} \circ \Psi_{\sigma_0, \sigma} = \Psi_{\sigma, \sigma} = \text{Id},$$

and the same identity with σ and σ_0 exchanged gives

$$\Psi_{\sigma_0, \sigma} \circ \Psi_{\sigma, \sigma_0} = \text{Id}.$$

Thus Ψ_{σ, σ_0} is a C^∞ -diffeomorphism of $\mathbb{R}^d$, with inverse $\Psi_{\sigma_0, \sigma}$.

It remains to identify the transported laws. The curve $\sigma \mapsto \mu_\sigma$ is narrowly continuous, since $\mu_\sigma = \text{Law}(X_0 + \sigma Z)$ and bounded continuous test functions are handled by dominated convergence, as in Remark 17. By Proposition 16, the curve $(\mu_\sigma)_{\sigma > 0}$ solves

$$\partial_\sigma \mu_\sigma + \nabla \cdot (v_\sigma \mu_\sigma) = 0$$

in the weak sense.

We verify the hypotheses of the characteristic representation theorem for the continuity equation on an arbitrary compact subinterval $J \subset I$. The local regularity condition is satisfied because, for every compact $Q \subset \mathbb{R}^d$,

$$\int_J \sup_{x \in Q} \left(\|v_\sigma(x)\| + \|\nabla_x v_\sigma(x)\|_{\text{op}} \right) d\sigma < \infty.$$

Moreover, the velocity is integrable against the curve of laws:

$$\int_{\mathbb{R}^d} \|v_\sigma(x)\| \mu_\sigma(dx) = \mathbb{E} [\|\mathbb{E}[Z \mid X_\sigma]\|] \leq \mathbb{E} \|Z\|.$$

Hence

$$\int_J \int_{\mathbb{R}^d} \|v_\sigma(x)\| \mu_\sigma(dx) d\sigma < \infty.$$

The characteristic representation formula for the continuity equation therefore applies; see (Ambrosio et al. 2008, Prop. 8.1.8). It gives, for $\sigma \geq \sigma_0$, $\mu_\sigma = (\Psi_{\sigma, \sigma_0})_\# \mu_{\sigma_0}$. If $\sigma < \sigma_0$, applying the same result on $[\sigma, \sigma_0]$ gives $\mu_{\sigma_0} = (\Psi_{\sigma_0, \sigma})_\# \mu_\sigma$. Pushing forward by the inverse map Ψ_{σ, σ_0} yields again $\mu_\sigma = (\Psi_{\sigma, \sigma_0})_\# \mu_{\sigma_0}$. Thus (3) holds for all $\sigma, \sigma_0 \in I$.

Finally, assume $q \in \mathcal{P}_2(\mathbb{R}^d)$. Then $X_\sigma = X_0 + \sigma Z$ has finite second moment for every $\sigma > 0$, so $\mu_\sigma \in \mathcal{P}_2(\mathbb{R}^d)$. The Grönwall estimate also gives, with $C'_I = \exp(C_I(\sigma_+ - \sigma_-))$,

$$\|\Psi_{\sigma, \sigma_0}(x)\| \leq C'_I(1 + \|x\|), \quad \sigma, \sigma_0 \in I.$$

Therefore, if $\lambda \in \mathcal{P}_2(\mathbb{R}^d)$, then

$$\int_{\mathbb{R}^d} \|\Psi_{\sigma, \sigma_0}(x)\|^2 \lambda(dx) \leq 2C_I'^2 \int_{\mathbb{R}^d} (1 + \|x\|^2) \lambda(dx) < \infty.$$

Thus $(\Psi_{\sigma, \sigma_0})_\# \lambda \in \mathcal{P}_2(\mathbb{R}^d)$ for every $\lambda \in \mathcal{P}_2(\mathbb{R}^d)$, which is the final assertion. $\square$

B.2 The Refinement Family

The family $\mathfrak{G}$ must be infinite: several hypotheses ask for a constant independent of the mesh, and on any finite collection of grids such a constant exists trivially. Fixed endpoints matter twice: they make the terminal bias $\sigma_K \sqrt{d}$ of eq. (7) the same for every member, and they let a schedule-uniform per-step constant be summed into a schedule-uniform total. Since the grid is uniform in η , the relative step h_K/η_j is largest where η_j is smallest (Figure 3), and the single bound (12) covers every block of the schedule, with $\underline{\eta} = \sigma_{\text{hi}}^\rho$ on the high-noise block and $\underline{\eta} = \underline{\sigma}^\rho$ on the whole schedule.

B.3 From η -Euler to the EDM Predictor

Remark 19 (The EDM predictor is not η -Euler). *The frozen σ -step (4) is the map analyzed throughout. It is not the explicit Euler step of the η -clock ODE eq. (11): the exact flow is invariant under $\eta = \sigma^\rho$ but explicit Euler is not, and the two use different relaxation coefficients, agreeing only to first order in h_j/η_j . On the power-law clock the EDM predictor is the integrating-factor form of that η -step, whatever ρ ; the rest of this subsection records the derivation and the exact one-step discrepancy.*

The EDM predictor eqs. (4) and (5) is the finite-step sampler analyzed in this paper. This choice should be separated from the clock convention itself. The exact probability flow is invariant under the change of variables $\eta = \sigma^\rho$, but explicit Euler is not invariant under a nonlinear reparameterization of time. Consequently, an explicit Euler step in the η -clock is not, at finite step size, the same update as the first-order predictor used in EDM on the same positive noise levels (Karras et al. 2022, Sec. 3). This appendix makes the difference precise in two ways: it gives the exact

one-step discrepancy between the two updates, and it reads the EDM predictor as an integrating-factor variant of η -Euler. The upshot is that the EDM predictor, unlike η -Euler, is the same map on every power-law clock, so the clock exponent changes only where the levels are placed, not the update. The full EDM sampler may also include stochastic churn and a Heun correction (Karras et al. 2022, Sec. 3). The comparison here concerns only the underlying deterministic first-order predictor, because this is the map directly comparable with explicit η -Euler.

We work on a generic decreasing clock grid $\eta_0 > \eta_1 > \dots > \eta_K > 0$, with local steps $h_j = \eta_j - \eta_{j+1}$ and noise levels $\sigma_j = \eta_j^{1/\rho}$; on the refinement family $\mathfrak{G}$ all local steps are equal, $h_j \equiv h_K$. The comparison is governed by the relative step

$$\bar{h}_j = \frac{h_j}{\eta_j} = 1 - \left(\frac{\sigma_{j+1}}{\sigma_j} \right)^\rho \in (0, 1).$$

To make the distinction explicit, suppose that a learned denoiser $\widehat{D}_{\sigma_j}$ induces the learned η -clock velocity

$$\widehat{w}_j(x) = \frac{1}{\rho\eta_j} (x - \widehat{D}_{\sigma_j}(x)), \quad \eta_j = \sigma_j^\rho.$$

The corresponding explicit η -Euler denoiser relaxation is

$$\widehat{\Phi}_j^{\text{Eu}}(x) = x - h_j \widehat{w}_j(x) = (1 - a_j^{\text{Eu}})x + a_j^{\text{Eu}} \widehat{D}_{\sigma_j}(x), \quad a_j^{\text{Eu}} = \frac{h_j}{\rho\eta_j} = \frac{\bar{h}_j}{\rho}.$$

By contrast, the EDM predictor eq. (5) has the same form with the relaxation coefficient

$$a_j = 1 - \frac{\sigma_{j+1}}{\sigma_j} = 1 - (1 - \bar{h}_j)^{1/\rho}.$$

Thus both updates use the same denoiser and the same pair of positive noise levels, but they use different relaxation coefficients, $a_j^{\text{Eu}} = \bar{h}_j/\rho$ and $a_j = 1 - (1 - \bar{h}_j)^{1/\rho}$. For fixed $\rho > 0$, Taylor expansion gives

$$a_j = \frac{\bar{h}_j}{\rho} - \frac{1-\rho}{2\rho^2} \bar{h}_j^2 + O_\rho(\bar{h}_j^3) = a_j^{\text{Eu}} - \frac{1-\rho}{2\rho^2} \bar{h}_j^2 + O_\rho(\bar{h}_j^3).$$

The two schemes are therefore first-order equivalent under the relative mesh condition $\max_j \bar{h}_j \rightarrow 0$, but they need not be close on a coarse terminal grid, where η_j is small and $\bar{h}_j$ may be of order one. The one-step discrepancy has the exact algebraic form

$$\widehat{\Phi}_j^{\text{Eu}}(x) - \widehat{\Phi}_j(x) = (a_j^{\text{Eu}} - a_j)(\widehat{D}_{\sigma_j}(x) - x).$$

Consequently,

$$\left\| \widehat{\Phi}_j^{\text{Eu}}(x) - \widehat{\Phi}_j(x) \right\| \leq |a_j^{\text{Eu}} - a_j| \left\| x - \widehat{D}_{\sigma_j}(x) \right\|.$$

This discrepancy identity is the basic reconciliation between the η -clock Euler sampler and the EDM finite-step predictor: they discretize the same continuous probability flow and may use the same denoiser, but they are distinct finite-step integrators.

There is also a useful way to read the EDM coefficient from the η -clock. If, over one step, the denoiser is frozen at its left-endpoint value $\widehat{D}_{\sigma_j}(x_j)$, then the linear equation

$$\frac{dx}{d\eta} = \frac{1}{\rho\eta} (x - \widehat{D}_{\sigma_j}(x_j))$$

can be integrated exactly from η_j to η_{j+1} . This gives

$$x_{j+1} = \frac{\sigma_{j+1}}{\sigma_j} x_j + \left(1 - \frac{\sigma_{j+1}}{\sigma_j} \right) \widehat{D}_{\sigma_j}(x_j),$$

which is precisely the EDM predictor. In this sense, on the power-law clock, the EDM predictor may be viewed as a σ -adapted or integrating-factor variant of the η -Euler step. It treats the leading scalar factor $(\rho\eta)^{-1}$ exactly while freezing the denoiser over the step. The result does not depend on ρ , which is the invariance announced above.

Relation to prior work: identification of the predictor. The predictor analyzed here is the deterministic DDIM update (Song et al. 2021) in the variance-exploding parametrization, which is also the first-order DPM-Solver step (Lu et al. 2022).

B.4 Proof of the One-Step Decomposition

Proof of eq. (10). By the triangle inequality in W_2 , applied to $\mu_{j+1} = (\Psi_j)_\# \mu_j$ and $\hat{\mu}_{j+1} = (\hat{\Phi}_j)_\# \hat{\mu}_j$,

$$e_{j+1} \leq W_2((\Psi_j)_\# \mu_j, (\Phi_j)_\# \mu_j) + W_2((\Phi_j)_\# \mu_j, (\hat{\Phi}_j)_\# \mu_j) + W_2((\hat{\Phi}_j)_\# \mu_j, (\hat{\Phi}_j)_\# \hat{\mu}_j).$$

All four laws lie in $\mathcal{P}_2(\mathbb{R}^d)$ by Assumption 4, so every term is finite. The first two terms are bounded by the cost of the diagonal coupling induced by μ_j : the first gives δ_j by eq. (8), and the second gives the learning term through the pointwise identity $\Phi_j - \hat{\Phi}_j = a_j(D_{\sigma_j} - \hat{D}_{\sigma_j})$ evaluated at $X_{\sigma_j} \sim \mu_j$. The third term equals $\gamma_j e_j$ when $e_j > 0$ by eq. (9), and vanishes when $e_j = 0$, since then $\mu_j = \hat{\mu}_j$ and the two pushforwards coincide. $\square$

B.5 Three One-Step Decompositions

This subsection justifies the order of the one-step decomposition (10): of the three possible decompositions compared below, it is the only one that keeps both local errors it creates, discretization and learning, on the exact law μ_j .

Let $(Y_j, \hat{X}_j)$ be an optimal coupling of $(\mu_j, \hat{\mu}_j)$, and set $Y_{j+1} = \Psi_j(Y_j) \sim \mu_{j+1}$ and $\hat{X}_{j+1} = \hat{\Phi}_j(\hat{X}_j) \sim \hat{\mu}_{j+1}$. Any three-term bound on $\|Y_{j+1} - \hat{X}_{j+1}\|_{\mathbb{L}_2}$ walks along the chain $\Psi_j \rightarrow \Phi_j \rightarrow \hat{\Phi}_j$, whose arrows are the discretization bias and the learning error, and changes the argument from Y_j to $\hat{X}_j$ exactly once. Where the change happens fixes which map is transported, and under which law the two local errors are measured: upstream of the change they sit on the exact law μ_j , downstream on the sampler law $\hat{\mu}_j$. Writing $\varepsilon_j(\lambda) = a_j \|\hat{D}_{\sigma_j} - D_{\sigma_j}\|_{\mathbb{L}_2(\lambda)}$ for the learning error under a law λ , so that $\varepsilon_j(\mu_j) = a_j \beta_j \mathcal{R}_j$ by eq. (21), the three options are

$$\begin{aligned} \text{last: } e_{j+1} &\leq \|\hat{\Phi}_j(Y_j) - \hat{\Phi}_j(\hat{X}_j)\|_{\mathbb{L}_2} + \|\Psi_j - \Phi_j\|_{\mathbb{L}_2(\mu_j)} + \varepsilon_j(\mu_j), \\ \text{middle: } e_{j+1} &\leq \|\Phi_j(Y_j) - \Phi_j(\hat{X}_j)\|_{\mathbb{L}_2} + \|\Psi_j - \Phi_j\|_{\mathbb{L}_2(\mu_j)} + \varepsilon_j(\hat{\mu}_j), \\ \text{first: } e_{j+1} &\leq \|\Psi_j(Y_j) - \Psi_j(\hat{X}_j)\|_{\mathbb{L}_2} + \|\Psi_j - \Phi_j\|_{\mathbb{L}_2(\hat{\mu}_j)} + \varepsilon_j(\hat{\mu}_j). \end{aligned}$$

Argument change	Transported map	Discretization on	Learning on
after $\hat{\Phi}_j$	learned $\hat{\Phi}_j$	μ_j	μ_j
after Φ_j	oracle Φ_j	μ_j	$\hat{\mu}_j$
after Ψ_j	exact flow Ψ_j	$\hat{\mu}_j$	$\hat{\mu}_j$

The choice trades the stability of one map against the law under which the local errors live. The first option transports the exact flow, whose stability is a property of the data alone; this is the route of the log-concave analysis compared in Appendix H. It pays by moving both local errors

onto $\hat{\mu}_j$, where neither the universal acceleration bound nor the identity $\varepsilon_j(\mu_j) = a_j \beta_j \mathcal{R}_j$ applies without a change-of-measure estimate, and W_2 -closeness of $\hat{\mu}_j$ to μ_j alone does not supply one. The middle option keeps the acceleration bound but still moves the learning error off the exact law, and transports the oracle predictor, with $\text{Lip}(\Phi_j) \leq 1 - a_j + a_j \text{Lip}(D_{\sigma_j})$ set by the score geometry of the path. Without structural assumptions on q , $\text{Lip}(D_{\sigma_j})$ is not controlled at low noise, so this transported term is a cost rather than a gain. The last option, used in (Beyler and Bach 2025), is a coupling-level form of the decomposition (10). It keeps both local errors on μ_j , where Theorem 2 and eq. (21) apply directly, and places the whole dependence on the network in the stability of $\hat{\Phi}_j$. Its transported term is the cost of one particular coupling of $(\hat{\Phi}_j)_{\#}\mu_j$ and $(\hat{\Phi}_j)_{\#}\hat{\mu}_j$, and so dominates the intrinsic term $\gamma_j e_j$ of eq. (10), which measures the optimal one.

Appendix H compares these routes, as they are used in the closest Wasserstein analyses, with the present one.

C Universal Local Error

This appendix supports Section 3. It proves the universal acceleration bound Theorem 2 and the bound Lemma 3 on the local discretization bias (Appendix C.4), states the formal extrapolation to higher-order integrators (Remark 25), and closes with exact formulas for Gaussian input laws and the sharpness of the acceleration exponent. The acceleration $\mathcal{A}_\rho(\sigma, x)$ and the constant $B_{d,\rho}$ are defined in Section 3; $\mathcal{A}_1$ denotes the native σ -clock case. The argument rewrites the acceleration in a sequence of increasingly convenient coordinates—first in score–Hessian form, then in terms of conditional moments of the Gaussian noise. From the noise-moment form the universal $\mathbb{L}_2$ bound follows by elementary inequalities, after which the same identity yields exact formulas in the Gaussian case.

C.1 Clock Change and the Score–Hessian Form

Before turning to the quantitative estimate, it is worth seeing where the curvature of the clock, its second derivative $d^2\sigma/d\eta^2$, enters. Under a smooth reparametrization $\sigma = \sigma(\eta)$ the velocity transforms as $w_\eta(x) = \frac{d\sigma}{d\eta} v_\sigma(x)$, and the chain rule gives

$$\partial_\eta w_\eta(x) + \nabla w_\eta(x) w_\eta(x) = \left(\frac{d\sigma}{d\eta}\right)^2 (\partial_\sigma v_\sigma(x) + \nabla v_\sigma(x) v_\sigma(x)) + \frac{d^2\sigma}{d\eta^2} v_\sigma(x).$$

For the power-law clock $\eta = \sigma^\rho$ with $\rho > 0$ one has $\frac{d\sigma}{d\eta} = \frac{1}{\rho} \sigma^{1-\rho}$ and $\frac{d^2\sigma}{d\eta^2} = \frac{1-\rho}{\rho^2} \sigma^{1-2\rho}$, so that

$$\mathcal{A}_\rho(\sigma, x) = \frac{1}{\rho^2} \sigma^{2-2\rho} \mathcal{A}_1(\sigma, x) + \frac{1-\rho}{\rho^2} \sigma^{1-2\rho} v_\sigma(x).$$

The acceleration in the numerical clock is thus a rescaling of the acceleration in the noise clock, plus a multiple of the velocity v_σ itself, with coefficient proportional to $1 - \rho$: a genuinely curved clock ($\rho \neq 1$) injects this velocity term, which a linear clock ($\rho = 1$) does not. It reappears as the term $(1 - \rho) \mathbf{I}_d N_\sigma$ of the noise-moment identity (65), since $N_\sigma = v_\sigma$ by Tweedie’s identity.

For the quantitative estimate it is more convenient to write the clock acceleration in score–Hessian coordinates. Besides the score $s_\sigma = \nabla \log p_\sigma$, we write

$$H_\sigma = \nabla^2 \log p_\sigma = \nabla s_\sigma$$

for the Hessian of the log-density of μ_σ ; both are smooth on $\mathbb{R}^d$ because p_σ is smooth and positive.

Lemma 20 (Score–Hessian formula for the clock acceleration). *Let $\rho > 0$ and let q be a Borel probability measure on $\mathbb{R}^d$. For every $x \in \mathbb{R}^d$ and every $\sigma > 0$,*

$$\mathcal{A}_\rho(\sigma, x) = \frac{1}{\rho^2} \left(-\sigma^{4-2\rho} \nabla \operatorname{tr} H_\sigma(x) - \sigma^{4-2\rho} H_\sigma(x) s_\sigma(x) + (\rho - 2) \sigma^{2-2\rho} s_\sigma(x) \right). \quad (58)$$

Proof. The heat equation for the Gaussian smoothing in the σ -clock is

$$\partial_\sigma p_\sigma(x) = \sigma \operatorname{tr} \nabla^2 p_\sigma(x).$$

Since $\nabla^2 p_\sigma / p_\sigma = H_\sigma + s_\sigma s_\sigma^\top$, dividing by p_σ gives

$$\partial_\sigma \log p_\sigma = \sigma \left(\operatorname{tr} H_\sigma + \|s_\sigma\|^2 \right).$$

Differentiating in x gives

$$\partial_\sigma s_\sigma = \sigma (\nabla \operatorname{tr} H_\sigma + 2H_\sigma s_\sigma). \quad (59)$$

Using

$$w_\eta(x) = -\frac{1}{\rho} \sigma^{2-\rho} s_\sigma(x), \quad \frac{d\sigma}{d\eta} = \frac{1}{\rho} \sigma^{1-\rho},$$

we compute

$$\partial_\eta w_\eta(x) = -\frac{2-\rho}{\rho^2} \sigma^{2-2\rho} s_\sigma(x) - \frac{1}{\rho^2} \sigma^{3-2\rho} \partial_\sigma s_\sigma(x),$$

and

$$\nabla w_\eta(x) w_\eta(x) = \frac{1}{\rho^2} \sigma^{4-2\rho} H_\sigma(x) s_\sigma(x).$$

Therefore

$$\mathcal{A}_\rho(\sigma, x) = \frac{1}{\rho^2} \left((\rho - 2) \sigma^{2-2\rho} s_\sigma(x) - \sigma^{3-2\rho} \partial_\sigma s_\sigma(x) + \sigma^{4-2\rho} H_\sigma(x) s_\sigma(x) \right).$$

Substituting eq. (59) yields eq. (58). $\square$

C.2 The Noise-Moment Identity

We now rewrite the same acceleration in terms of conditional moments of the Gaussian noise. This is the form from which the universal $\mathbb{L}_2$ bound follows.

Throughout the rest of this appendix, for fixed $x \in \mathbb{R}^d$ and $\sigma > 0$, the notations $\mathbb{E}[\cdot \mid X_\sigma = x]$ and $\operatorname{Cov}(\cdot \mid X_\sigma = x)$ denote integrals in X_0 against the posterior kernel $\pi_{x,\sigma}$, with $Z = (x - X_0)/\sigma$ under this conditioning. By eq. (45), evaluating these pointwise representatives at $x = X_\sigma$ realizes the corresponding conditional expectations given X_σ almost surely, including for the unbounded integrands, depending on the conditioning point, considered here.

With this convention, recall that

$$N_\sigma(x) = \mathbb{E}[Z \mid X_\sigma = x]$$

is the conditional mean of the noise given $X_\sigma = x$. Define the conditional noise covariance by

$$\mathcal{C}_\sigma(x) = \operatorname{Cov}(Z \mid X_\sigma = x),$$

and the contracted third centered conditional noise moment by

$$\mathfrak{m}_{3,\sigma}(x) = \mathbb{E} \left[\|Z - N_\sigma(x)\|^2 (Z - N_\sigma(x)) \mid X_\sigma = x \right].$$

For the relation of these identities to higher-order Tweedie formulas, see Appendix H. The posterior differentiation identity used below is the Gaussian specialization of the meta-derivative identity of Dytso–Poor–Shamai (Dytso et al. 2023b, Thm. 1); see also the observation-dependent formulation of Dytso–Cardone–Zieder (Dytso et al. 2023a). We include the short proof in our notation because q is only assumed to be a Borel probability measure, and because the function to which the identity is applied depends explicitly on the conditioning point.

Lemma 21 (Gaussian posterior differentiation rule). *Let q be a Borel probability measure on $\mathbb{R}^d$ and fix $\sigma > 0$. For a measurable function $F : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$, let $\langle F \rangle_\sigma$ be the posterior average defined in eq. (44), so that, with the convention above,*

$$\mathbb{E}[F(x, X_0) \mid X_\sigma = x] = \langle F \rangle_\sigma(x) = \int_{\mathbb{R}^d} F(x, y) \pi_{x, \sigma}(\mathrm{d}y).$$

Assume that F is continuously differentiable in its first variable and that, locally uniformly in x , both $F(x, y)$ and $\nabla_x F(x, y)$ have at most polynomial growth in y . Then $x \mapsto \langle F \rangle_\sigma(x)$ is C^1 , and

$$\nabla_x \mathbb{E}[F(x, X_0) \mid X_\sigma = x] = \mathbb{E}[\nabla_x F(x, X_0) \mid X_\sigma = x] + \text{Cov} \left(F(x, X_0), \frac{X_0 - x}{\sigma^2} \mid X_\sigma = x \right). \quad (60)$$

Here the covariance between a scalar and a vector is understood componentwise. The same formula holds componentwise for vector-valued or matrix-valued F .

Proof. With the Gaussian density ϕ_σ of eq. (42), the definition of the posterior kernel gives

$$\langle F \rangle_\sigma(x) = \frac{I_F(x)}{I_1(x)}, \quad I_F(x) = \int_{\mathbb{R}^d} F(x, y) \phi_\sigma(x - y) q(\mathrm{d}y), \quad I_1(x) = \int_{\mathbb{R}^d} \phi_\sigma(x - y) q(\mathrm{d}y) = p_\sigma(x).$$

For x in a compact set, the Gaussian factor dominates every polynomial in y , uniformly in x . Therefore the assumed polynomial-growth bounds justify differentiation under the integral sign. Since

$$\nabla_x \phi_\sigma(x - y) = \frac{y - x}{\sigma^2} \phi_\sigma(x - y),$$

we obtain

$$\nabla I_F(x) = \int_{\mathbb{R}^d} \left(\nabla_x F(x, y) + F(x, y) \frac{y - x}{\sigma^2} \right) \phi_\sigma(x - y) q(\mathrm{d}y),$$

and

$$\nabla I_1(x) = \int_{\mathbb{R}^d} \frac{y - x}{\sigma^2} \phi_\sigma(x - y) q(\mathrm{d}y).$$

The quotient rule gives

$$\begin{aligned} \nabla_x \langle F \rangle_\sigma(x) &= \mathbb{E}[\nabla_x F(x, X_0) \mid X_\sigma = x] + \mathbb{E} \left[F(x, X_0) \frac{X_0 - x}{\sigma^2} \mid X_\sigma = x \right] \\ &\quad - \mathbb{E}[F(x, X_0) \mid X_\sigma = x] \mathbb{E} \left[\frac{X_0 - x}{\sigma^2} \mid X_\sigma = x \right], \end{aligned}$$

which is exactly eq. (60). □

With the posterior differentiation rule in hand, we can eliminate the score and Hessian in favour of conditional moments of the noise alone. The score is handled by Tweedie’s identity, the Hessian by Lemma 22, and the gradient of its trace by Lemma 23, which is where the posterior differentiation rule enters; substituting the three into eq. (58) gives the noise-moment identity Proposition 24.

Lemma 22 (Hessian–covariance identity). *Let q be a Borel probability measure on $\mathbb{R}^d$. For every $x \in \mathbb{R}^d$ and every $\sigma > 0$,*

$$s_\sigma(x) = -\sigma^{-1}N_\sigma(x), \quad H_\sigma(x) = \sigma^{-2}(\mathcal{C}_\sigma(x) - \mathbf{I}_d). \quad (61)$$

Proof. The first identity is Tweedie’s identity. Moreover, differentiating the Gaussian kernel twice gives

$$\frac{\nabla^2 p_\sigma(x)}{p_\sigma(x)} = \frac{1}{\sigma^2} \left(\mathbb{E}[ZZ^\top \mid X_\sigma = x] - \mathbf{I}_d \right).$$

Since

$$H_\sigma = \nabla^2 \log p_\sigma = \frac{\nabla^2 p_\sigma}{p_\sigma} - s_\sigma s_\sigma^\top,$$

and $s_\sigma = -\sigma^{-1}N_\sigma$, we obtain $H_\sigma(x) = \sigma^{-2}(\mathbb{E}[ZZ^\top \mid X_\sigma = x] - N_\sigma(x)N_\sigma(x)^\top - \mathbf{I}_d) = \sigma^{-2}(\mathcal{C}_\sigma(x) - \mathbf{I}_d)$. $\square$

Lemma 23 (Gradient of the conditional noise variance). *Let q be a Borel probability measure on $\mathbb{R}^d$. For every $x \in \mathbb{R}^d$ and every $\sigma > 0$,*

$$\nabla_x \operatorname{tr} \mathcal{C}_\sigma(x) = -\frac{1}{\sigma} \mathbf{m}_{3,\sigma}(x), \quad \text{hence} \quad \nabla \operatorname{tr} H_\sigma(x) = -\sigma^{-3} \mathbf{m}_{3,\sigma}(x). \quad (62)$$

Proof. Write

$$N = N_\sigma(x), \quad W = Z - N.$$

Then

$$\mathcal{C}_\sigma(x) = \mathbb{E}[WW^\top \mid X_\sigma = x], \quad \operatorname{tr} \mathcal{C}_\sigma(x) = \mathbb{E}[\|W\|^2 \mid X_\sigma = x].$$

We apply Lemma 21 to

$$F(x, X_0) = \|W\|^2 = \left\| \frac{x - X_0}{\sigma} - N_\sigma(x) \right\|^2.$$

This application is legitimate because $N_\sigma(x) = -\sigma s_\sigma(x)$, and s_σ is smooth in x . Hence, on compact x -sets, N_σ and $\nabla_x N_\sigma$ are bounded. Therefore F and $\nabla_x F$ have polynomial growth in X_0 , and the posterior Gaussian factor provides all required integrability. The differentiation rule gives

$$\nabla_x \operatorname{tr} \mathcal{C}_\sigma(x) = \mathbb{E}[\nabla_x \|W\|^2 \mid X_\sigma = x] + \operatorname{Cov} \left(\|W\|^2, \frac{X_0 - x}{\sigma^2} \mid X_\sigma = x \right). \quad (63)$$

We compute the two terms separately. For each coordinate $i = 1, \dots, d$,

$$\partial_{x_i} W = \frac{e_i}{\sigma} - \partial_{x_i} N_\sigma(x),$$

and therefore

$$\partial_{x_i} \|W\|^2 = 2W^\top \left(\frac{e_i}{\sigma} - \partial_{x_i} N_\sigma(x) \right).$$

The vector in parentheses is deterministic once x is fixed, while

$$\mathbb{E}[W \mid X_\sigma = x] = 0.$$

Consequently,

$$\mathbb{E}[\nabla_x \|W\|^2 \mid X_\sigma = x] = 0. \quad (64)$$

For the covariance term, observe that

$$\frac{X_0 - x}{\sigma^2} = -\frac{Z}{\sigma}.$$

Hence

$$\text{Cov} \left(\|W\|^2, \frac{X_0 - x}{\sigma^2} \middle| X_\sigma = x \right) = -\frac{1}{\sigma} \text{Cov} \left(\|W\|^2, Z \middle| X_\sigma = x \right).$$

Since $Z = N + W$, and $N = N_\sigma(x)$ is deterministic under the conditioning,

$$\text{Cov} \left(\|W\|^2, Z \middle| X_\sigma = x \right) = \text{Cov} \left(\|W\|^2, W \middle| X_\sigma = x \right).$$

Using again $\mathbb{E}[W \mid X_\sigma = x] = 0$, this last covariance is

$$\mathbb{E} \left[\|W\|^2 W \mid X_\sigma = x \right] = \mathbf{m}_{3,\sigma}(x).$$

Combining this with eqs. (63) and (64) gives the first identity in eq. (62). By eq. (61),

$$\text{tr } H_\sigma(x) = \sigma^{-2} (\text{tr } \mathcal{C}_\sigma(x) - d),$$

and since σ is fixed when differentiating with respect to x , the second identity follows. $\square$

The resulting identity is the pivot of the whole appendix: the universal bound below follows from it by crude moment inequalities, while its Gaussian specialization is exact.

Proposition 24 (Noise-moment formula for the clock acceleration). *Let $\rho > 0$ and let q be a Borel probability measure on $\mathbb{R}^d$. For every $x \in \mathbb{R}^d$ and every $\sigma > 0$,*

$$\mathcal{A}_\rho(\sigma, x) = \frac{\sigma^{1-2\rho}}{\rho^2} \left(((1 - \rho)\mathbf{I}_d + \mathcal{C}_\sigma(x))N_\sigma(x) + \mathbf{m}_{3,\sigma}(x) \right). \quad (65)$$

Proof. We substitute

$$s_\sigma(x) = -\sigma^{-1}N_\sigma(x), \quad H_\sigma(x) = \sigma^{-2}(\mathcal{C}_\sigma(x) - \mathbf{I}_d), \quad \nabla \text{tr } H_\sigma(x) = -\sigma^{-3}\mathbf{m}_{3,\sigma}(x),$$

from Lemmas 22 and 23, into the score–Hessian acceleration formula (58). The three terms become

$$-\sigma^{4-2\rho}\nabla \text{tr } H_\sigma = \sigma^{1-2\rho}\mathbf{m}_{3,\sigma},$$

$$-\sigma^{4-2\rho}H_\sigma s_\sigma = \sigma^{1-2\rho}(\mathcal{C}_\sigma - \mathbf{I}_d)N_\sigma,$$

and

$$(\rho - 2)\sigma^{2-2\rho}s_\sigma = (2 - \rho)\sigma^{1-2\rho}N_\sigma.$$

Therefore

$$\mathcal{A}_\rho(\sigma, x) = \frac{\sigma^{1-2\rho}}{\rho^2} [\mathbf{m}_{3,\sigma}(x) + (\mathcal{C}_\sigma(x) - \mathbf{I}_d)N_\sigma(x) + (2 - \rho)N_\sigma(x)].$$

Since $-\mathbf{I}_d + (2 - \rho)\mathbf{I}_d = (1 - \rho)\mathbf{I}_d$, this gives

$$\mathcal{A}_\rho(\sigma, x) = \frac{\sigma^{1-2\rho}}{\rho^2} \left(((1 - \rho)\mathbf{I}_d + \mathcal{C}_\sigma(x))N_\sigma(x) + \mathbf{m}_{3,\sigma}(x) \right).$$

This proves eq. (65). $\square$

C.3 Proof of the Universal Bound

We can now prove the universal acceleration bound. The noise-moment identity (65) factors $\mathcal{A}_\rho(\sigma, \cdot)$ into the explicit scale prefactor $\sigma^{1-2\rho}/\rho^2$ and a bracketed moment vector; the entire task is to bound that vector in $\mathbb{L}_2$ uniformly over all input laws q , which reduces to controlling the conditional mean, covariance, and third moment of a standard Gaussian noise.

Proof of Theorem 2. Throughout the proof all conditional quantities are evaluated at X_σ . We write

$$\begin{aligned} N &= N_\sigma(X_\sigma) = \mathbb{E}[Z \mid X_\sigma], \\ W &= Z - N, \\ \mathcal{C} &= \mathcal{C}_\sigma(X_\sigma) = \mathbb{E}[WW^\top \mid X_\sigma], \end{aligned}$$

and

$$\mathbf{m}_3 = \mathbf{m}_{3,\sigma}(X_\sigma) = \mathbb{E}[\|W\|^2 W \mid X_\sigma].$$

By the noise-moment formula for the clock acceleration eq. (65),

$$\mathcal{A}_\rho(\sigma, X_\sigma) = \frac{\sigma^{1-2\rho}}{\rho^2} (((1-\rho)\mathbf{I}_d + \mathcal{C})N + \mathbf{m}_3).$$

Thus it is enough to bound, uniformly in q and σ ,

$$S_\sigma = ((1-\rho)\mathbf{I}_d + \mathcal{C})N + \mathbf{m}_3$$

in $\mathbb{L}_2$. First, since conditional expectation is a contraction in $\mathbb{L}_2$,

$$\|N\|_{\mathbb{L}_2} = \|\mathbb{E}[Z \mid X_\sigma]\|_{\mathbb{L}_2} \leq \|Z\|_{\mathbb{L}_2} = \sqrt{d}. \quad (66)$$

The covariance and third-moment terms are bounded together. Since $N + W = Z$,

$$\mathcal{C}N + \mathbf{m}_3 = \mathbb{E}[W(\langle W, N \rangle + \|W\|^2) \mid X_\sigma] = \mathbb{E}[W \langle W, Z \rangle \mid X_\sigma].$$

By the Cauchy–Schwarz inequality and conditional Jensen’s inequality,

$$\|\mathcal{C}N + \mathbf{m}_3\|^2 \leq \left(\mathbb{E}[\|W\|^2 \|Z\| \mid X_\sigma] \right)^2 \leq \mathbb{E}[\|W\|^4 \|Z\|^2 \mid X_\sigma].$$

Taking expectations and applying Hölder’s inequality with exponents 3/2 and 3,

$$\|\mathcal{C}N + \mathbf{m}_3\|_{\mathbb{L}_2}^2 \leq \left(\mathbb{E} \|W\|^6 \right)^{2/3} \left(\mathbb{E} \|Z\|^6 \right)^{1/3}.$$

Since $W = Z - \mathbb{E}[Z \mid X_\sigma]$, the triangle inequality, followed by the contraction property of conditional expectation in $\mathbb{L}_6$, gives

$$\|W\|_{\mathbb{L}_6} \leq \|Z\|_{\mathbb{L}_6} + \|\mathbb{E}[Z \mid X_\sigma]\|_{\mathbb{L}_6} \leq 2 \|Z\|_{\mathbb{L}_6},$$

so that $\mathbb{E} \|W\|^6 \leq 2^6 \mathbb{E} \|Z\|^6$. Since $Z \sim \mathcal{N}(0, \mathbf{I}_d)$,

$$\mathbb{E} \|Z\|^6 = d(d+2)(d+4).$$

Consequently,

$$\|\mathcal{C}N + \mathbf{m}_3\|_{\mathbb{L}_2} \leq 4\sqrt{d(d+2)(d+4)}. \quad (67)$$

Combining eqs. (66) and (67), we obtain

$$\|S_\sigma\|_{\mathbb{L}_2} \leq |1-\rho|\sqrt{d} + 4\sqrt{d(d+2)(d+4)} \leq \sqrt{d} [1-\rho + 4(d+3)],$$

where the last step uses $(d+2)(d+4) = (d+3)^2 - 1 \leq (d+3)^2$. Substituting this estimate into the representation

$$\mathcal{A}_\rho(\sigma, X_\sigma) = \frac{\sigma^{1-2\rho}}{\rho^2} S_\sigma$$

proves eq. (14) with $B_{d,\rho} = \rho^{-2}\sqrt{d} [1-\rho + 4(d+3)]$, as stated in Theorem 2. $\square$

C.4 Proof of the Local Bias Bound

The local bias of Lemma 3 compares one exact flow step with the oracle predictor, which freezes the σ -clock velocity at the left endpoint. Their difference is the Taylor remainder of the flow in the native clock, so the case $\rho = 1$ of Theorem 2 controls it.

Proof of Lemma 3. Write $\ell_j = \sigma_j - \sigma_{j+1} = a_j \sigma_j$ for the step in the native σ -clock, as in Section 5, so that $\Phi_j(x) = x - \ell_j v_{\sigma_j}(x)$ by eqs. (1) and (4). Let $Y_j \sim \mu_j$ and $y(r) = \Psi_{\sigma_j-r, \sigma_j}(Y_j)$ for $0 \leq r \leq \ell_j$. The exact flow transports the smoothed laws, so $y(r) \sim \mu_{\sigma_j-r}$, with $dy/dr = -v_{\sigma_j-r}(y(r))$ and $d^2y/dr^2 = \mathcal{A}_1(\sigma_j - r, y(r))$. Since $\Phi_j(y(0)) = y(0) - \ell_j v_{\sigma_j}(y(0))$ and $y(0) = Y_j$, Taylor's formula with integral remainder gives

$$\Psi_j(Y_j) - \Phi_j(Y_j) = \int_0^{\ell_j} (\ell_j - r) \mathcal{A}_1(\sigma_j - r, y(r)) dr,$$

and Minkowski's integral inequality yields $\delta_j \leq \int_0^{\ell_j} (\ell_j - r) \|\mathcal{A}_1(\sigma_j - r, y(r))\|_{\mathbb{L}_2} dr$; it applies because the integrand is jointly measurable in (r, ω) , as $\mathcal{A}_1$ is continuous on $\mathbb{R}^d \times (0, \infty)$ and $r \mapsto y(r)$ is continuous on $[0, \ell_j]$, where $\sigma_j - r \geq \sigma_{j+1} > 0$, and because its $\mathbb{L}_2$ norm is bounded uniformly in r by the estimate below. Taking $\rho = 1$ in Theorem 2 gives $\|\mathcal{A}_1(\sigma, X_\sigma)\|_{\mathbb{L}_2} \leq B_{d,1} \sigma^{-1}$. With $y(r) \sim \mu_{\sigma_j-r}$,

$$\delta_j \leq B_{d,1} \int_0^{\ell_j} \frac{\ell_j - r}{\sigma_j - r} dr = \Delta_j,$$

since $\sigma_j - \ell_j = \sigma_{j+1}$. □

C.5 The Leading-Order Local Bias and the Clock

The bound (15) has the compact form $\Delta_j = B_{d,1} \sigma_j g(a_j)$ with $g(a) = a + (1 - a) \log(1 - a) = \frac{1}{2}a^2 + O(a^3)$. On a member G_K of the refinement family $\mathfrak{G}$, uniform in the clock $\eta = \sigma^\rho$ with step h_K , one has $\sigma_{j+1}/\sigma_j = (1 - h_K/\eta_j)^{1/\rho}$, hence $a_j = 1 - (1 - h_K/\eta_j)^{1/\rho} = \frac{h_K}{\rho \eta_j} [1 + O_\rho(h_K/\eta_j)]$. Since $\eta_j^{-2} = \sigma_j^{-2\rho}$, this gives the expansion (16),

$$\Delta_{j,K} = B_{d,1} \sigma_j \frac{a_j^2}{2} [1 + O(a_j)] = \frac{B_{d,1}}{2\rho^2} h_K^2 \sigma_j^{1-2\rho} \left[1 + O_\rho\left(\frac{h_K}{\eta_j}\right) \right],$$

whose leading term carries the same noise exponent $\sigma_j^{1-2\rho}$ as the pointwise acceleration bound (14). Thus $\rho = 1/2$ is exactly the clock for which the leading local bias bound does not depend on the noise level. This is the sense in which we call it balanced: it balances the universal bias bound of the first-order predictor across noise scales. In the EDM convention $\rho = 1/\rho_{\text{EDM}}$ (Section 3) this is $\rho_{\text{EDM}} = 2$, the analogue for the analyzed first-order predictor of the schedule-smoothness calculation in (Karras et al. 2022, Appendix D.1). It is not a claim that $\rho = 1/2$ is optimal among all schedules, nor that it optimizes the quality of the final samples.

The practical clock $\rho_{\text{EDM}} = 7$, that is $\rho = 1/7$, leaves a factor $\sigma_j^{5/7}$ that grows with the noise level: compared with the balanced clock, it refines the low-noise end of the schedule and leaves the largest per-step biases at high noise. Within this analysis the departure is harmless when the high-noise contraction is strong enough: in the supercritical regime of Remark 37, where the effective high-noise margin b_{eff} exceeds $1 - \rho = 6/7$, the kernel discounts those biases and their sum is set by the exit scale $\sigma_{K_{\text{hi}}}$, not by σ_0 ; Section 7.3 measures where a pretrained network reaches this regime. The finer low-noise steps serve sample quality, a criterion outside the scope of this analysis. Why the balanced value is tied to first-order integrators is discussed in Remark 25.

Remark 25 (Formal extrapolation to higher-order integrators). *The balanced clock $\rho = 1/2$, i.e. $\rho_{\text{EDM}} = 2$, is tied to the first-order predictor: $\mathcal{A}_\rho$ is the second η -derivative of the flow, and it is the second derivative that governs the local truncation error of a first-order step. Formally, the m -th η -derivative scales like $\sigma^{1-m\rho}$, so a p -th order integrator on a uniform η -grid would have leading local error $\propto h^{p+1}\sigma^{1-(p+1)\rho}$ and would be equalized by $\rho_{\text{EDM}} = p+1$. This last statement is a formal extrapolation and is not proved here: only the case $p = 1$ is established, by Theorem 2, which gives $\rho_{\text{EDM}} = 2$. In particular the value $\rho_{\text{EDM}} = 3$ that the extrapolation attaches to the second-order Heun corrector of the full EDM sampler—the value reported to nearly equalize the per-step truncation error (Karras et al. 2022, Sec. 3)—is heuristic here, since we do not analyze the Heun corrector.*

Relation to prior work: schedule design. Schedule-oriented studies analyze backward SDEs, interpolation drifts, or the broader EDM design space (Wang et al. 2024; Strasman et al. 2025; Y. Chen et al. 2025; Kahouli et al. 2025), or optimize the schedule directly for a given model or data law (Sabour et al. 2024; Williams et al. 2024). Wainwright (2026) derives local KL error bounds for Euler discretization of a stochastic innovations representation, expressed through increments of denoising growth complexity along the Gaussian heat flow; these bounds lead to optimized schedules and data-certified guarantees. Our balanced clock $\rho = 1/2$ plays a different role: it equalizes across noise scales a local-bias bound that holds uniformly over data laws, and is not meant to minimize the error for a particular model or data law. The clock experiment of Table 4 illustrates the distinction: the clock that balances the universal bound does not have the smallest measured biases or final error.

C.6 Gaussian Laws and Sharpness

The universal bound is worst-case: it holds for every Borel input law, at the price of a dimensional factor of order $d^{3/2}$. For Gaussian input laws the same noise-moment identity can instead be evaluated in closed form, since the third conditional moment vanishes and the conditional covariance is explicit. This exhibits the exact dependence of the acceleration on the spectrum of the data covariance, and supplies the witnesses used below to show that the exponent of the universal bound is sharp and to separate the sharp steps of its proof from the lossy one.

Proposition 26 (Exact clock acceleration for Gaussian input laws). *Let $\rho > 0$ and assume that*

$$q = \mathcal{N}(m, \Sigma_0), \quad \Sigma_0 \in \mathbb{S}_+^d.$$

Let $\lambda_1, \dots, \lambda_d$ be the eigenvalues of Σ_0 . Then, for every $\sigma > 0$,

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2}^2 = \frac{\sigma^{2-4\rho}}{\rho^4} \sum_{i=1}^d \left(1 - \rho + \frac{\lambda_i}{\lambda_i + \sigma^2}\right)^2 \frac{\sigma^2}{\lambda_i + \sigma^2}. \quad (68)$$

In particular, within the Gaussian class,

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2} \leq \frac{\sqrt{d}\Gamma_\rho}{\rho^2} \sigma^{1-2\rho}, \quad \Gamma_\rho = \max_{0 \leq u \leq 1} \sqrt{u} |2 - \rho - u|. \quad (69)$$

The $\sqrt{d}$ dependence in eq. (69) is sharp inside the Gaussian family.

Proof. Let $V_\sigma = \Sigma_0 + \sigma^2 \mathbf{I}_d$. Since (Z, X_σ) is jointly Gaussian,

$$\begin{aligned} N_\sigma(x) &= \mathbb{E}[Z \mid X_\sigma = x] = \sigma V_\sigma^{-1}(x - m), \\ \mathcal{C}_\sigma(x) &= \text{Cov}(Z \mid X_\sigma = x) = \mathbf{I}_d - \sigma^2 V_\sigma^{-1} = \Sigma_0 V_\sigma^{-1}. \end{aligned}$$

The conditional law of Z given $X_\sigma = x$ is Gaussian with covariance independent of x , so its centered third conditional moment vanishes, $\mathbf{m}_{3,\sigma}(x) = 0$. Using the noise-moment formula (65),

$$\mathcal{A}_\rho(\sigma, x) = \frac{\sigma^{1-2\rho}}{\rho^2} ((1-\rho)\mathbf{I}_d + \mathcal{C}_\sigma) N_\sigma(x).$$

Diagonalizing Σ_0 , the i -th coordinate of $N_\sigma(X_\sigma)$ has variance $\sigma^2/(\lambda_i + \sigma^2)$, while the corresponding eigenvalue of $\mathcal{C}_\sigma$ is $\lambda_i/(\lambda_i + \sigma^2)$. Hence

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2}^2 = \frac{\sigma^{2-4\rho}}{\rho^4} \sum_{i=1}^d \left(1 - \rho + \frac{\lambda_i}{\lambda_i + \sigma^2}\right)^2 \frac{\sigma^2}{\lambda_i + \sigma^2},$$

which proves eq. (68). Writing $u_i = \sigma^2/(\lambda_i + \sigma^2) \in (0, 1]$, so that $\lambda_i/(\lambda_i + \sigma^2) = 1 - u_i$, the i -th summand equals $u_i(2 - \rho - u_i)^2$, and the bound (69) follows immediately by maximizing the one-dimensional factor $\sqrt{u}|2 - \rho - u|$ over $u \in [0, 1]$. It is sharp within the Gaussian family by choosing all eigenvalues λ_i so that the corresponding u_i 's attain the maximizer of $u \mapsto \sqrt{u}|2 - \rho - u|$. $\square$

Corollary 27 (Isotropic Gaussian specialization). *Let $\rho > 0$. If*

$$q = \mathcal{N}(m, \varsigma^2 \mathbf{I}_d), \quad \varsigma \geq 0,$$

then

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2} = \frac{\sqrt{d}}{\rho^2} \sigma^{2-2\rho} \frac{|(2-\rho)\varsigma^2 + (1-\rho)\sigma^2|}{(\varsigma^2 + \sigma^2)^{3/2}}.$$

In particular, for the native σ -clock $\rho = 1$,

$$\|\mathcal{A}_1(\sigma, X_\sigma)\|_{\mathbb{L}_2} = \sqrt{d} \frac{\varsigma^2}{(\varsigma^2 + \sigma^2)^{3/2}}. \quad (70)$$

The estimate of Theorem 2 is sharp in its dependence on the noise scale σ , and lossy in its dependence on the dimension d . We take the two axes in turn.

Proposition 28 (Sharpness of the acceleration exponent). *Let $\rho > 0$ and $\sigma > 0$. If $\rho \neq 1$ and $q = \delta_m$ for some $m \in \mathbb{R}^d$, then*

$$\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2} = \frac{|1-\rho|}{\rho^2} \sqrt{d} \sigma^{1-2\rho}.$$

If $\rho = 1$ and $q_\sigma = \mathcal{N}(0, 2\sigma^2 \mathbf{I}_d)$, then

$$\|\mathcal{A}_1(\sigma, X_\sigma)\|_{\mathbb{L}_2} = \frac{2}{3\sqrt{3}} \sqrt{d} \sigma^{-1}. \quad (71)$$

Consequently, for every $\rho > 0$, no estimate with a better power of σ than $\sigma^{1-2\rho}$ in eq. (14) can hold uniformly over the class of all Borel probability measures q .

Proof. First suppose $\rho \neq 1$, and take $q = \delta_m$. Then

$$X_\sigma = m + \sigma Z,$$

and conditioning on X_σ reveals Z exactly. Hence

$$N_\sigma(X_\sigma) = Z, \quad \mathcal{C}_\sigma(X_\sigma) = 0, \quad \mathbf{m}_{3,\sigma}(X_\sigma) = 0,$$

so that, by eq. (65),

$$\mathcal{A}_\rho(\sigma, X_\sigma) = \frac{1-\rho}{\rho^2} \sigma^{1-2\rho} Z,$$

and the first claim follows from $\|Z\|_{\mathbb{L}_2} = \sqrt{d}$. Thus, whenever $\rho \neq 1$, the power $\sigma^{1-2\rho}$ is attained, with equality, by a Dirac law.

For $\rho = 1$, the Dirac law gives zero acceleration because the path $m + \sigma Z$ is affine in the native σ -clock. Nevertheless the same scale is still sharp uniformly over q . Indeed, for each $\sigma > 0$ and $t > 0$, take

$$q_\sigma = \mathcal{N}(0, t\sigma^2 \mathbf{I}_d).$$

Then eq. (70) gives

$$\|\mathcal{A}_1(\sigma, X_\sigma)\|_{\mathbb{L}_2} = \sqrt{d} \sigma^{-1} \frac{t}{(1+t)^{3/2}},$$

and the factor $t(1+t)^{-3/2}$ is maximized at $t = 2$, yielding eq. (71). In both cases the lower bound is a positive multiple of $\sqrt{d} \sigma^{1-2\rho}$ at every $\sigma > 0$, which proves the last claim. $\square$

Minimax reading. This sharpness statement is minimax in q . It should not be read as saying that every fixed regular input law saturates the universal scale: for a fixed nondegenerate full-dimensional Gaussian $q = \mathcal{N}(m, \Sigma_0)$, with $\Sigma_0 > 0$, the formula (68) gives $\|\mathcal{A}_\rho(\sigma, X_\sigma)\|_{\mathbb{L}_2} = O(\sigma^{2-2\rho})$ as $\sigma \rightarrow 0$, one power of σ better than the worst-case bound. The universal exponent is driven by singular laws, or by laws whose intrinsic scale is comparable to the current noise level σ .

Where the factor d is lost. The proof of Theorem 2 bounds the covariance and third-moment terms jointly, with the constant 4 of eq. (67). To see where the dimension is lost, we isolate an auxiliary estimate of the covariance term alone, which is the whole acceleration for the Gaussian witness eq. (71): there $\mathfrak{m}_{3,\sigma} = 0$, so at $\rho = 1$ the noise-moment identity (65) reduces to $\mathcal{A}_1(\sigma, \cdot) = \sigma^{-1} \mathcal{C}_\sigma N_\sigma$. With the notation of the proof of the theorem, let $R = \mathbb{E}[\|Z\|^2 \mid X_\sigma]$. By Jensen's inequality $\|N\|^2 \leq R$, and $\text{tr } \mathcal{C} = \mathbb{E}[\|W\|^2 \mid X_\sigma] = R - \|N\|^2$. Since $\mathcal{C}$ is positive semidefinite, $\|\mathcal{C}N\| \leq \|\mathcal{C}\|_{\text{op}} \|N\| \leq (\text{tr } \mathcal{C}) \|N\|$, so that $\|\mathcal{C}N\|^2 \leq (R - \|N\|^2)^2 \|N\|^2$. For $0 \leq u \leq R$ the cubic $u \mapsto (R - u)^2 u$ is maximized at $u = R/3$, with value $4R^3/27$; with $\mathbb{E}R^3 \leq \mathbb{E}\|Z\|^6 = d(d+2)(d+4)$, this gives

$$\|\mathcal{C}N\|_{\mathbb{L}_2} \leq \frac{2}{3\sqrt{3}} \sqrt{d(d+2)(d+4)}. \quad (72)$$

The witness saturates every step of this estimate but one. It sits at the maximizer of the cubic: for $t = 2$, $\mathcal{C}_\sigma = \frac{2}{3} \mathbf{I}_d$ and each coordinate of N_σ has variance $\frac{1}{3}$, so $\|N_\sigma\|^2$ and R concentrate at $d/3$ and d , which is why the constant $\frac{2}{3\sqrt{3}}$ is the same; and the moment step is tight to leading order, both sides being of order d^3 . The one lossy step is $\|\mathcal{C}_\sigma\|_{\text{op}} \leq \text{tr } \mathcal{C}_\sigma$, which at $t = 2$ replaces $\frac{2}{3}$ by $\frac{2d}{3}$: carrying the operator norm through the chain returns the exact value $\frac{2}{3\sqrt{3}} \sqrt{d} \sigma^{-1}$ of eq. (71), whereas the trace returns $\frac{2}{3\sqrt{3}} d^{3/2} \sigma^{-1}$, the estimate (72).

General laws and an open question. This diagnosis is specific to the Gaussian family, where $\mathfrak{m}_{3,\sigma} = 0$ and the third-moment term is absent; on its own it does not lower the universal rate. For general laws the proof controls the covariance and third-moment terms together, through the contracted moment $\mathbb{E}[\|W\|^2 \|Z\| \mid X_\sigma]$ of eq. (67), whose Cauchy–Schwarz step discards the matrix structure of $W \langle W, Z \rangle$ just as the trace discards that of $\mathcal{C}_\sigma$. Bringing $B_{d,\rho}$ below $d^{3/2}$ would require controlling that contracted moment more sharply.

The operator-norm/trace step is the price of assuming nothing whatever about q . Under a bounded-support assumption $\text{supp } q \subseteq B(m, r)$ one has $\mathcal{C}_\sigma = \sigma^{-2} \text{Cov}(X_0 \mid X_\sigma) \preceq (r/\sigma)^2 \mathbf{I}_d$, so

that $\|\mathcal{C}_\sigma N_\sigma\|_{\mathbb{L}_2} \leq (r/\sigma)^2 \sqrt{d}$ and the $\sqrt{d}$ rate is restored for the covariance term, at the cost of a σ -dependent constant. Whether the true universal rate is $\Theta(\sqrt{d})$, $\Theta(d)$, or $\Theta(d^{3/2})$ —in particular whether the operator-norm/trace step can be avoided without a moment assumption on q —is left open; closing it would directly sharpen the constant $B_{d,\rho}$ of Theorem 2. At the CIFAR-10 dimension $d = 3,072$, the current constant is $B_{3,072,1} \approx 6.8 \times 10^5$.

Relation to prior work: local bias and dimension. The posterior identities of Appendix C are Gaussian-posterior moment identities of the kind used for higher-order Tweedie formulas (Efron 2011; Meng et al. 2021). They bound the local bias for every data law, at the price of an explicit dimension dependence in $B_{d,\rho}$. Total-variation and Kullback–Leibler guarantees can adapt their dimension dependence to low-dimensional structure in the data (De Bortoli 2022; G. Li and Yan 2024; Liang et al. 2025); the sharp dimension dependence of a universal bias bound is left open (Appendix C).

D EDM Preconditioning

This appendix complements Section 4. It reads the EDM margin as a monotonicity property of the learned velocity, gives the noise threshold above which a Lipschitz envelope certifies contraction, and checks the high-noise contraction for the oracle denoiser.

D.1 Complements on the EDM Margin

The margin (22) has an infinitesimal reading. By eq. (18), $\hat{v}_{\sigma_j}(x) = \sigma_j^{-1}[(1 - \alpha_j)x - \beta_j \hat{F}_j(c_j x)]$, and the Lipschitz bound on $\hat{F}_j$ yields, for all $x, y \in \mathbb{R}^d$,

$$\langle x - y, \hat{v}_{\sigma_j}(x) - \hat{v}_{\sigma_j}(y) \rangle \geq \frac{b_j}{\sigma_j} \|x - y\|^2 : \quad (73)$$

the learned velocity is b_j/σ_j -monotone, although b_j/σ_j , built from a worst-case envelope, need not be its best monotonicity modulus. Monotonicity alone would give a weaker finite-step factor, since squaring the predictor displacement $\hat{\Phi}_j = \text{Id} - \ell_j \hat{v}_{\sigma_j}$, with $\ell_j = \sigma_j - \sigma_{j+1}$, produces a positive term of order ℓ_j^2 ; the affine EDM representation avoids that loss.

If $L_{F,j} \leq L_{\text{hi}}$ at every level above a noise threshold σ_{hi} , then $b_j \geq b_{\text{hi}}$ at these levels as soon as

$$\frac{\sigma_j}{\tau_q} \geq \frac{L_{\text{hi}} + \sqrt{L_{\text{hi}}^2 + 4b_{\text{hi}}(1 - b_{\text{hi}})}}{2(1 - b_{\text{hi}})}.$$

Any uniform normalized Lipschitz envelope therefore provides a sufficiently large admissible threshold σ_{hi} for the high-noise block. More generally, writing $L_F(\sigma)$ for the envelope at noise level σ , $L_F(\sigma) = o(\sigma)$ gives $b_j \rightarrow 1$ as $\sigma \rightarrow \infty$, and the certified contraction approaches the damping by the noise ratio.

D.2 High-Noise Contraction for the Oracle

For the oracle, the high-noise contraction of Assumption 6 is part of the hypotheses and is not automatic: $\nabla D_\sigma(x) = \sigma^{-2} \text{Cov}(X_0 \mid X_\sigma = x)$, whose supremum over x can be infinite when q has unbounded support. If $\text{supp } q \subseteq B(0, R)$, then $0 \preceq \nabla D_\sigma \preceq (R/\sigma)^2 \mathbf{I}_d$, so $\text{Lip}(\Phi_j) \leq 1 - a_j(1 - R^2/\sigma_j^2)$ and the assumption holds with margin b_{hi} above $\sigma_{\text{hi}} = R/\sqrt{1 - b_{\text{hi}}}$.

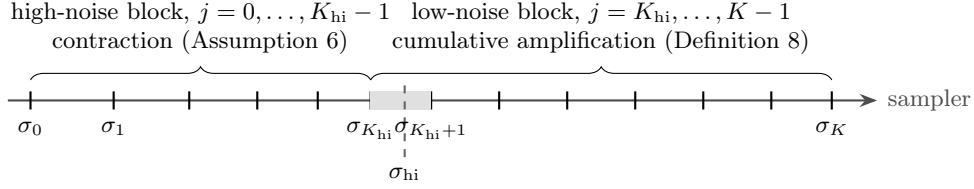


Figure 5: The split index K_{hi} of eq. (25) is the last level at or above the threshold σ_{hi} . The step $\sigma_{K_{\text{hi}}} \rightarrow \sigma_{K_{\text{hi}}+1}$ that crosses the threshold (shaded) is the first step of the low-noise block, so every high-noise step ends at or above σ_{hi} .

Relation to prior work: contraction through denoiser regularity. S. Li and Zeng (2026) study deterministic diffusion updates whose contraction certificates fail, measure their local Lipschitz behavior, and propose an inference-time correction based on Stein identities. Their first-order certificate includes the condition $\text{Lip}(\widehat{D}_\sigma) < 1$ in the EDM signal-scaling convention (S. Li and Zeng 2026, Sec. 4.1 and App. C.1). In our parametrization, this is the condition that makes the predictor contractive: by eq. (5), $\widehat{\Phi}_j = (1 - a_j) \text{Id} + a_j \widehat{D}_{\sigma_j}$, hence $\text{Lip}(\widehat{\Phi}_j) \leq 1 - a_j(1 - \text{Lip}(\widehat{D}_{\sigma_j}))$. The EDM preconditioning turns it into a condition on the raw network, since $\text{Lip}(\widehat{D}_{\sigma_j}) \leq \alpha_j + \beta_j c_j L_{F,j} = 1 - b_j < 1$ whenever $L_{F,j} < \sigma_j / \tau_q$, by eqs. (18) and (22). Our analysis uses this certificate only at high noise, applies to the uncorrected predictor, and replaces worst-case certificates at low noise by the amplification factor γ_j .

E Propagation

This appendix complements Section 5. It details the split index, proves the directional and field-level bounds and their hierarchy, reads the directional rate geometrically, and proves the strict separation between the realized amplification and the worst-case majorants.

E.1 The Split Index

With the convention $K_{\text{hi}} = 0$ when $\sigma_0 < \sigma_{\text{hi}}$, the split index eq. (25) is the last level at or above σ_{hi} . The high-noise block is the set of steps $j = 0, \dots, K_{\text{hi}} - 1$, each of which ends at $\sigma_{j+1} \geq \sigma_{\text{hi}}$; the low-noise block is $j = K_{\text{hi}}, \dots, K - 1$, so the step $\sigma_{K_{\text{hi}}} \rightarrow \sigma_{K_{\text{hi}}+1}$ that crosses the threshold belongs to the low-noise block (Figure 5). Either block may be empty, with the conventions that empty sums vanish and empty products equal one: $K_{\text{hi}} = 0$ when no step ends at or above the threshold, and $K_{\text{hi}} = K$ when $\sigma_K \geq \sigma_{\text{hi}}$.

The threshold plays no role in Definition 1: the family $\mathfrak{G}$ is fixed first, and each member G_K then acquires its own split index $K_{\text{hi}}(K)$. When $\underline{\sigma} < \sigma_{\text{hi}} \leq \bar{\sigma}$, the nested grids give $\sigma_{K_{\text{hi}}(K)} \downarrow \sigma_{\text{hi}}$ and $K_{\text{hi}}(K)/K \rightarrow (\bar{\eta} - \sigma_{\text{hi}}^\rho)/(\bar{\eta} - \underline{\eta})$ as $K \rightarrow \infty$, so each block occupies a fixed asymptotic fraction of the schedule. Otherwise one block is empty for every K . In Assumption 6 the inequality needs no convention at $e_j = 0$, where both sides vanish.

E.2 Low-Noise Majorants: Proofs

Figure 6 summarizes the majorants of Λ_K and their order.

Proof of Proposition 9. Since $\widehat{\Phi}_j(x) = x - \ell_j \widehat{v}_{\sigma_j}(x)$, for all $x, y \in \mathbb{R}^d$,

$$\left\| \widehat{\Phi}_j(x) - \widehat{\Phi}_j(y) \right\|^2 = \|x - y\|^2 - 2\ell_j \langle x - y, \widehat{v}_{\sigma_j}(x) - \widehat{v}_{\sigma_j}(y) \rangle + \ell_j^2 \left\| \widehat{v}_{\sigma_j}(x) - \widehat{v}_{\sigma_j}(y) \right\|^2. \quad (74)$$

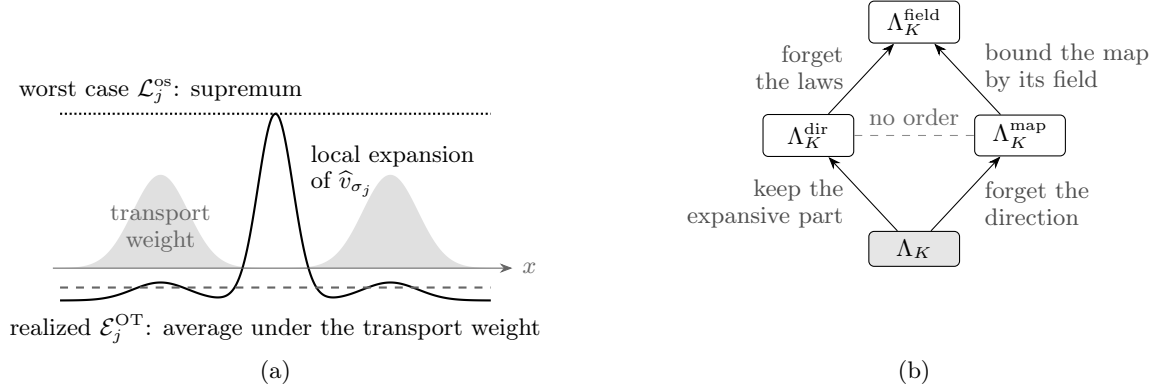


Figure 6: Schematic, not to scale. (a) Along one direction, the local expansion rate of the learned velocity (solid) peaks between the two modes of the law. The shaded density, with one lobe per mode, is the squared-displacement occupation of the optimal-coupling segments between μ_j and $\hat{\mu}_j$, which is the weight in eq. (81): the transport moves mass within each mode, not across the gap where the expansion peaks. The global one-sided rate $\mathcal{L}_j^{\text{os}}$ is the supremum of the expansion rate (dotted); the directional rate $\mathcal{E}_j^{\text{OT}}$ is its average under this weight (dashed), and stays small. In higher dimension the supremum also runs over all directions. (b) Majorants of Λ_K ; an arrow from A to B means $A \leq B$, and each arrow discards the information named beside it. The directional and map-level majorants are not ordered, and Proposition 10 shows that the chain cannot be reversed.

If $e_j = 0$, then $\gamma_j = 1$ by eq. (9) and $\mathcal{E}_{j,+}^{\text{OT}} = Q_j^{\text{OT}} = 0$ by convention, so eq. (28) and eq. (29) hold trivially. Let $e_j > 0$, so that $\mathbb{E} \|U_j - V_j\|^2 = e_j^2$, and define the *signed* directional expansion rate

$$\mathcal{E}_j^{\text{OT}} = \frac{\mathbb{E} \langle V_j - U_j, \mathbf{v}_j \rangle}{e_j^2}, \quad \text{so that} \quad \mathcal{E}_{j,+}^{\text{OT}} = (\mathcal{E}_j^{\text{OT}})_+. \quad (75)$$

Pushing the optimal coupling (U_j, V_j) through $\hat{\Phi}_j$ gives a coupling of the two pushforwards, so $\gamma_j^2 e_j^2 \leq \mathbb{E} \|\hat{\Phi}_j(U_j) - \hat{\Phi}_j(V_j)\|^2$. Taking expectations in eq. (74) at $(x, y) = (U_j, V_j)$ and dividing by e_j^2 ,

$$\gamma_j^2 \leq \frac{\mathbb{E} \|\hat{\Phi}_j(U_j) - \hat{\Phi}_j(V_j)\|^2}{e_j^2} = 1 + 2\ell_j \mathcal{E}_j^{\text{OT}} + \ell_j^2 Q_j^{\text{OT}} \leq 1 + 2\ell_j \mathcal{E}_{j,+}^{\text{OT}} + \ell_j^2 Q_j^{\text{OT}}, \quad (76)$$

which is eq. (28). Its right-hand side is at least one, so it also bounds $\bar{\gamma}_j^2 = \max\{1, \gamma_j^2\}$; then $\log \bar{\gamma}_j = \frac{1}{2} \log \bar{\gamma}_j^2$ and $\log(1+x) \leq x$ give eq. (29). Summing over the low-noise block gives eq. (30). $\square$

The signed rate may be negative, in which case the step contracts the realized discrepancy at first order; only its positive part enters Λ_K^{dir} . At a step with $e_j = 0$ the two laws coincide, $\gamma_j = 1$, and every stepwise bound on $\log \bar{\gamma}_j$ holds trivially; the signed rate, and the bounds on γ_j itself, are stated only for $e_j > 0$.

The hierarchy eq. (34) rests on the following certificate.

Corollary 29 (Field-level certificate). *Assume that $\text{Lip}(\hat{v}_{\sigma_j}) < \infty$ at every low-noise step, and let $\mathcal{L}_j^{\text{os}}$ be the global one-sided rate (32). Then $|\mathcal{L}_j^{\text{os}}| \leq \text{Lip}(\hat{v}_{\sigma_j})$, and $\mathcal{L}_j^{\text{os}}$ is the smallest constant such that, for all $x, y \in \mathbb{R}^d$,*

$$-\langle \hat{v}_{\sigma_j}(x) - \hat{v}_{\sigma_j}(y), x - y \rangle \leq \mathcal{L}_j^{\text{os}} \|x - y\|^2. \quad (77)$$

At every low-noise step, $Q_j^{\text{OT}} \leq \text{Lip}(\widehat{v}_{\sigma_j})^2$ and $\mathcal{E}_{j,+}^{\text{OT}} \leq (\mathcal{L}_j^{\text{os}})_+$. Consequently, with Λ_K^{dir} , Λ_K^{map} and Λ_K^{field} as in eqs. (30), (31) and (33), both chains of eq. (34) hold:

$$\Lambda_K \leq \Lambda_K^{\text{dir}} \leq \Lambda_K^{\text{field}}, \quad \Lambda_K \leq \Lambda_K^{\text{map}} \leq \Lambda_K^{\text{field}}.$$

These bounds remain valid if each $\mathcal{L}_j^{\text{os}}$ is replaced by any larger constant, in particular by any constant satisfying eq. (77), both in the stepwise bounds and in Λ_K^{field} .

The certificate follows from a stepwise chain, which also orders the directional, map and field bounds on a single step.

Corollary 30 (Field-level certificate, stepwise form). *Under the hypotheses of Corollary 29, fix a low-noise step. Then $Q_j^{\text{OT}} \leq \text{Lip}(\widehat{v}_{\sigma_j})^2$, $\mathcal{E}_{j,+}^{\text{OT}} \leq (\mathcal{L}_j^{\text{os}})_+$, and if $e_j > 0$ also $\mathcal{E}_j^{\text{OT}} \leq \mathcal{L}_j^{\text{os}}$ and*

$$\begin{aligned} \gamma_j^2 &\leq 1 + 2\ell_j \mathcal{E}_j^{\text{OT}} + \ell_j^2 Q_j^{\text{OT}} \\ &\leq \text{Lip}(\widehat{\Phi}_j)^2 \leq 1 + 2\ell_j \mathcal{L}_j^{\text{os}} + \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2. \end{aligned} \quad (78)$$

Moreover, at every low-noise step,

$$\log \bar{\gamma}_j \leq \ell_j \mathcal{E}_{j,+}^{\text{OT}} + \frac{1}{2} \ell_j^2 Q_j^{\text{OT}} \leq \ell_j (\mathcal{L}_j^{\text{os}})_+ + \frac{1}{2} \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2, \quad (79)$$

$$\log \bar{\gamma}_j \leq \log \max\{1, \text{Lip}(\widehat{\Phi}_j)\} \leq \ell_j (\mathcal{L}_j^{\text{os}})_+ + \frac{1}{2} \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2. \quad (80)$$

Proof of the field-level certificate.

Proof of Corollaries 29 and 30. By Cauchy–Schwarz, the quotient in eq. (32) lies in $[-\text{Lip}(\widehat{v}_{\sigma_j}), \text{Lip}(\widehat{v}_{\sigma_j})]$, so its supremum $\mathcal{L}_j^{\text{os}}$ is finite with $|\mathcal{L}_j^{\text{os}}| \leq \text{Lip}(\widehat{v}_{\sigma_j})$; being a supremum, it satisfies eq. (77) and no smaller constant does. If $e_j > 0$, then $\mathbb{E} \|U_j - V_j\|^2 = e_j^2$. Applying eq. (77) at $(x, y) = (U_j, V_j)$ and taking expectations gives $\mathcal{E}_j^{\text{OT}} \leq \mathcal{L}_j^{\text{os}}$, hence $\mathcal{E}_{j,+}^{\text{OT}} \leq (\mathcal{L}_j^{\text{os}})_+$; the Lipschitz bound gives $\mathbb{E} \|v_j\|^2 \leq \text{Lip}(\widehat{v}_{\sigma_j})^2 e_j^2$, that is, $Q_j^{\text{OT}} \leq \text{Lip}(\widehat{v}_{\sigma_j})^2$. When $e_j = 0$, the conventions give $Q_j^{\text{OT}} = \mathcal{E}_{j,+}^{\text{OT}} = 0$, so these two bounds remain valid.

In eq. (78), the first inequality and the identification of the middle member with $\mathbb{E} \left\| \widehat{\Phi}_j(U_j) - \widehat{\Phi}_j(V_j) \right\|^2 / e_j^2$ are eq. (76); this quotient is at most $\text{Lip}(\widehat{\Phi}_j)^2$, which is the second inequality. For the third, eq. (77) and the Lipschitz bound on $\widehat{v}_{\sigma_j}$ bound the right-hand side of eq. (74) by $(1 + 2\ell_j \mathcal{L}_j^{\text{os}} + \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2) \|x - y\|^2$ for every pair (x, y) . The restriction to $e_j > 0$ matters only for the first two members: at $e_j = 0$ the convention $\gamma_j = 1$ is unrelated to $\text{Lip}(\widehat{\Phi}_j)$, which may be smaller than one.

In eq. (79), the first inequality is eq. (29) and the second follows from the two bounds just proved. In eq. (80), the first inequality follows from $\gamma_j \leq \text{Lip}(\widehat{\Phi}_j)$ when $e_j > 0$ (eq. (78)) and from $\gamma_j = 1$ when $e_j = 0$. For the second, the last inequality of eq. (78), whose proof does not use e_j , and $\mathcal{L}_j^{\text{os}} \leq (\mathcal{L}_j^{\text{os}})_+$ give $\max\{1, \text{Lip}(\widehat{\Phi}_j)\} \leq 1 + 2\ell_j (\mathcal{L}_j^{\text{os}})_+ + \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j})^2$; taking half the logarithm and using $\log(1 + x) \leq x$ concludes.

Summing over the low-noise block, eq. (30) and the second inequality of eq. (79) give $\Lambda_K \leq \Lambda_K^{\text{dir}} \leq \Lambda_K^{\text{field}}$, and the two inequalities of eq. (80) give $\Lambda_K \leq \Lambda_K^{\text{map}} \leq \Lambda_K^{\text{field}}$. Replacing $\mathcal{L}_j^{\text{os}}$ by a larger constant only enlarges the right-hand sides of eqs. (78) to (80) and Λ_K^{field} . $\square$

The hierarchy. The directional and map-level majorants are not ordered in general, because each discards something the other keeps: the directional sum keeps the direction of the displacement but has already dropped signed contraction (through the positive part) and relaxed the logarithm, whereas the map sum keeps the logarithm but tests every direction. For example, for $\widehat{v}(x) = -x$, one step contributes $\ell + \ell^2/2$ to the directional sum but only $\log(1 + \ell)$ to the map sum. Before these two relaxations, the squared amplification is ordered, as eq. (78) shows.

E.3 Geometric Reading of the Directional Rate

Under the additional assumption $\widehat{v}_{\sigma_j} \in C^1(\mathbb{R}^d; \mathbb{R}^d)$, since μ_j is absolutely continuous, Brenier’s theorem (Villani 2003, Theorem 2.12) allows the choice $V_j = T_j(U_j)$ for an optimal map T_j . With $\xi_j(x) = T_j(x) - x$, for $e_j > 0$, the signed rate (75) reads

$$\mathcal{E}_j^{\text{OT}} = - \frac{\int_0^1 \int \xi_j(x)^\top \text{Sym} \nabla \widehat{v}_{\sigma_j}(x + t\xi_j(x)) \xi_j(x) \mu_j(\mathrm{d}x) \mathrm{d}t}{\int \|\xi_j(x)\|^2 \mu_j(\mathrm{d}x)}. \quad (81)$$

The directional rate is therefore an energy-weighted average of Rayleigh quotients of $-\text{Sym} \nabla \widehat{v}_{\sigma_j}$ along the segments actually travelled by the transport, whereas eq. (32) is a supremum over all points and directions. The directional rate may be much smaller when the displacement avoids the most expansive eigendirections. Evaluated on finitely many sampled segments, the local quotients compare the displacement with the worst direction at the same points; they are an empirical diagnostic, not a certificate of eq. (32), which is how the CIFAR-10 probes of Section 7.3 must be read. At high noise the worst case is already favorable: by eq. (73), $\mathcal{L}_j^{\text{os}} \leq -b_j/\sigma_j < 0$ whenever the EDM margin is positive, so following the realized displacement pays off only below the threshold.

Remark 31 (An integrable one-sided rate bounds Λ_K). *The field-level majorant separates a mesh-free rate from a finite-step remainder, and gives the one sufficient condition of this paper for Λ_K to stay bounded along $\mathfrak{G}$. Let $\ell_{\max,K} = \max_j \ell_j$. If σ_{hi} lies in the interior of the noise range and $\sigma \mapsto (\mathcal{L}^{\text{os}}(\sigma))_+$ and $\sigma \mapsto \text{Lip}(\widehat{v}_\sigma)^2$ are Riemann integrable, the first-order part of Λ_K^{field} converges to $\int_{\sigma}^{\sigma_{\text{hi}}} (\mathcal{L}^{\text{os}}(\sigma))_+ \mathrm{d}\sigma$. The quadratic part is at most $\frac{1}{2} \ell_{\max,K} \sum_j \ell_j \text{Lip}(\widehat{v}_{\sigma_j})^2 \rightarrow 0$, so integrability of the one-sided rate yields a majorant, hence a Λ_K , bounded uniformly along $\mathfrak{G}$. For the oracle field, $-\nabla v_\sigma = \sigma \nabla^2 \log p_\sigma$ by eq. (1), so both rates are governed by the small-noise behaviour of the log-Hessian of the smoothed data law; for laws supported on manifolds with corners, this behaviour is described by Brosse and Dalalyan (2026). The condition is worst-case in space; Proposition 10 shows how much it can overstate.*

Relation to prior work: stability from the structure of the data law. Like Gao–Zhu, most Wasserstein guarantees obtain stability from structure of the data law or of the forward dynamics: strong log-concavity (Gao et al. 2025), weak log-concavity, which the forward smoothing strengthens along the path (Gentiloni Silveri and Ocello 2025; Stéphanovitch 2026; Kremling et al. 2025), or semiconvexity with strong convexity at infinity (Bruno and Sabanis 2025). These assumptions yield one-sided or global Lipschitz control of the flow between any two points. Our directional condition is also one-sided, but it concerns the learned velocity, and only along the optimal displacement between the exact and sampler laws: it is a property of the realized transport, not a consequence of a global property of the data law.

Relation to prior work: deterministic samplers and Jacobian control. Non-asymptotic guarantees for reverse-SDE samplers are commonly stated in total variation or Kullback–Leibler divergence (S. Chen et al. 2023b; Lee et al. 2023; H. Chen et al. 2023; Benton et al. 2024b; Conforti et al. 2025). These analyses typically compare path measures through Girsanov’s theorem, so the score error is evaluated along the exact process and no propagation factor through the learned dynamics appears. The probability-flow ODE admits no such change of measure, and guarantees for deterministic samplers require additional control. S. Chen et al. (2023c) obtain polynomial guarantees by interleaving the deterministic flow with stochastic corrector steps. G. Li et al. (2024b) analyze the deterministic sampler directly in total variation, assuming, in addition to $\mathbb{L}_2$ score accuracy, control of the error on the score Jacobian; sharp total-variation analysis of probability-flow discretization likewise assumes both score and score-Jacobian accuracy (G. Li et al. 2024a). S. Chen et al. (2023a) give polynomial guarantees for DDIM-type deterministic samplers, the family

of the first-order EDM predictor, by decomposing each step into a restoration and a degradation step. In our W_2 setting, this additional requirement is carried by the propagation factor γ_j , and Jacobian-type conditions play the role of its field-level majorants eq. (78). Benton et al. (2024a) bound the W_2 error of flow-matching ODEs by a Grönwall argument under Lipschitz control of the learned field, which is the worst-case route of Corollary 29; Kwon et al. (2022) likewise bound the W_2 error of the probability-flow ODE by the score-matching objective under Lipschitz conditions on the learned score. Arsenyan et al. (2025) obtain W_2 guarantees for the stochastic DDPM sampler that are robust to noisy score evaluations, with rates matching the Gaussian case. Other recent Wasserstein analyses of diffusion samplers include Koike (2026), Lyu and Huang (2026), and Tang et al. (2026).

E.4 The Strict Separation from Worst-Case Stability

The proof of Proposition 10 is given below, together with the exact limit; the constant C grows with $\bar{\sigma}/\underline{\sigma}$ and is large on the EDM noise range (Remark 33). The divergence is not a mesh-refinement instability: for each fixed ε , both worst-case majorants have a finite limit in K . They grow like ε^{-1} across perturbations whose amplitude vanishes while their slope grows, whereas Λ_K stays identically zero. The map and field majorants agree at first order (Lemma 32), so the loss lies between the laws and the worst-case majorants, not between map and field. Appendix E.4 also gives a fixed construction with $\Lambda_K = 0$ in which every predictor has infinite Lipschitz constant and every one-sided rate is infinite (Proposition 34).

The mechanism is the translated initialization: it keeps the discrepancy large relative to the perturbation amplitude, so that the Gaussian contraction absorbs the perturbation. The proof bounds the cost of the optimal input coupling pushed through the predictor, without reoptimizing the output coupling. The construction therefore shows an advantage of realized displacements over worst-case regularity, but not the same separation with exact initialization and purely discretization-induced error. The mixture experiment of Section 7.2 examines this non-adversarial counterpart.

Lemma 32 (Map and field agree at first order). *Fix a step j , assume $\text{Lip}(\hat{v}_{\sigma_j}) < \infty$, and let $\mathcal{L}_j^{\text{os}} \in \mathbb{R}$ be the smallest constant in eq. (77). Then*

$$1 + \ell_j \mathcal{L}_j^{\text{os}} \leq \text{Lip}(\hat{\Phi}_j) \leq \sqrt{1 + 2\ell_j \mathcal{L}_j^{\text{os}} + \ell_j^2 \text{Lip}(\hat{v}_{\sigma_j})^2}. \quad (82)$$

Proof. The smallest constant exists and is finite, since by Cauchy–Schwarz the quotient below lies in $[-\text{Lip}(\hat{v}_{\sigma_j}), \text{Lip}(\hat{v}_{\sigma_j})]$. The upper bound is the last inequality of eq. (78), whose proof does not use e_j . For the lower bound, take pairs $x \neq y$ along which $-\langle \hat{v}_{\sigma_j}(x) - \hat{v}_{\sigma_j}(y), x - y \rangle / \|x - y\|^2$ approaches $\mathcal{L}_j^{\text{os}}$. By Cauchy–Schwarz and $\hat{\Phi}_j(x) = x - \ell_j \hat{v}_{\sigma_j}(x)$,

$$\frac{\|\hat{\Phi}_j(x) - \hat{\Phi}_j(y)\|}{\|x - y\|} \geq \frac{\langle \hat{\Phi}_j(x) - \hat{\Phi}_j(y), x - y \rangle}{\|x - y\|^2} = 1 - \ell_j \frac{\langle \hat{v}_{\sigma_j}(x) - \hat{v}_{\sigma_j}(y), x - y \rangle}{\|x - y\|^2},$$

whose right-hand side approaches $1 + \ell_j \mathcal{L}_j^{\text{os}}$. $\square$

When $\mathcal{L}_j^{\text{os}} \geq 0$, the lower bound gives $\text{Lip}(\hat{\Phi}_j) \geq 1$, and $x - x^2/2 \leq \log(1 + x) \leq x$ for $x \geq 0$, together with $\mathcal{L}_j^{\text{os}} \leq \text{Lip}(\hat{v}_{\sigma_j})$, turns eq. (82) into

$$|\log \text{Lip}(\hat{\Phi}_j) - \ell_j \mathcal{L}_j^{\text{os}}| \leq \frac{1}{2} \ell_j^2 \text{Lip}(\hat{v}_{\sigma_j})^2.$$

The step contribution $\log \max\{1, \text{Lip}(\hat{\Phi}_j)\}$ to Λ_K^{map} and the step contribution $\ell_j(\mathcal{L}_j^{\text{os}})_+ + \frac{1}{2} \ell_j^2 \text{Lip}(\hat{v}_{\sigma_j})^2$ to Λ_K^{field} therefore share the first-order term $\ell_j \mathcal{L}_j^{\text{os}}$ and differ by at most $\ell_j^2 \text{Lip}(\hat{v}_{\sigma_j})^2$.

Throughout the rest of the appendix, set $\ell_{\text{tot}} = \bar{\sigma} - \underline{\sigma}$ and $\vartheta = \underline{\sigma}/\bar{\sigma}$.

Proof of Proposition 10. The construction perturbs the Gaussian denoiser by an oscillation of amplitude $\sigma\varepsilon$ and slope of order ε^{-1} , and starts the sampler from a translate of $\mu_{\bar{\sigma}}$ by $R_{\star}\varepsilon$. Part (a) follows from the amplitude of the perturbation. For (b), a lower bound on the mean of the sampler law keeps the discrepancy e_j^ε of order ε , and pushing an optimal coupling through the predictor then bounds γ_j^ε by one. For (c), the Lipschitz constants and one-sided rates are computed exactly, and the majorants become Riemann sums with explicit limits. Parts (a) and (b), and the exact stepwise formulas for these constants, hold for every $\varepsilon > 0$; only the limits in (c) use $\varepsilon < 2\tau_q$. The schedules are the grids $G_K \in \mathfrak{G}$ of Definition 1; for each ε , the denoiser family and the initialization below are fixed across refinements. Since the construction is the same on every $G_K \in \mathfrak{G}$, we suppress K from stepwise objects, writing for instance $\hat{\Phi}_j^\varepsilon$ for $\hat{\Phi}_{j,K}^\varepsilon$.

Construction. The Gaussian target $q = \mathcal{N}(0, \tau_q^2)$ is centered with scale τ_q , and

$$D_\sigma(x) = \frac{\tau_q^2}{\tau_q^2 + \sigma^2}x, \quad v_\sigma(x) = \varpi(\sigma)x, \quad \varpi(\sigma) = \frac{\sigma}{\tau_q^2 + \sigma^2}.$$

The rate ϖ is unimodal with maximum $1/(2\tau_q)$ at $\sigma = \tau_q$, so $\varpi_{\min} = \min_{[\underline{\sigma}, \bar{\sigma}]} \varpi = \min\{\varpi(\underline{\sigma}), \varpi(\bar{\sigma})\} > 0$. Set

$$R_{\star} = \frac{1}{\vartheta} \max\left\{2\ell_{\text{tot}}, \frac{4}{\varpi_{\min}}\right\}.$$

Initialize from the translate $\nu_0^\varepsilon = (x \mapsto x + R_{\star}\varepsilon)_{\#}\mu_{\bar{\sigma}}$, so that $W_2(\nu_0^\varepsilon, \mu_{\bar{\sigma}}) = R_{\star}\varepsilon$, and set

$$\hat{D}_\sigma^\varepsilon(x) = D_\sigma(x) - \sigma\varepsilon \sin(x/\varepsilon^2), \quad \sigma \in [\underline{\sigma}, \bar{\sigma}].$$

This denoiser admits the EDM parametrization eq. (18): since $\beta_j, c_j > 0$, inverting eq. (18) defines the raw output $\hat{F}_j(u) = \beta_j^{-1}(\hat{D}_{\sigma_j}^\varepsilon(u/c_j) - \alpha_j u/c_j)$. The learned velocity and predictor are

$$\hat{v}_\sigma^\varepsilon(x) = \varpi(\sigma)x + \varepsilon \sin(x/\varepsilon^2), \quad \hat{\Phi}_j^\varepsilon(x) = \chi_j x - \ell_j \varepsilon \sin(x/\varepsilon^2), \quad \chi_j = 1 - \ell_j \varpi(\sigma_j). \quad (83)$$

Each predictor is smooth and globally Lipschitz, hence satisfies Assumption 4.

(a) Small errors. The initialization error is $R_{\star}\varepsilon$ by construction, and the denoiser error is pointwise at most $\sigma\varepsilon$. By eq. (21) and $\beta(\sigma) = \sigma\tau_q/\sqrt{\tau_q^2 + \sigma^2}$,

$$\mathcal{R}_j^\varepsilon = \frac{\|\hat{D}_{\sigma_j}^\varepsilon(X_{\sigma_j}) - D_{\sigma_j}(X_{\sigma_j})\|_{\mathbb{L}_2}}{\beta_j} \leq \frac{\sqrt{\tau_q^2 + \sigma_j^2}}{\tau_q} \varepsilon \leq \frac{\sqrt{\tau_q^2 + \bar{\sigma}^2}}{\tau_q} \varepsilon.$$

This is (a), with $C = \max\{R_{\star}, \sqrt{\tau_q^2 + \bar{\sigma}^2}/\tau_q\}$.

(b) Zero cumulative log-amplification. We first show that the discrepancy never falls below the perturbation scale. Since $\varpi(\sigma) < 1/\sigma$,

$$1 > \chi_j > 1 - \frac{\ell_j}{\sigma_j} = \frac{\sigma_{j+1}}{\sigma_j} > 0,$$

so every product of consecutive factors χ_i starting at level 0 is at least ϑ . Let $\bar{x}_j^\varepsilon$ be the mean of $\hat{\mu}_j^\varepsilon$, so $\bar{x}_0^\varepsilon = R_{\star}\varepsilon$. Taking expectations in eq. (83) gives $\bar{x}_{j+1}^\varepsilon \geq \chi_j \bar{x}_j^\varepsilon - \ell_j \varepsilon$. Iterating with $0 < \chi_i < 1$,

$$\bar{x}_j^\varepsilon \geq \vartheta R_{\star}\varepsilon - \varepsilon \sum_{i < j} \ell_i \geq \varepsilon(\vartheta R_{\star} - \ell_{\text{tot}}) \geq \frac{\vartheta R_{\star}}{2} \varepsilon,$$

by the choice $\vartheta R_\star \geq 2\ell_{\text{tot}}$. The exact laws μ_j are centered, and W_2 dominates the distance between means, hence

$$e_j^\varepsilon \geq \bar{x}_j^\varepsilon \geq \frac{\vartheta R_\star}{2} \varepsilon > 0 \quad \text{at every step of every schedule.} \quad (84)$$

Next, push an optimal coupling (U_j, V_j) of $(\mu_j, \hat{\mu}_j^\varepsilon)$ through $\hat{\Phi}_j^\varepsilon$. Minkowski's inequality, eq. (83), and $|\sin u - \sin v| \leq 2$ give $W_2((\hat{\Phi}_j^\varepsilon)_\# \mu_j, (\hat{\Phi}_j^\varepsilon)_\# \hat{\mu}_j^\varepsilon) \leq \chi_j e_j^\varepsilon + 2\ell_j \varepsilon$. With eq. (84),

$$\gamma_j^\varepsilon \leq \chi_j + \frac{2\ell_j \varepsilon}{e_j^\varepsilon} \leq 1 - \ell_j \left(\varpi(\sigma_j) - \frac{4}{\vartheta R_\star} \right) \leq 1,$$

by the choice $\vartheta R_\star \geq 4/\varpi_{\min}$. This holds for every $\varepsilon > 0$. Since $\sigma_{\text{hi}} > \bar{\sigma}$, every step belongs to the low-noise block, so the cumulative log-amplification (Definition 8) vanishes, $\Lambda_K = 0$. This is (b).

(c) Worst-case expansion. We first compute the one-sided rates and Lipschitz constants. By eq. (83), $(\hat{v}_{\sigma_j}^\varepsilon)'(x) = \varpi(\sigma_j) + \varepsilon^{-1} \cos(x/\varepsilon^2)$, so in dimension one eq. (32) reads

$$\mathcal{L}_j^{\text{os}} = \sup_x (-(\hat{v}_{\sigma_j}^\varepsilon)'(x)) = \varepsilon^{-1} - \varpi(\sigma_j) \geq \varepsilon^{-1} - \frac{1}{2\tau_q}.$$

This lower bound holds at each step separately, with a constant independent of j and K ; it does not come from accumulation over steps. Summed over the schedule, it makes the first term of eq. (33) at least $\sum_j \ell_j (\varepsilon^{-1} - 1/(2\tau_q)) = \ell_{\text{tot}} (\varepsilon^{-1} - 1/(2\tau_q))$. The same slope drives the map: differentiating eq. (83) gives $(\hat{\Phi}_j^\varepsilon)'(x) = \chi_j - (\ell_j/\varepsilon) \cos(x/\varepsilon^2)$, and because $\chi_j > 0$ its supremum in absolute value is attained where the cosine equals -1 :

$$\text{Lip}(\hat{\Phi}_j^\varepsilon) = \chi_j + \frac{\ell_j}{\varepsilon} = 1 + \ell_j \mathcal{L}_j^{\text{os}},$$

so eq. (82) holds with equality here and

$$\frac{\text{Lip}(\hat{\Phi}_j^\varepsilon) - 1}{\ell_j} = \mathcal{L}_j^{\text{os}} \geq \varepsilon^{-1} - \frac{1}{2\tau_q}.$$

These exact stepwise formulas hold for every $\varepsilon > 0$, and show that the map and field majorants quantify the same gap.

We now pass to the limits, and assume $\varepsilon < 2\tau_q$. Then $\varepsilon^{-1} > 1/(2\tau_q) \geq \varpi(\sigma_j)$, so $\mathcal{L}_j^{\text{os}} > 0$ and every $\text{Lip}(\hat{\Phi}_j^\varepsilon) = 1 + \ell_j \mathcal{L}_j^{\text{os}}$ exceeds one. This is what allows us to drop the maximum with one in $\Lambda_K^{\text{map}, \varepsilon}$, which becomes $\sum_{j=0}^{K-1} \log \text{Lip}(\hat{\Phi}_j^\varepsilon)$. Write $x_j = \ell_j \mathcal{L}_j^{\text{os}} = \ell_j (\varepsilon^{-1} - \varpi(\sigma_j)) \in [0, \ell_j/\varepsilon]$. Since $x - x^2/2 \leq \log(1+x) \leq x$ for $x \geq 0$,

$$\left| \sum_{j=0}^{K-1} \log \text{Lip}(\hat{\Phi}_j^\varepsilon) - \sum_{j=0}^{K-1} x_j \right| \leq \frac{1}{2} \sum_{j=0}^{K-1} x_j^2 \leq \frac{\ell_{\text{tot}}}{2\varepsilon^2} \ell_{\max, K}.$$

As $K \rightarrow \infty$ along $\mathcal{K}$, $\ell_{\max, K} \rightarrow 0$, so the remainder vanishes and the Riemann sum converges to $\int_{\underline{\sigma}}^{\bar{\sigma}} (\varepsilon^{-1} - \varpi(\sigma)) d\sigma$. Since $\int \varpi(\sigma) d\sigma = \frac{1}{2} \log(\tau_q^2 + \sigma^2)$, this gives the map-level limit

$$\lim_{K \rightarrow \infty} \Lambda_K^{\text{map}, \varepsilon} = \frac{\bar{\sigma} - \underline{\sigma}}{\varepsilon} - \frac{1}{2} \log \frac{\tau_q^2 + \bar{\sigma}^2}{\tau_q^2 + \underline{\sigma}^2}. \quad (85)$$

It remains to identify the limit of the field-level majorant $\Lambda_K^{\text{field}, \varepsilon}$ of eq. (33). Since $\varepsilon^{-1} > \varpi(\sigma_j)$, the derivative computed above gives

$$\text{Lip}(\hat{v}_{\sigma_j}^\varepsilon) = \varepsilon^{-1} + \varpi(\sigma_j).$$

Therefore

$$0 \leq \frac{1}{2} \sum_{j=0}^{K-1} \ell_j^2 \text{Lip}(\widehat{v}_{\sigma_j}^\varepsilon)^2 \leq \frac{\ell_{\text{tot}}}{2} \left(\varepsilon^{-1} + \frac{1}{2\tau_q} \right)^2 \ell_{\max, K} \longrightarrow 0.$$

The first-order term of $\Lambda_K^{\text{field}, \varepsilon}$ is $\sum_j \ell_j (\mathcal{L}_j^{\text{os}})_+ = \sum_j x_j$, whose Riemann-sum limit is the map-level limit just computed. Hence the field and map majorants have the common limit (85), which is of the form $(\bar{\sigma} - \underline{\sigma})/\varepsilon + O(1)$ with $O(1) = -\frac{1}{2} \log((\tau_q^2 + \bar{\sigma}^2)/(\tau_q^2 + \underline{\sigma}^2))$. This term depends only on τ_q , $\underline{\sigma}$ and $\bar{\sigma}$, not on ε , and lies in $[-\log(\bar{\sigma}/\underline{\sigma}), 0]$. This proves (c). $\square$

Remark 33 (Cost of the construction). *The price of the separation is the size of the translation $R_\star \varepsilon$: the constant C of Proposition 10 is at least $R_\star = (\bar{\sigma}/\underline{\sigma}) \max\{2(\bar{\sigma} - \underline{\sigma}), 4/\varpi_{\min}\}$, and both factors are large on wide noise ranges. The first is the ratio of the endpoints. In the second, $4/\varpi(\sigma) = 4(\tau_q^2 + \sigma^2)/\sigma$, so $4/\varpi_{\min}$ is of order $\max\{\tau_q^2/\underline{\sigma}, \bar{\sigma}\}$ when $\underline{\sigma} \ll \tau_q \ll \bar{\sigma}$. With the EDM endpoints $\underline{\sigma} = 0.002$, $\bar{\sigma} = 80$ and $\tau_q = 0.5$, the ratio is 4×10^4 and $4/\varpi_{\min} \approx 500$.*

The first construction gives a quantitative separation: both worst-case majorants are finite for each fixed ε but arbitrarily large as $\varepsilon \downarrow 0$. A fixed construction, in which the perturbation does not vary along a vanishing parameter, gives the qualitative non-implication.

Proposition 34 (Zero cumulative log-amplification with infinite worst-case constants). *In the setting of Proposition 10, for every $\bar{\varepsilon} > 0$ there are a smooth denoiser family satisfying Assumption 4 and the EDM parametrization, and an initialization, such that on the same refinement grids $\gamma_{j,K} \leq 1$ at every step of every schedule, so $\Lambda_K = 0$, while every predictor has infinite global Lipschitz constant and every one-sided rate $\mathcal{L}_j^{\text{os}}$ is infinite.*

Proof. Let $\bar{\varepsilon} > 0$, take $R_\star$ as in the proof above, let $\nu_0^{\text{fix}, \bar{\varepsilon}}$ be the translate of $\mu_{\bar{\sigma}}$ by $R_\star \bar{\varepsilon}$, and define the second, now fixed, denoiser family

$$\widehat{D}_\sigma^{\text{fix}, \bar{\varepsilon}}(x) = D_\sigma(x) - \sigma \bar{\varepsilon} \sin(x^2).$$

Attach this denoiser family and initialization, fixed across refinements, to the grids $G_K \in \mathfrak{G}$. The residual, mean, and coupling arguments above use only the amplitude bounds $|\sin| \leq 1$ and $|\sin u - \sin v| \leq 2$, not the frequency of the oscillation, which changes from x/ε^2 to x^2 . They apply verbatim with ε replaced by $\bar{\varepsilon}$: (a) of Proposition 10 holds with $\bar{\varepsilon}$ in place of ε , and the corresponding factors satisfy $\gamma_{j,K}^{\text{fix}, \bar{\varepsilon}} \leq 1$ at every step of every $G_K \in \mathfrak{G}$. The associated predictor $\widehat{\Phi}_j^{\text{fix}, \bar{\varepsilon}}(x) = \chi_j x - \ell_j \bar{\varepsilon} \sin(x^2)$ is smooth, hence locally Lipschitz, and satisfies $|\widehat{\Phi}_j^{\text{fix}, \bar{\varepsilon}}(x)| \leq |x| + \ell_j \bar{\varepsilon}$, so Assumption 4 holds. But

$$(\widehat{\Phi}_j^{\text{fix}, \bar{\varepsilon}})'(x) = \chi_j - 2\ell_j \bar{\varepsilon} x \cos(x^2)$$

is unbounded, so $\text{Lip}(\widehat{\Phi}_j^{\text{fix}, \bar{\varepsilon}}) = \infty$ at every step; and since $(\widehat{v}_{\sigma_j}^{\text{fix}, \bar{\varepsilon}})'(x) = \varpi(\sigma_j) + 2\bar{\varepsilon} x \cos(x^2)$ is unbounded below as well, $\mathcal{L}_j^{\text{os}} = \infty$ and eq. (77) holds for no finite constant. Neither worst-case certificate is available, while $\Lambda_K = 0$. $\square$

Remark 35 (Conjecture: localized perturbations). *We conjecture, without proof, that the oscillatory form is not essential: a narrow smooth bump should confine the large derivative to an arbitrarily small spatial region, and a cutoff in σ should confine the perturbation to a prescribed low-noise interval while leaving the high-noise denoiser unchanged, with the same arguments.*

F The Global Wasserstein Bound

This appendix complements Section 6. It proves the high-noise and low-noise block estimates, with the summation lemmas they rely on, and concatenates them into the proofs of Theorem 11 and corollary 12; it then bounds the initialization error and extends the bound to the deployed sample.

F.1 Explicit Form of the Global Bound

Two quantities of the proof are left implicit in Theorem 11. On a finite mesh the kernel contracts slightly less than its continuous form, by the factor

$$\kappa(\theta) = \frac{1 - (1 - \theta)^{1/\rho}}{\rho^{-1} \log((1 - \theta)^{-1})} \in (0, 1) \quad (86)$$

at relative step $h/\eta_j = \theta$, and $\kappa(\theta) \uparrow 1$ as $\theta \downarrow 0$. The learning terms sum to the learning scale

$$\begin{aligned} \Upsilon(s_1, s_0) &= \int_{s_1}^{s_0} \frac{\tau_q \, ds}{\sqrt{s^2 + \tau_q^2}} \\ &\leq \min \left\{ s_0 - s_1, \tau_q \log \left(1 + \frac{2s_0}{\tau_q} \right) \right\}. \end{aligned} \quad (87)$$

Theorem 36 (Global Wasserstein bound, explicit form). *Under the hypotheses of Theorem 11, set $b_{\text{eff}} = b_{\text{hi}} \kappa(\theta_{\text{hi}})$ and $C_\star = C_{\rho, \max(\theta_{\text{hi}}, \theta_{\text{lo}})}$, the constant of Lemma 41. For every $G_K \in \mathfrak{G}$ satisfying the mesh condition*

$$h_K \leq \min \{ \theta_{\text{hi}} \sigma_{\text{hi}}^\rho, \theta_{\text{lo}} \sigma^\rho \}, \quad (88)$$

the bound (36) holds with Disc_K as in Theorem 11, that is,

$$\text{Disc}_K = C_\star B_{d,1} h_K [\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0)],$$

and with the learning term

$$\text{Learn}_K = \sqrt{d} C_{\text{res}} \left[\frac{\tau_q}{b_{\text{hi}}} (1 - \Pi_{0, K_{\text{hi}}}) + \Upsilon(\sigma_K, \sigma_{K_{\text{hi}}}) \right],$$

which is at most the learning term of Theorem 11 by eq. (87).

Remark 37 (Three regimes, one rate). *Since Ξ_ρ is nonincreasing in b , contraction is not what makes the discretization error first order; it decides which noise scale sets the constant. For $\rho < 1$, the high-noise scale function $\Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0)$ is at most $\sigma_{K_{\text{hi}}}^{1-\rho}/(b_{\text{eff}} + \rho - 1)$ if $b_{\text{eff}} > 1 - \rho$ (supercritical), $\sigma_{K_{\text{hi}}}^{1-\rho} \log(\sigma_0/\sigma_{K_{\text{hi}}})$ if $b_{\text{eff}} = 1 - \rho$ (critical), and $\sigma_{K_{\text{hi}}}^{b_{\text{eff}}} \sigma_0^{1-\rho-b_{\text{eff}}}/(1 - \rho - b_{\text{eff}})$ if $b_{\text{eff}} < 1 - \rho$ (subcritical). In the supercritical regime the damped sum of the local discretization biases of the high-noise block is set by $\sigma_{K_{\text{hi}}}$ alone, however large σ_0 is. At $\rho = 1/7$ ($\rho_{\text{EDM}} = 7$) the supercritical condition reads $b_{\text{eff}} > 6/7$. Since $b_{\text{eff}} = b_{\text{hi}} \kappa(\theta_{\text{hi}}) < b_{\text{hi}}$ and $\kappa(\theta_{\text{hi}}) \uparrow 1$ as $\theta_{\text{hi}} \downarrow 0$, it requires $b_{\text{hi}} > 6/7$, and is then met on every sufficiently fine mesh, that is, for θ_{hi} small enough (Section 7.3).*

F.2 High-Noise Block

Under the high-noise contraction eq. (26), eq. (24) specializes to

$$e_{j+1} \leq (1 - b_{\text{hi}} a_j) e_j + \Delta_j + a_j \beta_j \mathcal{R}_j, \quad j = 0, \dots, K_{\text{hi}} - 1. \quad (89)$$

Under the EDM certificate of Proposition 7, the step-dependent factor $1 - a_j b_j$ may replace $1 - b_{\text{hi}} a_j$ throughout. The kernel of Section 6, $\Pi_{r,k} = \prod_{i=r}^{k-1} (1 - b_{\text{hi}} a_i)$ for $0 \leq r \leq k$, has factors in $(0, 1)$, and $\Pi_{k,k} = 1$ (empty product). It satisfies $\Pi_{r,k} = (1 - b_{\text{hi}} a_r) \Pi_{r+1,k}$ for $r < k$.

Proposition 38 (High-noise contraction estimate). *Let $b_{\text{hi}} \in (0, 1)$, and assume Assumption 5 and the high-noise contraction eq. (26). Then, for every $G_K \in \mathfrak{G}$ and every $k \in \{0, \dots, K_{\text{hi}}\}$,*

$$e_k \leq \Pi_{0,k} e_0 + \sum_{j=0}^{k-1} \Pi_{j+1,k} \Delta_j + \frac{\tau_q \sqrt{d} C_{\text{res}}}{b_{\text{hi}}} (1 - \Pi_{0,k}).$$

Proof. For $k = 0$ the bound reads $e_0 \leq e_0$. For $k \geq 1$, iterating eq. (89) for $j = 0, \dots, k-1$, all of whose coefficients are nonnegative, gives $e_k \leq \Pi_{0,k}e_0 + \sum_{j=0}^{k-1} \Pi_{j+1,k}(\Delta_j + a_j\beta_j\mathcal{R}_j)$. Since $\beta_j \leq \tau_q$ and $\mathcal{R}_j \leq \sqrt{d}C_{\text{res}}$, the learning term satisfies $a_j\beta_j\mathcal{R}_j \leq (\tau_q\sqrt{d}C_{\text{res}}/b_{\text{hi}})b_{\text{hi}}a_j$, and the kernel telescopes: $\Pi_{j+1,k}b_{\text{hi}}a_j = \Pi_{j+1,k} - \Pi_{j,k}$, whose sum over $j = 0, \dots, k-1$ is $\Pi_{k,k} - \Pi_{0,k} = 1 - \Pi_{0,k}$. $\square$

The kernel damps the initialization error and saturates the accumulated learning error at $\tau_q\sqrt{d}C_{\text{res}}/b_{\text{hi}}$, however many steps the block contains. In the damped bias sum $\sum_j \Pi_{j+1,k}\Delta_j$, the universal bias bound Δ_j is of order $h^2\sigma_j^{1-2\rho}$, so for $\rho < 1/2$ the earliest, highest-noise steps contribute the most, and the kernel discounts those same steps geometrically. The scale function eq. (35) measures the outcome; explicitly,

$$\Xi_\rho(b; s_1, s_0) = \begin{cases} \frac{s_1^{1-\rho}}{b + \rho - 1} \left[1 - \left(\frac{s_1}{s_0} \right)^{b+\rho-1} \right], & b \neq 1 - \rho, \\ s_1^{1-\rho} \log \frac{s_0}{s_1}, & b = 1 - \rho, \end{cases}$$

and $\Xi_\rho(0; s_1, s_0) = \int_{s_1}^{s_0} s^{-\rho} ds$ is the undamped sum. On a finite mesh the relaxation a_j is smaller than the log-noise increment $r_j = \log(\sigma_j/\sigma_{j+1})$, whose sums give the continuous kernel, and $\kappa(\theta)$ of eq. (86) is the value of a_j/r_j at $h/\eta_j = \theta$. On every stretch of steps with $h/\eta_i \leq \theta$ for $i = j, \dots, k-1$, $\Pi_{j,k} \leq (\sigma_k/\sigma_j)^{b_{\text{hi}}\kappa(\theta)}$ (Lemma 42).

Proposition 39 (High-noise estimate on the refinement family). *Let $0 < \rho \leq 1$ and $b_{\text{hi}} \in (0, 1)$, and assume Assumption 5 and the high-noise contraction eq. (26). Fix $\theta_{\text{hi}} \in (0, 1)$ and set $\kappa_{\text{hi}} = \kappa(\theta_{\text{hi}})$ and $b_{\text{eff}} = b_{\text{hi}}\kappa_{\text{hi}}$. There is a constant $C_{\rho, \theta_{\text{hi}}} < \infty$, depending only on ρ and θ_{hi} , such that for every $G_K \in \mathfrak{G}$ with $h_K \leq \theta_{\text{hi}}\sigma_{\text{hi}}^\rho$,*

$$e_{K_{\text{hi}}} \leq \Pi_{0, K_{\text{hi}}}e_0 + C_{\rho, \theta_{\text{hi}}}B_{d,1}h_K\Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0) + \frac{\tau_q\sqrt{d}C_{\text{res}}}{b_{\text{hi}}}(1 - \Pi_{0, K_{\text{hi}}}). \quad (90)$$

The mesh condition gives $h_K/\eta_j \leq \theta_{\text{hi}}$ on the whole high-noise block. The proof, in Appendix F.3 together with the explicit constant, bounds $\Pi_{j+1, K_{\text{hi}}} \leq (\sigma_{K_{\text{hi}}}/\sigma_{j+1})^{b_{\text{eff}}}$ and compares the resulting sum with the integral eq. (35). The range $\rho > 1$, that is $\rho_{\text{EDM}} < 1$, is not treated by this estimate nor by the low-noise one; it plays no role in practice.

F.3 Summation of the Local Biases

This subsection proves the two summation estimates behind Proposition 39 and Proposition 43. Throughout, $\eta_r > \eta_{r+1} > \dots > \eta_{k+1} > 0$ is a segment of a grid that is uniform in the clock $\eta = \sigma^\rho$, with $0 < \rho \leq 1$, common step $h = \eta_j - \eta_{j+1}$, and levels $\sigma_j = \eta_j^{1/\rho}$; the lemmas below differ only in the indices of the segment.

The argument has three steps. Lemma 40 compares a Riemann sum on the grid with the corresponding integral, at a cost controlled by the relative mesh h/η_j . Lemma 41 uses it to bound the sum of the universal bias bounds Δ_j weighted by a power kernel $(\sigma_{k+1}/\sigma_{j+1})^b$, and identifies the resulting integral with the scale function Ξ_ρ of eq. (35); with $b = 0$ it bounds the low-noise bias sum of Proposition 43. For the high-noise block, Lemma 42 bounds the discrete contraction kernel $\Pi_{j+1, k+1}$ by such a power, with exponent b_{eff} , and inserting both bounds into Proposition 38 proves Proposition 39.

F.3.1 A Relative-Mesh Riemann Comparison

Lemma 40 (Relative-mesh Riemann comparison). *Let $f_p(\eta) = \eta^{-p}$ with $p \in \mathbb{R}$, and assume $h \leq \theta \eta_j$ for $j = r, \dots, k$ and some $\theta \in (0, 1)$. Then*

$$h \sum_{j=r}^k f_p(\eta_{j+1}) \leq (1 - \theta)^{-p_+} \int_{\eta_{k+1}}^{\eta_r} f_p(\eta) d\eta, \quad p_+ = \max(p, 0). \quad (91)$$

Proof. From $\eta_{j+1} = \eta_j - h \geq (1 - \theta)\eta_j$ we have $\eta_j/\eta_{j+1} \leq (1 - \theta)^{-1}$. For η in the panel $[\eta_{j+1}, \eta_j]$, $f_p(\eta_{j+1})/f_p(\eta) = (\eta/\eta_{j+1})^p \leq (1 - \theta)^{-p_+}$, so $h f_p(\eta_{j+1}) \leq (1 - \theta)^{-p_+} \int_{\eta_{j+1}}^{\eta_j} f_p(\eta) d\eta$. Summing over $j = r, \dots, k$ gives eq. (91). $\square$

F.3.2 The Damped Bias Sum

Lemma 41 (Damped bias sum). *Assume $h \leq \theta \eta_j$ for $j = r, \dots, k$ and some $\theta \in (0, 1)$. Then for every $b \in [0, 1]$,*

$$\sum_{j=r}^k \left(\frac{\sigma_{k+1}}{\sigma_{j+1}} \right)^b \Delta_j \leq C_{\rho, \theta} B_{d,1} h \Xi_\rho(b; \sigma_{k+1}, \sigma_r), \quad C_{\rho, \theta} = \frac{(1 - \theta)^{-2-2/\rho}}{2\rho}, \quad (92)$$

with Δ_j as in Lemma 3 and Ξ_ρ as in eq. (35).

Proof. Write $\theta_j = h/\eta_j \leq \theta$. Since $\sigma_{j+1}/\sigma_j = (\eta_{j+1}/\eta_j)^{1/\rho} = (1 - \theta_j)^{1/\rho}$, the relaxation coefficient is $a_j = 1 - (1 - \theta_j)^{1/\rho}$. As $1/\rho \geq 1$, Bernoulli's inequality gives $a_j \leq \theta_j/\rho$, and $1 - a_j = (1 - \theta_j)^{1/\rho} \geq (1 - \theta)^{1/\rho}$. The function $g(a) = a + (1 - a) \log(1 - a) = \sum_{m \geq 2} a^m / (m(m - 1))$ satisfies $g(a) \leq a^2 / (2(1 - a))$. Hence, using $\theta_j = h\sigma_j^{-\rho}$,

$$\Delta_j = B_{d,1} \sigma_j g(a_j) \leq \frac{(1 - \theta)^{-1/\rho}}{2\rho^2} B_{d,1} h^2 \sigma_j^{1-2\rho}.$$

Up to the constant $(1 - \theta)^{-1/\rho} B_{d,1} / (2\rho^2)$ and the factor h^2 , the j th term of eq. (92) is therefore at most $(\sigma_{k+1}/\sigma_{j+1})^b \sigma_j^{1-2\rho} = \sigma_{k+1}^b \eta_{j+1}^{-b/\rho} \eta_j^{(1-2\rho)/\rho}$ in the clock variable. One factor h turns the sum of these terms into a Riemann sum, and the other remains as the factor h of eq. (92). Evaluating the bias factor $\eta_j^{(1-2\rho)/\rho}$ at η_{j+1} instead of η_j costs at most $(1 - \theta)^{-(1-2\rho)/\rho}$, since $\eta_j/\eta_{j+1} \leq (1 - \theta)^{-1}$, and Lemma 40 with $p = (b + 2\rho - 1)/\rho \leq 2$ then gives

$$h \sum_{j=r}^k \eta_{j+1}^{-b/\rho} \eta_j^{(1-2\rho)/\rho} \leq (1 - \theta)^{-(1-2\rho)/\rho - 2} \int_{\eta_{k+1}}^{\eta_r} \eta^{(1-2\rho-b)/\rho} d\eta = \rho (1 - \theta)^{-(1-2\rho)/\rho - 2} \int_{\sigma_{k+1}}^{\sigma_r} s^{-\rho-b} ds,$$

by the substitution $\eta = s^\rho$. Multiplying by σ_{k+1}^b turns the last integral into $\Xi_\rho(b; \sigma_{k+1}, \sigma_r)$. Collecting the factors, whose exponents of $(1 - \theta)^{-1}$ add up to at most $2 + 2/\rho$, gives eq. (92). $\square$

The constant depends on b only through the bound $p \leq 2$, so it is uniform over $b \in [0, 1]$; in particular the same lemma serves the damped high-noise sum and, with $b = 0$, the undamped low-noise sum. As $\theta \downarrow 0$ it tends to $1/(2\rho)$, the value given by the leading-order expansion (16) of the universal bias bound, $\Delta_j \approx B_{d,1} h^2 \sigma_j^{1-2\rho} / (2\rho^2)$.

F.3.3 Proof of the High-Noise Estimate

Lemma 42 (Finite-mesh contraction of the kernel). *Let $b_{\text{hi}} \in (0, 1)$, let $j \leq k$ and let the segment be $\eta_j > \dots > \eta_k$, with $a_i = 1 - \sigma_{i+1}/\sigma_i$ and $\Pi_{j,k} = \prod_{i=j}^{k-1} (1 - b_{\text{hi}} a_i)$. If $h \leq \theta \eta_i$ for $i = j, \dots, k-1$ and some $\theta \in (0, 1)$, then $\Pi_{j,k} \leq (\sigma_k/\sigma_j)^{b_{\text{hi}} \kappa(\theta)}$, with κ as in eq. (86).*

Proof. Write

$$r_i = \log \frac{\sigma_i}{\sigma_{i+1}} = \frac{1}{\rho} \log \frac{1}{1 - h/\eta_i}$$

for the log-noise increment of step i , so that $a_i = 1 - e^{-r_i}$. The continuous kernel with exponent b is $(\sigma_k/\sigma_j)^b = \exp(-b \sum_{i=j}^{k-1} r_i)$, and the discrete relaxation is smaller than the increment, $a_i \leq r_i$, since $1 - e^{-r} \leq r$. In the other direction, r_i is an increasing function of $h/\eta_i \leq \theta$, so $r_i \leq r_\theta = \rho^{-1} \log((1 - \theta)^{-1})$, and since $r \mapsto (1 - e^{-r})/r$ is decreasing,

$$a_i \geq \kappa(\theta) r_i, \quad \kappa(\theta) = \frac{1 - e^{-r_\theta}}{r_\theta} = \frac{1 - (1 - \theta)^{1/\rho}}{\rho^{-1} \log((1 - \theta)^{-1})} \in (0, 1),$$

which is eq. (86). Finally $1 - x \leq e^{-x}$ for every factor gives

$$\Pi_{j,k} \leq \exp\left(-b_{\text{hi}} \sum_{i=j}^{k-1} a_i\right) \leq \exp\left(-b_{\text{hi}} \kappa(\theta) \sum_{i=j}^{k-1} r_i\right) = \left(\frac{\sigma_k}{\sigma_j}\right)^{b_{\text{hi}} \kappa(\theta)}.$$

For $j = k$ both sides equal one. □

Proof of Proposition 39. For $K_{\text{hi}} = 0$ the kernel $\Pi_{0,0}$ is an empty product, equal to one, the bias sum is empty, and $\Xi_\rho(b_{\text{eff}}; \sigma_0, \sigma_0) = 0$, so eq. (90) reduces to $e_0 \leq e_0$. For $K_{\text{hi}} \geq 1$, every level η_j with $j \leq K_{\text{hi}}$ satisfies $\eta_j \geq \sigma_{\text{hi}}^\rho$, so the mesh condition $h_K \leq \theta_{\text{hi}} \sigma_{\text{hi}}^\rho$ gives $h_K \leq \theta_{\text{hi}} \eta_j$ on the whole high-noise block. Apply Proposition 38 with $k = K_{\text{hi}}$, bound each kernel $\Pi_{j+1, K_{\text{hi}}}$, $0 \leq j \leq K_{\text{hi}} - 1$, by Lemma 42 on the segment $\eta_{j+1} > \dots > \eta_{K_{\text{hi}}}$, which gives $\Pi_{j+1, K_{\text{hi}}} \leq (\sigma_{K_{\text{hi}}}/\sigma_{j+1})^{b_{\text{eff}}}$, and the resulting sum by Lemma 41 with $r = 0$, $k = K_{\text{hi}} - 1$ and $b = b_{\text{eff}} \leq 1$:

$$\sum_{j=0}^{K_{\text{hi}}-1} \Pi_{j+1, K_{\text{hi}}} \Delta_j \leq \sum_{j=0}^{K_{\text{hi}}-1} \left(\frac{\sigma_{K_{\text{hi}}}}{\sigma_{j+1}}\right)^{b_{\text{eff}}} \Delta_j \leq C_{\rho, \theta_{\text{hi}}} B_{d,1} h_K \Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0).$$

□

F.4 Low-Noise Block and Proof of the Global Bound

No stability assumption is made below the threshold. The recursion is closed by Λ_K , which bounds every partial product of the truncated factors; with no contraction to exploit, the universal bias bounds are summed without a kernel, which is the undamped case $b = 0$ of eq. (35).

Proposition 43 (Low-noise estimate on the refinement family). *Let $0 < \rho \leq 1$, assume Assumption 5, and let Λ_K be the cumulative low-noise log-amplification of Definition 8. Fix $\theta_{\text{lo}} \in (0, 1)$. There is a constant $C_{\rho, \theta_{\text{lo}}} < \infty$, depending only on ρ and θ_{lo} , such that for every $G_K \in \mathfrak{G}$ with $h_K \leq \theta_{\text{lo}} \underline{\sigma}^\rho$,*

$$e_K \leq e^{\Lambda_K} \left[e_{K_{\text{hi}}} + C_{\rho, \theta_{\text{lo}}} B_{d,1} h_K \Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \sqrt{d} C_{\text{res}} \Upsilon(\sigma_K, \sigma_{K_{\text{hi}}}) \right], \quad (93)$$

where $\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}})$ equals $(\sigma_{K_{\text{hi}}}^{1-\rho} - \sigma_K^{1-\rho})/(1 - \rho)$ for $\rho < 1$ and $\log(\sigma_{K_{\text{hi}}}/\sigma_K)$ for $\rho = 1$, and Υ is the learning scale eq. (87), $\Upsilon(s_1, s_0) = \tau_q [\text{arsinh}(s_0/\tau_q) - \text{arsinh}(s_1/\tau_q)]$.

Proof. For $K_{\text{hi}} = K$ there is nothing to prove, since $\Lambda_K = 0$ and the sums vanish. Otherwise, iterating eq. (24) from $j = K_{\text{hi}}$ to $K - 1$, using $\gamma_i \leq \bar{\gamma}_i$ and bounding every partial product $\prod_{i=j+1}^{K-1} \bar{\gamma}_i$, $K_{\text{hi}} \leq j \leq K - 1$, by e^{Λ_K} (an empty product equals $1 \leq e^{\Lambda_K}$) gives $e_K \leq e^{\Lambda_K} [e_{K_{\text{hi}}} + \sum_{j=K_{\text{hi}}}^{K-1} (\Delta_j + a_j \beta_j \mathcal{R}_j)]$. The bias sum is bounded by Lemma 41 with $r = K_{\text{hi}}$, $k = K - 1$ and $b = 0$, since $h_K/\eta_j \leq h_K/\underline{\eta} \leq \theta_{\text{lo}}$ by eq. (12), where $\underline{\eta} = \underline{\sigma}^\rho$. For the learning term, $a_j \beta_j = \ell_j \tau_q / \sqrt{\sigma_j^2 + \tau_q^2}$. The integrand of eq. (87) is decreasing and σ_j is the upper end of the step, so $a_j \beta_j \leq \int_{\sigma_{j+1}}^{\sigma_j} \tau_q (s^2 + \tau_q^2)^{-1/2} ds$. With Assumption 5, the learning terms therefore sum to at most $\sqrt{d} C_{\text{res}} \Upsilon(\sigma_K, \sigma_{K_{\text{hi}}})$, with no mesh condition. $\square$

The learning scale satisfies $\Upsilon(s_1, s_0) \leq \min\{s_0 - s_1, \tau_q \log(1 + 2s_0/\tau_q)\}$: it is at most the length of the noise range, since its integrand is at most one, and it grows only logarithmically in the upper end once $s_0 \gg \tau_q$, since $\text{arsinh } x = \log(x + \sqrt{x^2 + 1}) \leq \log(1 + 2x)$.

Proof of Theorems 11 and 36. The constant is $C_\star = C_{\rho, \max(\theta_{\text{hi}}, \theta_{\text{lo}})}$, that of Lemma 41. By eq. (88), the mesh conditions of Proposition 39 and Proposition 43 both hold. Substitute the bound on $e_{K_{\text{hi}}}$ of Proposition 39 into eq. (93), use $C_{\rho, \theta} \leq C_\star$ for $\theta \leq \max(\theta_{\text{hi}}, \theta_{\text{lo}})$, since $C_{\rho, \theta}$ is increasing in θ , and add the terminal bias eq. (7). The two discretization terms combine into $C_\star B_{d,1} h_K [\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0)] = \text{Disc}_K$. For $K_{\text{hi}} = 0$ the high-noise terms vanish ($\Pi_{0,0} = 1$, $\Xi_\rho(b_{\text{eff}}; \sigma_0, \sigma_0) = 0$); for $K_{\text{hi}} = K$ the low-noise terms vanish. This gives Theorem 36, and Theorem 11 follows by the bound on Υ in eq. (87). $\square$

The two mesh conditions in eq. (88) are those of the two blocks; they are kept separate because θ_{hi} sets how much of the margin the kernel retains, $b_{\text{eff}} = b_{\text{hi}} \kappa(\theta_{\text{hi}})$, whereas θ_{lo} enters only the constant. Refinement does not improve the denoiser or remove an initialization mismatch, so a growing envelope for e^{Λ_K} can make those terms of the bound increase even when the actual error stays bounded. For the discretization term with $\rho < 1$, $\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) \leq \sigma_{K_{\text{hi}}}^{1-\rho}/(1-\rho)$, so in the supercritical regime $b_{\text{eff}} > 1 - \rho$ it is $O(e^{\Lambda_K} h_K \sigma_{K_{\text{hi}}}^{1-\rho})$, independent of σ_0 at fixed clock mesh. Raising σ_0 to shrink the initialization error therefore costs only through $h_K = (\sigma_0^\rho - \sigma_K^\rho)/K$ and through Λ_K . In the critical and subcritical regimes the scale function contributes an additional factor $\log(\sigma_0/\sigma_{K_{\text{hi}}})$ or $(\sigma_0/\sigma_{K_{\text{hi}}})^{1-\rho-b_{\text{eff}}}$. At $\rho = 1$ every $b_{\text{eff}} > 0$ is supercritical. Because $\kappa_{\text{hi}} < 1$, the relevant exponent is b_{eff} , not b_{hi} ; but if $b_{\text{hi}} > 1 - \rho$, choosing θ_{hi} small enough that $b_{\text{hi}} \kappa(\theta_{\text{hi}}) > 1 - \rho$ makes the bound supercritical on every G_K with $h_K \leq \theta_{\text{hi}} \sigma_{\text{hi}}^\rho$.

Proof of Corollary 12. The mesh is $h_K = (\bar{\sigma}^\rho - \underline{\sigma}^\rho)/K$, and eq. (37) gives $e^{\Lambda_K} = O(K^\omega)$. The scale function is bounded uniformly in K : since Ξ_ρ is nonincreasing in b and additive over adjacent intervals, $\Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \Xi_\rho(b_{\text{eff}}; \sigma_{K_{\text{hi}}}, \sigma_0) \leq \Xi_\rho(0; \sigma_K, \sigma_{K_{\text{hi}}}) + \Xi_\rho(0; \sigma_{K_{\text{hi}}}, \sigma_0) = \Xi_\rho(0; \underline{\sigma}, \bar{\sigma})$. Substitute these bounds in the discretization term. For the oracle with exact initialization, $e_0 = 0$ and $\mathcal{R}_j = 0$ for every j , so Assumption 5 holds with $C_{\text{res}} = 0$ and $\text{Learn}_K = 0$; the same estimate bounds $e_K = W_2(\hat{\mu}_K, \mu_\sigma) = O(K^{-(1-\omega)})$. This assertion does not require Assumption 6: choosing $\sigma_{\text{hi}} > \bar{\sigma}$ makes the high-noise block empty ($K_{\text{hi}} = 0$), and the estimate then uses only Assumption 4 and the envelope (37). Adding the terminal smoothing bias $\underline{\sigma}\sqrt{d}$ of eq. (7) gives the second assertion. $\square$

F.5 Initialization Error at the Top Noise Level

For the canonical EDM initialization $\nu_0 = \hat{\mu}_0 = \mathcal{N}(0, \sigma_0^2 \mathbf{I}_d)$ of Section 2, a Gaussian at the top noise level centered at the data mean, which is zero for the centered target of Section 4, the initialization error $e_0 = W_2(\nu_0, \mu_{\sigma_0})$ is controlled by the top noise scale: $e_0 \leq \sqrt{d} \tau_q$ for every $\sigma_0 > 0$, and under a light-tail assumption e_0 decays like σ_0^{-1} , with $2\sigma_0 e_0 \rightarrow \|\Sigma_{\text{data}}\|_F \leq d \tau_q^2$ as $\sigma_0 \rightarrow \infty$ (Proposition 44). In the bound it is further damped by the high-noise kernel $\Pi_{0, K_{\text{hi}}}$.

Proposition 44 (Initialization error at the top noise level). *Let $q \in \mathcal{P}_2(\mathbb{R}^d)$ be centered, let $X_0 \sim q$, so that $\mathbb{E}[X_0] = 0$, and set $\tau_q^2 = d^{-1}\mathbb{E}\|X_0\|^2$, as in Section 4, and $\mu_{\sigma_0} = \text{Law}(X_0 + \sigma_0 Z)$ for an independent $Z \sim \mathcal{N}(0, \mathbf{I}_d)$. Let $\nu_0 = \mathcal{N}(0, \sigma_0^2 \mathbf{I}_d)$. Then, for every $\sigma_0 > 0$,*

$$e_0 = W_2(\nu_0, \mu_{\sigma_0}) \leq \sqrt{d} \tau_q.$$

If moreover X_0 has light tails, in the sense that $\mathbb{E} \exp(\xi \|X_0\|^2) < \infty$ for some $\xi > 0$, then, with $\Sigma_{\text{data}} = \mathbb{E}[X_0 X_0^\top]$,

$$\lim_{\sigma_0 \rightarrow \infty} 2\sigma_0 e_0 = \|\Sigma_{\text{data}}\|_F \leq \text{tr } \Sigma_{\text{data}} = d \tau_q^2.$$

In particular, e_0 decays at the rate σ_0^{-1} : for every $\varepsilon > 0$ there exists $\sigma_\star < \infty$ such that

$$e_0 \leq \frac{\|\Sigma_{\text{data}}\|_F + \varepsilon}{2\sigma_0} \leq \frac{d \tau_q^2 + \varepsilon}{2\sigma_0} \quad \text{for all } \sigma_0 \geq \sigma_\star.$$

Proof. The first bound follows from the shared-noise coupling. Draw a single $Z \sim \mathcal{N}(0, \mathbf{I}_d)$ and couple $X_{\sigma_0} = X_0 + \sigma_0 Z \sim \mu_{\sigma_0}$ with $\sigma_0 Z \sim \nu_0$. Then

$$W_2(\nu_0, \mu_{\sigma_0})^2 \leq \mathbb{E} \|(X_0 + \sigma_0 Z) - \sigma_0 Z\|^2 = \mathbb{E} \|X_0\|^2 = d \tau_q^2,$$

so $e_0 \leq \sqrt{d} \tau_q$. For the sharp σ_0^{-1} asymptotic, we use (Beyler and Bach 2025, Proposition 7), which compares a scaled and Gaussian-smoothed random vector with a centered Gaussian. Apply it to $X = X_0$ with coefficients $(1, \sigma_0, \sigma_0)$ in the notation there. Then $X + \sigma_0 Z = X_{\sigma_0}$ has law μ_{σ_0} , and $\sigma_0 Z'$, with $Z' \sim \mathcal{N}(0, \mathbf{I}_d)$, has law ν_0 , so the distance compared there equals $W_2(\nu_0, \mu_{\sigma_0})$. The second bound of that proposition requires X to be centered, which holds since q is, and to satisfy the light-tail condition above, a hypothesis inherited from the smoothed-Wasserstein asymptotics (H.-B. Chen and Niles-Weed 2022, Theorem 2.1) on which its proof rests. With our coefficients it states that $W_2(\nu_0, \mu_{\sigma_0}) \sim \|\Sigma_{\text{data}}\|_F / (2\sigma_0)$ as $\sigma_0 \rightarrow \infty$, which is the limit $2\sigma_0 e_0 \rightarrow \|\Sigma_{\text{data}}\|_F$; (Beyler and Bach 2025, Corollary 8) states the same limit for data of bounded support. The inequality $\|\Sigma_{\text{data}}\|_F \leq \text{tr } \Sigma_{\text{data}} = d \tau_q^2$ holds because Σ_{data} is positive semidefinite, and the final display restates the limit with an threshold $\sigma_\star$. $\square$

F.6 From the Positive-Noise Iterate to the Deployed Sample

Theorem 11 controls $\hat{\mu}_K$, not the deployed sample. The deployed EDM sampler appends a final step to $\sigma = 0$. In the frozen- σ predictor eq. (5) that step has relaxation $a = 1$, so it is exactly one evaluation of the learned denoiser, $x \mapsto \hat{D}_{\sigma_K}(x)$, and the emitted law is $(\hat{D}_{\sigma_K})_\# \hat{\mu}_K$. Write $\text{mmse}_q(\sigma) = \mathbb{E} \|X_0 - D_\sigma(X_0 + \sigma Z)\|^2$.

Corollary 45 (Deployed-output closure). *Adopt the hypotheses of Theorem 11, and assume in addition that the terminal denoiser $\hat{D}_{\sigma_K}$ is globally L_K^D -Lipschitz. Then the law of the emitted sample satisfies*

$$W_2((\hat{D}_{\sigma_K})_\# \hat{\mu}_K, q) \leq \underbrace{L_K^D e_K}_{\text{propagated sampler error}} + \underbrace{\sqrt{d} C_{\text{res}} \sigma_K}_{\text{learning error}} + \underbrace{\sqrt{\text{mmse}_q(\sigma_K)}}_{\text{posterior uncertainty}},$$

with $e_K \leq e^{\Lambda_K} [\Pi_{0, K_{\text{hi}}} e_0 + \text{Disc}_K + \text{Learn}_K]$, the bound on e_K established in the proof of Theorem 11.

Proof. Insert $(\hat{D}_{\sigma_K})_\# \mu_K$ and $(D_{\sigma_K})_\# \mu_K$ between the emitted law and q . Pushing an optimal coupling of $(\hat{\mu}_K, \mu_K)$ through $\hat{D}_{\sigma_K}$ gives the first term by the Lipschitz hypothesis. Coupling the learned and exact denoisers at the same $Y_K = X_0 + \sigma_K Z \sim \mu_K$ gives, by eq. (21), the cost $\beta_K \mathcal{R}_K \leq \sqrt{d} C_{\text{res}} \sigma_K$, since $\sigma_K = \underline{\sigma}$ lies in the range of Assumption 5 and $\beta_K \leq \sigma_K$. Finally $(D_{\sigma_K}(Y_K), X_0)$ couples $(D_{\sigma_K})_\# \mu_K$ with q at cost $\text{mmse}_q(\sigma_K)$. $\square$

The Lipschitz hypothesis is a global condition on the terminal denoiser, of the same status as the high-noise EDM criterion in Proposition 7. The last two terms can also be read together. Write $\widehat{m}(\sigma) = \sigma^{-2} \mathbb{E} \left\| \widehat{D}_\sigma(X_0 + \sigma Z) - X_0 \right\|^2$, the denoising error in units of the per-coordinate noise variance: it equals d for the identity map, which removes no noise, and is small when the denoiser removes most of it. The shared-noise coupling $(\widehat{D}_{\sigma_K}(X_0 + \sigma_K Z), X_0)$ gives the direct diagnostic

$$W_2((\widehat{D}_{\sigma_K})_\# \widehat{\mu}_K, q) \leq L_K^D e_K + \sigma_K \sqrt{\widehat{m}(\sigma_K)}, \quad \sigma_K^2 \widehat{m}(\sigma_K) = \beta_K^2 \mathcal{R}_K^2 + \text{mmse}_q(\sigma_K),$$

where the identity is the orthogonality of the posterior-mean error. Since $\text{mmse}_q(\sigma_K) \leq \sigma_K^2 d$, the closure matches the terminal bias $\sigma_K \sqrt{d}$ of eq. (36) in the worst case, and improves on it only when the final denoiser removes most of the noise, $\widehat{m}(\sigma_K) \ll d$; its interest is to separate the propagated, learning and posterior errors acting on the emitted law.

G Numerical Experiments

This appendix supports Section 7. Table 1 lists what each experiment measures. Appendix G.1 defines the estimands and their numerical approximation, and Appendix G.2 gives the full figures and tables summarized in the main text. Appendices G.3 to G.5 report results that complement the three findings of the main text. Appendix G.6 collects the checks establishing that the reported numbers are numerically resolved, including the two that fail. Appendix G.7 describes the code and data.

Table 1: Quantities of the analysis and what the two experiments measure of them.

quantity of the analysis	one-dimensional mixture	CIFAR-10
final error e_K , factors $\gamma_{j,K}$, Λ_K (Definition 8)	measured by quadrature	not accessible
one-step recursion (10)	every term measured	not accessible
directional majorant Λ_K^{dir} eq. (30)	measured	displacement rate $\lambda^\parallel$ on coarse-fine segments eq. (41)
field-level majorant (33)	finite-domain proxy	worst-direction rate $\lambda^{\max}$ eq. (41); empirical EDM margin (40)
stability hypotheses	tested quantitatively	not certified

G.1 Experimental Definitions and Implementation

G.1.1 Shared Schedule and Implementation

Unless varied in the analytic controls, experiments use the nested EDM schedule

$$\sigma_j = \left(\bar{\sigma}^{1/7} + \frac{j}{K} \left(\underline{\sigma}^{1/7} - \bar{\sigma}^{1/7} \right) \right)^7, \quad j = 0, \dots, K, \quad (\bar{\sigma}, \underline{\sigma}) = (80, 0.002).$$

Consequently $G_K \subset G_{2K}$, so the coarse and fine trajectories in the synchronous experiment meet at exactly the same noise levels. Grid construction and the one-dimensional audit use float64. The CIFAR-10 network, sampler, and Jacobian actions use float32, matching inference; subtraction of recorded states and outputs, scalar products, and moment reductions use float64 to limit cancellation and summation error, which does not recover information already lost during float32 inference. The CIFAR experiments use the public class-conditional CIFAR-10 EMA checkpoint released with Karras et al. (2022). Random seeds and noisy probes are held fixed across noise levels and refinements.

G.1.2 One-Dimensional Audit

Target law and denoisers. The target is the four-component Gaussian mixture with weights $(0.15, 0.35, 0.35, 0.15)$, centres m_r proportional to $(-3, -1, 1, 3)$, and common component standard deviation $\varsigma = 0.04$. The centres are rescaled so that the mixture is centered with $\tau_q = 0.5$, so the EDM coefficients eq. (17) use the exact τ_q . The main comparison uses the exact posterior-mean denoiser and three learned denoisers with seeds 0, 1, and 2. Each learned denoiser is an EDM-preconditioned three-hidden-layer MLP of width 128 with SiLU activations. It is trained for 20,000 Adam steps with batches of 4096, initial learning rate 10^{-3} , cosine decay, gradient clipping at one, and an exponential moving average of rate 0.999. Training noise follows the EDM log-normal law with $(P_{\text{mean}}, P_{\text{std}}) = (-1.2, 1.2)$. Two analytic arms complete the set and require no training. The misspecified arm is the posterior mean of a deliberately wrong mixture, with weights $(0.2, 0.3, 0.3, 0.2)$, centres $1.02 m_r$ and component standard deviation 0.7ς ; it provides a discrepancy dominated by learning error rather than by discretization. A perturbed oracle adds a smooth, bounded perturbation of controlled amplitude to the exact normalized residual,

$$\widehat{D}_\sigma^\varepsilon(x) = D_\sigma(x) + \varepsilon \beta(\sigma) \tanh(c_{\text{in}}(\sigma)x), \quad \varepsilon \in \{0.003, 0.01, 0.03, 0.1\}, \quad (94)$$

so that $\mathcal{R}_j \leq \varepsilon$ at every level and the perturbation of the learned velocity has slope at most ε/τ_q . Unlike the oracle discretization error, the learning contribution of eq. (94) does not decrease under refinement; Appendix G.3 reports the effect of the four amplitudes on Λ_K .

Quantile representation. For $K \in \{17, 34, 68, 136, 272, 544, 1088\}$, each target and sampler law is represented at $M = 65,536$ midpoint quantiles. Target quantiles are obtained from the mixture CDF; Gaussian or exact-target initialization quantiles are propagated through the predictor and sorted after every step. In one dimension this is the monotone optimal coupling.

Directional quantities. At step j , let (U, V) denote the monotone coupling of the target and sampler laws, set $e_{j,K}^2 = \mathbb{E}|U - V|^2$, and write $\mathbf{v} = \widehat{v}_{\sigma_j}(U) - \widehat{v}_{\sigma_j}(V)$ for the velocity increment, as in eq. (27). The stepwise quantities are

$$\mathcal{E}_{j,K}^{\text{OT}} = -\frac{\mathbb{E}[(U - V)\mathbf{v}]}{e_{j,K}^2}, \quad Q_{j,K}^{\text{OT}} = \frac{\mathbb{E}|\mathbf{v}|^2}{e_{j,K}^2}, \quad \gamma_{j,K} = \frac{W_2((\widehat{\Phi}_j)_\# \mu_j, (\widehat{\Phi}_j)_\# \widehat{\mu}_j)}{e_{j,K}}.$$

Up to quantile quadrature, eq. (29) gives

$$\log \max\{1, \gamma_{j,K}\} \leq \ell_j(\mathcal{E}_{j,K}^{\text{OT}})_+ + \frac{\ell_j^2}{2} Q_{j,K}^{\text{OT}}. \quad (95)$$

We also record the root-mean-square amplification of the fixed input coupling,

$$A_{j,K}^{\text{OT}} = \frac{\|\widehat{\Phi}_j(U) - \widehat{\Phi}_j(V)\|_{\mathbb{L}_2}}{e_{j,K}} \geq \gamma_{j,K}. \quad (96)$$

By the predictor identity (74), $(A_{j,K}^{\text{OT}})^2 = 1 + 2\ell_j \mathcal{E}_{j,K}^{\text{OT}} + \ell_j^2 Q_{j,K}^{\text{OT}}$, so the slack in eq. (95) splits into the effect of reoptimizing the output coupling, from $\gamma_{j,K}$ to $A_{j,K}^{\text{OT}}$, and the algebraic relaxation that follows. $A_{j,K}^{\text{OT}}$ equals $\gamma_{j,K}$ for the oracle and misspecified posterior mean because their predictor maps are increasing, and in the recorded runs it coincides with $\gamma_{j,K}$ on every arm and step.

Finite-domain quantities. For the mixture centres m_r and component standard deviation ς , the spatial search uses

$$I_\sigma(R) = \left[\min_r m_r - R\sqrt{\varsigma^2 + \sigma^2}, \max_r m_r + R\sqrt{\varsigma^2 + \sigma^2} \right].$$

This interval depends on the target law and σ , but not on the sampler law or on K . On N_x equispaced points of this interval, augmented by bounded scalar refinement around the four largest grid candidates, we compute

$$\mathcal{L}_{j,K}^{\text{os,pts}} = \max_{x \in \mathcal{X}_{j,K}^{\text{pts}}} [-\hat{v}'_{\sigma_j}(x)], \quad L_{v,j,K}^{\text{pts}} = \max_{x \in \mathcal{X}_{j,K}^{\text{pts}}} |\hat{v}'_{\sigma_j}(x)|,$$

where $\mathcal{X}_{j,K}^{\text{pts}}$ is the resulting finite set at $\sigma = \sigma_j$. The same search gives the finite-domain EDM margin $b^{\text{pts}}(\sigma) = 1 - \alpha(\sigma) - \max_x |\hat{D}'_\sigma(x) - \alpha(\sigma)|$: since $\hat{D}'_\sigma(x) - \alpha(\sigma) = \beta(\sigma)c_{\text{in}}(\sigma)\hat{F}'_\sigma(c_{\text{in}}(\sigma)x)$ by eq. (18), it is the margin (22) with the Lipschitz constant of the normalized branch replaced by the maximum of its slope over the finite point set. The main search uses $(R, N_x) = (12, 4097)$.

Noise threshold. For each denoiser, a candidate threshold is computed before any accumulated quantity: on 400 geometrically spaced noise levels, it is the bottom of the top contiguous block, starting at $\bar{\sigma}$, on which $b^{\text{pts}}(\sigma) \geq b_{\text{hi}} = 0.5$. There are four distinct candidates: 0.876 for the six analytic denoisers, and 1.53, 1.57 and 1.84 for the three trained networks. The largest, $\sigma_{\text{hi}} = 1.84$, is used as a common threshold for every denoiser, refinement and initialization, and determines the split index K_{hi} of each grid through eq. (25). This is an empirical split, not a global certificate. The largest candidate gives the largest low-noise block, hence the largest sums of nonnegative stepwise contributions among the four candidate splits; every accumulated quantity is also re-summed at each candidate (Table 8).

Accumulated quantities. Summing over the low-noise block defines the exact cumulative log-amplification Λ_K of Definition 8, its directional bound

$$\Lambda_K^{\text{dir}} := \sum_{j=K_{\text{hi}}}^{K-1} \left[\ell_j(\mathcal{E}_{j,K}^{\text{OT}})_+ + \frac{\ell_j^2}{2} Q_{j,K}^{\text{OT}} \right],$$

and the finite-domain field proxy

$$\Lambda_K^{\text{field,pts}} := \sum_{j=K_{\text{hi}}}^{K-1} \left[\ell_j(\mathcal{L}_{j,K}^{\text{os,pts}})_+ + \frac{\ell_j^2}{2} (L_{v,j,K}^{\text{pts}})^2 \right]. \quad (97)$$

Because both the domain and the evaluations are finite, $\Lambda_K^{\text{field,pts}}$ is a proxy for the field-level bound, not a certified upper bound on $\mathbb{R}$; in particular, the empirical ordering with Λ_K^{dir} is an outcome to check rather than an identity imposed by notation. The geometry panel of Figure 8 uses G_{272} , a representative level near $\sigma = 0.2$, and 1025 spatial points. The error weight w_j is accumulated segment by segment over the M quantile pairs, and its Riemann integral against λ_j reproduces the logged $\mathcal{E}_j^{\text{OT}}$ at that level to within 10^{-3} .

End-to-end recursion. The same quantiles make every term of eq. (10) observable. Let $u_m = (m - 1/2)/M$, let $T_{j,m}$ be the u_m -quantile of μ_j , and let $T_{j+1,m}$ be the corresponding quantile at the next noise level. In one dimension the exact flow preserves quantile rank, so $\Psi_j(T_{j,m}) = T_{j+1,m}$.

In addition to $e_{j,K}$ and $\gamma_{j,K}$, we compute the measured local bias, the quantile quadrature of $\delta_{j,K}$ in eq. (8), and the measured learning term

$$\begin{aligned}\tilde{\delta}_{j,K}^2 &= \frac{1}{M} \sum_{m=1}^M |T_{j+1,m} - \Phi_j(T_{j,m})|^2, \\ \tilde{r}_{j,K}^2 &= \frac{a_j^2}{M} \sum_{m=1}^M \left| \hat{D}_{\sigma_j}(T_{j,m}) - D_{\sigma_j}(T_{j,m}) \right|^2.\end{aligned}$$

Thus, up to the common quantile quadrature,

$$e_{j+1,K} \leq \gamma_{j,K} e_{j,K} + \tilde{\delta}_{j,K} + \tilde{r}_{j,K}. \quad (98)$$

We record the one-step slack and unroll the measured raw factors, without truncating contraction, into

$$\begin{aligned}C_K^{\text{init}} &= e_{0,K} \prod_{k=0}^{K-1} \gamma_{k,K}, & C_K^{\text{disc}} &= \sum_{j=0}^{K-1} \tilde{\delta}_{j,K} \prod_{k=j+1}^{K-1} \gamma_{k,K}, \\ C_K^{\text{learn}} &= \sum_{j=0}^{K-1} \tilde{r}_{j,K} \prod_{k=j+1}^{K-1} \gamma_{k,K}, & e_{K,K} &\leq C_K^{\text{init}} + C_K^{\text{disc}} + C_K^{\text{learn}}.\end{aligned} \quad (99)$$

In the exact-initialization control, C_K^{disc} is the recursion bound (39) of the main text. These are contributions to an a posteriori upper bound, not a decomposition of the observed error or the closed-form bound of Theorem 11. Stability is not treated as a fourth additive error source: its effect is precisely the family of downstream products of $\gamma_{k,K}$ weighting the three terms. The ratio of their sum to $e_{K,K}$ is reported only when $e_{K,K}$ is numerically resolved (Table 8); no floor is applied to produce a finite ratio otherwise.

The canonical run starts the sampler from the canonical EDM initialization $\mathcal{N}(0, \bar{\sigma}^2)$ of Proposition 44, which enters Theorem 11 through e_0 . A separate oracle control starts instead from the exact law $\mu_{\bar{\sigma}}$. In that control $C_K^{\text{init}} = C_K^{\text{learn}} = 0$, so both the observed final error and C_K^{disc} isolate numerical discretization. This control records its own $\gamma_{j,K}$ and Λ_K ; the amplification of the Gaussian-initialized run is not substituted in the error-amplification comparison. We also record $\sum_j \tilde{\delta}_{j,K}$ and the propagated universal bias bound $\sum_j \Delta_j \prod_{k=j+1}^{K-1} \gamma_{k,K}$, using the same raw propagation factors. For each dyadic pair $(K/2, K)$ we report the local orders eq. (38) of the exact-initialization final error, of C_K^{disc} and of $\sum_j \tilde{\delta}_{j,K}$, and compare them with the amplification-based order $1 - (\Lambda_K - \Lambda_{K/2})/\log 2$, the order that $K^{-1}e^{\Lambda_K}$ would have on the same pair (Figure 7c). It is computed from the measured Λ_K , so the comparison is an a posteriori consistency check, not a prediction; equivalently, it tests whether $c_K = Ke_K e^{-\Lambda_K}$ is stable on the tested range (Table 2). We do not assign a convergence order to the total learned-sampler error once initialization or learning sets a visible floor.

G.1.3 High-Noise CIFAR-10 Diagnostics

Neither the optimal coupling between the exact and sampler laws nor the factors $\gamma_{j,K}$ are computed on CIFAR-10. The coefficients $\alpha, \beta, c_{\text{in}}$ of eq. (17) are those of the checkpoint, with τ_q replaced by the hyperparameter $\sigma_{\text{data}} = 0.5$: CIFAR-10 is neither centered nor of root-mean-square exactly 0.5 per coordinate, so this value is not τ_q , and the margin and residual below are those of the deployed parametrization. The high-noise calculation probes a local preconditioning mechanism on held-out noisy data. The probe bank consists of $N = 128$ held-out CIFAR-10 test images with independent

Gaussian noises, reused at every level. For $Y_{\sigma,i} = X_i + \sigma Z_i$, the supervised residual per coordinate is

$$r_{\text{reg}}(\sigma) = \frac{1}{\beta(\sigma)} \left(\frac{1}{dN} \sum_{i=1}^N \|\widehat{D}_\sigma(Y_{\sigma,i}) - X_i\|^2 \right)^{1/2}.$$

It is evaluated at all 273 levels of G_{272} . The population risk includes the excess risk and irreducible posterior uncertainty (eq. (20)); it is an upper proxy for the learning residual, not a measurement of that residual alone.

At the same probes, eight power iterations from each of two random starts estimate the local stretch $S_{F,i}(\sigma) = \left\| \nabla \widehat{F}_\sigma(c_{\text{in}}(\sigma) Y_{\sigma,i}) \right\|_{\text{op}}$ of the raw EDM network branch in normalized input; the larger of the two estimates is denoted $\widetilde{S}_{F,i}(\sigma)$. With the deployed preconditioning coefficients and the empirical p -quantile $\widetilde{S}_F^{[p]}(\sigma) = \text{Quant}_p\{\widetilde{S}_{F,i}(\sigma)\}_i$ over the probes, the empirical margin (40) is

$$b_{\text{probe}}^{[p]}(\sigma) = 1 - \alpha(\sigma) - \beta(\sigma) c_{\text{in}}(\sigma) \widetilde{S}_F^{[p]}(\sigma). \quad (100)$$

It is evaluated for $p = 0.5$ and $p = 0.9$ at the 90 levels of G_{136} satisfying $\sigma \geq 0.5$. Since the map from stretch to margin is decreasing and affine, $b_{\text{probe}}^{[0.9]}$ is the 10th percentile of the per-probe margins $1 - \alpha - \beta c_{\text{in}} \widetilde{S}_{F,i}$. Compared with the EDM margin (22), it replaces the Lipschitz constant $L_{F,j}$, a supremum over all inputs, by a percentile over 128 probes, and each probe stretch by a power-iteration estimate, which cannot exceed it. Both substitutions can only raise the margin, so the empirical margin is an optimistic estimate of b_j , not a certificate; its comparison with 6/7 is discussed in Section 7.3.

G.1.4 Low-Noise Synchronous-Segment Diagnostic

For each $K \in \{17, 34, 68, 136, 272\}$, each of the ten classes, and each of 128 fixed latent variables per class, a predictor trajectory on G_K is paired with the predictor trajectory on G_{2K} generated from the same latent; the ensemble thus has 1280 trajectories per grid. At a level σ_j of $G_K \subset G_{2K}$ let

$$x_i = \widehat{X}_{j,i}^{(K)}, \quad y_i = \widehat{X}_{2j,i}^{(2K)}, \quad \zeta_i = y_i - x_i, \quad \mathbf{v}_i = \widehat{\Phi}_{\sigma_j}(y_i) - \widehat{\Phi}_{\sigma_j}(x_i).$$

Pooling raw second moments over the ensemble gives

$$\mathcal{E}_{j,K}^{\text{sync}} = -\frac{\sum_i \langle \zeta_i, \mathbf{v}_i \rangle}{\sum_i \|\zeta_i\|^2}, \quad Q_{j,K}^{\text{sync}} = \frac{\sum_i \|\mathbf{v}_i\|^2}{\sum_i \|\zeta_i\|^2},$$

and the predictor identity (74) gives, for the root-mean-square amplification $A_{j,K}^{\text{sync}} = (\sum_i \|\widehat{\Phi}_j(y_i) - \widehat{\Phi}_j(x_i)\|^2 / \sum_i \|\zeta_i\|^2)^{1/2}$ of the predictor along this coupling,

$$(A_{j,K}^{\text{sync}})^2 = 1 + 2\ell_j \mathcal{E}_{j,K}^{\text{sync}} + \ell_j^2 Q_{j,K}^{\text{sync}}. \quad (101)$$

Accumulated synchronous quantities are summed over the levels $\sigma_j \leq 2$ of G_K , the window also used in the calibration of Appendix G.4.

Segment chain. The rates below are the rate (41) of the main text, written per trajectory and per level. The segment calculation uses only $K = 68, 272$. On each grid the starting levels are those nearest in log noise to 0.004, 0.01, 0.03, 0.1, 0.3, 1, 3, 8, with duplicate indices removed and actual levels reported. The last two levels examine the transition region; this set is not the theoretical low-noise block. The first eight fixed latent variables in each class are used, hence 80 segments per

selected level; $\mathcal{E}_{j,K}^{\text{sync}}$ is recomputed on exactly this subset for the chain below. For a nonzero segment define $u_i = \zeta_i / \|\zeta_i\|$ and

$$\begin{aligned}\lambda_{i,j}^{\parallel}(t) &= -u_i^{\top} \text{Sym} \nabla \widehat{v}_{\sigma_j}(x_i + t\zeta_i) u_i, \\ \lambda_{i,j}^{\max}(t) &= \lambda_{\max}(-\text{Sym} \nabla \widehat{v}_{\sigma_j}(x_i + t\zeta_i)).\end{aligned}$$

With energy weights $w_i = \|\zeta_i\|^2 / \sum_k \|\zeta_k\|^2$, the fundamental theorem of calculus along each segment gives the equality below; the first inequality bounds an average by a supremum, and the second a Rayleigh quotient by the largest eigenvalue. For the continuous quantities the chain

$$\mathcal{E}_{j,K}^{\text{sync}} = \sum_i w_i \int_0^1 \lambda_{i,j}^{\parallel}(t) dt \leq \sum_i w_i \sup_{t \in [0,1]} \lambda_{i,j}^{\parallel}(t) \leq \sum_i w_i \sup_{t \in [0,1]} \lambda_{i,j}^{\max}(t), \quad (102)$$

is therefore exact; the synchronous rate and the two segment quantities use the same states and the same energy weights.

In dimension $d = 3072$ a Rayleigh quotient far below the largest eigenvalue is the default behavior of any generic direction, so the gap between $\lambda^{\parallel}$ and $\lambda^{\max}$ is uninformative on its own. For each segment a unit direction u_i^{rand} is therefore drawn once, uniformly on the sphere with a fixed seed, and

$$\lambda_{i,j}^{\text{rand}}(t) = -(u_i^{\text{rand}})^{\top} \text{Sym} \nabla \widehat{v}_{\sigma_j}(x_i + t\zeta_i) u_i^{\text{rand}}$$

is evaluated at the same nodes, with the same energy weights. A synchronous direction indistinguishable from a random one carries no directional information, while one that sits between the baseline and the maximum is partially aligned with the expansive subspace.

Discrete segment estimators. The continuous suprema in eq. (102) are approximated on the nine nodes $T_9 = \{0, 1/8, \dots, 1\}$; the nested sets $T_5 = \{0, 1/4, 1/2, 3/4, 1\}$ and $T_3 = \{0, 1/2, 1\}$ diagnose resolution in t , and the trapezoidal rule on T_9 approximates the integral. Jacobian–vector products evaluate $\lambda_{i,j}^{\parallel}$ and $\lambda_{i,j}^{\text{rand}}$; 32 Lanczos steps estimate $\lambda_{i,j}^{\max}$ by the largest Ritz value. Two convergence diagnostics accompany it: the half-iteration drift, the change in the largest Ritz value between 16 and 32 steps, and the Ritz residual, the norm of the residual of the corresponding Ritz pair. Only the equality in eq. (102) is checked against an independent computation, the trapezoidal integral against $\mathcal{E}_{j,K}^{\text{sync}}$. The two inequalities are exact for the continuous quantities, but their computed versions are not guaranteed: both the finite-node maximum and an unconverged largest Ritz value can underestimate the continuous supremum, so the computed inequalities are empirical consistency checks, not certified versions of eq. (102). The segment calculation requires at most $2 \times 8 \times 80 \times 9 \times 32 = 368,640$ Lanczos operator applications, about one sixteenth of evaluating every low-noise level on all five grids, plus two Jacobian–vector products per node for the directional and random rates.

Sampling and influence statistics. The primary estimator is untrimmed, and a dominant trajectory is retained: its removal is a sensitivity check only. We report the effective sample size

$$\text{ESS} = \frac{1}{\sum_i w_i^2} \quad (103)$$

together with $\max_i w_i$ and the largest leave-one-out change. Pointwise sensitivity intervals use the 2.5th and 97.5th percentiles of 1000 bootstrap resamples within classes, retaining eight segments per class, recomputing energy weights, and using the same resample for all terms of a comparison. These intervals describe sampling sensitivity, not Jacobian approximation error. The fixed subset may miss influential trajectories in the full ensemble, so its geometry is not presented as representative of all rare events.

Only the full ensemble is accumulated over the whole window. Its linear term $\sum_j \ell_j(\mathcal{E}_{j,K}^{\text{sync}})_+$ is plotted in Figure 9d; its quadratic term $\frac{1}{2} \sum_j \ell_j^2 Q_{j,K}^{\text{sync}}$ is not plotted and stays below 0.09 on every grid (0.087 at $K = 17$, 0.038 at $K = 272$). Each accumulated rate is recomputed after removing each of the 1280 trajectories in turn, always removing the same latent trajectory at every noise level and renormalizing within the affected class. The minimum and maximum measure single-trajectory influence, not statistical confidence; a small range does not rule out the joint influence of several rare events. No cumulative field curve is inferred from the eight sparse segment levels. As a descriptive complement we also accumulate, over the same window, the median rate

$$\sum_{j: \sigma_j \leq 2} \ell_j \left(\text{median}_i \left(-\frac{\langle \zeta_i, \mathbf{v}_i \rangle}{\|\zeta_i\|^2} \right) \right)_+,$$

where at each level the median runs over the trajectories with $\zeta_i \neq 0$. The median is taken level by level, so it does not follow a single trajectory, and no trajectory is selected by outcome. This statistic is not the energy-weighted rate of eq. (102) and never replaces it in an inequality.

Zero displacements carry zero energy and have no defined individual rate. Non-finite states, outputs, or positive-energy rates invalidate the corresponding aggregate rather than being dropped or replaced by zero, and displacement size relative to states and outputs is recorded to flag subtraction near float32 resolution. A reproducible large discrepancy is part of the measured phenomenon; any unresolved discrepancy is reported as missing or qualified evidence, never as a favorable stability estimate.

G.2 Full Figures and Tables

Table 2: Oracle denoiser with exact initialization, under refinement. Orders are the local orders eq. (38) on the pair $(K/2, K)$; the amplification-based order is $1 - (\Lambda_K - \Lambda_{K/2})/\log 2$, and $c_K = K e_K e^{-\Lambda_K}$. Bound/error divides the recursion bound (39) by e_K , with the measured local biases $\tilde{\delta}_{j,K}$ or with their universal bounds Δ_j ($B_{1,1} = 16$), propagated by the same measured factors.

K	final error		summed biases		amplification			bound / error	
	e_K	order	$\sum_j \tilde{\delta}_{j,K}$	order	Λ_K	ampl. order	c_K	measured	universal
17	0.113	–	0.166	–	0.325	–	1.388	1.35	134
34	0.0747	0.597	0.0934	0.826	0.548	0.679	1.469	1.40	127
68	0.0497	0.590	0.0496	0.913	0.795	0.643	1.524	1.40	122
136	0.0332	0.583	0.0255	0.959	1.065	0.612	1.555	1.39	119
272	0.0222	0.581	0.0129	0.981	1.344	0.596	1.572	1.38	118
544	0.0148	0.581	0.00650	0.991	1.630	0.589	1.580	1.37	117
1088	0.00988	0.585	0.00326	0.996	1.915	0.588	1.583	1.36	116

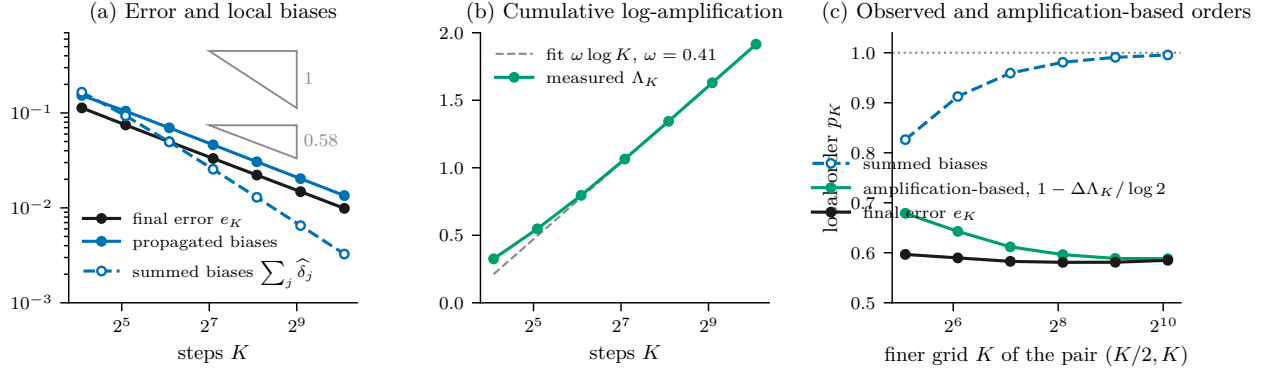


Figure 7: Oracle denoiser on the four-component mixture, exact initialization, $M = 65,536$ quantiles. **(a)** Final error e_K , the recursion bound (39) built from the measured local biases and factors, and the unweighted sum of the measured biases; triangles mark slopes 1 and 0.58. **(b)** Measured Λ_K , with a logarithmic fit on $K \geq 136$. **(c)** Local orders eq. (38) on each pair $(K/2, K)$, against the amplification-based order $1 - (\Lambda_K - \Lambda_{K/2}) / \log 2$ computed from (b). The summed biases converge at first order; the final error does not, and the growth of Λ_K accounts for the gap.

Table 3: Measured Λ_K and its two majorants, as ratios to Λ_K , on the coarsest and finest grids. Directional: Λ_K^{dir} eq. (30); field: the finite-domain proxy for eq. (33). Canonical Gaussian initialization, common noise threshold.

denoiser	$K = 17$			$K = 1088$		
	Λ_K	directional	field	Λ_K	directional	field
oracle	0.325	1.976	143	1.921	1.022	11.1
trained, seed 0	0.324	1.970	27.5	1.328	1.020	5.1
trained, seed 1	0.334	1.934	28.0	1.875	1.017	3.8
trained, seed 2	0.320	1.990	29.6	1.879	1.018	3.8
misspecified mean	0.205	3.938	944	0.673	1.012	75.6

For the oracle, D'_σ is a posterior variance divided by σ^2 , hence nonnegative, so the predictor preserves order and the optimal coupling remains optimal after each step: the gap between Λ_K and Λ_K^{dir} comes only from the relaxation $\log(1+x) \leq x$ and the positive part in eq. (29). On the coarsest grid most of the excess of the field proxy is the quadratic term $\frac{1}{2}\ell_j^2 \text{Lip}(\hat{v}_{\sigma_j})^2$, which vanishes under refinement; what remains on the finest grid is first order and geometric. In one dimension both rates read off the local expansion rate $\lambda_j(x) = (D'_{\sigma_j}(x) - 1)/\sigma_j$ of the oracle velocity: $\mathcal{L}_j^{\text{os}}$ is its supremum over x , and the directional rate is its average $\mathcal{E}_j^{\text{OT}} = \int \lambda_j w_j$ against the error weight

$$w_j(x) = \frac{\mathbb{E}[|U_j - V_j| \mathbf{1}\{x \text{ between } V_j \text{ and } U_j\}]}{e_j^2},$$

a probability density that spreads each coupled pair along its segment (Figure 8a). Λ_K itself depends on the denoiser (Figure 8b): the trained networks stay close to the oracle, except seed 0, whose Λ_K is lower (1.33 against 1.88 for the other two seeds at $K = 1088$, Table 3), whereas the misspecified posterior mean, whose error is dominated by learning, settles near 0.67.

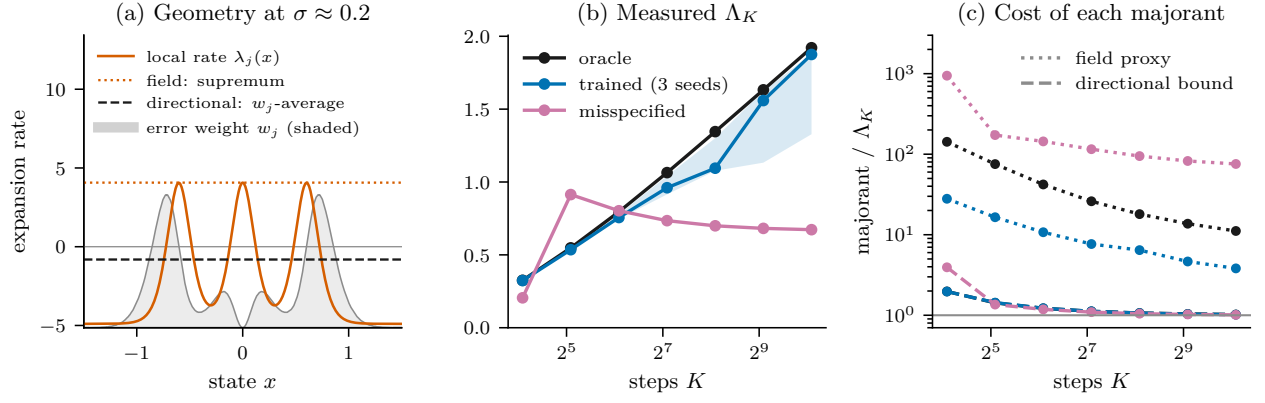


Figure 8: Where expansion sits, and what each stability control costs. Canonical Gaussian initialization. **(a)** Oracle on G_{272} at one low noise level: local expansion rate $\lambda_j(x)$, the error weight w_j (shaded, arbitrary scale), and the two rates each bound pays at this step, the supremum of λ_j (field) and its w_j -average $\mathcal{E}_j^{\text{OT}}$ (directional). The error sits where the predictor contracts. **(b)** Measured Λ_K by denoiser; trained networks as median and range over three seeds. **(c)** Directional bound (dashed) and finite-domain field proxy (dotted), divided by Λ_K , with the colours of (b).

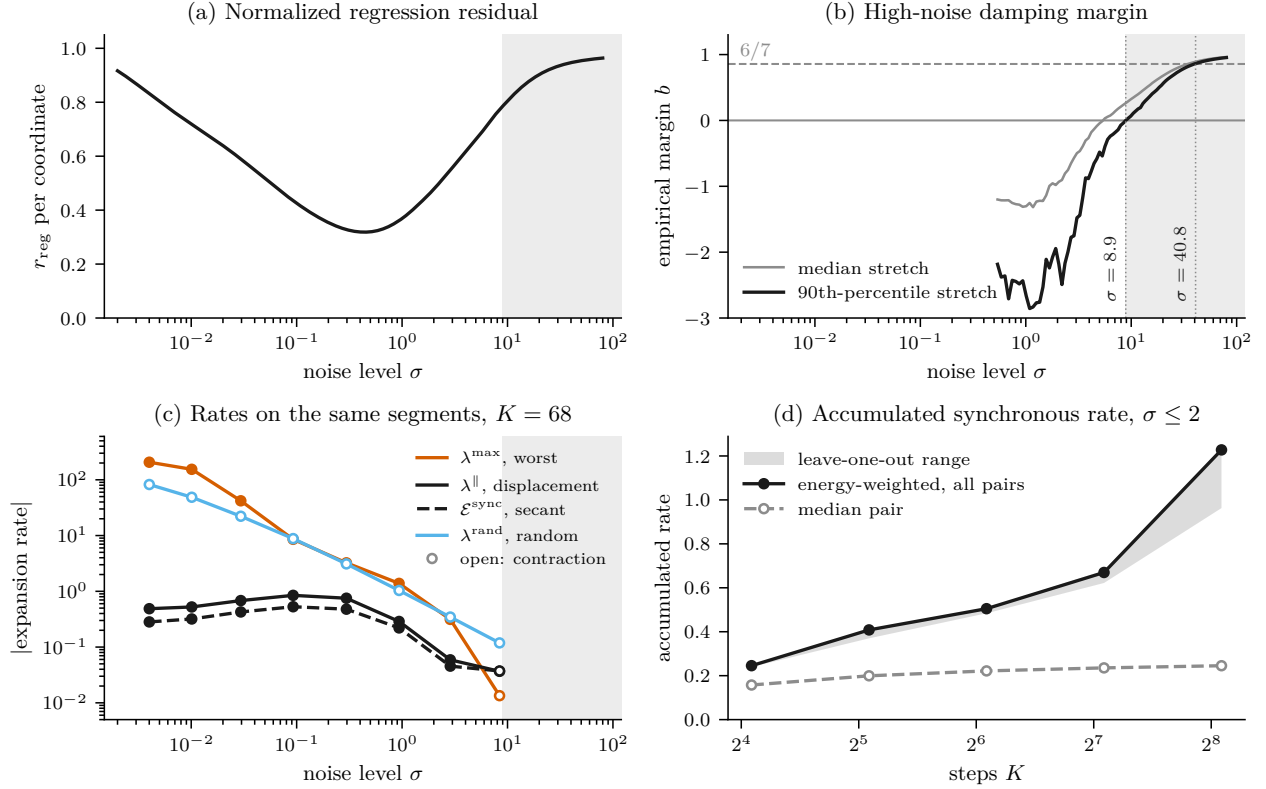


Figure 9: Stability diagnostics for the pretrained CIFAR-10 EDM model. Shading marks the noise levels at which the 90th-percentile empirical margin of (b) is positive. (a) Normalized denoising loss r_{reg} per coordinate. (b) Empirical margin (40) from the median and the 90th percentile of the local stretch; dotted lines mark where the latter crosses 0 and the supercritical threshold $6/7$. (c) Energy-weighted rates on the coarse-fine segments of G_{68} , at the same nodes: worst direction, displacement, secant, and random direction eq. (41). Absolute values; open markers are negative rates. (d) Accumulated synchronous rate over $\sigma \leq 2$, energy-weighted over all 1280 trajectories with its leave-one-trajectory-out range, and the same accumulation of the level-wise median of the per-trajectory rates.

G.3 Supplementary Results: One-Dimensional Audit

Remark 46 (Finite-range growth and a uniform oracle bound). *The oracle mixture is not a counterexample to a uniform bound on Λ_K . Let $\varsigma = 0.04$ be its common component standard deviation, and m_r the centre of the component from which X_0 is drawn, a discrete random variable. Differentiating its posterior mean gives*

$$v'_\sigma(x) = \frac{\sigma}{\varsigma^2 + \sigma^2} - \frac{\sigma}{(\varsigma^2 + \sigma^2)^2} \text{Var}(m_r | X_\sigma = x).$$

The centres are bounded, so their conditional variance is bounded uniformly in x . Hence $L = \sup_{\sigma \in [\underline{\sigma}, \bar{\sigma}], x} |v'_\sigma(x)| < \infty$, and

$$\log \max(1, \gamma_{j,K}) \leq \log(1 + \ell_j L) \leq \ell_j L, \quad \Lambda_K \leq L(\bar{\sigma} - \underline{\sigma}).$$

This analytic bound holds for every refinement and initialization, but its constant is quantitatively uninformative. The logarithmic growth and the sublinear order of Section 7.1 are therefore preasymptotic: first order must eventually return, but not within the tested range, which already far exceeds the step counts used in practice (Karras et al. 2022). The growth motivates the logarithmic envelope (37) without proving it.

Figure 10 shows the measured recursion from the canonical Gaussian initialization. With the oracle, the Gaussian start reproduces the exact-initialization curve of Figure 7a: its propagated initialization term stays below 6.2×10^{-5} , against 0.0136 for discretization at $K = 1088$, so the run is discretization-dominated as well. With the learned denoisers, the propagated learning contribution overtakes discretization from $K = 272$ on, for every seed, and the observed error levels off near 0.018 on the finest grids for two of the three seeds; no order is assigned to these curves.

Refinement regime of Λ_K . For every arm we record, in addition to the three accumulated curves, the increment $\Lambda_K - \Lambda_{K/2}$, its distribution over fixed noise decades, and the signed directional rate $\mathcal{E}_{j,K}^{\text{OT}}$ at the levels of each G_K nearest to $\sigma \in \{0.04, 0.065, 0.09, 0.15\}$. The question was whether Λ_K stabilizes only for arms whose low-noise discrepancy has a learning-error floor. The answer is partial.

- For the oracle, Λ_K grows by 0.22–0.29 per doubling, and at $K = 1088$, 92 percent of it comes from $\sigma \in [0.01, 0.1]$.
- The two arms with a large floor, the misspecified mean and the perturbed oracle with $\varepsilon = 0.1$, converge: their Λ_K and their fixed-noise rates settle at every tested level.
- The trained networks remain close to the oracle in Λ_K (Table 3), but for all four denoisers the fixed-noise rates depend on the level chosen. At $\sigma \approx 0.065$ the oracle rate keeps growing (3.3 to 34) and the trained ones slow down (to about 21). At $\sigma \approx 0.09$ the oracle rate levels off near 11 while two of the trained ones still grow (to 17–18). The nearest grid level also differs from the target by up to 10 percent in σ for $K \geq 34$, and more on G_{17} .
- The perturbed oracles with $\varepsilon \leq 0.03$ show isolated collapses of Λ_K (for instance 0.12 at $K = 272$ for $\varepsilon = 0.01$). At these step counts the local bias and the perturbation nearly cancel, so the displacement whose amplification $\gamma_{j,K}$ measures nearly vanishes. These are not trends.

We therefore do not claim that a model-error floor regularizes Λ_K in general.

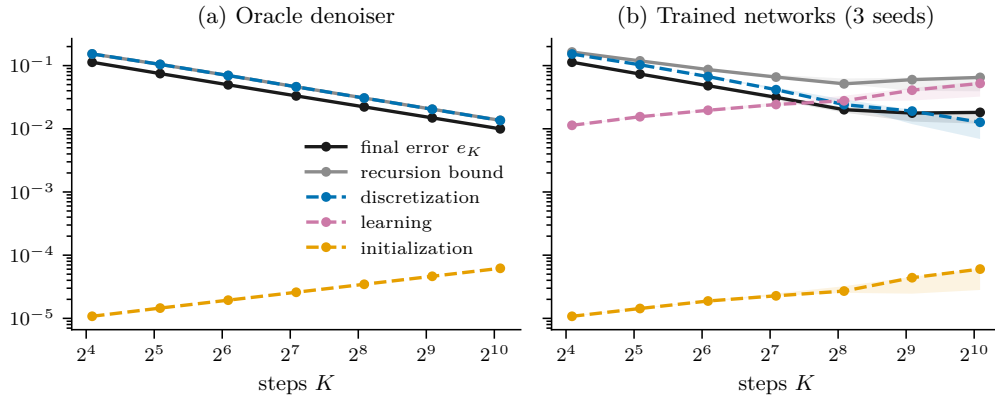


Figure 10: Terms of the measured recursion (99) from the canonical Gaussian initialization: final error, recursion bound, and its propagated discretization, learning and initialization contributions. (a) Oracle denoiser. (b) Trained networks, median and range over three seeds. The contributions add up to an upper bound, not to the observed error.

G.4 Analytic Controls

These controls reuse the mixture and analytic denoisers above, without network training or spatial maximization. They use 4096 midpoint quantiles; the finest settings are repeated with 8192, and

differences comparable to the quadrature discrepancy are left uninterpreted. Tables 4 to 6 report the outcomes.

Clock. For the oracle with exact initialization, we compare $\rho_{\text{EDM}} = 2, 3, 7$ at $K = 68, 136, 272, 544$, with the same endpoints, recording final error, measured local biases, their universal bounds, and the relative mesh $\theta_K = h_K/\underline{\eta}$ of eq. (12). Equal K means equal numbers of denoiser evaluations, but not equal relative meshes: with $\underline{\sigma} = 0.002$, the clock $\rho_{\text{EDM}} = 2$ has $\theta_K > 1$ for $K \leq 136$ and reaches $\theta_K < 1/2$ only at $K = 544$, whereas $\rho_{\text{EDM}} = 7$ has $\theta_K < 0.06$ already at $K = 68$. The clock $\rho_{\text{EDM}} = 1$ is excluded because θ_K exceeds one on every step count considered, so none of the estimates of Section 6 applies to it.

Outcome. The universal bias bound of Lemma 3 exceeds the measured biases by a factor of about 280 to 1190. It also reverses the ranking of the clocks: at $K = 544$ the measured biases and the final error order the clocks $\rho_{\text{EDM}} = 7 < 3 < 2$, while the universal bound orders them $2 < 3 < 7$. The clock $\rho_{\text{EDM}} = 2$ balances the leading universal bound, but it need not minimize observed biases or final error, since the mixture concentrates its local biases in a narrow noise window. The bound controls rates, not the choice of schedule.

Table 4: Clock control at $K = 544$, oracle with exact initialization; every grid satisfies $\theta_K < 1/2$. Ratio: universal bound over measured biases.

ρ_{EDM}	final error	measured biases	universal bound	ratio
2	0.0229	0.0164	4.64	282
3	0.0173	0.0095	5.13	539
7	0.0139	0.0065	7.48	1150

Starting noise. We use $\rho_{\text{EDM}} = 7$ and fix h to the clock step of the reference grid with $\bar{\sigma} = 80$ and $K = 272$. Integer step counts are chosen whose upper endpoints are nearest 20, 80, and 320 in the clock, and the actual endpoint $(\underline{\sigma}^{1/7} + Kh)^7$ is reported, so every grid is clock-uniform with exactly the same h . The oracle starts from the exact top law. For this control alone $\sigma_{\text{hi}} = 4$ and $b_{\text{hi}} = 0.9$. A global oracle certificate is available from

$$0 \leq D'_\sigma(x) \leq \frac{\zeta^2}{\zeta^2 + \sigma^2} + \frac{\sigma^2(\max_r m_r - \min_r m_r)^2}{4(\zeta^2 + \sigma^2)^2},$$

since the posterior variance is the within-component variance plus the variance of component means, the latter bounded by one quarter of their squared span. If the displayed upper bound is at most $1 - b_{\text{hi}}$ at every high-noise level, the oracle predictor is $(1 - b_{\text{hi}}a_j)$ -Lipschitz.

Outcome. The certificate holds on every grid ($b_{\text{eff}} = 0.886 > 6/7$). Raising $\bar{\sigma}$ from 20 to 318 multiplies the undamped high-noise sum of universal bounds by 14 but the damped one only by 2.6 (Table 5), and changes the final error by 1.6×10^{-6} in absolute terms (7.5×10^{-5} relatively). Early error is damped, as the high-noise block predicts.

Table 5: Starting-noise control, $\rho_{\text{EDM}} = 7$ with a fixed clock step; oracle started from the exact top law. The change in final error is relative to $\bar{\sigma} = 80$. The last two columns sum the universal bias bounds Δ_j over the high-noise steps ($\sigma_{j+1} \geq \sigma_{\text{hi}} = 4$), without and with the weights $\Pi_{j+1, K_{\text{hi}}}$ of the high-noise kernel.

$\bar{\sigma}$	K	final error	change	$\sum_j \Delta_j$	$\sum_j \Pi_{j+1, K_{\text{hi}}} \Delta_j$
19.8	209	0.02176	-1.6×10^{-6}	3.36	1.54
80	272	0.02176	–	13.77	2.81
318	348	0.02176	$+0.1 \times 10^{-6}$	47.60	4.00

Calibration of the synchronous diagnostic. For the oracle and misspecified posterior mean, we compare synchronous G_K/G_{2K} pairs at $K = 68, 136, 272$ with the optimal target–sampler coupling, both from canonical Gaussian initialization, on the common window $\sigma_j \leq 2$. Latent ranks are preserved for synchronous pairs and sorted only for optimal transport.

Outcome. For the oracle the two accumulated rates grow together (ratio 1.29 to 1.24 for $K = 68$ to 272). For the misspecified denoiser they move apart: the synchronous rate rises from 1.11 to 1.87 while the optimal-coupling rate falls from 0.76 to 0.69, and so does Λ_K on the same window, from 0.80 to 0.70. A growing synchronous rate therefore need not track Λ_K once the denoiser is inexact.

Table 6: Calibration of the synchronous diagnostic: accumulated linear rates $\sum_j \ell_j(\mathcal{E}_{j,K}^{\text{sync}})_+$ and $\sum_j \ell_j(\mathcal{E}_{j,K}^{\text{OT}})_+$ over the levels $\sigma_j \leq 2$, canonical Gaussian initialization. Ratio: synchronous over optimal coupling. Last column: Λ_K restricted to the same levels, $\sum_j \log \max\{1, \gamma_{j,K}\}$.

denoiser	K	synchronous	optimal coupling	ratio	Λ on window
oracle	68	0.909	0.704	1.29	0.793
	272	1.605	1.296	1.24	1.326
misspecified	68	1.112	0.762	1.46	0.804
	272	1.870	0.687	2.72	0.699

G.5 Supplementary CIFAR–10 Diagnostics

Accumulated synchronous rates. Section 7.3 discusses the endpoints of the two curves of Figure 9d. On the intermediate grids $K = 34, 68, 136$, the accumulated energy-weighted rate is 0.41, 0.50, 0.67, and the accumulated median rate of Appendix G.1.4 is 0.20, 0.22, 0.24, starting from 0.16 at $K = 17$; the successive ratios of the median rate decrease from 1.27 to 1.04.

Influence of rare trajectories. Concentration increases with refinement. Half of the total leave-one-out change is carried by 129 trajectories at $K = 17$ and by 21 at $K = 272$. At $K = 272$ five coarse–fine pairs have a final squared displacement more than 100 times their class median; the largest is 3268 times that median. The median squared displacement decreases with a local exponent approaching -2 (-1.93 on the last doubling), the first-order expectation. The most influential trajectory is different on every grid, and every large leave-one-out change is a decrease, so these pairs cause the rise rather than offset it. The refinement trend is therefore described as sensitive to rare pairs, not as a property of the ensemble.

G.6 Numerical Reliability and Sensitivity Checks

Table 8 lists, for each reported quantity, the check applied, its acceptance criterion, and the outcome. Two checks fail, both on the fine CIFAR segment grid G_{272} ; the corresponding statistics are withdrawn from Figure 9 and from the main text.

For the exact-initialization comparison, we additionally repeat all three grids $K = 272, 544, 1088$ with $4M = 262,144$ quantiles. This checks both endpoints of each of the last two refinement pairs at a common quadrature resolution (Table 7). The finest-grid error changes from 0.00987629 to 0.00996318, and its cumulative log-amplification from 1.91498 to 1.92367. On each pair the error order and the amplification-based order shift by the same amount and in the same direction, by about 0.003 on $(272, 544)$ and 0.0068 on $(544, 1088)$, so their difference changes by less than 10^{-4} . The individual orders are thus not resolved to the third decimal, but their agreement is robust to this refinement. These differences measure sensitivity to the tested quadrature refinement, not certified errors relative to exact integration.

Table 7: Paired quadrature check with exact initialization. Local orders eq. (38) on the pair $(K/2, K)$; the amplification-based order is $1 - (\Lambda_K - \Lambda_{K/2})/\log 2$, and the bias-sum order refers to $\sum_j \tilde{\delta}_{j,K}$. Digits show numerical drift rather than certified precision.

pair $(K/2, K)$	quantiles	error order	ampl.-based order	bias-sum order
(272, 544)	65536	0.5811	0.5886	0.9908
(272, 544)	262144	0.5779	0.5854	0.9908
(544, 1088)	65536	0.5850	0.5882	0.9955
(544, 1088)	262144	0.5782	0.5814	0.9955

Table 8: Numerical reliability checks. Failures lead to omission, not to a qualified report.

quantity	check	criterion	outcome
One-dimensional mixture			
endpoint error $e_{K,K}$	M vs $4M$ quantiles on G_{1088} (analytic arms, trained seed 0)	discrepancy $< e_{K,K}/10$	pass; oracle error changes by $< 1\%$. Bound/error ratio not reported for arms without a $4M$ rerun
cumulative log-amplification Λ_K	M vs $4M$ on G_{1088}	small relative change	Gaussian start: about 0.1%; exact start: about 0.45%. Paired orders checked separately in Table 7
one-step recursion (98)	measured slack	nonnegative up to quadrature	pass on every arm and step
field proxy eq. (97)	domain $(R, N_x) = (12, 4097) \rightarrow (16, 8193)$	small relative change	pass; $\leq 0.8\%$. The maximizer hits the domain boundary at 225 of 507 oracle levels on G_{1088} (never for trained arms) but sits on a flat plateau, not clipped
noise threshold	re-summation at the four candidate thresholds of Appendix G.1.2	range reported	Λ_K bit-identical; Λ_K^{dir} varies by 0.13% at $K = 1088$
clock control	$M = 4096$ vs 8192 at $\rho_{\text{EDM}} = 7$	discrepancy $< 10\%$	pass; 8.7%, below the interpreted differences
starting-noise control	finite-mesh certificate	$b_{\text{hi}}\kappa(\theta_{\text{hi}}) > 6/7$ on every grid	pass; $b_{\text{eff}} = 0.886$
CIFAR-10, high noise			
margin crossings $\sigma = 8.9, 40.8$	independent rerun	same grid levels	pass; reproduced exactly
empirical margin (100)	8, 16, 32 power iterations at 13 levels of G_{136} around the crossings	crossings unchanged	pass; $b_{\text{probe}}^{[0.9]}$ moves by $\leq 5 \cdot 10^{-5}$ (tail probes by up to 0.1 below $\sigma \approx 10$); it stays $+5.7 \cdot 10^{-4}$ at $\sigma = 8.9$ and exceeds 6/7 by $6.6 \cdot 10^{-3}$ at $\sigma = 40.8$
CIFAR-10, low-noise segments			
secant integral, G_{68}	trapezoid of $\lambda^{\parallel}$ on T_9 vs $\mathcal{E}_{j,K}^{\text{sync}}$	agreement	pass; within 0.011
$\lambda^{\text{max}}, G_{68}$	Lanczos Ritz residual, half-iteration drift	small residual	pass; $< 0.11\%$ of λ^{max} except at $\sigma = 0.004$ (4.6%, an underestimate that only widens the reported gap)
segment sample, G_{68}	ESS eq. (103) of 80 segments	not dominated by one segment	pass; ESS 18–40
segment sample, G_{272}	ESS; bootstrap at $\sigma = 0.004$	not dominated by one segment	fail ; one segment carries 88–90% of the energy at every $\sigma \leq 1$ (ESS 1.2–1.3); bootstrap interval 8.8 times the point estimate. Not reported
segment maxima, G_{272}	nested $T_3/T_5/T_9$; rerun with 65 nested nodes	maxima resolved in t	fail ; nested check passes, but with 65 nodes the nine-node maxima at $\sigma \approx 0.03, 0.1, 0.3$ are low by factors 2 to 4.5, and at $\sigma \approx 0.3$ the refined $\lambda^{\parallel}$ exceeds the nine-node λ^{max} . The secant integral is reproduced within 0.001. Not reported; the nested check is necessary, not sufficient
accumulated synchronous rate	leave-one-out over 1280 trajectories	trend stable under single removal	sensitive; two trajectories dominate at $K = 272$ (Section 7.3). Trend reported as driven by rare pairs (Appendix G.5)

Software checks. The one-dimensional code checks the predictor secant identity, the ordering between the realized and directional quantities, the independence of the spatial interval from K , the vanishing learned term for the oracle, and the residual bound $\mathcal{R}_j \leq \varepsilon$ of the perturbed oracle. The CIFAR code checks exact nesting of the schedules, the synchronous predictor identity, the segment chain on known linear maps, the random-direction rate against the exact Rayleigh quotient of a known symmetric matrix, nestedness of the 3/5/9-node estimators, energy-weighted aggregation, zero-displacement handling, conservation of trajectory identities in the influence analysis, stratified resampling, and propagation of invalid observations. Reduced smoke configurations exercise each calculation before the full runs. The targeted oracle audit also checks that sharing target quantiles across nested grids reproduces the independent-grid calculation, and that orders compare identical quadrature resolutions and initializations.

G.7 Code and Data Availability

The code and the frozen raw outputs of every run, with their resolved configurations, are available in the public code repository <https://github.com/nbrosse/edm-error-propagation-code>. Two scripts regenerate from these outputs the numerical figures, the generated tables and the measured values quoted in the main text; a check mode fails when one of them is stale with respect to the outputs. The other tables and values of this appendix are computed from the same outputs but are not regenerated by the scripts. The one-dimensional experiments run on a CPU in a few hours in total. The CIFAR-10 diagnostics use the public class-conditional EDM checkpoint of Karras et al. (2022) and the CIFAR-10 test images; the longest of them, the synchronous diagnostic, takes about six hours on a single NVIDIA L4 GPU.

H Comparison with Prior Wasserstein Analyses

This appendix compares our analysis with the two closest Wasserstein analyses of probability-flow samplers, which follow the two routes of Appendix B.5: Beyler–Bach transport the learned map, Gao–Zhu the exact flow. It closes with the counterexamples that motivate measuring propagation separately from score accuracy.

H.1 Closest Comparison: Beyler–Bach

Beyler and Bach (2025) study deterministic and stochastic samplers on the same Gaussian smoothing path. Their heat parameter is the variance $t = \sigma^2$ in our notation. If the data law is supported in a ball of radius R , their score Hessian estimate implies that the exact Euler map

$$f_{t,h}(x) = x + h \nabla \log p_t(x)$$

satisfies, for $h \leq t$,

$$\text{Lip}(f_{t,h}) \leq L_{t,h} = 1 + h \left(\frac{R^2}{t^2} - \frac{1}{t} \right). \quad (104)$$

In particular, this certificate becomes contractive for $t > R^2$ (Beyler and Bach 2025, Lemma 3). The map $f_{t,h}$ is our oracle predictor in their variables: since $v_\sigma = -\sigma \nabla \log p_\sigma$ by eq. (1), with $\ell_j = \sigma_j - \sigma_{j+1}$, eq. (4) reads $\Phi_j = \text{Id} - \ell_j v_{\sigma_j} = f_{\sigma_j^2, \sigma_j \ell_j}$, and the condition $h \leq t$ holds automatically because $\ell_j < \sigma_j$. Their learned-score assumption imposes an analogous Lipschitz control on $x \mapsto x + h s_\theta(t, x)$ (Beyler and Bach 2025, Assumption 2). The current discrepancy is then propagated through that worst-case map factor, while score and discretization errors are evaluated on the exact law. This produces the same three-term recursion as ours.

For Euler, their global estimate is first order in the maximal step (Beyler and Bach 2025, Proposition 10). Its constants, however, inherit the bounded-support radius and deteriorate as the sampler approaches the data law; the early-stopping dependence contains, in particular, a factor of the form $\exp(R^2/(2\varepsilon))$. The difference is thus not the order of convergence but the mechanism and the constants used to obtain it. The comparison can be summarized as follows.

	Beyler and Bach (2025)	This paper
Path	Heat variance t	$X_\sigma = X_0 + \sigma Z$, with $t = \sigma^2$
Sampler	Euler, Heun, and Euler–Maruyama	First-order deterministic EDM predictor
Local bias	Bounds depending on R or on Gaussian smoothing	Universal acceleration bound, with no structural assumption on q
Learned error	$\mathbb{L}_2$ score error under the exact law	Normalized EDM regression residual under the exact law
Propagation	Global Lipschitz envelope of the learned map	Realized amplification factor γ_j , with directional and worst-case majorants
High noise	Contraction from smoothing and bounded support	Contraction explicitly certified by EDM preconditioning

Our local-bias estimate replaces the support-dependent control by posterior identities valid for every Borel data law. For propagation, eq. (104) is analogous to our map-level bound (31), an intermediate link of the chain eq. (78). Our recursion instead retains the smaller quantity it actually multiplies, the amplification factor γ_j , which admits the transport-directional bound (28). Conversely, Beyler–Bach cover Heun and Euler–Maruyama; the global theorem of this paper covers only the first-order deterministic predictor.

Retaining γ_j sharpens the propagation step but does not by itself give an a priori guarantee, since γ_j depends on the sampler laws (Section 5). The separation example of Proposition 10 shows that a worst-case map bound can be unnecessarily large, not that an envelope for Λ_K holds for general learned denoisers.

H.2 A Structural Wasserstein Route: Gao–Zhu

Gao and Zhu (2025) analyze probability-flow ODE samplers directly in W_2 for a general linear forward diffusion

$$dX_t = -f(t)X_t dt + g(t)dB_t.$$

They assume that the data density p_0 is positive and differentiable, with $-\log p_0$ m_0 -strongly convex and L_0 -smooth. They also impose a time-regularity bound on the exact score within each step: for all x and $k = 1, \dots, K$, $\sup_{(k-1)h_{\text{GZ}} \leq t \leq kh_{\text{GZ}}} \|\nabla \log p_{T-t}(x) - \nabla \log p_{T-(k-1)h_{\text{GZ}}}(x)\| \leq L_1 h_{\text{GZ}}(1 + \|x\|)$, where h_{GZ} is their step size, written so to avoid a clash with our clock η , and $T = Kh_{\text{GZ}}$ is the horizon. They further assume an $\mathbb{L}_2$ score-estimation error bounded by M along the numerical iterates and a sufficiently small step size (Gao and Zhu 2025, Assumptions 3.1–3.3, Theorem 3.4). Their exponential-integrator sampler then satisfies

$$W_2(\text{Law}(u_K), p_0) \leq \exp\left(-\int_0^{Kh_{\text{GZ}}} \mu_{\text{GZ}}(t) dt\right) \|X_0\|_{\mathbb{L}_2} + E_1(f, g, K, h_{\text{GZ}}, L_1) + E_2(f, g, K, h_{\text{GZ}}, M, L_1),$$

where E_1 and E_2 are respectively the discretization and score-matching terms (Gao and Zhu 2025, Theorem 3.4). The continuous contraction rate is explicit:

$$\mu_{\text{GZ}}(t) = \frac{m_0 g(t)^2}{2 \left[\exp\left(-2 \int_0^t f(s) ds\right) + m_0 \int_0^t \exp\left(-2 \int_s^t f(v) dv\right) g(s)^2 ds \right]} > 0.$$

Strong log-concavity is what makes μ_{GZ} positive. At the discrete level, a synchronous coupling yields a one-step factor, written here γ_j^{GZ} , constrained to $(0, 1)$ by the step-size condition and then multiplied through the accumulated error (Gao and Zhu 2025, Proposition 4.2). This factor should not be confused with our γ_j : theirs is an explicit coupling-based contraction coefficient, whereas ours is the ratio of two Wasserstein distances after applying the learned finite map.

The comparison with the present analysis is summarized below.

	Gao and Zhu (2025)	This paper
Forward path	General linear diffusion with coefficients f, g	Gaussian path $X_\sigma = X_0 + \sigma Z$
Sampler	Exponential integrator for the learned probability-flow ODE	First-order finite EDM predictor
Data assumptions	Smooth, strongly log-concave density	No structural assumption for the local bias; centered $q \in \mathcal{P}_2$ for the global bound
Local bias	Time regularity and spatial Lipschitz control of the score	Universal acceleration bound
Learned error	$\mathbb{L}_2$ score error along the numerical iterates	Normalized EDM regression residual under the exact law
Propagation	Synchronous coupling with explicit contraction from log-concavity	Realized amplification factor γ_j , with directional and worst-case majorants

Both analyses therefore separate initialization, discretization and learning errors in the same metric, but place the structural burden at different points. Gao–Zhu derive contractivity of the continuous flow and of the coupled discretization from the target geometry. We obtain the local bias without that geometry, then expose propagation as a separate condition on the learned finite transport: EDM preconditioning certifies it at high noise, while at low noise only the cumulative low-noise log-amplification Λ_K is required.

H.3 Score Accuracy Does Not Imply Stability

The counterexamples of Zhou (2026) show that a small score error does not by itself make a sampler stable. A tail perturbation can have arbitrarily small score error under every forward marginal while explicit Euler develops diverging moments; in the deterministic probability-flow construction, the discrete laws converge weakly but diverge in every W_p , $p \geq 1$ (Zhou 2026, Theorem 3.1 and Corollary 3.3). A residual evaluated on the exact law therefore cannot control the error alone: the propagation of an existing discrepancy through the learned map must be measured separately, which is the role of γ_j in our recursion. The deterministic example does not contradict our theorem, since its field has superlinear tail growth and violates Assumption 4. Their bounded, globally Lipschitz neural construction, which would satisfy that assumption, concerns Euler–Maruyama rather than the deterministic predictor, and its constants are not uniform along the family (Zhou 2026, Theorem 3.5).