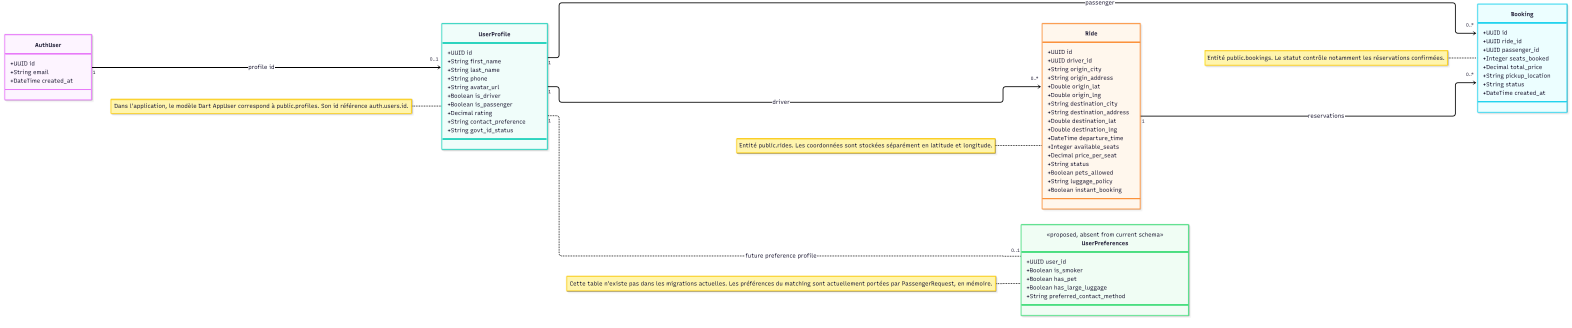

AuthUser
•UUID id
•String email
•DateTime created_at
1
profile_id
0..1
UserProfile
•UUID id
•String first_name
•String last_name
•String phone
•String avatar_url
•Boolean is_driver
•Boolean is_passenger
•Decimal rating
•String contact_preference
•String govt_id_status
Dans l'application, le modèle Dart AppUser correspond à public.profiles. Son id référence auth.users.id.
1
passenger
0..*
Booking
•UUID id
•UUID ride_id
•UUID passenger_id
•Integer seats_booked
•Decimal total_price
•String pickup_location
•String status
•DateTime created_at
Entité public.bookings. Le statut contrôle notamment les réservations confirmées.
0..*
1
driver
0..*
Ride
•UUID id
•UUID driver_id
•String origin_city
•String origin_address
•Double origin_lat
•Double origin_lng
•String destination_city
•String destination_address
•Double destination_lat
•Double destination_lng
•DateTime departure_time
•Integer available_seats
•Decimal price_per_seat
•String status
•Boolean pets_allowed
•String luggage_policy
•Boolean instant_booking
1
reservations
0..*
Entité public.rides. Les coordonnées sont stockées séparément en latitude et longitude.
1
future preference profile
0..1
«proposed, absent from current schema»
UserPreferences
•UUID user_id
•Boolean is_smoker
•Boolean has_pet
•Boolean has_large_luggage
•String preferred_contact_method
Cette table n'existe pas dans les migrations actuelles. Les préférences du matching sont actuellement portées par PassengerRequest, en mémoire.