



Hochschule
Bonn-Rhein-Sieg
University of Applied Sciences



ROS Nodes, Topics, and Messages

Foundation Course

September 5, 2019

Hassan Umari

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Recap

Summary of yesterday's session

- ROS is a collection of libraries and tools that helps you when you develop software for robots.
- ROS provides several ways to transfer data between nodes:
 1. ROS topics and messages (**publish/subscribe**).
 2. ROS services (**request/reply**).
 3. ROS actions (**request/reply**).
 4. Parameter server.

Recap

Summary of yesterday's session


- We will focus today on ROS topics and messages..

```
graph TD; Master([Master]); Camera([Camera]); ImageViewer([Image Viewer]);
```

Master

Camera

Image
Viewer

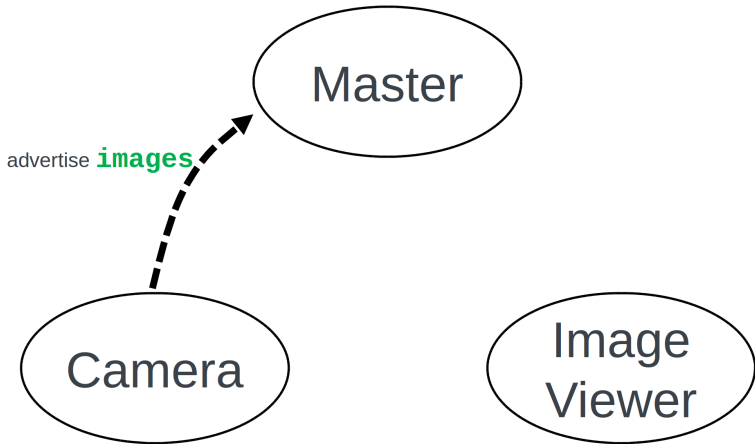





1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



1. Recap

2. ROS nodes in Python

2.1 A simple ROS node in Python

2.2 Writing a publisher node in Python

2.3 How to use ROS messages

2.4 Writing a subscriber node in Python

2.5 General notes

3. ROS Launch Files

4. Names in ROS

4.1 Namespaces

4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

6.1 Catkin

6.2 Package Manifest

6.3 Package Manifest

6.4 Custom ROS Messages



A simple ROS node

../scripts/00_simple_node.py

```
#!/usr/bin/env python

import rospy
from time import sleep

rospy.init_node("print_text")

while True:
    print "Hello world!"
    sleep(1)
```

A simple ROS node

../scripts/01_simple_node.py

```
#!/usr/bin/env python
```

```
import rospy
```

```
rospy.init_node("print_text")  
rate = rospy.Rate(1)
```

```
while not rospy.is_shutdown():  
    print "Hello world!"  
    rate.sleep()
```

Writing a publisher node in Python

../scripts/02_simple_publisher.py

```
rospy.init_node('node name')
```

- nodes name must be unique. If you want to make sure the name of the node is unique:

```
rospy.init_node('node name', anonymous= True)
```

- node name will look like this:
/print_text_19637_1567065017476

Three ways to run a node

ROS Nodes

There are 3 ways to run a node:

1. Like you normally do (not recommended). Example (in case of python node):

```
python <file name>
```

2. using rosrun command:

```
rosrun <package name> <node name>
```

3. Using launch files. (we'll see it later)

Let's create a package first!

ROS Nodes

- ROS commands find your files (python scripts, cpp files, launch files, message definitions) if they are located in a package inside the workspace.
- Normally, a package looks like this:



include



launch



msg



scripts



src



srv



CMakeLists.txt



package.xml

Let's create a package first!

ROS Nodes

- go to the README and do the steps for **creating a package**.

ROS commands

ROS Nodes

- Navigate to a ROS package directly:

```
roscd <package name>
```

- run a node without navigating to it's directory:

```
roslaunch <package name> <executable>
```

Let's create a package first!

ROS Nodes

- go to the README and do the steps for **running a node**.

More ROS commands

ROS Nodes, Topics, and Messages

- List all the running nodes:

```
rostopic list
```

- Get more info. about a certain node:

```
rostopic info <node name>
```

1. Recap

2. ROS nodes in Python

2.1 A simple ROS node in Python

2.2 Writing a publisher node in Python

2.3 How to use ROS messages

2.4 Writing a subscriber node in Python

2.5 General notes

3. ROS Launch Files

4. Names in ROS

4.1 Namespaces

4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

6.1 Catkin

6.2 Package Manifest

6.3 Package Manifest

6.4 Custom ROS Messages



Writing a publisher node in Python

ROS Nodes, Topics, and Messages

- Let's extend our previous node and make it publish a String ROS message.

Writing a publisher node in Python

../scripts/02_simple_publisher.py

```
#!/usr/bin/env python

import rospy

from std_msgs.msg import String

rospy.init_node('talker')

pub = rospy.Publisher('myFirstTopic', String, queue_size=10)

rate = rospy.Rate(1)

my_message = String()
my_message.data = "Hello there! How are you?"

while not rospy.is_shutdown():
    pub.publish(my_message)
    rate.sleep()
```

Writing a publisher node in Python

../scripts/02_simple_publisher.py

```
rospy.Publisher(name, data_class, queue_size)
```

- **name**: Name of the topic to publish on.
- **data_class**: The type of message. It is a ROS message class.
- **queue_size**: The size of the outgoing message queue.

Writing a publisher node in Python

../scripts/02_simple_publisher.py

```
rospy.Publisher(  
    name,  
    data_class,  
    subscriber_listener=None,  
    tcp_nodelay=False,  
    latch=False,  
    headers=None,  
    queue_size=None  
)
```


Writing a publisher node in Python

Things to note..

- ROS messages are implemented as classes.
- To publish a message you also need to define a **Publisher** class.
- Most of ROS concepts and functionalities are implemented as classes. This is why understanding OOP helps you understand ROS better.

Writing a publisher node in Python

ROS Nodes, Topics, and Messages

- Go to the README file and do the instructions of section:
some of ROS commands.

More ROS commands

ROS Nodes, Topics, and Messages

- Get the current list of topics:

```
rostopic list
```

- Print published messages:

```
rostopic echo <topic name>
```

More ROS commands

ROS Nodes, Topics, and Messages

- Publish a message from terminal:

```
rostopic pub <topic name> <msg type> <msg>
```

- Get message type of a topic:

```
rostopic type <topic name>
```

1. Recap

2. ROS nodes in Python

2.1 A simple ROS node in Python

2.2 Writing a publisher node in Python

2.3 How to use ROS messages

2.4 Writing a subscriber node in Python

2.5 General notes

3. ROS Launch Files

4. Names in ROS

4.1 Namespaces

4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

6.1 Catkin

6.2 Package Manifest

6.3 Package Manifest

6.4 Custom ROS Messages



How to use ROS messages

ROS Nodes, Topics, and Messages

- ROS messages are just classes with attributes you can fill.
- ROS messages are defined in separate files and have to be placed in a package. (will be covered today).
- The following command can be used to see the class attributes, or the description, of a ROS message:

```
rosmmsg show <package/msg>
```

How to use ROS messages

Example

```
rosmmsg show std_msgs/String
```

The output is:


```
string data
```


- It means ROS **String** message is a class with an attribute named **data** of type string (Python string).

How to use ROS messages

Importing a ROS message

- `String` message is located in the `std_msgs` package.

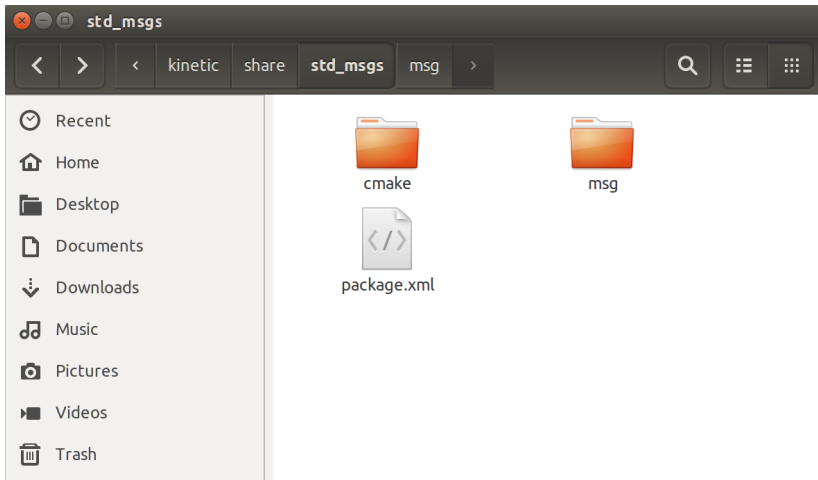

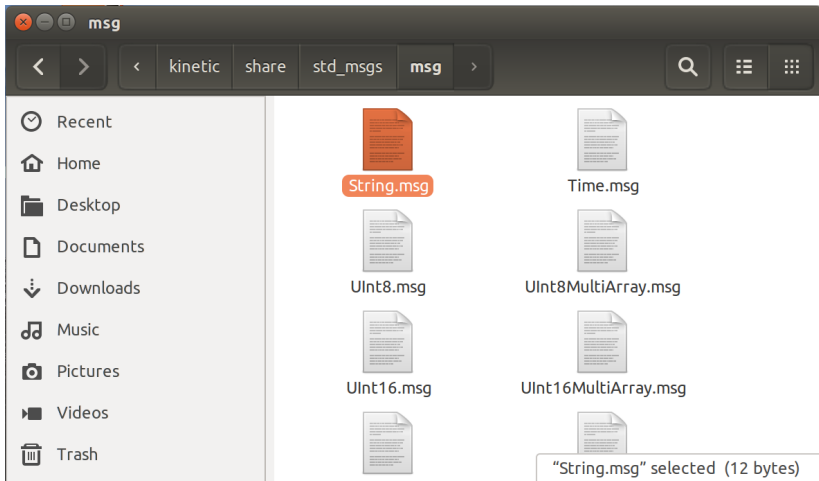

Note: this is not the file that is imported in our script though! this file is not even Python nor C++. We will see later what this file is.

How to use ROS messages

Importing a ROS message

Python

```
from std_msgs.msg import String
```

C++

```
#include "std_msgs/String.h"
```

Exercise 1

1. Recap

2. ROS nodes in Python

2.1 A simple ROS node in Python

2.2 Writing a publisher node in Python

2.3 How to use ROS messages

2.4 Writing a subscriber node in Python

2.5 General notes

3. ROS Launch Files

4. Names in ROS

4.1 Namespaces

4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

6.1 Catkin

6.2 Package Manifest

6.3 Package Manifest

6.4 Custom ROS Messages



Writing a subscriber node in Python

../scripts/03_simple_subscriber.py

```
#!/usr/bin/env python

import rospy
from std_msgs.msg import String

def my_callback_function(msg):
    print msg

rospy.init_node('listener')
rate = rospy.Rate(100)
sub = rospy.Subscriber('myFirstTopic', String,
                       callback=my_callback_function)

while not rospy.is_shutdown():
    pass
```

Writing a subscriber node in Python

../scripts/04_simple_subscriber.py

```
#!/usr/bin/env python
```

```
import rospy
from std_msgs.msg import String
```

```
def my_callback_function(msg):
    print msg
```

```
rospy.init_node('listener')
rate = rospy.Rate(100)
```

```
rospy.Subscriber('myFirstTopic', String, callback=my_callback_function)
```

```
rospy.spin()
```

Writing a subscriber node in Python

Subscriber class

- go to the README, and let's do section:
Simple subscriber

Writing a subscriber node in Python

Subscriber class

```
rospy.Subscriber(  
    name,  
    data_class,  
    callback=None,  
    callback_args=None,  
    queue_size=None,  
    buff_size=65536,  
    tcp_nodelay=False  
)
```

Writing a subscriber node in Python

Subscriber class

- go to the README, and let's do section:
Simple subscriber

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



General notes

more on ROS nodes

- You can define multiple publishers and subscribers in a node.
- You can call `init_node` function once only!
- To make your code look neat, you can wrap ROS stuff in a class and hide them!

Let's see an example with multiple publishers/subscribers and let's define them in a class...

Let's see script
05_node_example.py

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



ROS Launch Files

- If you are working on a project that is comprised of multiple nodes, it's not practical to run each node manually everytime!
- ROS Launch files provide a way to run/launch multiple nodes at once.

ROS Launch Files

../launch/00_simple.launch

```
<!-- Example launch file to run the turtlesim node-->  
  
<launch>  
  
<node pkg="turtlesim" type="turtlesim_node" name="turtle"/>  
  
</launch>
```


ROS Launch Files

- To run a launch file:

```
roslaunch <package name> <launch file>
```

- Example

```
roslaunch my_first_package 00_simple.launch
```

ROS Launch Files

- Ros launch files are XML files that consists for tags.
- They have `.launch` file extension.
- You would ideally place them inside a `launch` folder inside your package.



include



launch



msg



scripts



src



srv



CMakeLists.txt



package.xml

ROS Launch Files

- With launch files, you can do the following:
 - Define nodes to be run.
 - Set ROS parameters on the parameter server.
 - Name remapping (will be covered later).
 - Define arguments for the launch file itself.
 - Include other launch files, and pass arguments to them.
 - Bring up the master (no need to call `roscore`).
 - Push a group of nodes into a separate namespace (will be covered later).
 - The list goes on..

ROS Launch Files

../launch/01_simple.launch

```
<!-- Example launch file to run
the turtlesim node and our script 06-->

<launch>

<node pkg="turtlesim" type="turtlesim_node" name="turtle"/>

<node pkg="my_first_package" type="06_parameters_example.py"
  name="commander"/>

</launch>
```

ROS Launch Files

- Go to the README, and do section
Using launch files

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Names in ROS

- Resources in ROS computation graph (nodes, topics, parameters, etc..) must all have unique names.

Names in ROS

- Suppose we have a `camera` node that publishes on a topic named `image`
- what if you added a camera to your robot, and want to run two `camera` nodes?
- You will get name collision if you run the node twice!

Names in ROS

- ROS provides two mechanisms to avoid such situation:
 - Namespaces.
 - Remappings.

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Namespaces

Names in ROS

- A node can be run under a namespace. For example, if we have two cameras, left camera, and right camera, the two `camera` nodes can have different namespaces:
- Node names:

```
/left/camera  
/right/camera
```

- Topic names:

```
/left/image  
/right/image
```

Namespaces

How to? Using rosrn

- From the terminal using `rosrn` command:

```
rosrn <package name> <node name> __ns:=<namespace>
```

Example:

```
rosrn turtlesim turtlesim_node __ns:=first
```

Node name becomes:

```
/first/turtlesim
```

- Notice the forward slash (/) is used as a separator.

Namespaces

How to? from a launch file

- Using the `group` tag, you can push down resource names under a chosen namespace.

Namespaces

How to? from a launch file

```
<!-- Example launch file using the group tag-->  
  
<launch>  
  
  <group ns="/first">  
    <node pkg="turtlesim" type="turtlesim_node" name="turtle"/>  
  </group>  
  
</launch>
```

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Name Remappings

- The second way ROS provides to change resource names is **remapping**.
- With name remapping, you can rename any resource.
Examples:
 - rename a node.
 - Change the name of the topic a node publishes/subscribes to.
- Again, this is done without having to edit source code of the node. (node is reusable without altering it).

Name Remappings

How to? Using rosrun

- From the terminal using `rosrun` command:

```
rosrun <package name> <node name> __ns:=<namespace>
```

Example:

```
rosrun turtlesim turtlesim_node __ns:=first
```

Node name becomes:

```
/first/turtlesim
```

- Notice the forward slash (/) is used as a separator.

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Parameter Server

- A network-shared dictionary accessible to all nodes.
- All nodes can access and modify those values.
- Parameter server is a part of ROS Master.

Parameter Server

Command line tools

- The `rosparam` command can do the following:
 - Get a list of parameter names currently held by the master.

```
rosparam list
```

- Set/change the value of a parameter:

```
rosparam set <parameter name>
```

- Get/fetch the value of a parameter:

```
rosparam get <parameter name>
```

Parameter Server

rospy interface to the parameter server

- A node can fetch/retrieve a parameter as follows:

```
rospy.get_param(param_name)
```

- It can optionally define a default value in case the parameter is not set in the parameter server:

```
rospy.get_param(param_name, default=value)
```

- A node can set a parameter on the parameter server:

```
rospy.set_param(param_name, param_value)
```

Let's see script
06_parameters_example.py

Parameter Server

Examples

The examples that follows, assume the node name is `move` and has a namespace of `/robot1`, so the resolved node name is `/robot1/move`

Parameter Server

- Global naming:

```
var = rospy.get_param("/speed")  
resolves to ⇒ /speed
```

- Relative naming:

```
var = rospy.get_param("speed")  
resolves to ⇒ /robot1/speed
```

- Private naming:

```
var = rospy.get_param("~speed")  
resolves to ⇒ /robot1/move/speed
```


1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



- In ROS, packages are compiled and built using Catkin.
- The build process is not only to compile C++ nodes, it's also used to generate source files (ex. Python and C++ files that define ROS messages as classes which you can import/include).
- Today, we will look at ROS message generation, and how to define custom ROS messages.

- Catkin is not a compiler. It is a tool that handles the compilation process from source files to executables. It invokes system's compiler (ex. g++) and handles your package dependencies.
- to do that, Catkin needs information on what to compile, where to find, etc...

A ROS package

- The `CMakeList.txt` file is what tells Catkin these things.
- `package.xml` file is where you add information about the package (author, maintainer, dependencies, etc..).



include



launch



msg



scripts



src



srv



CMakeLists.txt



package.xml

- These files are auto-generated by `catkin_create_pkg` command.

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



Package Manifest

package.xml file

- Go to the package we have created earlier
(`my_first_package`) and open the `package.xml` file there.

Package Manifest

package.xml file

- It's an XML file that consists of tags you need to fill.
- It defines properties of the package which include:
 - Name of the package: `<name>`.
 - Version number: `<version>`.
 - Description: `<description>`.
 - Package maintainer: `<maintainer>`.
 - License: `<license>`.
 - Package URL: `<url>`.
 - Author of package `<author>`.

Package Manifest

package.xml file

- It also defines package dependencies:
 - Build Dependencies: `<build_depend>`.
 - Build Export Dependencies: `<build_export_depend>`.
 - Execution Dependencies: `<exec_depend>`.
 - Test Dependencies: `<test_depend>`.
 - Build Tool Dependencies: `<buildtool_depend>`. (catkin)
 - Documentation Tool Dependencies: `<doc_depend>`
 - All of the above: `<depend>`.

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



CMakeLists.txt

- The second file is (`CMakeLists.txt`). This defines how to build the package, what to compile, etc..
- Go to the package we have created earlier (`my_first_package`) and open the(`CMakeLists.txt`).

1. Recap

2. ROS nodes in Python

- 2.1 A simple ROS node in Python
- 2.2 Writing a publisher node in Python
- 2.3 How to use ROS messages
- 2.4 Writing a subscriber node in Python
- 2.5 General notes

3. ROS Launch Files

4. Names in ROS

- 4.1 Namespaces
- 4.2 Name Remappings

5. Parameter Server

6. Catkin and Custom ROS messages

- 6.1 Catkin
- 6.2 Package Manifest
- 6.3 Package Manifest
- 6.4 Custom ROS Messages



rospy reference

- rospy full documentation (all the classes, all the functions ..etc):

<http://docs.ros.org/kinetic/api/rospy/html/>

- ROS wiki
- On ROS names: "Programming Robots with ROS: a practical introduction to the Robot Operating System" Book, 2015, by Quigley and others.
- More on ROS names:
<https://wiki.ros.org/Remapping%20Arguments>