Cucumber Report

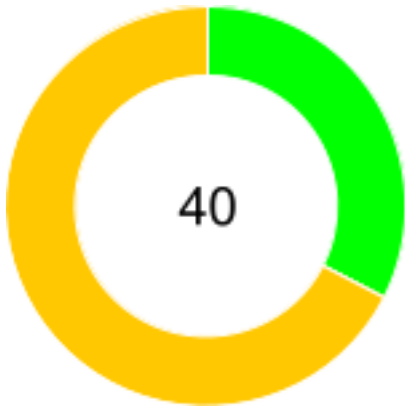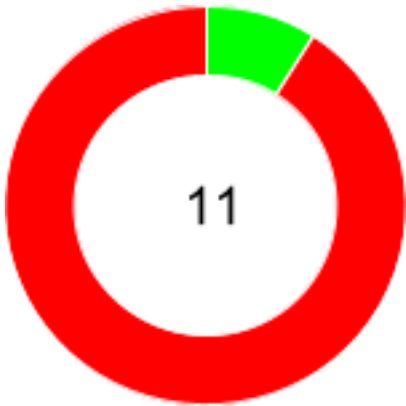| Start : Oct 08, 10:57:43.053 AM	End : Oct 08, 10:58:04.138 AM	Duration : 21.085 s
Features	Scenarios	Steps
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 1 FAILED - 10 SKIPPED - 0	PASSED - 13 FAILED - 0 SKIPPED - 27

Features: 1

Scenarios: 11

Steps: 40

Pass % — Features: 0 %

Pass % — Scenarios: 9 %

Pass % — Steps: 32 %

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Verify Xealei Login Page	21.085 s	11	1	10	0	40	13	0	27

#	Feature Name	Scenario Name
1	*Verify Xealei Login Page*	*To verify the login page for fields, logo & button.*
2		*To verify the eye icon is working in Password field.*
3		*To verify the Privacy Policy link.*
4		*To verify Xealei Login page with Invalid credentials*
5		*To verify Xealei Login Page by enter only valid Email/Username*
6		*To verify Xealei Login Page by enter only valid Password*
7		*To verify Xealei Login Page by enter only valid Email/Username and Invalid Password*
8		*To verify Xealei Login Page without enter Email/Username and Password*
9		*To verify Xealei login page with valid credentials*
10		*To verify Xealei login page by click the ENTER key with valid credentials*

TAG	Scenario				Feature			
Name	*T*	*P*	*F*	*S*	*T*	*P*	*F*	*S*
@Login-AllScenarios	11	1	10	0	1	0	1	0
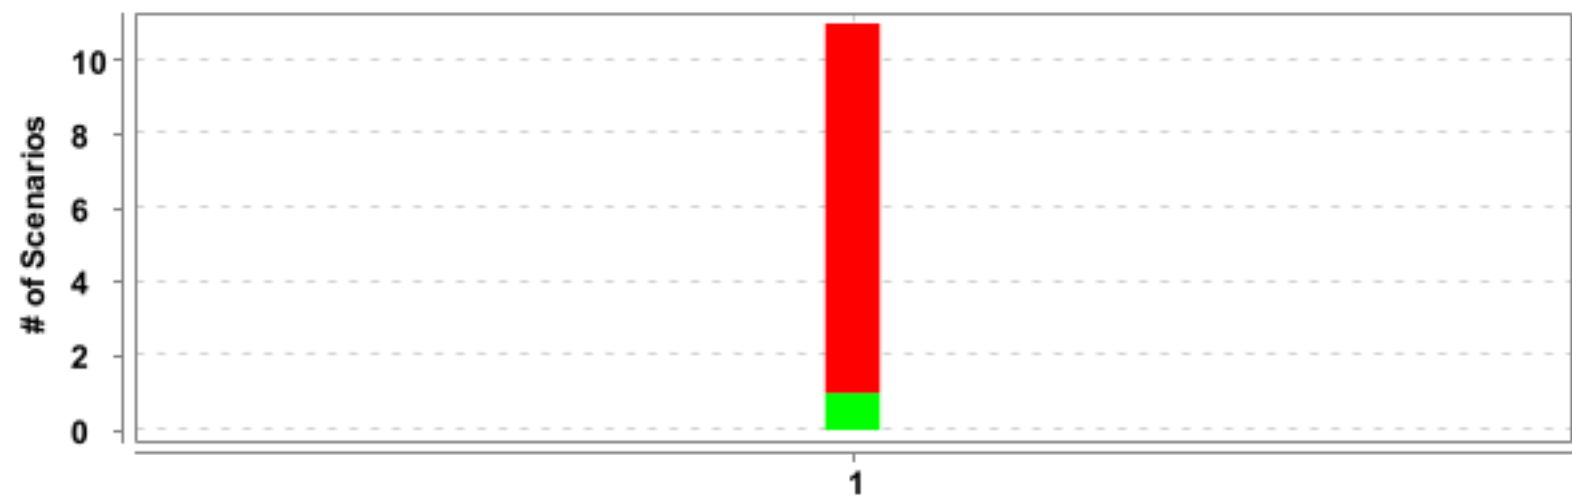
#	Feature Name	T	P	F	S	Duration
1	Verify Xealei Login Page	11	1	10	0	21.085 s
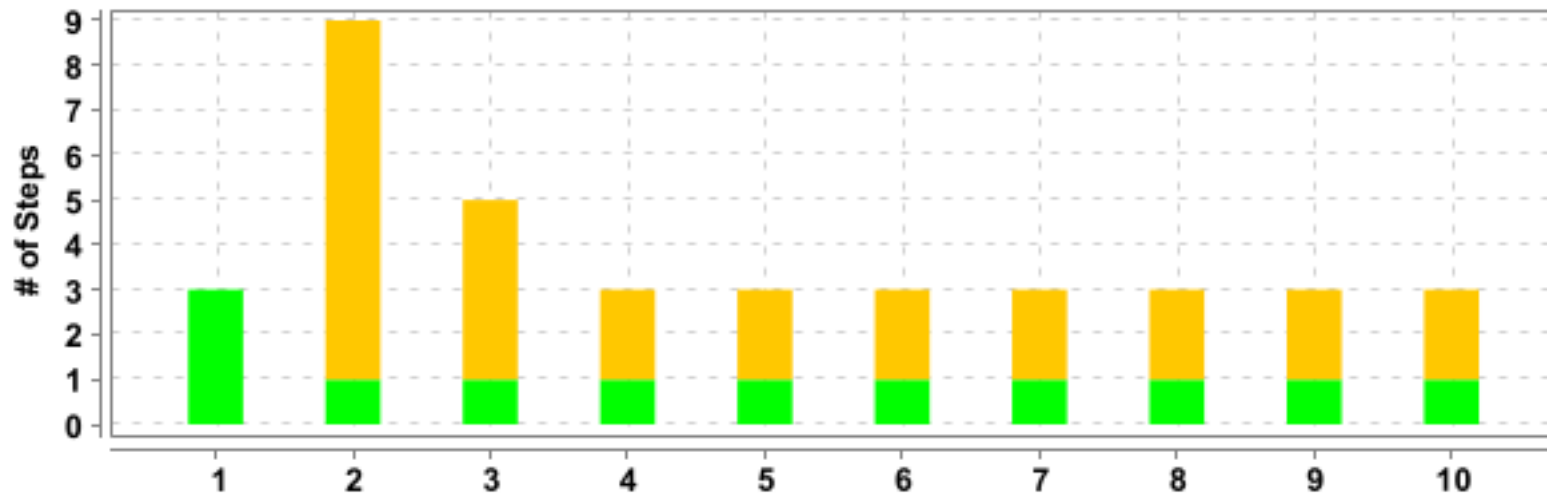
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Verify Xealei Login Page	To verify the web url link for login page	3	3	0	0	18.832 s
2		To verify the login page for fields, logo & button.	9	1	0	8	0.396 s
3		To verify the eye icon is working in Password field.	5	1	0	4	0.131 s
4		To verify the Privacy Policy link.	3	1	0	2	0.058 s
5		To verify Xealei Login page with Invalid credentials	3	1	0	2	0.133 s
6		To verify Xealei Login Page by enter only valid Email/Username	3	1	0	2	0.074 s
7		To verify Xealei Login Page by enter only valid Password	3	1	0	2	0.132 s
8		To verify Xealei Login Page by enter only valid Email/Username and Invalid Password	3	1	0	2	0.116 s
9		To verify Xealei Login Page without enter Email/Username and Password	3	1	0	2	0.120 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
10		*To verify Xealei login page with valid credentials*	3	1	0	2	0.090 s
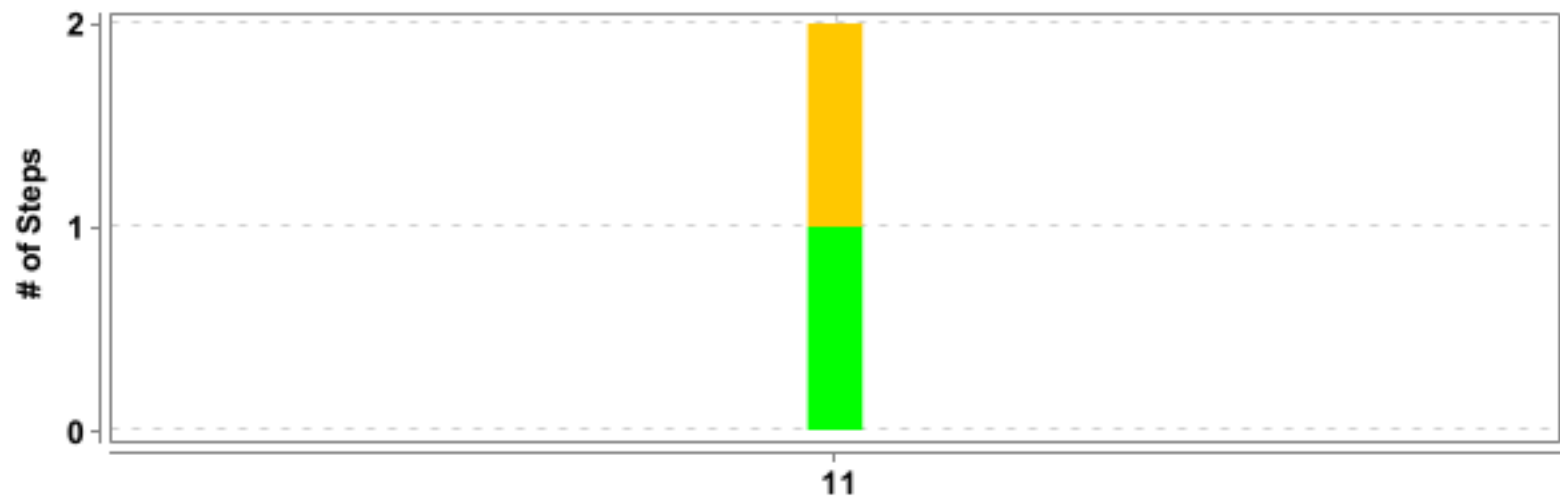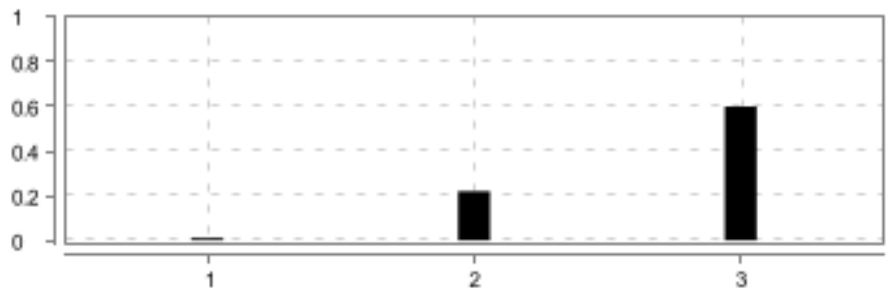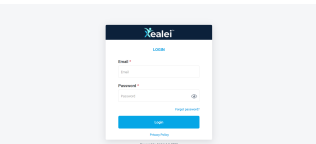
#	Feature Name	Scenario Name	T	P	F	S	Duration
11	Verify Xealei Login Page	To verify Xealei login page by click the ENTER key with valid credentials	2	1	0	1	0.060 s
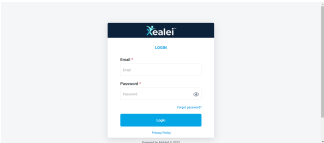
Verify Xealei Login Page

FAILED	DURATION - 21.085 s	Scenarios			Steps		
/ 10:57:43.053 AM // 10:58:04.138 AM /		Total - 11			Total - 40		
		Pass - 1	11		Pass - 13	40	
		Fail - 10			Fail - 0		
		Skip - 0			Skip - 27		
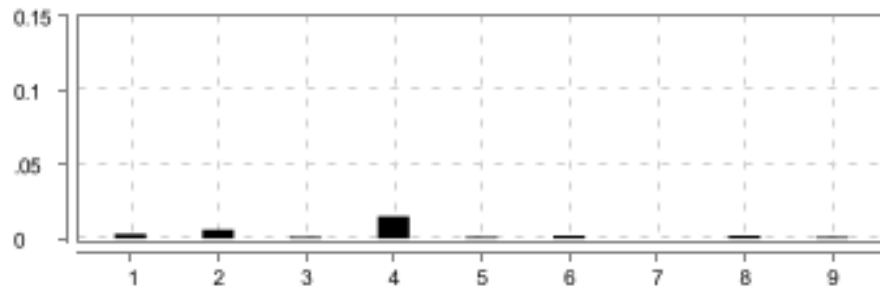
To verify the web url link for login page

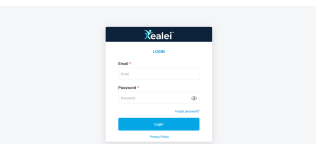| PASSED	DURATION - 18.832 s		Steps	
/ 10:57:43.061 AM // 10:58:01.893 AM /			Total - 3	
Verify Xealei Login Page			Pass - 3	3
			Fail - 0	
@Login-AllScenarios			Skip - 0	

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.011 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	PASSED	0.748 s
	To verify the web url link for login page		
2	Then User must verify the login page is displayed	PASSED	0.220 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	PASSED	0.573 s
	To verify the web url link for login page		

#	Step / Hook Details	Status	Duration
3	Then User must verify the tab url address for login screen	PASSED	0.600 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	PASSED	0.404 s
	To verify the web url link for login page		

To verify the login page for fields, logo & button.
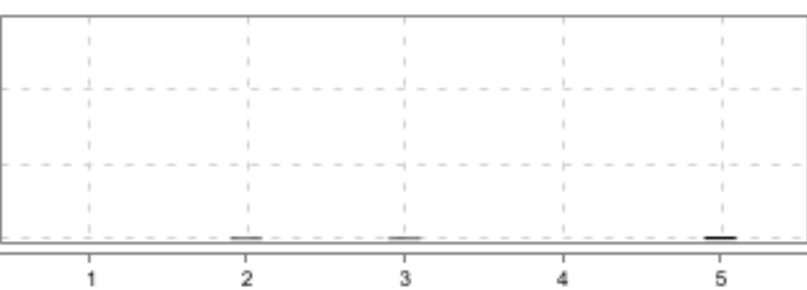
FAILED	DURATION - 0.396 s		Steps
/ 10:58:02.019 AM // 10:58:02.415 AM /			Total - 9
			Pass - 1
Verify Xealei Login Page			Fail - 0
			Skip - 8
@Login-AllScenarios			

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.003 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.260 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	Then User must verify the Login text is displayed	SKIPPED	0.006 s
3	Then User must verify the Email and password fields contains * symbol	SKIPPED	0.001 s
4	Then User must verify the Email textbox contains "Email" text	SKIPPED	0.015 s
5	Then User must verify the Password textbox contains "Password" text	SKIPPED	0.001 s
6	Then User must verify the eye icon is displayed	SKIPPED	0.002 s
7	Then User must verify the "Login" text is displayed in Login button	SKIPPED	0.000 s
8	Then User must verify the Forget password link is displayed	SKIPPED	0.002 s
9	Then User must verify the copy rights "Powered by Alphind © 2023" text is displayed	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.010 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.010 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify the eye icon is working in Password field.

FAILED	DURATION - 0.131 s
/ 10:58:02.525 AM // 10:58:02.656 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 5
Pass - 1
Fail - 0
Skip - 4

5

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.060 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

#	Step / Hook Details	Status	Duration
2	When User must enter password in password textbox	SKIPPED	0.001 s
3	Then User must verify the entered password in password textbox is display as hidden	SKIPPED	0.001 s
4	And User must click the eye icon	SKIPPED	0.000 s
5	Then User must verify the password is display as Unhidden	SKIPPED	0.002 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.015 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) 　　at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) 　　at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) 　　at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) 　　at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) 　　at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) 　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) 　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) 　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) 　　at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) 　　at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.018 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID:		

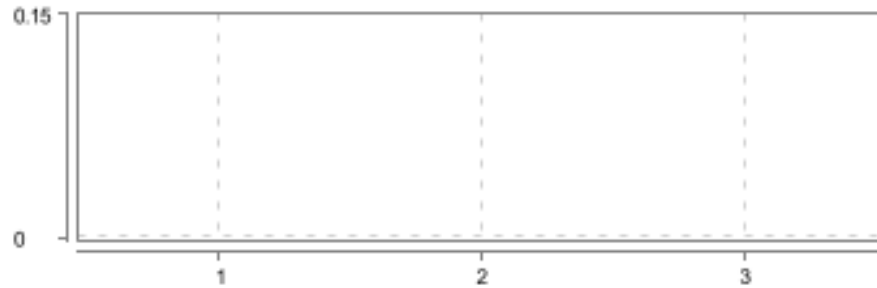| #	Step / Hook Details	Status	Duration

	6bc373316aed020a031614a3a8c87ef5
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify the Privacy Policy link.

FAILED	DURATION - 0.058 s
/ 10:58:02.705 AM // 10:58:02.763 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.023 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310},		

#	Step / Hook Details	Status	Duration

	networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo.., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must click the Privacy Policy	SKIPPED	0.001 s
3	Then User must verify "PRIVACY POLICY" popup should be displayed after click the Privacy Policy link	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.015 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

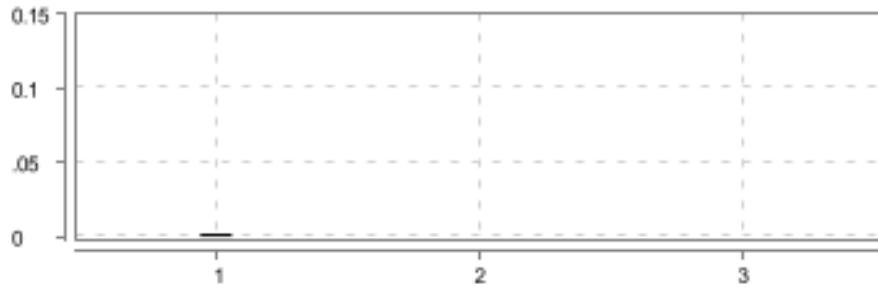| #	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown() org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)	FAILED	0.010 s

To verify Xealei Login page with Invalid credentials

FAILED	DURATION - 0.133 s
/ 10:58:02.798 AM // 10:58:02.931 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.042 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		

#	Step / Hook Details	Status	Duration
	at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must perform invalid email and password and click Login button	SKIPPED	0.000 s
3	Then User must verify the error message after click the Login button "User not found"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.017 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	    at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.065 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)		
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)		
	at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		
	at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

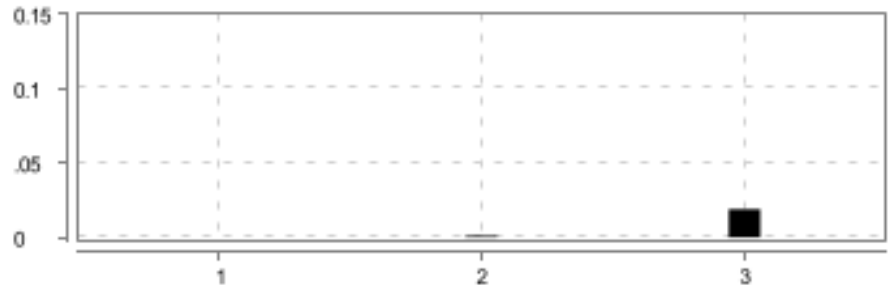## To verify Xealei Login Page by enter only valid Email/Username

FAILED	DURATION - 0.074 s
/ 10:58:03.076 AM // 10:58:03.150 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.002 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.013 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo.		

#	Step / Hook Details	Status	Duration

	.., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	   at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	   at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must enter valid email in email textbox and click Login button without enter password	SKIPPED	0.000 s
3	Then User must verify the error message contains for password after click the Login button "Please enter password"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.015 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()
	
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)
		FAILED	0.034 s

To verify Xealei Login Page by enter only valid Password

FAILED	DURATION - 0.132 s

/ 10:58:03.237 AM // 10:58:03.369 AM /

Verify Xealei Login Page

@Login-AllScenarios

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.016 s

org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)

#	Step / Hook Details	Status	Duration
	at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must enter valid password in password textbox and click Login button without enter email	SKIPPED	0.001 s
3	Then User must verify the error message contains for email after click the Login button "Please enter email ID"	SKIPPED	0.019 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.018 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	    at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.042 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei Login Page by enter only valid Email/Username and Invalid Password
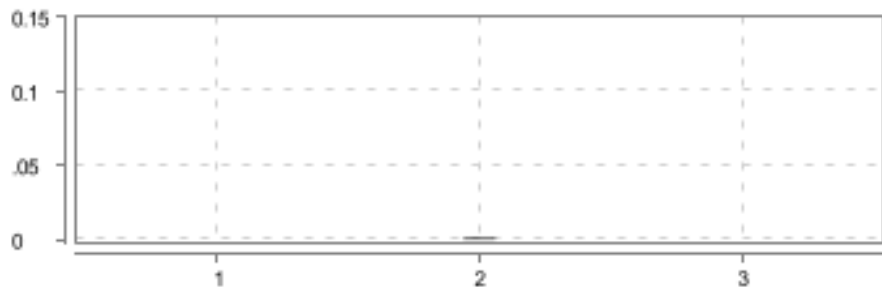
FAILED	DURATION - 0.116 s		Steps
/ 10:58:03.434 AM // 10:58:03.550 AM /			Total - 3
Verify Xealei Login Page			Pass - 1 Fail - 0
@Login-AllScenarios			Skip - 2

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.027 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		

#	Step / Hook Details	Status	Duration

	webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	
	   at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	   at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	   at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must enter valid email and invalid password and click Login button	SKIPPED	0.001 s
3	Then User must verify the error message after enter valid email, invalid password and click the Login button "Incorrect password"	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.064 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	
	   at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.016 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

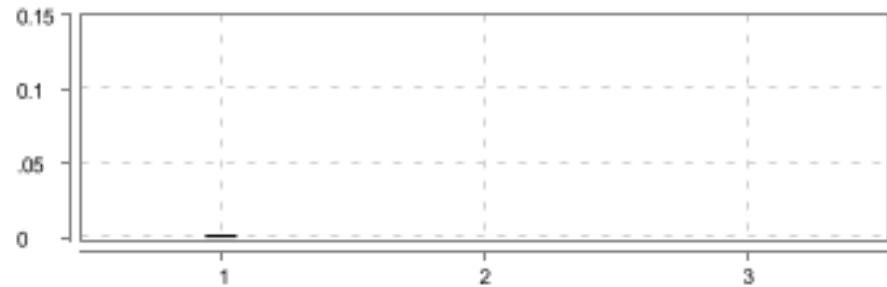**To verify Xealei Login Page without enter Email/Username and Password**

FAILED	DURATION - 0.120 s
/ 10:58:03.773 AM // 10:58:03.893 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.034 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User click Login button without enter username and password	SKIPPED	0.001 s

#	Step / Hook Details	Status	Duration
3	Then User must verify the error message contains for both email and password after click the Login button "Please enter email ID" and "Please enter password"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.022 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	  at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.050 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		

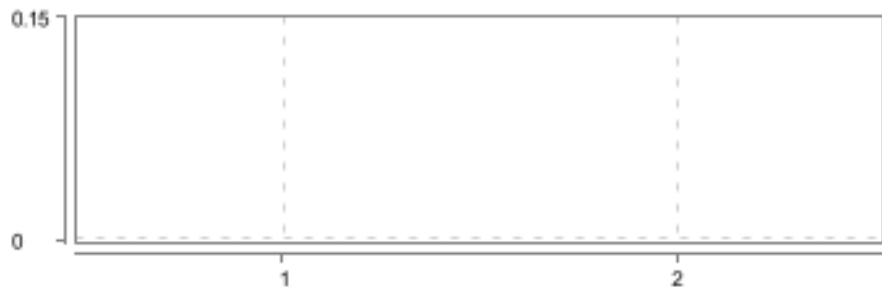| #	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei login page with valid credentials

FAILED	DURATION - 0.090 s	
/ 10:58:03.968 AM // 10:58:04.058 AM /		
Verify Xealei Login Page		
@Login-AllScenarios		

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.002 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.017 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5		

#	Step / Hook Details	Status	Duration
	at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)		
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)		
	at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)		
	at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		
	at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must perform login with valid email and password	SKIPPED	0.000 s
3	Then User must verify once the page is navigate to HOME_DASHBOARD successfully "Home"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.012 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.044 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5 　　at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) 　　at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) 　　at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) 　　at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) 　　at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) 　　at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) 　　at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) 　　at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) 　　at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) 　　at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) 　　at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) 　　at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) 　　at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) 　　at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei login page by click the ENTER key with valid credentials

FAILED	DURATION - 0.060 s
/ 10:58:04.078 AM // 10:58:04.138 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 2
Pass - 1
Fail - 0
Skip - 1

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.036 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must perform login with valid email and password by click the Enter key	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.007 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	    at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.008 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [6bc373316aed020a031614a3a8c87ef5, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53310}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53310/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 6bc373316aed020a031614a3a8c87ef5
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		