Cucumber Report

Start : Oct 08, 10:57:44.659 AM	**End : Oct 08, 10:58:04.007 AM**	**Duration : 19.348 s**
Features	Scenarios	Steps

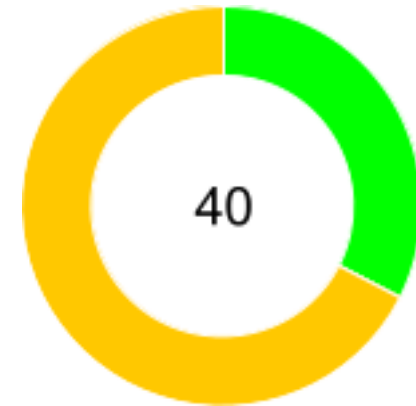|		
PASSED - 0 FAILED - 1 SKIPPED - 0	PASSED - 1 FAILED - 10 SKIPPED - 0	PASSED - 13 FAILED - 0 SKIPPED - 27

1

11

40

40 50 60 Pass % 70
30
20   80
10   90
0 %
0   100

40 50 60 Pass % 70
30
20   80
10   90
9 %
0   100

40 50 60 Pass % 70
30
20   80
10   90
32 %
0   100
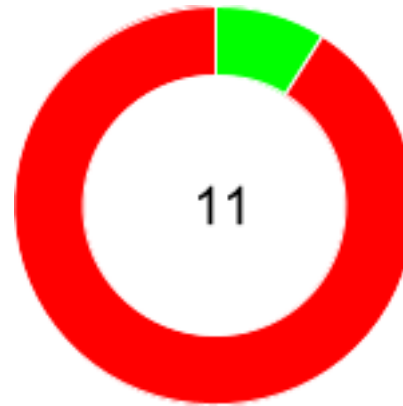
Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
Verify Xealei Login Page	19.348 s	11	1	10	0	40	13	0	27

#	Feature Name	Scenario Name
1	*Verify Xealei Login Page*	*To verify the login page for fields, logo & button.*
2		*To verify the eye icon is working in Password field.*
3		*To verify the Privacy Policy link.*
4		*To verify Xealei Login page with Invalid credentials*
5		*To verify Xealei Login Page by enter only valid Email/Username*
6		*To verify Xealei Login Page by enter only valid Password*
7		*To verify Xealei Login Page by enter only valid Email/Username and Invalid Password*
8		*To verify Xealei Login Page without enter Email/Username and Password*
9		*To verify Xealei login page with valid credentials*
10		*To verify Xealei login page by click the ENTER key with valid credentials*

TAG	Scenario				Feature			
Name	T	P	F	S	T	P	F	S
@Login-AllScenarios	11	1	10	0	1	0	1	0
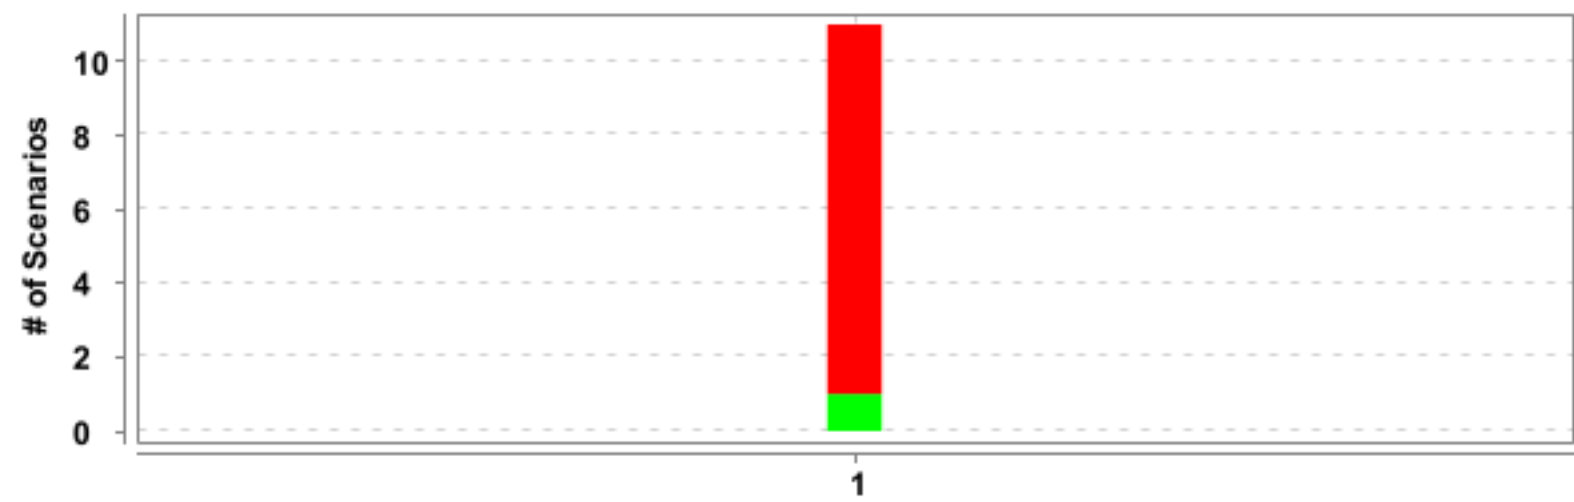
#	Feature Name	T	P	F	S	Duration
1	Verify Xealei Login Page	11	1	10	0	19.348 s
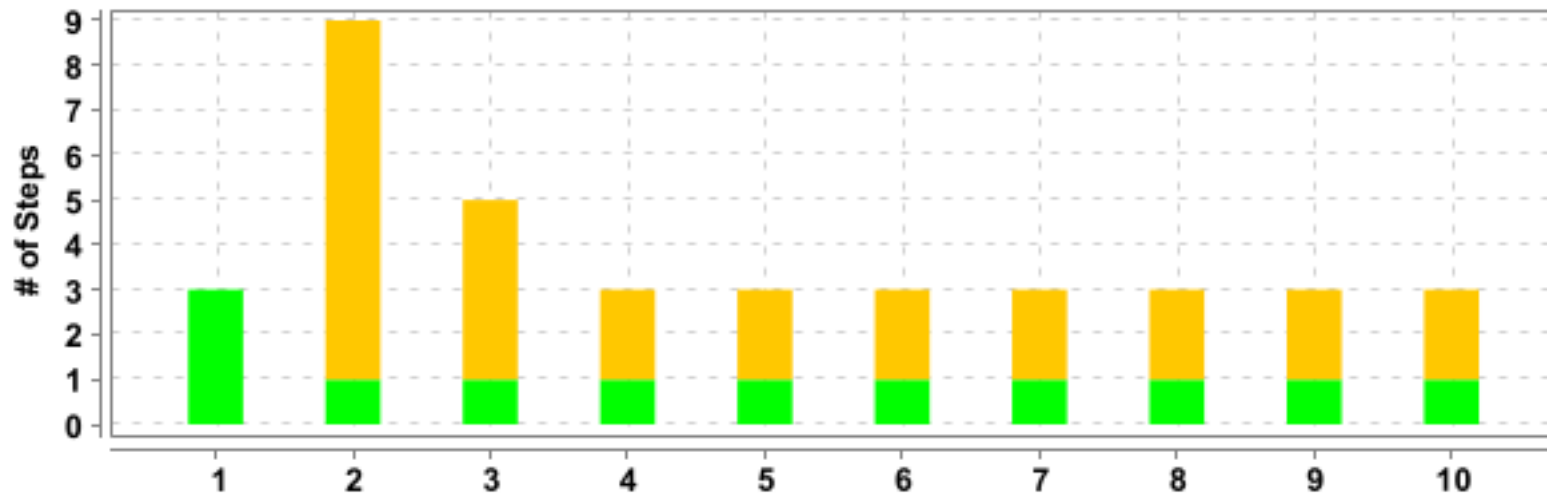
#	Feature Name	Scenario Name	T	P	F	S	Duration
1	Verify Xealei Login Page	To verify the web url link for login page	3	3	0	0	17.400 s
2		To verify the login page for fields, logo & button.	9	1	0	8	0.241 s
3		To verify the eye icon is working in Password field.	5	1	0	4	0.065 s
4		To verify the Privacy Policy link.	3	1	0	2	0.173 s
5		To verify Xealei Login page with Invalid credentials	3	1	0	2	0.194 s
6		To verify Xealei Login Page by enter only valid Email/Username	3	1	0	2	0.067 s
7		To verify Xealei Login Page by enter only valid Password	3	1	0	2	0.056 s
8		To verify Xealei Login Page by enter only valid Email/Username and Invalid Password	3	1	0	2	0.073 s
9		To verify Xealei Login Page without enter Email/Username and Password	3	1	0	2	0.258 s

#	Feature Name	Scenario Name	T	P	F	S	Duration
10		*To verify Xealei login page with valid credentials*	3	1	0	2	0.133 s
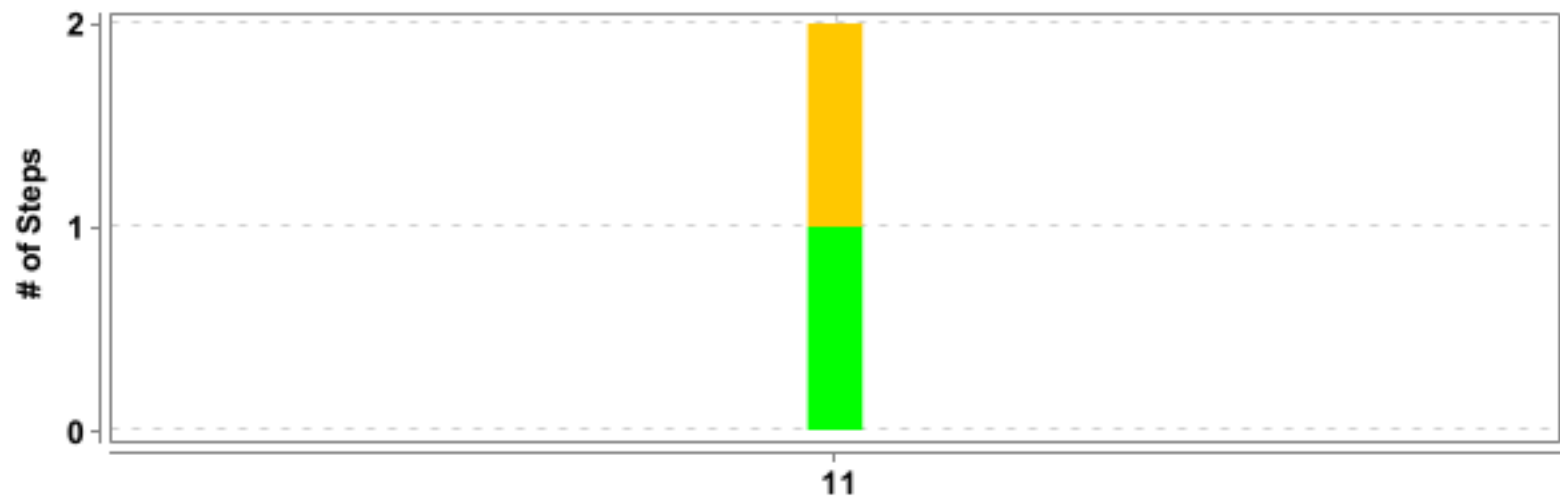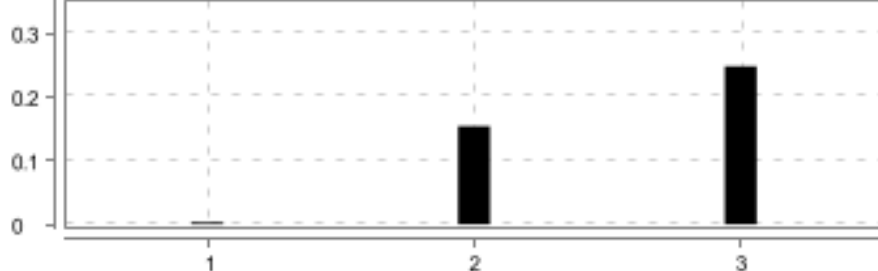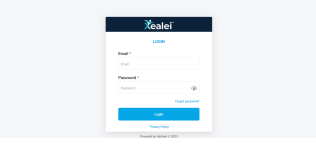
#	Feature Name	Scenario Name	T	P	F	S	Duration
11	*Verify Xealei Login Page*	*To verify Xealei login page by click the ENTER key with valid credentials*	2	1	0	1	0.052 s
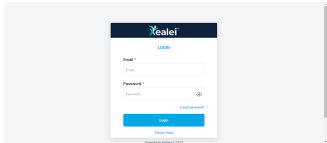
Verify Xealei Login Page

FAILED	DURATION - 19.348 s	Scenarios Total - 11 Pass - 1 Fail - 10 Skip - 0	11	Steps Total - 40 Pass - 13 Fail - 0 Skip - 27	40
/ 10:57:44.659 AM // 10:58:04.007 AM /					

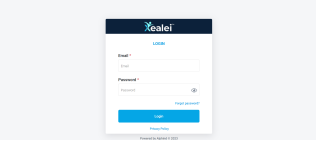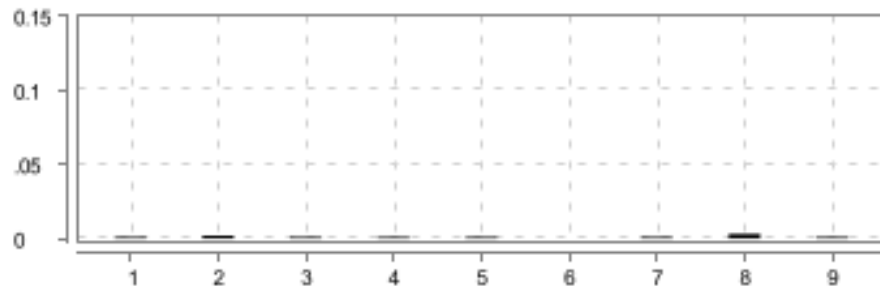## To verify the web url link for login page

PASSED	DURATION - 17.400 s		Steps Total - 3 Pass - 3 Fail - 0 Skip - 0	3
/ 10:57:44.673 AM // 10:58:02.073 AM /				
Verify Xealei Login Page				
@Login-AllScenarios				

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.003 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario) To verify the web url link for login page	PASSED	0.579 s
2	Then User must verify the login page is displayed	PASSED	0.154 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario) To verify the web url link for login page	PASSED	0.423 s

#	Step / Hook Details	Status	Duration
3	Then User must verify the tab url address for login screen	PASSED	0.248 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	PASSED	0.402 s
	To verify the web url link for login page		

To verify the login page for fields, logo & button.
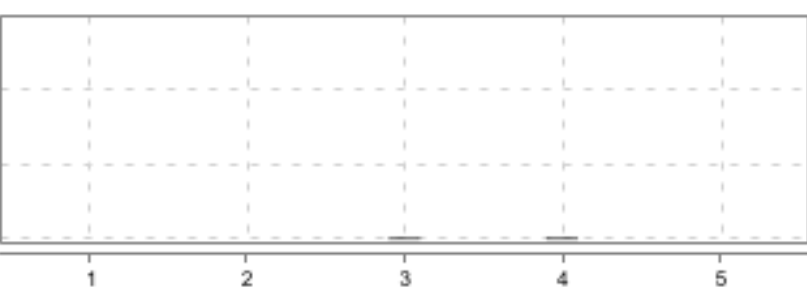
FAILED	DURATION - 0.241 s		Steps
/ 10:58:02.140 AM // 10:58:02.381 AM /			Total - 9
			Pass - 1
Verify Xealei Login Page			Fail - 0
			Skip - 8
@Login-AllScenarios			

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.174 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	Then User must verify the Login text is displayed	SKIPPED	0.002 s
3	Then User must verify the Email and password fields contains * symbol	SKIPPED	0.001 s
4	Then User must verify the Email textbox contains "Email" text	SKIPPED	0.001 s
5	Then User must verify the Password textbox contains "Password" text	SKIPPED	0.001 s
6	Then User must verify the eye icon is displayed	SKIPPED	0.000 s
7	Then User must verify the "Login" text is displayed in Login button	SKIPPED	0.001 s
8	Then User must verify the Forget password link is displayed	SKIPPED	0.003 s
9	Then User must verify the copy rights "Powered by Alphind © 2023" text is displayed	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.009 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.010 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify the eye icon is working in Password field.

FAILED	DURATION - 0.065 s
/ 10:58:02.442 AM // 10:58:02.507 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 5
Pass - 1
Fail - 0
Skip - 4

5

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.008 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

#	Step / Hook Details	Status	Duration
2	When User must enter password in password textbox	SKIPPED	0.000 s
3	Then User must verify the entered password in password textbox is display as hidden	SKIPPED	0.001 s
4	And User must click the eye icon	SKIPPED	0.001 s
5	Then User must verify the password is display as Unhidden	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.035 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	    at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.009 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID:		

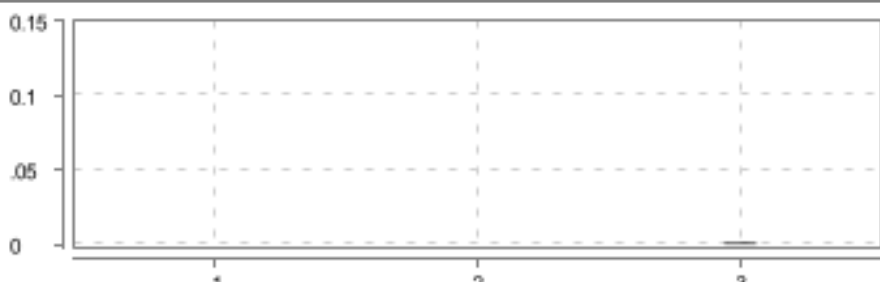| #	Step / Hook Details	Status	Duration
	260510c2f152359a26fed99db894d77b at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify the Privacy Policy link.

FAILED	DURATION - 0.173 s
/ 10:58:02.593 AM // 10:58:02.766 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.056 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320},		

#	Step / Hook Details	Status	Duration

	networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must click the Privacy Policy	SKIPPED	0.001 s
3	Then User must verify "PRIVACY POLICY" popup should be displayed after click the Privacy Policy link	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.016 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

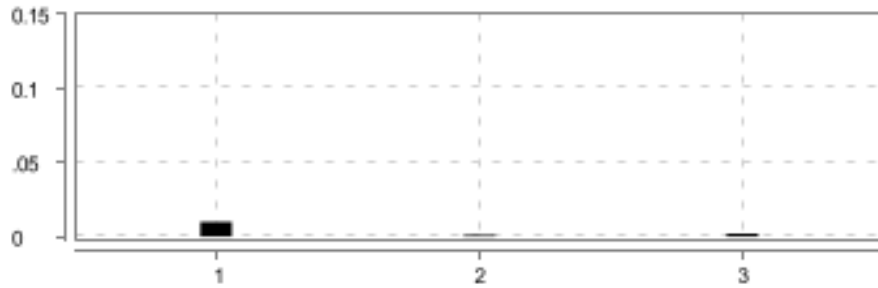| #	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.018 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei Login page with Invalid credentials

FAILED	DURATION - 0.194 s	Steps
/ 10:58:02.804 AM // 10:58:02.998 AM /		Total - 3
Verify Xealei Login Page		Pass - 1 Fail - 0
@Login-AllScenarios		Skip - 2

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.023 s

org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)

#	Step / Hook Details	Status	Duration
	at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must perform invalid email and password and click Login button	SKIPPED	0.000 s
3	Then User must verify the error message after click the Login button "User not found"	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.048 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	    at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	    at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.109 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

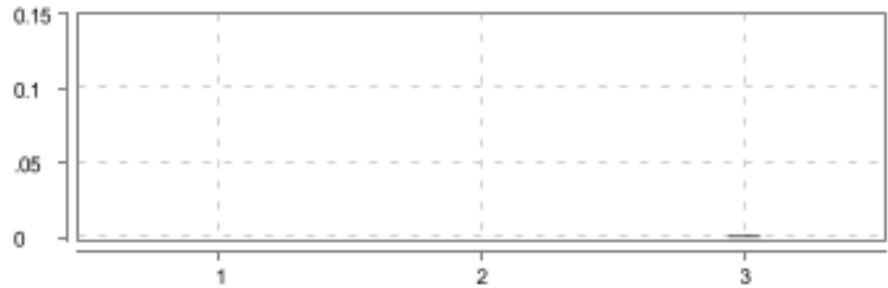## To verify Xealei Login Page by enter only valid Email/Username

FAILED	*DURATION - 0.067 s*		
/ 10:58:03.069 AM // 10:58:03.136 AM /			Steps Total - 3 Pass - 1 Fail - 0 Skip - 2
Verify Xealei Login Page			
@Login-AllScenarios			

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.010 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.013 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo.		

#	Step / Hook Details	Status	Duration

	.., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	   at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	   at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	   at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	   at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	   at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	   at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	   at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	   at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must enter valid email in email textbox and click Login button without enter password	SKIPPED	0.001 s
3	Then User must verify the error message contains for password after click the Login button "Please enter password"	SKIPPED	0.002 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.011 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	   at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	   at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	   at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	   at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	   at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.018 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	  at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei Login Page by enter only valid Password

FAILED	DURATION - 0.056 s
/ 10:58:03.214 AM // 10:58:03.270 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.017 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method)
	    at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		

#	Step / Hook Details	Status	Duration
	at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must enter valid password in password textbox and click Login button without enter email	SKIPPED	0.000 s
3	Then User must verify the error message contains for email after click the Login button "Please enter email ID"	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.010 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	  at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.022 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)		

#	Step / Hook Details	Status	Duration
	at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei Login Page by enter only valid Email/Username and Invalid Password

FAILED	DURATION - 0.073 s
/ 10:58:03.303 AM // 10:58:03.376 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.026 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true,		

#	Step / Hook Details	Status	Duration

	webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must enter valid email and invalid password and click Login button	SKIPPED	0.000 s
3	Then User must verify the error message after enter valid email, invalid password and click the Login button "Incorrect password"	SKIPPED	0.001 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.017 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.013 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei Login Page without enter Email/Username and Password

FAILED	*DURATION - 0.258 s*
/ 10:58:03.504 AM // 10:58:03.762 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps

Total - 3
Pass - 1
Fail - 0
Skip - 2

3

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.000 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.225 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	  at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	  at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	  at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	  at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User click Login button without enter username and password	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
3	Then User must verify the error message contains for both email and password after click the Login button "Please enter email ID" and "Please enter password"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.013 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	  at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.011 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)		

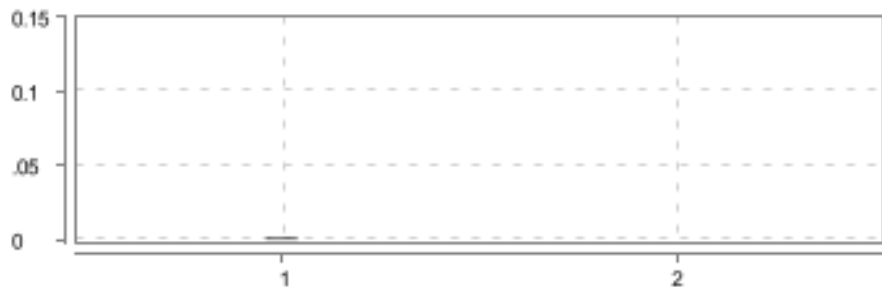| #	Step / Hook Details	Status	Duration
	at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)		
	at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		
	at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei login page with valid credentials

FAILED	DURATION - 0.133 s		Steps
/ 10:58:03.797 AM // 10:58:03.930 AM /			Total - 3
			Pass - 1
Verify Xealei Login Page			Fail - 0
			Skip - 2
@Login-AllScenarios			

(Donut chart showing "3")

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.052 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo.., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b		

#	Step / Hook Details	Status	Duration
	at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		
2	When User must perform login with valid email and password	SKIPPED	0.000 s
3	Then User must verify once the page is navigate to HOME_DASHBOARD successfully "Home"	SKIPPED	0.000 s
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.060 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602) at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318) at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.014 s
	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo. .., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193) at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183) at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158) at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543) at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352) at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439) at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		

To verify Xealei login page by click the ENTER key with valid credentials

FAILED	DURATION - 0.052 s
/ 10:58:03.955 AM // 10:58:04.007 AM /	
Verify Xealei Login Page	
@Login-AllScenarios	

Steps
Total - 2
Pass - 1
Fail - 0
Skip - 1

#	Step / Hook Details	Status	Duration
1	Given User is on Xealei login page	PASSED	0.001 s
	AFTER_STEP - org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(io.cucumber.java.Scenario)	FAILED	0.015 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	    at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	    at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	    at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	    at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	    at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	    at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	    at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	    at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	    at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)
	    at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)
	    at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)
	    at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)
	    at org.alphind.xealei.stepdefinition.OtherHooks.ssAfterStep(OtherHooks.java:43)		

2	When User must perform login with valid email and password by click the Enter key	SKIPPED	0.000 s

#	Step / Hook Details	Status	Duration
	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.screenShot(io.cucumber.java.Scenario)	FAILED	0.013 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, screenshot {}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)
	  at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)
	  at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:598)
	  at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:602)
	  at org.openqa.selenium.remote.RemoteWebDriver.getScreenshotAs(RemoteWebDriver.java:318)
	  at org.alphind.xealei.stepdefinition.OtherHooks.screenShot(OtherHooks.java:52)		

	AFTER - org.alphind.xealei.stepdefinition.OtherHooks.tearDown()	FAILED	0.017 s

	org.openqa.selenium.NoSuchSessionException: invalid session id Build info: version: '4.8.3', revision: 'e5e76298c3' System info: os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '17.0.8.1' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [260510c2f152359a26fed99db894d77b, findElement {using=xpath, value=//div[contains(text(),'Loading')]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 117.0.5938.149, chrome: {chromedriverVersion: 117.0.5938.149 (e3344ddefa1..., userDataDir: C:\Users\admin\AppData\Loca...}, fedcm:accounts: true, goog:chromeOptions: {debuggerAddress: localhost:53320}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:53320/devtoo..., se:cdpVersion: 117.0.5938.149, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: 260510c2f152359a26fed99db894d77b
	  at jdk.internal.reflect.GeneratedConstructorAccessor29.newInstance(Unknown Source)
	  at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45)
	  at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499)
	  at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480)
	  at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200)		

#	Step / Hook Details	Status	Duration
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133)		
	at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53)		
	at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:193)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:183)		
	at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:158)		
	at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:543)		
	at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162)		
	at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:352)		
	at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344)		
	at org.alphind.xealei.baseclass.BaseClass.waitForPageLoad(BaseClass.java:439)		
	at org.alphind.xealei.stepdefinition.OtherHooks.tearDown(OtherHooks.java:61)		