

Experiment No. 3

Creating Transactions

Aim: Creating Transactions using Solidity and Remix IDE

Theory:

- Consider a smart contract for basic banking operations. This contract includes all of the functionalities and capabilities that Solidity presents. Also, it demonstrates about how to send ETH between any account and the contract developed (from an account to a contract or from a contract to an account) and how to restrict the people who can use the relevant function of the smart contract.
- Create a client object to keep the client's information, which will join the contract by using the struct element. It keeps the client's ID, address, and balance in the contract. Then we create an array in the client_account type to keep the information of all of our clients.
- Assign an ID to each client whenever they join the contract, so we define an int counter and set it to 0 in the constructor of the contract.
- Define an address variable for the manager and a mapping to keep the last interest date of each client. Since we want to restrict the time required to send interest again to any account, it'll be used to check whether enough time has elapsed.
- In a smart contract, in order to restrict the people that can call the relevant method or to allow the execution of the method only specific circumstances. In these kinds of circumstances, the modifier checks the condition you've implemented, and it determines whether the relevant method should be executed.
- Before implementing all of the methods we need to organize the smart contract, we have to implement two modifiers. Both methods will check the people who call the relevant method and which of the modifiers is used. One of them determines whether the sender is the manager, and the other one determines whether the sender is a client.
- The fallback function is essential to making the contract receive ether from any address. The receive keyword is new in Solidity 0.6.x, and it's used as a fallback function to receive ether. Since we'll receive ether from the clients as a deposit, we need to implement the fallback function.
- The setManager method will be used to set the manager address to variables we've defined. The managerAddress is consumed as a parameter and cast as payable to provide sending ether. The joinAsClient method will be used to make sure the client

joins the contract. Whenever a client joins the contract, their interest date will be set, and the client information will be added to the client array.

- The deposit method will be used to send ETH from the client account to the contract. We want this method to be callable only by clients who've joined the contract, so the onlyClient modifier is used for this restriction. The transfer methods belong to the contract, and it's dedicated to sending an indicated amount of ETH between addresses. The payable keyword makes receipt of the ETH transfer possible, so the amount of ETH indicated in the msg.value will be transferred to the contract address.
- The withdraw method will be used to send ETH from the contract to the client account. It sends the unit of ETH indicated in the amount parameter, from the contract to the client who sent the transaction. We want this method to be callable only by clients who've joined the contract either, so the onlyClient modifier is used for this restriction. The address of the sender is held in the msg.sender variable.
- The sendInterest method will be used to send ETH as interest from the contract to all clients. We want this method to be callable only by the manager, so the onlyManager modifier is used for this restriction. Here, the last date when the relevant client takes the interest will be checked for all of the clients, and the interest will be sent if the specific time period has elapsed. Finally, the new interest date is reset for the relevant client into the interestDate array if the new interest is sent. The getContractBalance method will be used to get the balance of the contract we deployed.

```
// SPDX-License-Identifier: MIT
```

```
// BCT : Exp - 3
```

```
// Atharva Prashant Pawar (9427) - Comps-A [Batch-D]
```

```
pragma solidity ^0.8.0;
```

```
contract BankContract {  
    struct client_account {  
        int client_id;  
        address client_address;  
        uint client_balance_in_ether;  
    }  
    client_account[] clients;  
    int clientCounter;  
    address payable manager;  
    mapping(address => uint) public interestDate;
```

```

modifier onlyManager() {
    require(msg.sender == manager, "Only manager can call this!");
    _;
}

modifier onlyClients() {
    bool isclient = false;
    for(uint i=0;i<clients.length;i++){
        if(clients[i].client_address == msg.sender){
            isclient = true;
            break;
        }
    }
    require(isclient, "Only clients can call this!");
    _;
}

constructor() {
    clientCounter = 0;
}

// constructor() public{
//     clientCounter = 0;
// }

receive() external payable { }

function setManager(address managerAddress) public returns(string memory){
    manager = payable(managerAddress);
    return "";
}

function joinAsClient() public payable returns(string memory){
    interestDate[msg.sender] = block.timestamp;
    clients.push(client_account(clientCounter++, msg.sender, address(msg.sender).balance));
    return "";
}

function deposit() public payable onlyClients{


```

```

        payable(address(this)).transfer(msg.value);
    }
function withdraw(uint amount) public payable onlyClients {
    payable(msg.sender).transfer(amount * 1 ether);
}
function sendInterest() public payable onlyManager {
    for(uint i=0;i<clients.length;i++){
        address initialAddress = clients[i].client_address;
        uint lastInterestDate = interestDate[initialAddress];
        if(block.timestamp < lastInterestDate + 10 seconds){
            revert("It's just been less than 10 seconds!");
        }
        payable(initialAddress).transfer(1 ether);
        interestDate[initialAddress] = block.timestamp;
    }
}
function getContractBalance() public view returns(uint){
    return address(this).balance;
}
}

```


Step 1: Create BankContract.sol and Compile the Smart Contract

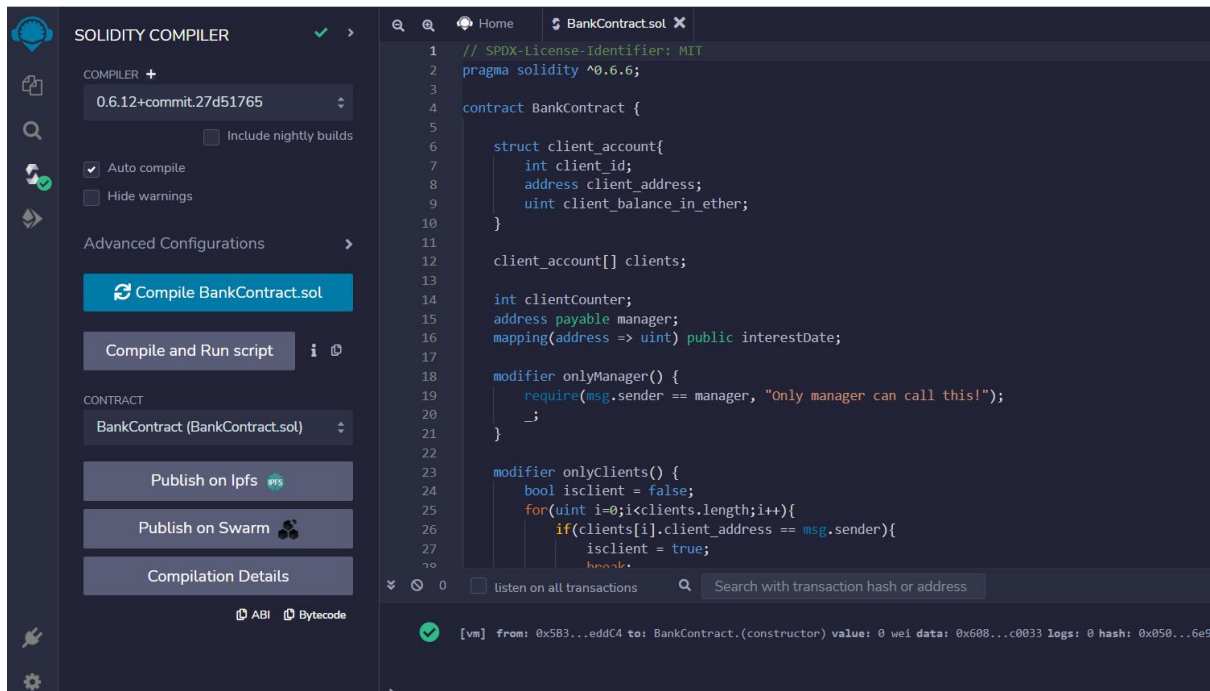

The screenshot shows the Solidity Compiler interface. On the left, the 'COMPILER' section displays version 0.6.12+commit.27d51765 and options for 'Auto compile' and 'Hide warnings'. Below this, the 'CONTRACT' section shows 'BankContract (BankContract.sol)' selected, with buttons for 'Publish on Ipfs', 'Publish on Swarm', and 'Compilation Details'. The main editor on the right shows the Solidity code for 'BankContract.sol'. The code defines a 'BankContract' with a 'client_account' struct, an array of 'clients', a 'manager' address, and a 'public interestDate'. It includes two modifiers, 'onlyManager()' and 'onlyClients()', and a 'constructor' that initializes the 'clients' array. The bottom status bar shows a successful compilation result: '[vm] from: 0x5B3...eddC4 to: BankContract.(constructor) value: 0 wei data: 0x608...c0033 logs: 0 hash: 0x050...6e9'.


```
1 // SPDX-License-Identifier: MIT
2 pragma solidity ^0.6.6;
3
4 contract BankContract {
5
6     struct client_account{
7         int client_id;
8         address client_address;
9         uint client_balance_in_ether;
10    }
11
12    client_account[] clients;
13
14    int clientCounter;
15    address payable manager;
16    mapping(address => uint) public interestDate;
17
18    modifier onlyManager() {
19        require(msg.sender == manager, "Only manager can call this!");
20        _;
21    }
22
23    modifier onlyClients() {
24        bool isclient = false;
25        for(uint i=0;i<clients.length;i++){
26            if(clients[i].client_address == msg.sender){
27                isclient = true;
28                break;
29            }
30        }
31        require(isclient, "Only clients can call this!");
32    }
```

Step 2: Deploy the Smart Contract.

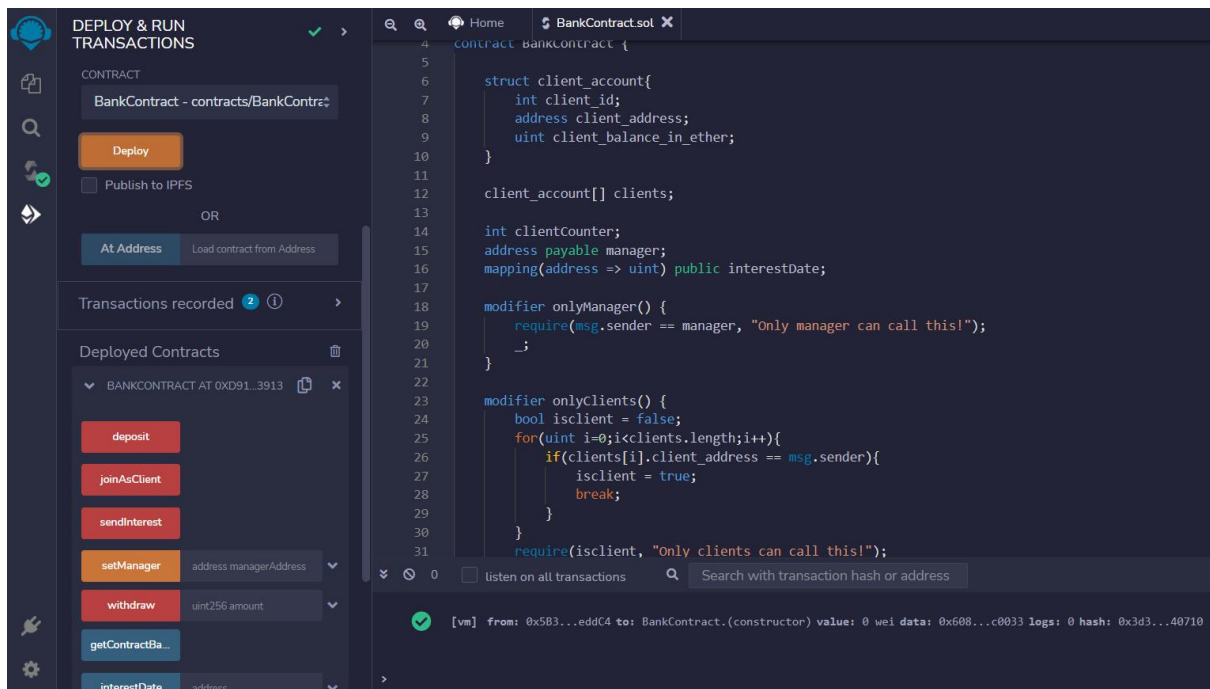

The screenshot shows the 'DEPLOY & RUN TRANSACTIONS' interface. On the left, the 'CONTRACT' section shows 'BankContract - contracts/BankContr...' selected, with a 'Deploy' button and a 'Publish to IPFS' checkbox. Below this, the 'Transactions recorded' section shows '2' transactions. The 'Deployed Contracts' section shows 'BANKCONTRACT AT 0XD91...3913' with a list of functions: 'deposit', 'joinAsClient', 'sendInterest', 'setManager', 'withdraw', 'getContractBa...', and 'interestDate'. The main editor on the right shows the Solidity code for 'BankContract.sol'. The bottom status bar shows a successful deployment result: '[vm] from: 0x5B3...eddC4 to: BankContract.(constructor) value: 0 wei data: 0x608...c0033 logs: 0 hash: 0x3d3...40710'.

```
4 contract BankContract {
5
6     struct client_account{
7         int client_id;
8         address client_address;
9         uint client_balance_in_ether;
10    }
11
12    client_account[] clients;
13
14    int clientCounter;
15    address payable manager;
16    mapping(address => uint) public interestDate;
17
18    modifier onlyManager() {
19        require(msg.sender == manager, "Only manager can call this!");
20        _;
21    }
22
23    modifier onlyClients() {
24        bool isclient = false;
25        for(uint i=0;i<clients.length;i++){
26            if(clients[i].client_address == msg.sender){
27                isclient = true;
28                break;
29            }
30        }
31        require(isclient, "Only clients can call this!");
32    }
```

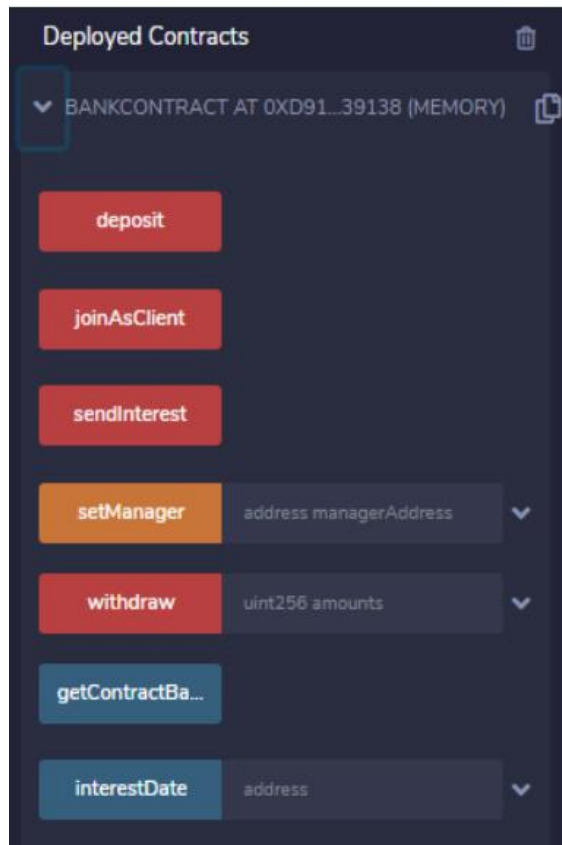


Step 3: Run the Transactions

Now, we're ready to call the functions that compound the smart contract developed. When we expand the relevant contract in the Deployed Contract subsection, the methods developed appear.


The setManager method

We're starting to simulate a small process by calling these methods. First, we're supposed to set a manager. Therefore, we type an address that we select from the account combo and click the yellow setManager button. The following output happens in the terminal. The decoded output shows the message that returned from the method, which is an empty string message — as we expected.

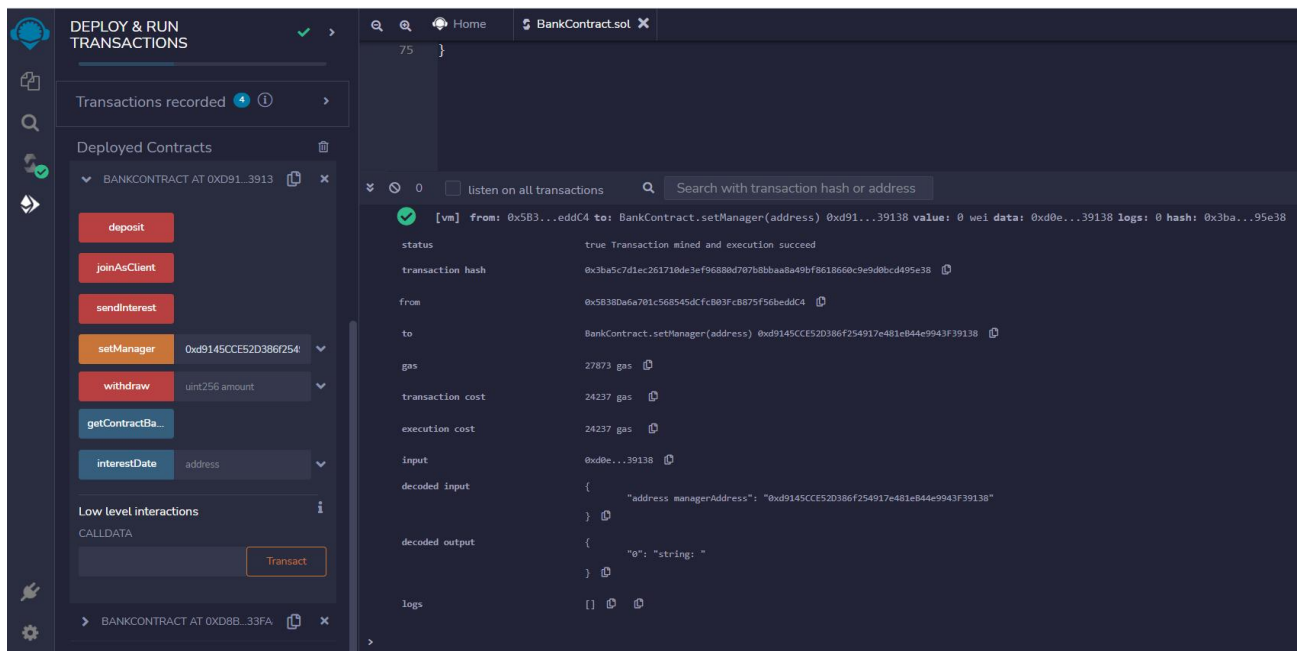

The joinAsClient method

We'll continue to join as a client for three clients that we determined from the account combo and call the joinAsClient method for each one. At this time — and this is different from the previous one. we should call the method while selecting related accounts because we take the msg.sender value from here. Select three addresses one by one and press joinAsClient button. We get following output.

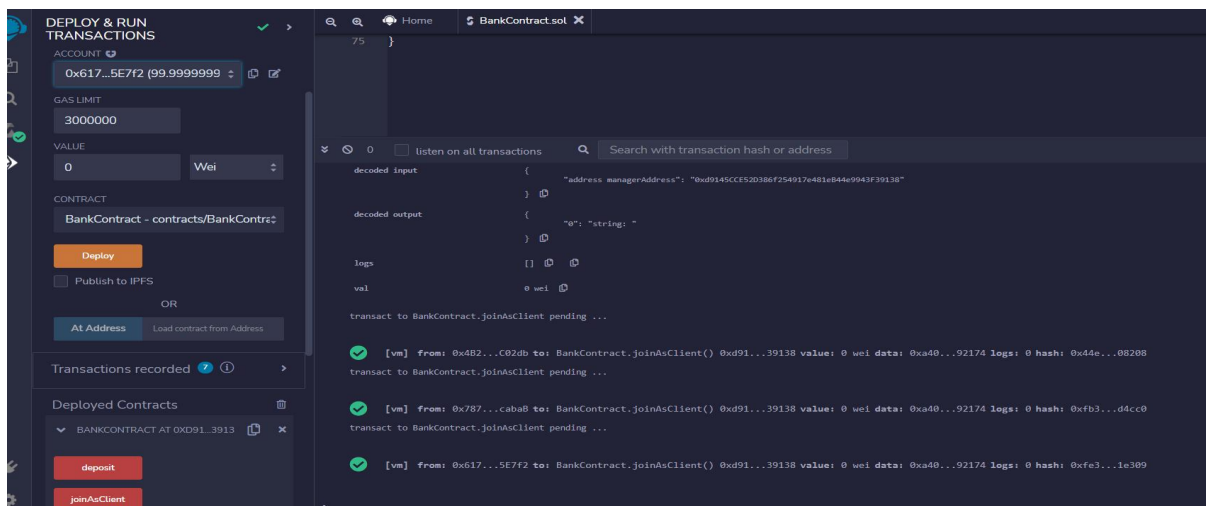

The deposit method

Now, we'll send 10 ETH from the clients' accounts to the contract by using the deposit method. In the deposit method, we take the amount declared in the msg.value from the sender that's represented in the msg.sender variable. Therefore, we set 10 ETH and call the deposit method by clicking the red deposit button for each client account, like we did before for the joinAsClient method. After these operations, the following messages show in the terminal, which means those three accounts sent 10 ETH from their account to the contract address.

Also, the final state of the accounts' balances look like this:


The screenshot shows the Remix IDE interface. On the left, the 'DEPLOY & RUN TRANSACTIONS' panel is visible, showing the 'BankContract' contract and its methods: deposit, joinAsClient, sendInterest, setManager, withdraw, getContractBalance, and interestDate. The 'Deployed Contracts' section shows the 'BANKCONTRACT AT 0XD91...3913'. The main editor displays the 'BankContract.sol' code, which includes a 'deposit' function and a 'getContractBalance' function. The transaction log on the right shows several transactions, including a 'deposit' transaction from 0x617...5E7F2 to the contract address 0xd91...3913 with a value of 1000000000000000000 wei. The log also shows a 'call' transaction from 0x617F2E2FD72F0905583197092aC168c91465E7F2 to the contract address 0xd9145CCE52D386F254917e481e44e9943F39138, which is the 'getContractBalance' method call.

The getContractBalance method


Now, we call the getContractBalance method to check whether the 30 ETH that was sent from the clients exist in the contract account. Therefore, we click the blue getContractBalance button, and it returns an amount that corresponds to 30 ETH in Wei.

The screenshot shows the Remix IDE interface. On the left, the 'DEPLOY & RUN TRANSACTIONS' panel is visible, showing the 'BankContract' contract and its methods: deposit, joinAsClient, sendInterest, setManager, withdraw, getContractBalance, and interestDate. The 'Deployed Contracts' section shows the 'BANKCONTRACT AT 0XD91...3913'. The main editor displays the 'BankContract.sol' code, which includes a 'deposit' function and a 'getContractBalance' function. The transaction log on the right shows several transactions, including a 'deposit' transaction from 0x617...5E7F2 to the contract address 0xd91...3913 with a value of 1000000000000000000 wei. The log also shows a 'call' transaction from 0x617F2E2FD72F0905583197092aC168c91465E7F2 to the contract address 0xd9145CCE52D386F254917e481e44e9943F39138, which is the 'getContractBalance' method call.

Now, we call the last method we've developed to withdraw an amount from the contract to the client's account. In the withdraw method, we transfer the amount declared in the msg.value from the account to the sender that's represented in the msg.sender variable. At this point, there's a problem realized, which is that the people who haven't joined the contract as a client can call this method too. We use the onlyClient modifier to avoid this problem. When we select an account belonging to anyone who hasn't joined the contract as a client and then call the withdraw method through the red withdraw button, the "Only clients can call this!" is displayed:

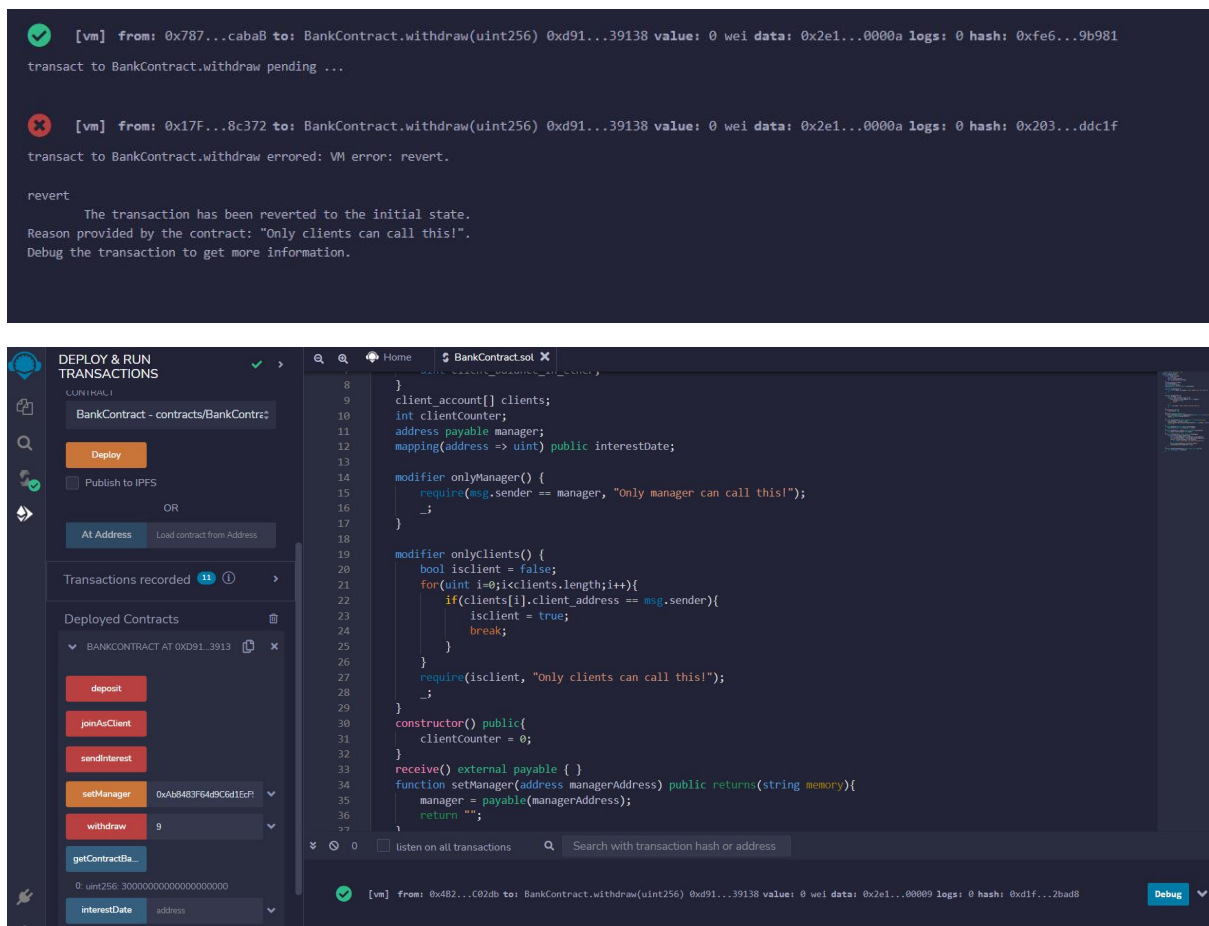


After calling the method, we see the ETH amount increased as much as we were expecting.

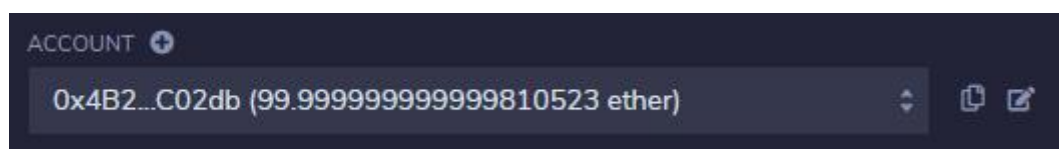

The balance of the sender

After these operations, only 18 ETH is supposed to be remaining in the contract address because a total of 12 ETH has been sent from the contract (3 ETH as interest and 9 ETH as a withdrawal). If we call the `getContractBalance` method, we see following result:

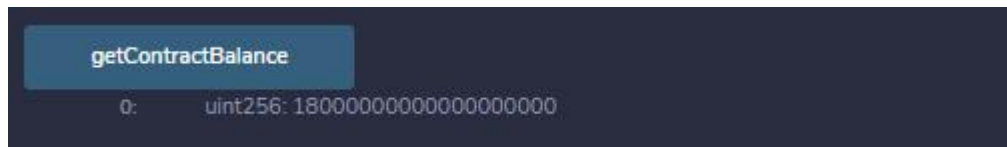

Conclusion

In this experiment, smart contract is successfully deployed on the Remix IDE. We tested all of the functionalities it presents by performing the transactions.

Output Screenshot Shot:

DEPLOY & RUN TRANSACTIONS

☐ Publish to IPFS

At Address
Load contract from Address

Transactions recorded 5 1

Deployed Contracts

▼ BANKCONTRACT AT 0XD91...391

Balance: 25 ETH

deposit

joinAsClient

sendInterest

setManager 0x5838D6a701c568545c

withdraw 10

getContractBa...

0: uint256: 3600000000000000000000

interestDate address

Low level interactions

CALLDATA

Transact

```

1 // SPDX-License-Identifier: MIT
2
3 // BCT : Exp - 3
4 // Atharva Prashant Pawar (9427) - Comps-A [Batch-D]
5
6 pragma solidity ^0.8.0;
7
8 contract BankContract {
9     struct client_account{
10         int client_id;
11         address client_address;
12         uint client_balance_in_ether;
13     }
14     client_account[] clients;
15     int clientCounter;
16     address payable manager;
17     mapping(address => uint) public interestDate;
18
19     modifier onlyManager() {
20         require(msg.sender == manager, "Only manager can call this!");
21         _;
22     }
23
24     modifier onlyClients() {
25         bool isClient = false;
26         for(uint i=0;i<clients.length;i++){
27             if(clients[i].client_address == msg.sender){
28                 isClient = true;
29                 break;

```

0
☐ listen on all transactions

Search with transaction hash or address

✓ [vm] from: 0x583...eddC4 to: BankContract.sendInterest() 0xd91...39138 value: 0 wei data: 0x9e0...a5d68 logs: 0 hash: 0x308...4f25e

Debug

DEPLOY & RUN TRANSACTIONS

☐ Publish to IPFS

At Address Load contract from Address

Transactions recorded 5

Deployed Contracts

BANKCONTRACT AT 0xd91...391

Balance: 25 ETH

deposit

joinAsClient

sendInterest

setManager 0x58380d6a701c56854c

withdraw 10

getContractBa...

0 uint256: 36000000000000000000

interestDate address

Low level interactions

CALLDATA

```
// SPDX-License-Identifier: MIT
// BCT : Exp - 3
// Atharva Prashant Pawar (9427) - Comps-A [Batch-D]
```

☐ listen on all transactions Search with transaction hash or address

- ethers.js
- remix

Type the library name to see available commands.
creation of BankContract pending...

[vm] from: 0x5B3...eddC4 to: BankContract.constructor value: 0 wei data: 0x608...20833 logs: 0 hash: 0x2be...51dd1

transact to BankContract.joinAsClient pending ...

[vm] from: 0x5B3...eddC4 to: BankContract.joinAsClient() 0xd91...39138 value: 3600000000000000000 wei data: 0xa40...92174 logs: 0 hash: 0xf22...61dc0

transact to BankContract.setManager pending ...

[vm] from: 0x5B3...eddC4 to: BankContract.setManager(address) 0xd91...39138 value: 0 wei data: 0xd0e...eddC4 logs: 0 hash: 0xbf2...3956a

call to BankContract.getContractBalance

CALL [call] from: 0x58380d6a701c56854dcfb803fcB875f56beddC4 to: BankContract.getContractBalance() data: 0x6f9...fb98a

transact to BankContract.withdraw pending ...

[vm] from: 0x5B3...eddC4 to: BankContract.withdraw(uint256) 0xd91...39138 value: 0 wei data: 0x2e1...0000a logs: 0 hash: 0x2c1...50600

transact to BankContract.sendInterest pending ...

[vm] from: 0x5B3...eddC4 to: BankContract.sendInterest() 0xd91...39138 value: 0 wei data: 0x9e0...a5d68 logs: 0 hash: 0x308...4f25e

At Address

Load contract from Address

Transactions recorded **5** ⓘ >

Deployed Contracts



▼ BANKCONTRACT AT 0XD91...391  

Balance: 25 ETH

deposit

joinAsClient

sendInterest

setManager

0x5B38Da6a701c568545c



withdraw

10



getContractBa...

0: uint256: 36000000000000000000

interestDate

address



Low level interactions



CALLDATA

Transact

Atharva Prashant Pawar (9427) [Batch-D]

BCT : Exp 3

Flow of experiment:

1. Code the Contract, Compile it, Debug Errors, Deploy the Error Free Compile
2. Select Address 1, change value unit to 'Ether'
3. Address 1 : "JoinASClient"
Address 1 : Value as 40 Ether, "deposit"
∴ Below explanation is in detail

- A. Set Manager to Client account as manager.
∴ Manager Address : 0x4B2...C02dB
Client 1 Address : 0x787...cabab

Deposit Amount : 36 Ether

∴ Balance Amount after deposit : 36 Ether

Withdraw Amount : 10 Ether

∴ Balance Amount after Withdrawal : 26 Ether

Set Interest : 1 Ether

∴ Balance Amount : 27 Ether