



ABLESTACK Online Docs
ABLESTACK-V4.0-4.0.15

기록

기록

Cube 웹 콘솔의 기록메뉴는 시스템에 발생하는 로그정보에 접근하여 검토 및 필터링하여 필요한 정보를 확인할 수 있는 방법을 제공합니다.

개요

Cube 웹 콘솔 기록 메뉴는 journalctl 유틸리티의 UI입니다. Cube 웹 콘솔 인터페이스에서 시스템 로그에 액세스하는 다양한 방법에 대해 설명합니다.

root@
ablecube33-1

도움말

세션

Q 검색

지난 24 시간 우선순위 오류 이상 식별자 모두 필터 priority:err 일시정지

시스템

개요

기록

자장소

네트워크

포드엔 컨테이너

가상 마신

계정

서비스

ABLESTACK

도구

소프트웨어 최신화

응용프로그램

진단 보고서

커널 덤프

터미널

SELinux

2025년 4월 30일

오류 1:24 error: beginning MaxStartups throttling

오류 1:14 SELinux is preventing /usr/bin/login from unlink access on the file /(null). For complete SELinux messages run: sealert -l 5fd2c779-daf6-40e4-b7e7-c4d84ce656e4

오류 1:14 SELinux is preventing /usr/bin/login from rename access on the file /(null). For complete SELinux messages run: sealert -l ef477ff2-7f5c-403f-80f5-cecf87d49122

오류 1:14 SELinux is preventing /usr/bin/login from setattr access on the file nshadow. For complete SELinux messages run: sealert -l 5165bbb5-85b0-46f3-8b0f-e3bf1544e527

오류 1:14 SELinux is preventing /usr/bin/login from write access on the file /etc/nshadow. For complete SELinux messages run: sealert -l 09d2606e-fe24-426f-b3dc-c011bf215fbc

오류 1:14 SELinux is preventing /usr/bin/login from create access on the file /(null). For complete SELinux messages run: sealert -l c236c470-1f0b-44b2-8615-b8cfc8688696

오류 1:14 SELinux is preventing /usr/bin/login from write access on the file .pwd.lock. For complete SELinux messages run: sealert -l 8f1d6fed-e449-4719-8782-ca517def04cc

오류 1:14 SELinux is preventing /usr/sbin/ldpd from open access on the file /sys/kernel/debug/40e/0000:ab:00:0/command. For complete SELinux messages run: sealert -l d029abd1-eeef-4bea-8506-cc8030795646

오류 1:14 SELinux is preventing /usr/sbin/ldpd from write access on the file command. For complete SELinux messages run: sealert -l b89c07fc-f506-4ce9-ae04-6e28896f9841

오류 1:14 snd_hda_intel 0000:00:1f:3: no codecs initialized

오류 1:14 hdaudio hdaudioC0D0: no AFG or MFG node found

오류 1:14 snd_hda_intel 0000:00:1f:3: azz_get_response timeout, switching to single_cmd mode: last cmd=0x000f0000

오류 1:14 Warning: Unmaintained driver is detected: ip6_tables

오류 1:14 Warning: Unmaintained driver is detected: ip_tables

오류 1:14 Warning: Unmaintained driver is detected: nft_compat

오류 1:14 Warning: Unmaintained driver is detected: ip_set

오류 1:14 Device: /dev/bus/0 [megaraid_disk_03] [SAT], no ATA CHECK POWER STATUS support, ignoring -n Directive

오류 1:14 Device: /dev/bus/0 [megaraid_disk_02] [SAT], no ATA CHECK POWER STATUS support, ignoring -n Directive

오류 1:14 Failed to listen on libvirt storage daemon socket.

오류 1:14 virtstoraged.socket: Socket service virtstoraged.service not loaded, refusing.

오류 1:14 Failed to listen on libvirt network daemon socket.

sshd 44

setroubleshoot

setroubleshoot

setroubleshoot

setroubleshoot

setroubleshoot

setroubleshoot

setroubleshoot

kernel

kernel

kernel

kernel

kernel

smartd

smartd

systemd

systemd


systemd

로그 필터링


- 웹 콘솔에서 최신 로그 항목을 기본적으로 표시됩니다. 특정 시간 범위로 필터링하려면 시간 드롭다운 메뉴를 클릭하고 원하는 옵션을 선택합니다.

- '오류 이상의 수준' 목록이 기본적으로 표시됩니다. 다른 '우선 순위'로 필터링하려면 드롭다운 메뉴를 클릭하고 선호하는 우선순위를 선택합니다.

- '모두' 식별자를 기본적으로 표시됩니다. 특정 '식별자'에 대한 로그를 필터링하려면 드롭다운 메뉴를 클릭하고 식별자를 선택합니다.

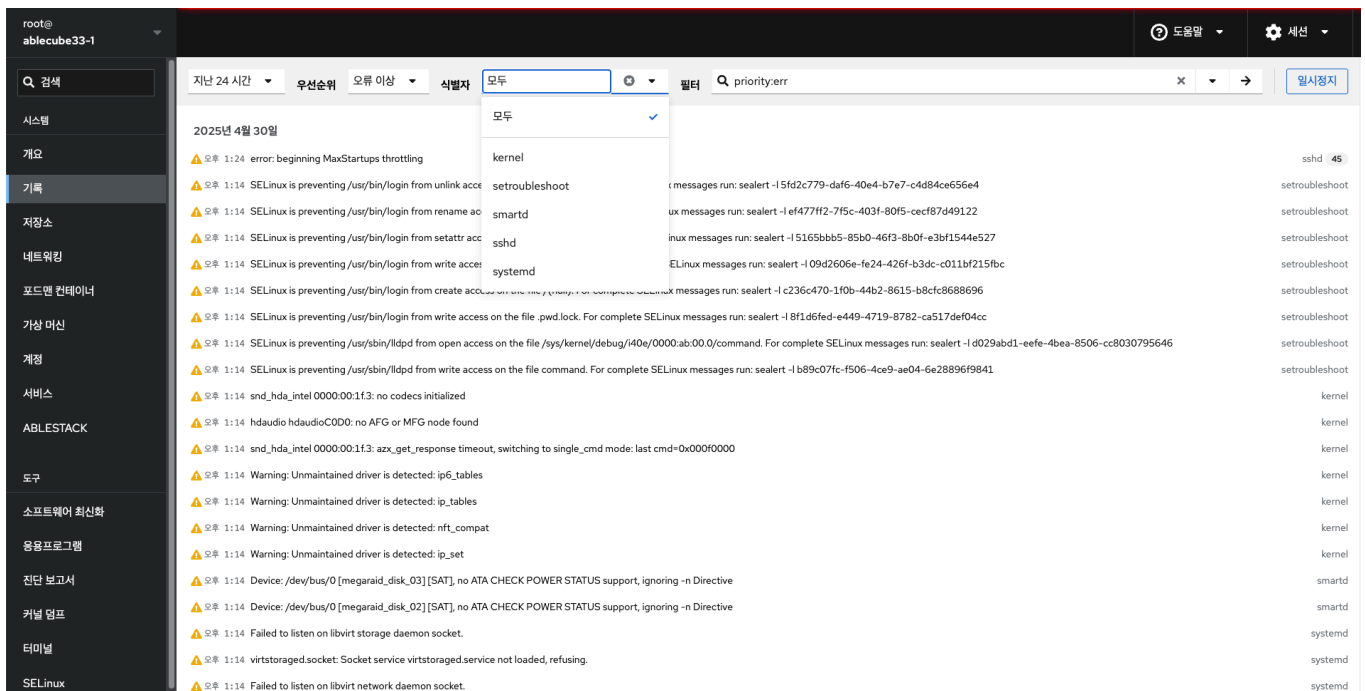

- 상세 로그 정보를 확인하려면 로그 목록을 클릭하세요.

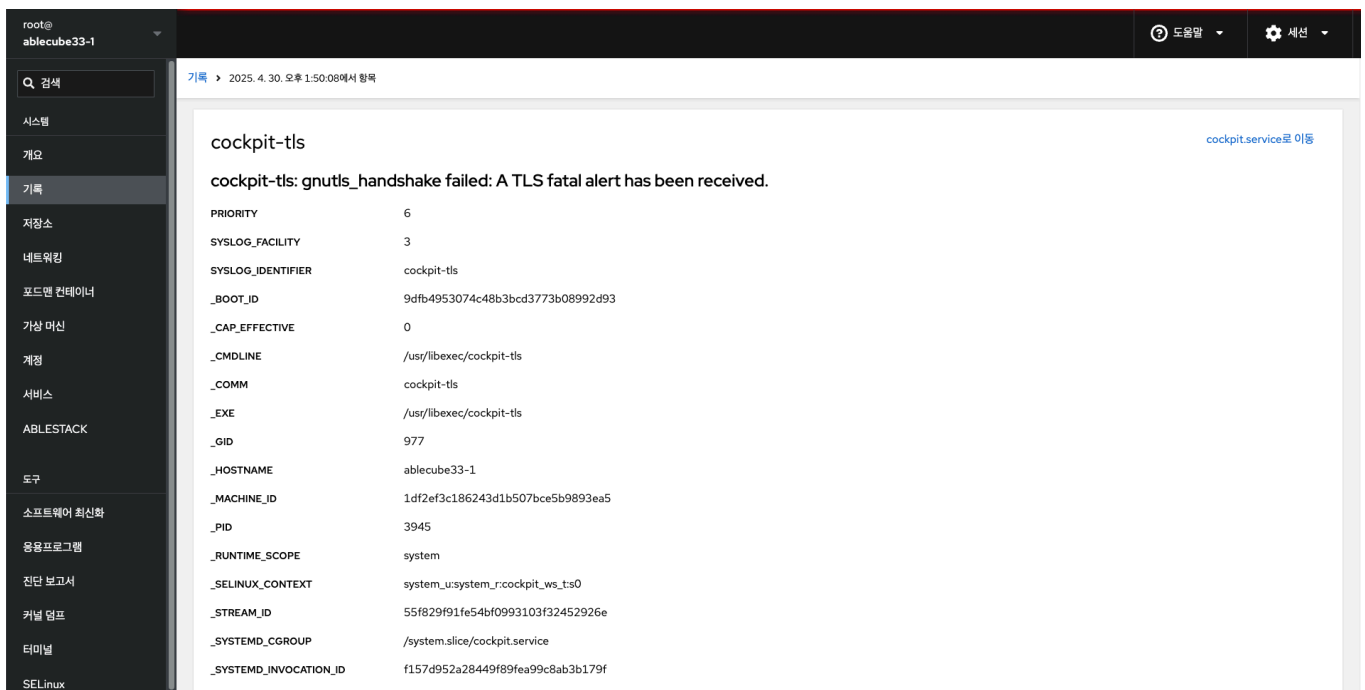

로그 필터링을 위한 텍스트 검색

텍스트 검색을 사용하여 로그를 필터링할 경우 세 개의 드롭다운 메뉴에 미리 정의된 옵션을 사용하거나 전체 검색을 직접 입력할 수 있습니다

- 드롭다운 메뉴 : 검색의 주요 매개 변수를 지정하는 데 사용할 수 있는 세 가지 드롭다운 메뉴가 있습니다.
 - 시간 : 검색의 다양한 시간 범위에 대한 사전 정의된 검색이 포함되어 있습니다.
 - 우선 순위 : 다양한 우선 순위 수준에 대한 옵션을 제공합니다. `journalctl --priority` 옵션에 해당합니다. 기본 우선 순위 값은 오류 이상 수준입니다. 다른 우선 순위를 지정하지 않을 때마다 설정됩니다.
 - 식별자 : 필터링 할 식별자를 선택할 수 있습니다. `journalctl --identifier` 옵션에 해당합니다.
- Quantifiers : 검색을 지정하는 데 사용할 수 있는 6개의 옵션이 있습니다. 로그 필터링 옵션 표에서 다룹니다.
- 로그 필드 : 특정 로그 필드를 검색하려는 경우 필드 내용과 함께 필드를 지정할 수 있습니다.

- 로그 메시지에서 자유 형식 텍스트 검색 : 로그 메시지에서 원하는 텍스트 문자열을 필터링 할 수 있습니다. 문자열은 정규식 형태로도 가능합니다.

Example


- 2025 년 4 월 29 일 이후 발생한 'systemd'로 식별 된 모든 로그 메시지를 필터링하고 'JOB_TYPE' 은 'start' 또는 'restart' 인 경우를 필터링합니다.
 - `identifier:systemd since:2025-4-29 JOB_TYPE=start,restart` 검색필드에 입력
 - 결과 값을 확인합니다.

The screenshot shows the Ablecube1 log management interface. The left sidebar contains a navigation menu with options like '검색' (Search), '시스템' (System), '개요' (Overview), '기록' (Logs), '저장소' (Storage), '네트워킹' (Networking), '포드엔 컨테이너' (Podman Containers), '가상 머신' (Virtual Machines), '계정' (Accounts), '서비스' (Services), 'ABLESTACK', '도구' (Tools), '소프트웨어 최신화' (Software Updates), '응용프로그램' (Applications), '진단 보고서' (Diagnostic Reports), '커널 로그' (Kernel Logs), '터미널' (Terminal), and 'SELinux'. The main panel displays a list of logs for the 'systemd' service. The search bar at the top right contains the query: `priority:debug identifier:systemd since:2025-4-29 JOB_TYPE=start,restart`. The search results show a list of logs with timestamps, messages, and the service name 'systemd'.

시간	우선순위	디버그 이상의 수준	식별자	메시지	서비스
2025년 4월 30일					
오전 9:43				Finished Auto mount faulty GFS mounts.	systemd
오전 9:43				Starting Auto mount faulty GFS mounts...	systemd
오전 9:43				Started Network Manager Script Dispatcher Service.	systemd
오전 9:43				Starting Network Manager Script Dispatcher Service...	systemd
오전 9:43				Finished Auto mount faulty GFS mounts.	systemd
오전 9:43				Starting Auto mount faulty GFS mounts...	systemd
오전 9:42				Finished Auto mount faulty GFS mounts.	systemd
오전 9:42				Starting Auto mount faulty GFS mounts...	systemd
오전 9:42				Started Network Manager Script Dispatcher Service.	systemd
오전 9:42				Starting Network Manager Script Dispatcher Service...	systemd
오전 9:42				Finished Auto mount faulty GFS mounts.	systemd
오전 9:42				Starting Auto mount faulty GFS mounts...	systemd
오전 9:42				Finished Auto mount faulty GFS mounts.	systemd
오전 9:42				Starting Auto mount faulty GFS mounts...	systemd
오전 9:42				Started Network Manager Script Dispatcher Service.	systemd
오전 9:42				Starting Network Manager Script Dispatcher Service...	systemd
오전 9:42				Finished Auto mount faulty GFS mounts.	systemd
오전 9:42				Starting Auto mount faulty GFS mounts...	systemd
오전 9:41				Finished Auto mount faulty GFS mounts.	systemd
오전 9:41				Starting Auto mount faulty GFS mounts...	systemd
오전 9:41				Started Network Manager Script Dispatcher Service.	systemd

Example

- 'service' 가 'cockpit-tls' 이면서 'succeeded' 가 포함된 경우를 필터링합니다.
 - `service:cockpit-tls boot:0 succeeded` 검색필드에 입력
 - 결과 값을 확인합니다.

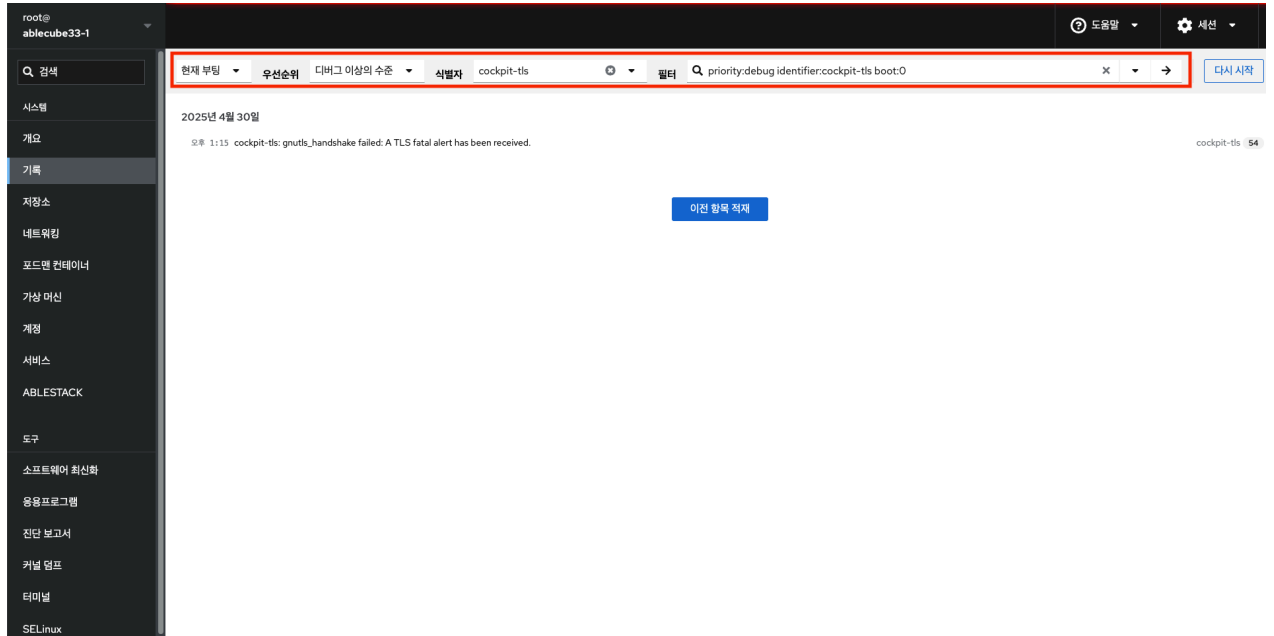

로그 필터링 옵션

로그 필터링에 사용할 수 있는 journalctl 옵션이 몇 가지 있습니다. 이 중 일부는 Cube 웹 콘솔 인터페이스의 드롭다운 메뉴의 일부로 이미 포함되어 있습니다.

Option name	Usage
priority	메시지 우선 순위별로 출력을 필터링합니다. 단일 숫자 또는 텍스트 로그 수준을 사용합니다. 로그 수준은 일반적인 syslog 로그 수준입니다. 단일 로그 수준이 지정되면 이 로그 수준 또는 더 낮은 (따라서 더 중요한) 로그 수준의 모든 메시지가 표시됩니다. (우선 순위 드롭다운 메뉴에 포함되어 있습니다.)
identifier	지정된 syslog 식별자 SYSLOG_IDENTIFIER에 대한 메시지를 표시합니다. 여러번 지정할 수 있습니다. (식별자 드롭다운 메뉴에 포함되어 있습니다.)
follow	가장 최근의 저널 항목만 표시하고 저널에 추가 될 때 새 항목을 계속 인쇄합니다. (드롭다운에 포함되지 않습니다.)

service	지정된 systemd 장치에 대한 메시지를 표시합니다. 여러번 지정할 수 있습니다. (드롭다운에 포함되지 않습니다. journalctl --unit 매개 변수에 해당합니다.)
boot	특정 부팅의 메시지를 표시합니다. 양의 정수는 저널의 시작부터 부팅을 조회하고 0보다 같거나 작은 정수는 저널의 끝에서 시작하는 부팅을 조회합니다. 따라서 1은 시간순으로 저널에서 찾은 첫 번째 부팅을 의미하고, 2는 두 번째 등의 순서로 검색됩니다. -0은 마지막 부팅이고, -1은 마지막 부팅 이전 부팅입니다. (시간 드롭 다운 메뉴에서 현재 부팅 또는 이전 부팅으로만 적용됩니다. 다른 옵션은 수동으로 작성해야 합니다.)
since	날짜 포맷은 '2025-04-29 18:17:16' 형식이어야 합니다. 시간 부분을 생략하면 "00:00:00" 으로 간주됩니다. 초 구성 요소만 생략하면 ":00"으로 간주됩니다. 날짜 구성 요소를 생략하면 현재 날짜로 간주됩니다. 대안으로, "yesterday", "today", "tomorrow" 문자열이 가능하며, 이는 각각 현재 날짜의 전날, 현재 날짜 혹은 다음날의 "00:00:00" 을 나타냅니다. "now" 은 현재 시간을 나타냅니다. 마지막으로, 각각 현재 시간 이전 또는 이후의 시간을 나타내는 "-"또는 "+"접두사가 붙은 상대 시간을 지정할 수 있습니다. (드롭다운에 포함되지 않습니다.)

ABLESTACK Online Docs