



ABLESTACK Online Docs  
ABLESTACK-V4.0-4.0.15

로그

# 로그

## 개요

클러스터 전반의 로그 정보를 실시간으로 수집하고 모니터링하는 기능을 제공합니다. 이 메뉴를 통해 MON, MGR, OSD, MDS, RGW 등 다양한 데몬의 로그 메시지를 통합적으로 확인할 수 있습니다. 일반적으로 로그 수집은 Loki, Fluentd 또는 journald와 같은 로그 백엔드와 연동되며, 구조화된 메타데이터와 함께 저장됩니다. 이를 통해 장애 분석, 이벤트 추적, 성능 이슈 진단 등을 보다 정확하게 수행할 수 있습니다.

로그는 시간, 데몬 종류, 심각도 등의 조건으로 필터링이 가능하여 가시성을 높입니다. 각 데몬은 systemd를 통해 로그를 기록하며, 로그는 journald 또는 로그 수집 에이전트를 통해 외부 저장소로 전달됩니다.

사용자는 UI 상에서 특정 키워드나 시간 조건으로 검색할 수 있으며, 필요한 경우 내보내기도 지원됩니다.

로그는 클러스터 유지보수와 장애 대응에서 필수적인 자료이며, 실시간 모니터링과 연계해 경고 설정도 가능합니다. 또한 Dashboard 또는 외부 로그 뷰어(Grafana, Loki 등)와 통합하여 사용할 수도 있습니다.


### Info

현재 로그 조회 기능은 한국어를 지원하지 않습니다.

로그를 조회하시려면 언어를 English(영어) 로 변경해주시기 바랍니다.

## 클러스터 로그 조회(Cluster Logs)

- 클러스터의 다양한 로그 데이터를 실시간으로 조회할 수 있습니다. 단, 현재는 영어(English) 언어 환경에서만 로그 내용이 정상적으로 표시됩니다.

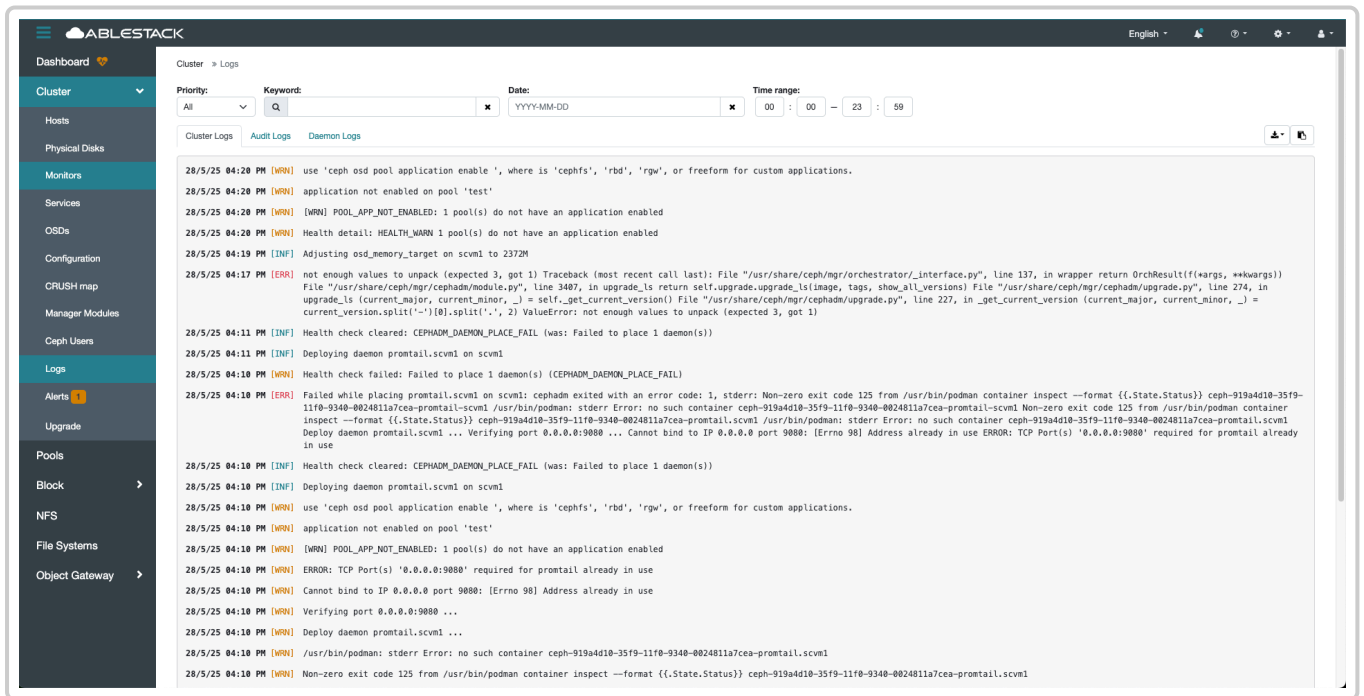


- **Priority** 로 로그 레벨을 설정하여 로그 조회를 할 수 있습니다.
- **Keyword** 로 특정 키워드를 검색하여 로그 조회를 할 수 있습니다.

- **Date** 로 특정 날짜 및 시간을 설정하여 로그 조회를 할 수 있습니다.
- **Time range** 로 특정 시간을 설정하여 로그 조회를 할 수 있습니다.

## 감사 로그 조회(Audit Logs)

1. 시스템 내에서 발생한 주요 이벤트 및 사용자 활동 내역을 기록한 로그입니다. 보안, 변경 이력 추적, 문제 진단 등 다양한 목적에 활용되며, 관리자는 이를 통해 시스템 운영의 투명성과 신뢰성을 확보할 수 있습니다.

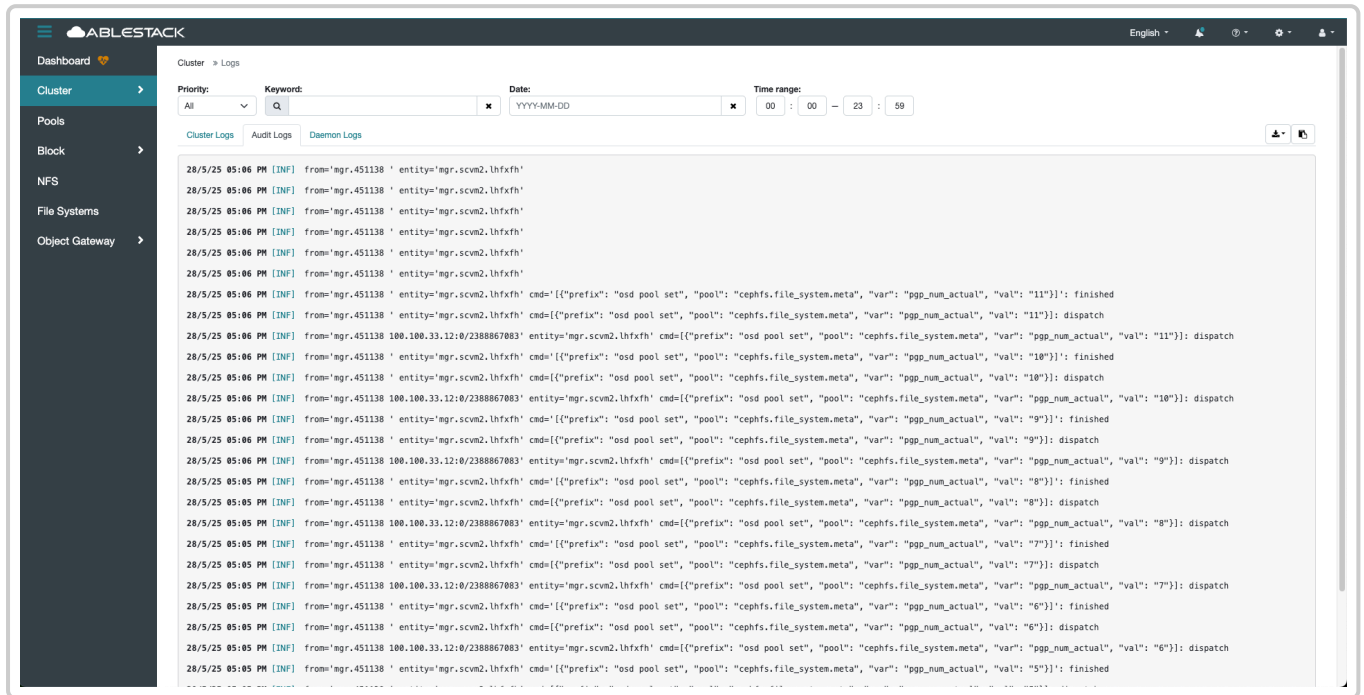

- **Priority** 로 로그 레벨을 설정하여 로그 조회를 할 수 있습니다.
- **Keyword** 로 특정 키워드를 검색하여 로그 조회를 할 수 있습니다.
- **Date** 로 특정 날짜 및 시간을 설정하여 로그 조회를 할 수 있습니다.
- **Time range** 로 특정 시간을 설정하여 로그 조회를 할 수 있습니다.


## 데몬 로그 조회(Daemon Logs)

### Check

해당 데몬 로그를 조회하기 위해서는 Loki 서비스와 Promtail 서비스가 사전에 생성 및 실행되어 있어야 합니다.

이 두 서비스는 로그 수집 및 시각화를 위한 필수 구성 요소이며, 설정이 완료되지 않으면 로그 데이터가 수집되지 않아 조회가 불가능합니다.


1. 클러스터를 구성하는 각 데몬(MON, OSD, MGR 등)의 동작 상태와 내부 이벤트를 확인할 수 있는 기능입니다. 문제 발생 시 원인 분석이나 상태 점검에 활용되며, 실시간 또는 특정 시간대의 로그를 통해 클러스터의 안정성을 진단할 수 있습니다.

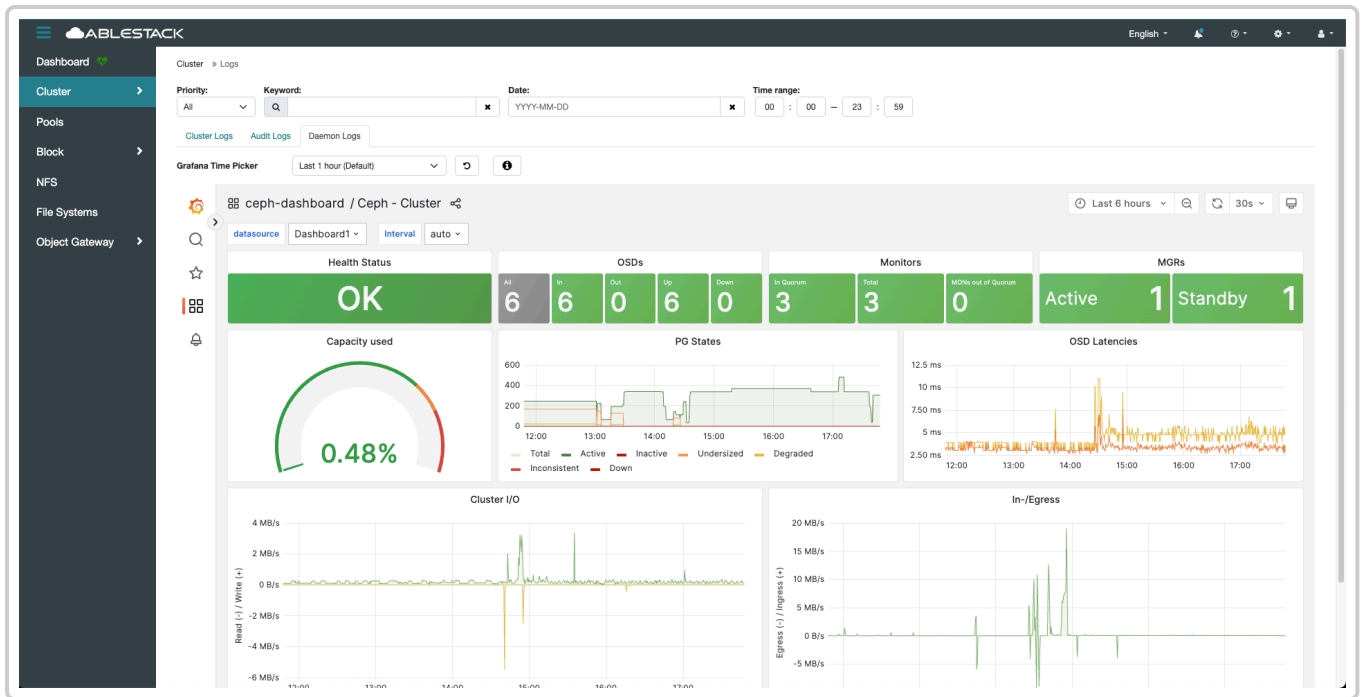

- **Interval** 를 사용하여 자동으로 새로고침 설정하여 반복적으로 새로운 데몬 로그 조회를 할 수 있습니다.
- 특정 시간 및 날짜를 선택하여 데몬 로그 조회를 할 수 있습니다.

## 로그 내보내기(Download)

1. 로그 데이터를 **JSON** 또는 **Text** 로 내보내는 기능을 제공합니다.

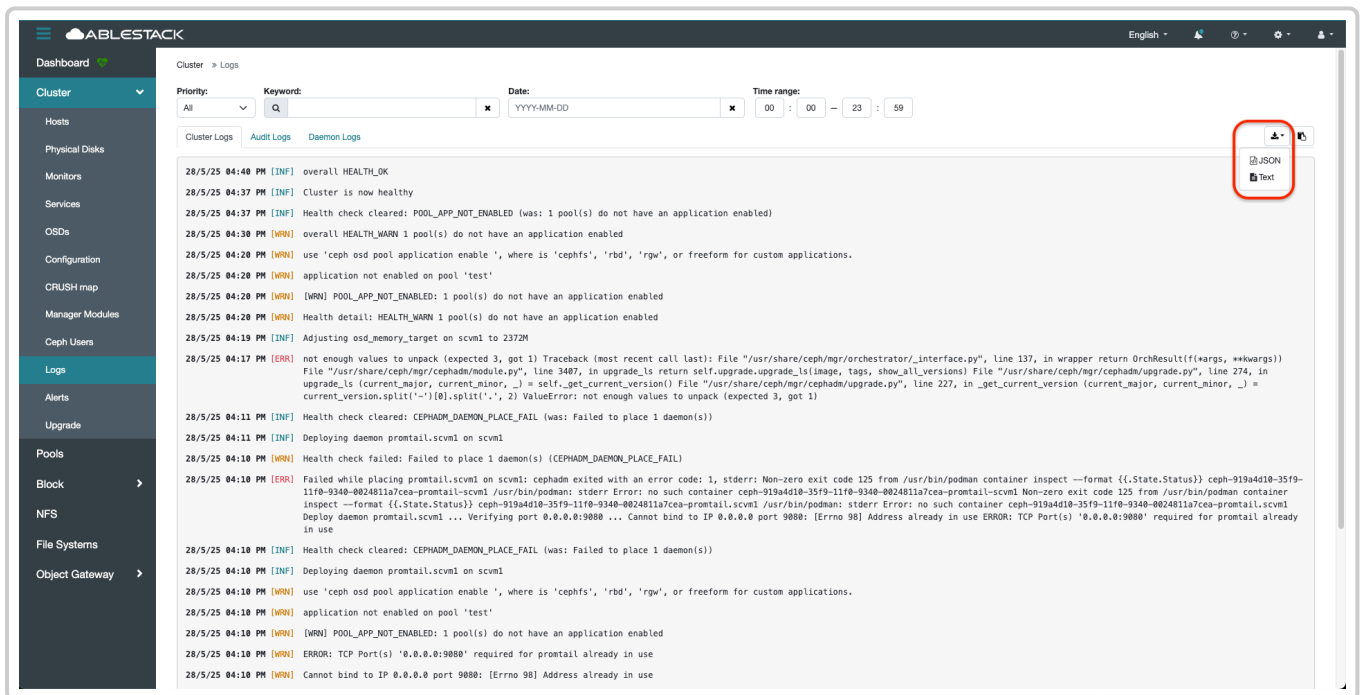

- 클릭 시, 해당 파일이 로컬 환경에 자동으로 다운로드 됩니다.

## 로그 복사(Copy To Clipboard)

## 1. 로그 데이터를 복사할 수 있는 기능을 제공합니다.

The screenshot shows the AbleStack dashboard with the 'Logs' section selected. The interface includes a sidebar with navigation options and a main area displaying a list of logs. The logs are filtered by 'Cluster' and 'Logs'. The log entries show various system events, including health checks, daemon deployment, and errors. A 'Copy to Clipboard' button is visible in the top right corner of the log list.

Cluster > Logs

Priority: All Keyword: Date: YYYY-MM-DD Time range: 00 : 00 - 23 : 59

Cluster Logs Audit Logs Daemon Logs

28/5/25 04:50 PM [INF] overall HEALTH\_OK

28/5/25 04:40 PM [INF] overall HEALTH\_OK

28/5/25 04:37 PM [INF] Cluster is now healthy

28/5/25 04:37 PM [INF] Health check cleared: POOL\_APP\_NOT\_ENABLED (was: 1 pool(s) do not have an application enabled)

28/5/25 04:30 PM [WRN] overall HEALTH\_WARN 1 pool(s) do not have an application enabled

28/5/25 04:20 PM [WRN] use 'ceph osd pool application enable ', where is 'cephfs', 'rbd', 'rgw', or freeform for custom applications.

28/5/25 04:20 PM [WRN] application not enabled on pool 'test'

28/5/25 04:20 PM [WRN] POOL\_APP\_NOT\_ENABLED: 1 pool(s) do not have an application enabled

28/5/25 04:20 PM [WRN] Health detail: HEALTH\_WARN 1 pool(s) do not have an application enabled

28/5/25 04:19 PM [INF] Adjusting osd\_memory\_target on scvml to 2372M

28/5/25 04:17 PM [ERR] not enough values to unpack (expected 3, got 1) Traceback (most recent call last): File "/usr/share/ceph/mgr/orchestrator/\_interface.py", line 137, in wrapper return OrchResult(f(\*args, \*\*kwargs)) File "/usr/share/ceph/mgr/cephadm/module.py", line 3407, in upgrade\_ls return self.upgrade.upgrade\_ls(image, tags, show\_all\_versions) File "/usr/share/ceph/mgr/cephadm/upgrade.py", line 274, in upgrade\_ls (current\_major, current\_minor, \_) = self.get\_current\_version() File "/usr/share/ceph/mgr/cephadm/upgrade.py", line 227, in \_get\_current\_version (current\_major, current\_minor, \_) = current\_version.split('~')[0].split('.')[0, 2) ValueError: not enough values to unpack (expected 3, got 1)

28/5/25 04:11 PM [INF] Health check cleared: CEPHADMON\_PLACEMENT\_FAIL (was: Failed to place 1 daemon(s))

28/5/25 04:11 PM [INF] Deploying daemon proutail.scvml on scvml

28/5/25 04:10 PM [WRN] Health check failed: Failed to place 1 daemon(s) (CEPHADM\_DAEMON\_PLACEMENT\_FAIL)

28/5/25 04:10 PM [ERR] Failed while placing proutail.scvml on scvml: cephadm exited with an error code: 1, stderr: Non-zero exit code 125 from /usr/bin/podman container inspect --format {{.State.Status}} ceph-919a4d10-35f9-11f0-9340-0024811a7cea-proutail-scvm1 /usr/bin/podman: stderr Errors: no such container ceph-919a4d10-35f9-11f0-9340-0024811a7cea-proutail-scvm1 Non-zero exit code 125 from /usr/bin/podman container inspect --format {{.State.Status}} ceph-919a4d10-35f9-11f0-9340-0024811a7cea-proutail-scvm1 /usr/bin/podman: stderr Errors: no such container ceph-919a4d10-35f9-11f0-9340-0024811a7cea-proutail-scvm1 Deploy daemon proutail.scvml ... Verifying port 0.0.0.0:9080 ... Cannot bind to IP 0.0.0.0 port 9080: [Errno 98] Address already in use ERROR: TCP Port(s) '0.0.0.0:9080' required for proutail already in use

28/5/25 04:10 PM [INF] Health check cleared: CEPHADMON\_PLACEMENT\_FAIL (was: Failed to place 1 daemon(s))

28/5/25 04:10 PM [INF] Deploying daemon proutail.scvml on scvml

28/5/25 04:10 PM [WRN] use 'ceph osd pool application enable ', where is 'cephfs', 'rbd', 'rgw', or freeform for custom applications.

28/5/25 04:10 PM [WRN] application not enabled on pool 'test'

28/5/25 04:10 PM [WRN] POOL\_APP\_NOT\_ENABLED: 1 pool(s) do not have an application enabled

28/5/25 04:10 PM [WRN] ERROR: TCP Port(s) '0.0.0.0:9080' required for proutail already in use

Copy to Clipboard

# ABLESTACK Online Docs