


F-CO Environmentally Friendly Insulation Materials Quickly and Easily Insulate Electric Wire and Cable Connections

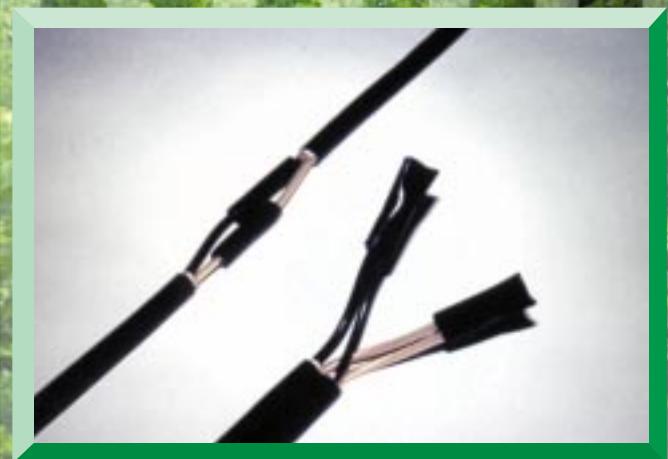

Q U I C K F-CO

QUICK F-CO

**Sheet-type insulation materials made of insulating adhesive putty and a protective layer of polyethylene
Wrap the insulation sleeve only once!**

Applications

- Insulation of indoor connections
- Insulation of connections inside boxes
- Filling spaces of rough connection points

Features

- No toxic substances are released when incinerated, including dioxin and halogen gases.
- Quick and easy insulation, even in narrow spaces.
- Consistent quality
- Substantial reduction in insulation processing time
- Water resistance with insulating adhesive putty [JIS C 0920 Protection Level Three (Rain Proof)]

Procedures



1. Cut the sheet to precise dimensions for insulation.



2. Position the sheet and wrap from the side where the polyethylene film is exposed.



3. After wrapping, squeeze the two ends together.



4. Make sure there is no space at the ends.



5. Installation is complete. It is also possible to make parallel connections.

Caution

1. The above procedure is an example of how to insulate. Thoroughly squeeze the adhesive putty to make sure there are no openings.
2. If connection points are exposed, shield the wires with tape or a tube.
3. Do not use if the connection points are crushed.
4. Do not use when the wires may be submerged in water.

Application

Type	Electric wire and cable size	JIS crimp sleeve by connector type	Applicable connector (size)
Q515K	1.25mm ² ~8mm ²	P Sleeve B Sleeve	P: 2-22 B: 1.25-14


Electrical Characteristics

Insulation resistance	100 MΩ or more
Breakdown voltage	10 kV or more


Structure and Specifications

- Sheet type insulating adhesive putty (50 mm width x 150 mm length x 1.5 mm thickness) affixed to a 0.12 mm protective layer of polyethylene

5 or less 50 5 or less

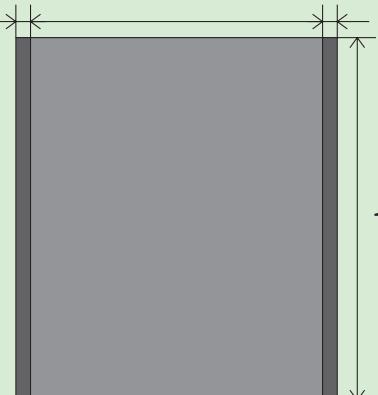

Units: Millimeters

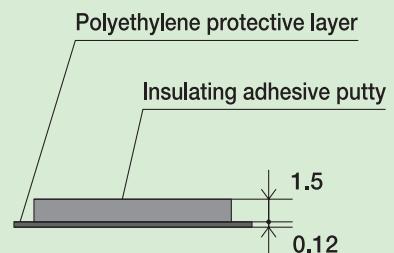

Sales Unit

- 20 -package sets, with 5 sheets per package
- Sold in retail stores

FURUKAWA ELECTRIC CO., LTD.

Head Office 6-1, Marunouchi 2-chome, Chiyoda-ku, Tokyo, 100-8322, Japan Tel: 81-3-3286-3218, Fax: 81-3-3286-3747

Overseas Representative Offices

Europe Representative Office

3rd Floor, Newcombe House, 43-45 Notting Hill Gate, London W11 3FE, U.K. Tel: 44-171-221-6000, Fax: 44-171-313-5310

Asia Representative Office

10 Anson Road, #25-07/08, International Plaza, Singapore 079903 Tel: 65-225-7149, Fax: 65-224-2362

China Representative Office

2301, China World Tower No. 1, Jian Guo Men Wai Avenue, Beijing 100004, P.R.C. Tel: 86-10-6505-4608, Fax: 86-10-6505-4609

Shanghai Representative Office

Room 24G, Jiu Shi Fu Xing Mansion No. 918, Huai Hai Zhong Road, Shanghai 200020, P.R.C. Tel: 86-21-64159072, Fax: 86-21-64157549

Hong Kong Representative Office

1910, Fortress Tower 250, King's Road, North Point, Hong Kong Tel: 852-2512-8938, Fax: 852-2512-9717

Philippines Representative Office

Room No. 702, Ortigaz Bldg., Ortigaz Center, Ortigaz Avenue, Pasig City, Metro Manila, Philippines Tel: 63-2-638-8552/8553, Fax: 63-2-638-8554

Taipei Representative Office

5th, No. 36, Chang An E. Rd., Sec 1, Taipei, Taiwan, R.O.C. Tel: 886-2-2562-7293, Fax: 886-2-2563-8093

North America Representative Office

900 Lafayette Street, Suite 509, Santa Clara, CA 95050, U.S.A. Tel: 1-408-248-4884, Fax: 1-408-249-3094

Central & South America Representative Office

Rua Afonso Bras, 413 Ciaixa Postal, 176 Vila Nova Conceicao, Cep 04511-900, Sao Paulo, S.P., Brazil Tel: 55-11-828-4725, Fax: 55-11-828-4848

Middle East Representative Office

Dubai Airport Free Zone, E-1, Suite No. 229 P.O. Box 54282, Dubai Airport Free Zone Dubai, United Arab Emirates Tel: 971-4-2994630 Fax: 971-4-2994609