

# Quantum simulation of partially distinguishable boson sampling

Alexandra E. Moylett<sup>1,2,3,\*</sup> and Peter S. Turner<sup>1</sup>

<sup>1</sup>Quantum Engineering Technology Labs, H. H. Wills Physics Laboratory and Department of Electrical & Electronic Engineering, University of Bristol, BS8 1FD, United Kingdom

<sup>2</sup>Quantum Engineering Centre for Doctoral Training, H. H. Wills Physics Laboratory and Department of Electrical & Electronic Engineering, University of Bristol, BS8 1FD, United Kingdom

<sup>3</sup>Heilbronn Institute for Mathematical Research, University of Bristol, BS8 1SN, United Kingdom


\*alex.moylett@bristol.ac.uk

## Main Results

- ▶ We provide an explicit polynomial time quantum circuit for Boson Sampling with photons of arbitrary distinguishability.
- ▶ This is through reducing Boson Sampling to the problem of sampling from irreducible representations of the Unitary group.
- ▶ This is solvable through known circuits for the Schur transform [BCH07].

## 1. Boson Sampling

- ▶ Sampling from  $n$  indistinguishable single photons on an  $m$ -mode interferometer.
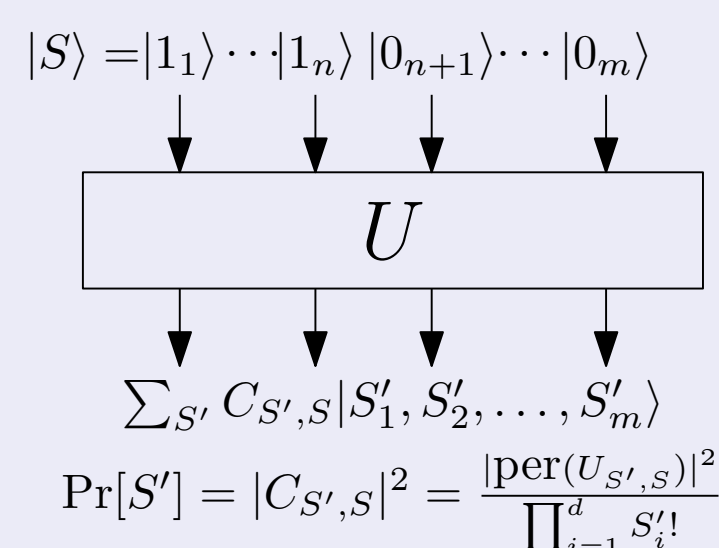
$$|S\rangle = |1_1\rangle \cdots |1_n\rangle |0_{n+1}\rangle \cdots |0_m\rangle$$


$$\Pr[S'] = |C_{S',S}|^2 = \frac{|\text{per}(U_{S',S})|^2}{\prod_{i=1}^d S_i!}$$

Figure: The Boson Sampling model.

- ▶ Efficient classical simulation would imply collapse of the polynomial hierarchy [AA11].
- ▶ Practical algorithms for up to 50 photons exist [NSC+17].
- ▶ Experimental issues such as loss and distinguishability need to be considered to reach a scale that outperforms classical computation

## 2. Schur-Weyl duality

- ▶ The Hilbert space  $(\mathbb{C}^m)^{\otimes n}$  carries dual irreps of  $U(m)$  and  $S_n$ .
- ▶ An efficient quantum circuit, denoted  $W$ , allows us to map between the computational basis and the irrep basis [BCH08].

$$W|\Psi\rangle = \sum_{\lambda} \sum_{q_{\lambda}, p_{\lambda}} C_{q_{\lambda}, p_{\lambda}}^{\lambda} |\lambda\rangle |q_{\lambda}\rangle |p_{\lambda}\rangle$$

- ▶ There is also an efficient mapping from occupation numbers to the symmetric  $\lambda = (n)$  irrep of  $U(m)$  [RSdG99].
- ▶ The fully symmetric irrep of  $S_n$  is one state, denoted  $|p_{(n)=1}\rangle$ .

## 3. Quantum circuit for Boson Sampling

- ▶ Circuit works by creating a single particle representation in terms of qudits via the methods in part 2.
- ▶ Interferometer  $U$  can be implemented by applying  $U^{\otimes n}$ .

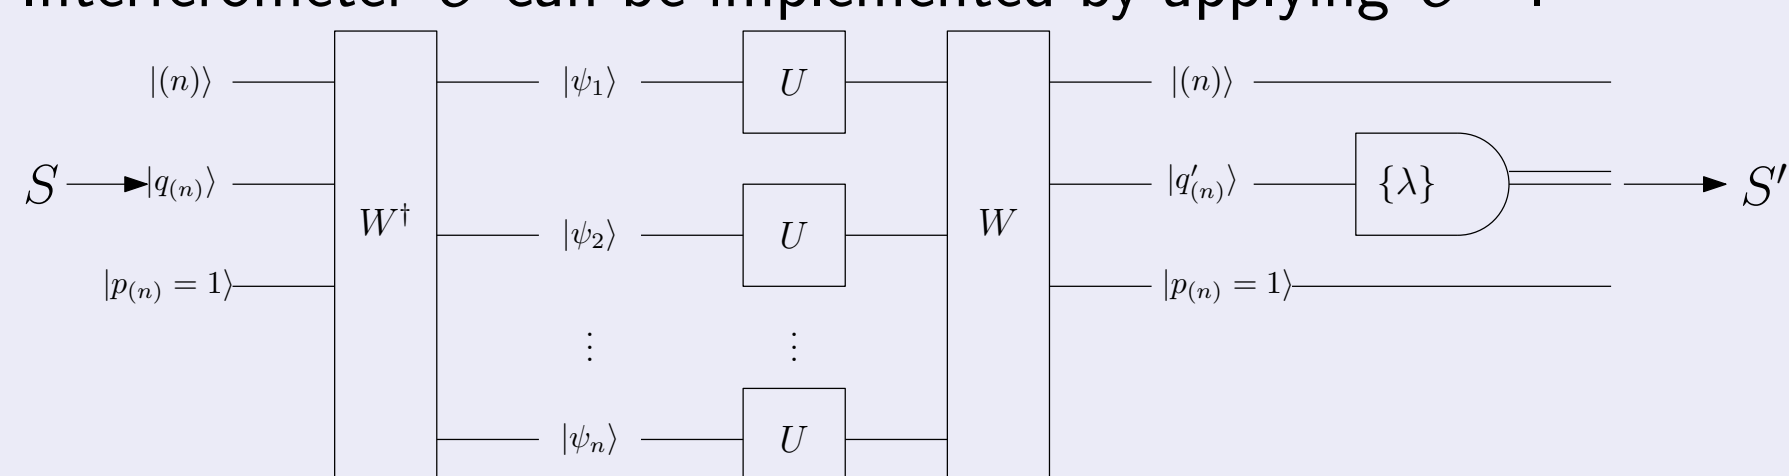


Figure: Circuit for Boson Sampling with indistinguishable photons. This circuit has accuracy  $\delta + \epsilon$  due to approximating  $U^{\otimes n}$  and  $W$ , and runs in polynomial time in terms of  $n, m, \log \delta^{-1}$  and  $\log \epsilon^{-1}$ .

- ▶ We also see the same distribution if we remove the second  $W$  circuit and measure each qudit in the computational basis.

## 4. Boson Sampling with partially distinguishable photons

- ▶ For distinguishability, we introduce a second set of  $n$  modes 'Label' modes as well as our  $m$  'System' modes.
- ▶ Occupation numbers map to symmetric irrep of  $U(m \times n)$ .
- ▶ This decomposes into irreps of  $U(m) \times U(n)$  [RCR12].

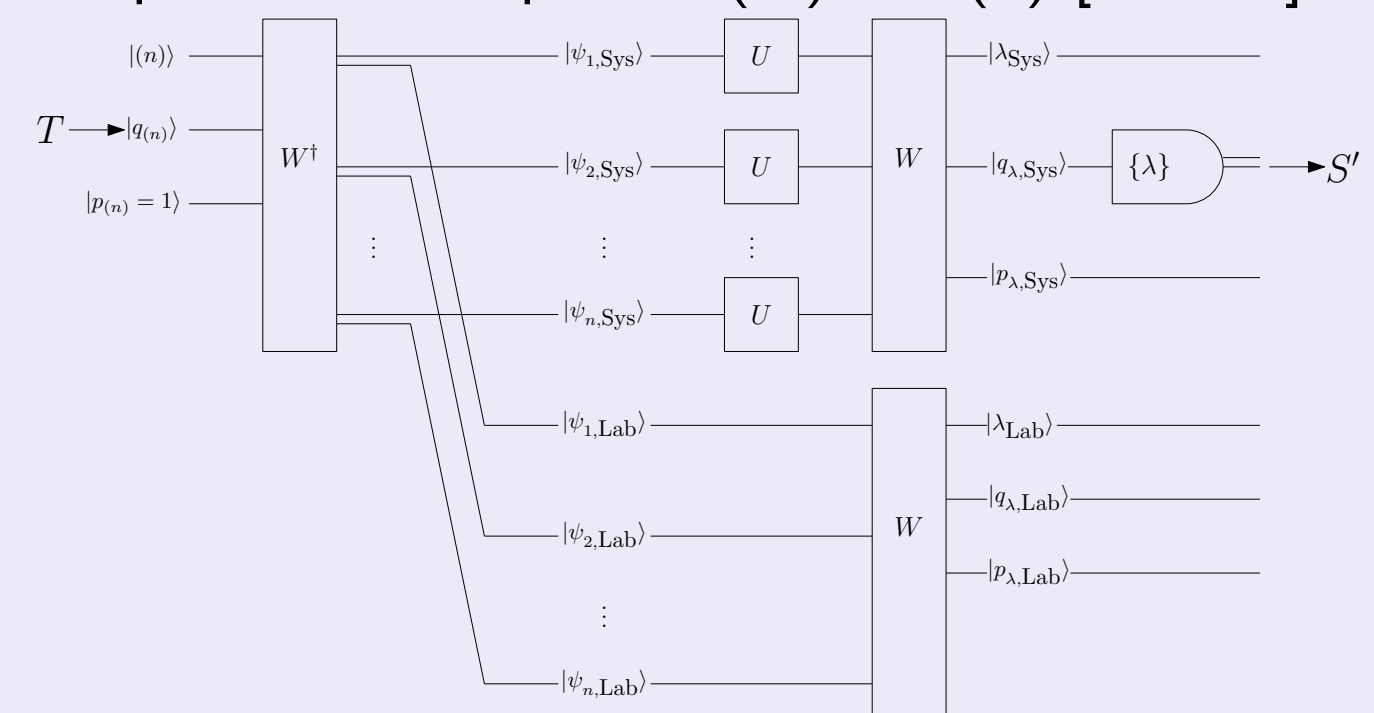


Figure: Circuit for Boson Sampling with photons of arbitrary distinguishability.

- ▶ Distinguishability increases entanglement between System and Label registers, creating a more mixed state.

## 5. Boson Sampling with loss

- ▶ Distribution known for  $n + k$  photons with  $k$  lost [AB16].
- ▶ This can be modelled by simply tracing out  $k$  qudits.

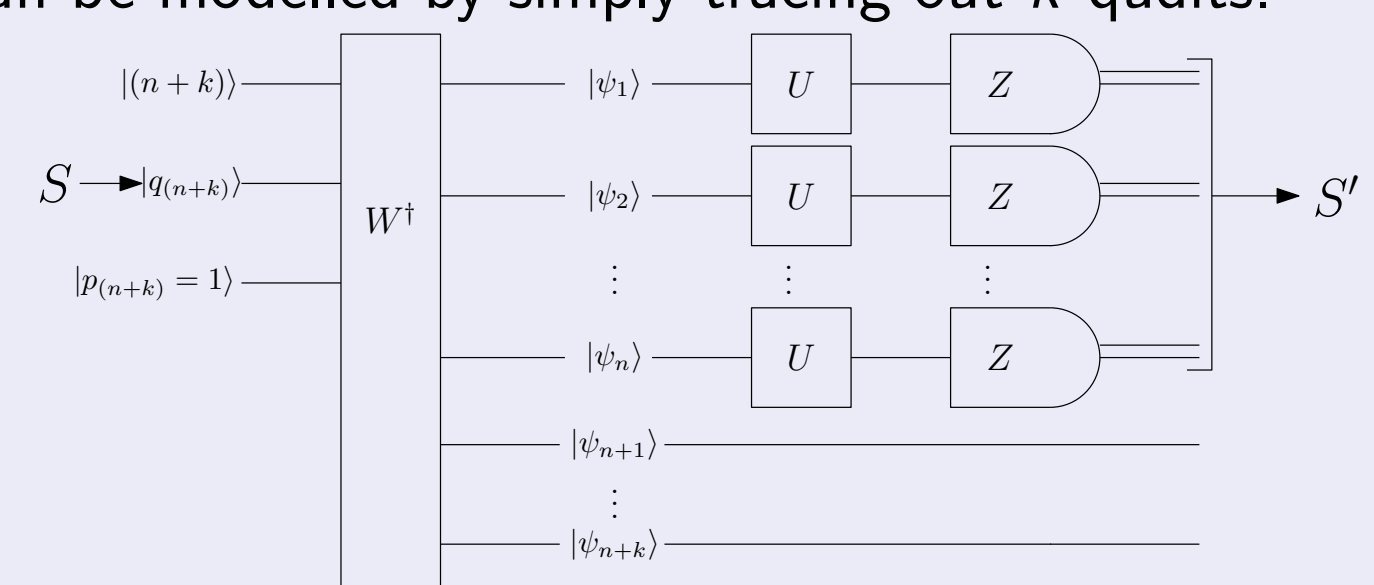


Figure: Circuit for Boson Sampling when  $k$  photons are lost.

## 6. Other results and future work

- ▶ Postselecting on  $|\lambda_{\text{Sys}}\rangle = |(n)\rangle$  allows us to perform indistinguishable Boson Sampling.
- ▶ Small probability of indistinguishability guarantees entanglement.

### Questions

- ▶ Can we learn how distinguishability affects complexity?
- ▶ Are there any applications which irrep sampling can be used for?
- ▶ What do more realistic distinguishability models look like?
- ▶ Can this circuit simulate other models of loss?

## References

- [AA11] S. Aaronson and A. Arkhipov, Proc. STOC'11, 333-342 (2011)
- [AB16] S. Aaronson and D. J. Brod, Phys. Rev. A **93**, 012335 (2016)
- [BCH07] D. Bacon, I. L. Chuang and A. W. Harrow, Proc. SODA'07, 1235-1244 (2007)
- [NSC+17] A. Neville et al., Nat. Phys. **13**, 11531157 (2017)
- [RCR12] D. J. Rowe, M. J. Carvalho and J. Repka, Rev. Mod. Phys. **84**, 711-757 (2012)
- [RSdG99] D. J. Rowe, B. C. Sanders and H. de Guise, J. Math. Phys., **40** 7, 3604-3615 (1999)