

TrekkerPhotoArt.com

# X10ManagerDesktop

Operations Manual

Alan Wagner  
12-16-2020


# Table of Contents

Overview .....	3
<b>X10ManagerDesktop Functional Operation</b> .....	3
<b>X10ManagerDesktop program Window</b> .....	5
<b>X10ManagerDesktop program Window Menus</b> .....	6
Specifications .....	7
Revisions .....	8
Licensing.....	9
<b>CREATIVE COMMONS PUBLIC LICENSE (CCPL)</b> .....	9
Installation .....	13
Setup .....	16
<b>1<sup>st</sup> Time Setup</b> .....	16
<b>Customize the X10Manager Desktop program Layout</b> .....	18
Repair Installation.....	19
Remove Installation .....	20
<b>Preserve Files and X10 database</b> .....	21
Controllers .....	23
<b>Add CP290 X10 Home Control Interface</b> .....	23
<b>Edit CP290 X10 Home Control Interface</b> .....	25
<b>Add CM15A X10 ActiveHome Pro</b> .....	26
<b>Edit CM15A X10 ActiveHome Pro</b> .....	28
<b>Download Events to Controller</b> .....	29
Modules .....	30
<b>Add X10 Module</b> .....	30
<b>Edit X10 Module</b> .....	32
Scenes .....	33
<b>Add Scene</b> .....	33
<b>Edit Scene</b> .....	35
Schedules.....	36
<b>Add Schedule</b> .....	36
<b>Edit Schedule</b> .....	38
Events .....	39
<b>Add Event</b> .....	39

<b>Edit Event</b> .....	42
<b>Macros</b> .....	44
<b>Add Macro</b> .....	44
<b>Edit Macro</b> .....	46
<b>Appendix</b> .....	47
<b>X10Manager (command line)</b> .....	47
<i>X10Manager.exe</i> .....	48
<i>Operations common to all Controllers</i> .....	49
<i>CM15A Controller specific Operations</i> .....	52
<i>CP290 Controller specific Operations</i> .....	54
<i>Email Notifications</i> .....	55
<b>Credits</b> .....	56
<i>The Code Project Open License (CPOL) 1.02</i> .....	57

# Overview

## X10ManagerDesktop Functional Operation

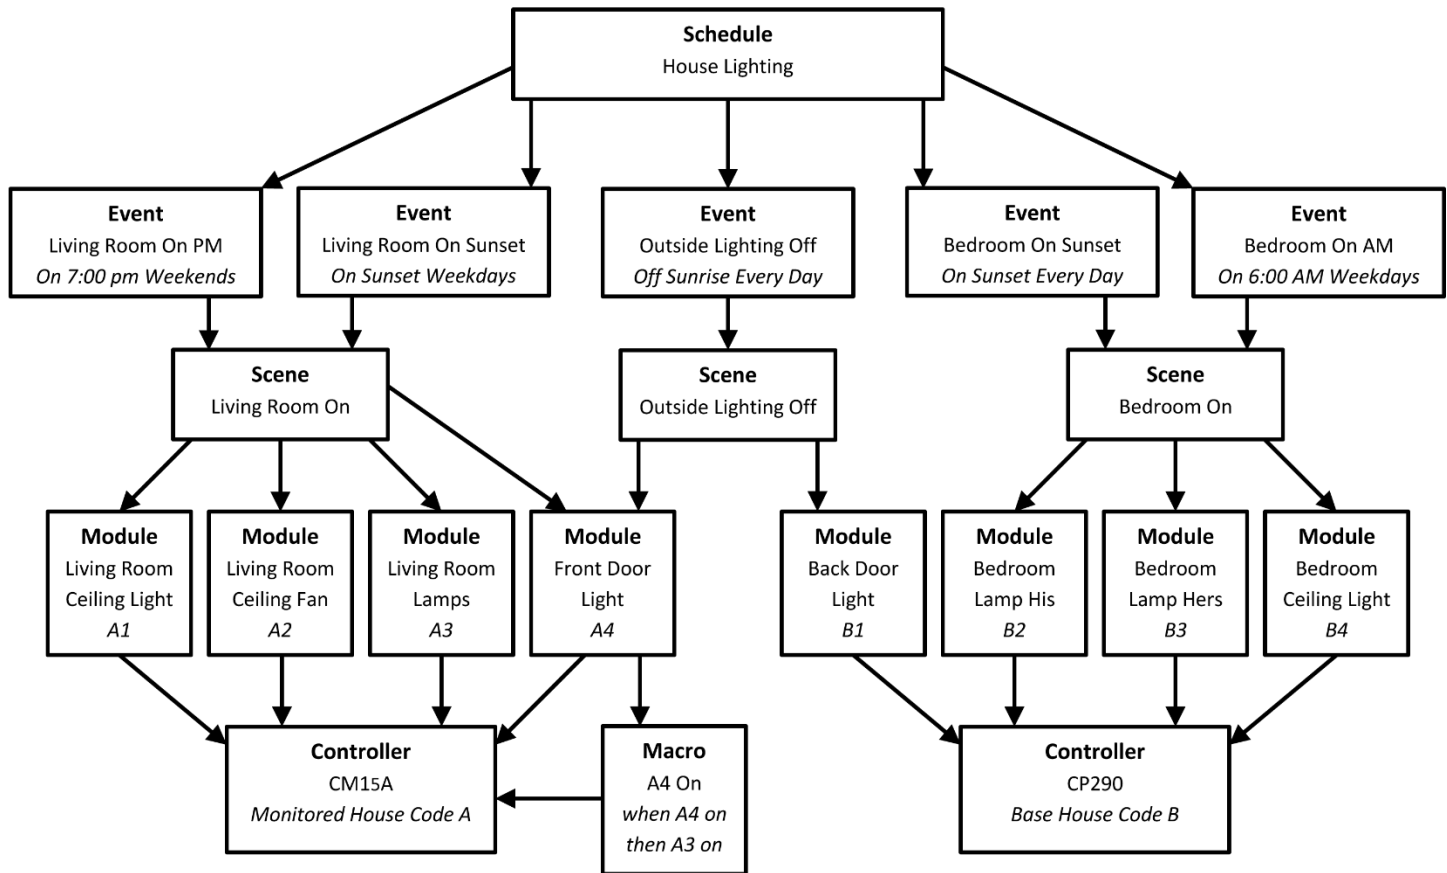

The “X10ManagerDesktop Functional Operation” diagram above shows relationships between **Schedules**, **Events**, **Scenes**, **Modules** and **Controllers**. The second item in each block is a freely formatted name of the **Schedule**, **Event**, **Scene**, **Module** or **Controller**. For example, the block labeled “Schedule” has been given a name “House Lighting”.

Items shown in *italics* would be an operation or designator. For example, the “Event” block “Living Room On PM” has an operation “*On 7:00 pm Weekends*”; the “Module” block “Living Room Ceiling Light” has a Module designation “*A1*”.

A **Schedule** consists of many **Events**. **Events** are unique to each **Schedule**. Each **Event** will trigger one **Scene**. For example, Event “Living Room On PM” could not trigger an additional Scene.

One **Scene** can be triggered by multiple **Events**. For example, Scene “Living Room On” has two Events named “Living Room On PM” and “Living Room On Sunset” that triggers Scene “Living Room On” at different times and days.

What’s shown above is for illustrative purposes. Additional **Events** and **Scenes** will need to be added. For example, a Scene can be added that will turn off the Living Room Lights.

## Overview – continued

### X10ManagerDesktop Functional Operation – continued

**Scenes** can be limited to groups of **Modules** set to one **House Code** as shown above with **Scene** “Living Room On”.

-or-

**Scenes** can control groups of **Modules** set over multiple **House Codes** as shown above with **Scene** “Outside Lighting Off”.

**Macros** (or **Macro Initiators**) can be added for **Controllers** that support **Macro Initiators** such as the CM15A.

From a **Scheduling** -or- **Event** -or- **Scene** perspective, **Controllers** can support **Modules** set using multiple **House Codes**. For example, additional Modules set at House D could be added to the CM15A Controller.

However, **Controllers** can have limitations. For example, the CM15A Controller is limited to Monitoring one House Code (in this case House Code A). So Macro Initiators could only be Triggered by Modules set to House Code A.

There can be multiple **Controllers**. The “X10ManagerDesktop Functional Operation” diagram shows two **Controllers**. Supported **Controllers** can be added in any desired combination. For example, a 2<sup>nd</sup> CM15A Controller can be added that would support **Modules** in House Code D to allow a Monitored House Code D for Macro Initiators.

Note: Information regarding installation, setup and operation of X10 Controllers and X10 Modules is not covered in this Operations Manual.

## Overview – continued

### X10ManagerDesktop program Window

The screenshot displays the X10ManagerDesktop application window with a menu bar (File, Controller, Module, Scene, Schedule, Macro, Help) and status bars (Download, All Lights Off, All Lights On). The main area is divided into four panels:


- Controller Edit:** A table with columns: AddEdit, Name, Type, Active, Description, HouseCode, Port, Hub, AppKey, UID, TransceiverHouseCodes, Dusk/Dawn/Resolution. It lists two controllers: CM15A and CP290.
- Module Edit:** A table with columns: AddEdit, Controller, Code, Name, Description, Enabled, Dimmer, Lighting, Extended. It lists various lighting modules like OutGar, FPorch, BDoor, HalFloor, GrgSrvDr, Garage, FrontWlk, Den Test Dimmer Module, DinLight, ComerCa, Kitchen, DinFan, and LivWall.
- Schedule Edit:** A table with columns: AddEdit, Name, Description, Sunrise Time, Sunset Time, Active. It lists one schedule: House Lighting with Events.
- Scene Edit:** A table with columns: AddEdit, Name, Description, HouseCode, CurrentHouseCodeOnly. It lists numerous scenes such as A/V Comp ON, ALL OFF JS, ALL OFF KS, Christmas Tree Off, Doors Off S, Doors On S, Front Walk Off, Front Walk On, Garage Off, Garage On, Garage Service Door ON, Hallway Floor Off, Hallway Floor On, Kitchen OFF, Kitchen ON, Living Room Lights Off, Living Room Wall Off, Living Room Wall On, and LivRoom Off.

**X10ManagerDesktop** program can concurrently manage multiple **Controllers**, **Modules**, **Scenes**, **Schedules** and their **Events** using their respective “Add” and “Edit” forms.

**Controllers**, **Modules**, **Scenes** **Schedules** and their **Events** will have freely formatted names and descriptions given when they are added or later modified via the **X10ManagerDesktop** program. “Add” and “Edit” forms.

The **Setup** section discusses a sequence for 1<sup>st</sup> time setup of **Controllers**, **Modules**, **Scenes**, **Schedules** and their **Events**.

## X10ManagerDesktop program Window Menus

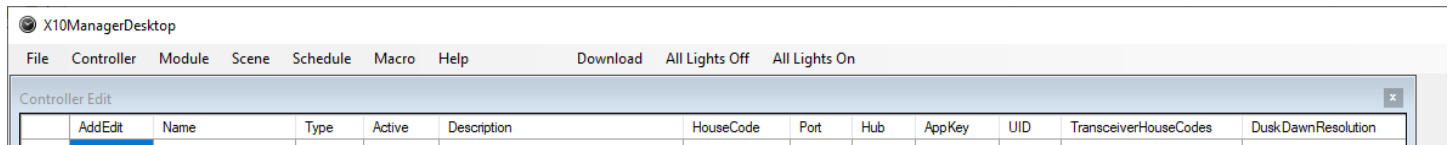

### File

- Settings X10ManagerDesktop program behavior
  - Longitude and Latitude used for calculating Sunrise and Sunset times are entered here.
- Backup Backup X10 database
  - The “Backup Directory Path” location is found in “Settings”
- Restore Restore X10 database
- Exit Exit Program – Exiting program saves Windows size and positions per user

### Controller

- Add Add a X10 Controller to the X10 database
- Edit Modify a X10 Controller already in the X10 database
- Download Download Event Timers to Selected Controllers

### Module

- Add Add a X10 Module to the X10 database
- Edit Modify a X10 Module already in the X10 database
- Import Import a list of X10 Modules from a CSV file
  - Refer to “Appendix” – “X10Manager.exe” – “Operations Common to all Controllers” – “importModulesToX10Db” for “CSV Import File Format”
- Export Export a list of X10 Modules to a CSV file

### Scene

- Add Add a Scene to the X10 database
- Edit Modify a Scene already in the X10 database

### Schedule

- Add Add a Schedule to the X10 database
- Edit Modify a Schedule already in the X10 database
  - Add Event / Edit Event is found in a selected Schedule

### Macro

- Add Add a Macro to the X10 database
- Edit Modify a Macro already in the X10 database

### Help

- View Help Uses Adobe Reader or Adobe Acrobat to display this Operations Manual
- About X10ManagerDesktop Displays X10ManagerDesktop run-time and version information

Download Download Event Timers to Selected Controllers

**All Lights Off** Turn Off all lights connected to “Enabled” Modules with “Control Lights” checked

**All Lights On** Turn On all lights connected to “Enabled” Modules with “Control Lights” checked

# Specifications

## Supported X10 Controllers:

- CP290 X10 Home Control Interface
- CM15A X10 ActiveHome Pro

**Operating System:** Microsoft Windows 10 (32 bit or 64 bit)

"Adobe Reader" or "Adobe Acrobat" is needed to read file **X10ManagerDesktop\_OperationsManual.pdf** which contains this "X10ManagerDesktop Operations Manual" document.

"Adobe Reader" or "Adobe Acrobat" can be found at:

<https://www.adobe.com/accessibility/products/reader.html>

<https://get2.adobe.com/reader/>

## Computer Interface:

- For each CP290 Controller: RS-232 Port (600 baud, 8 data bits, no parity, 1 stop bit)
- For each CM15A Controller: USB Port (1.1, 2, 3)

Note: Connection through external USB expansion hub is not supported.



# Revisions

## **"X10ManagerDesktop"**

Copyright © February 2006 trekkerphotoart.com

Version: 5

Revised: December 16, 2020

## **"X10Manager"** (command line)

Copyright © February 2006 trekkerphotoart.com

Version: 5

Revised: December 16, 2020

## **Program Schema:**

Copyright (c) November 2006 trekkerphotoart.com

Version: 5

Version Date: November 30, 2020

## **X10 Database Schema:**

Copyright (c) November 2006 trekkerphotoart.com

Version: 5

Version Date: November 30, 2020

# Licensing

This entire project (including and not limited to Documentation, Images, Executables, Libraries and Scripts) is Licensed under the "CREATIVE COMMONS PUBLIC LICENSE (CCPL)".

## CREATIVE COMMONS PUBLIC LICENSE (CCPL)

THE WORK (AS DEFINED BELOW) IS PROVIDED UNDER THE TERMS OF THIS CREATIVE COMMONS PUBLIC LICENSE ("CCPL" OR "LICENSE"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HERE, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. TO THE EXTENT THIS LICENSE MAY BE CONSIDERED TO BE A CONTRACT, THE LICENSOR GRANTS YOU THE RIGHTS CONTAINED HERE IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS.

### 1. Definitions

- a. **"Adaptation"** means a work based upon the Work, or upon the Work and other pre-existing works, such as a translation, adaptation, derivative work, arrangement of music or other alterations of a literary or artistic work, or phonogram or performance and includes cinematographic adaptations or any other form in which the Work may be recast, transformed, or adapted including in any form recognizably derived from the original, except that a work that constitutes a Collection will not be considered an Adaptation for the purpose of this License. For the avoidance of doubt, where the Work is a musical work, performance or phonogram, the synchronization of the Work in timed-relation with a moving image ("synching") will be considered an Adaptation for the purpose of this License.
- b. **"Collection"** means a collection of literary or artistic works, such as encyclopedias and anthologies, or performances, phonograms or broadcasts, or other works or subject matter other than works listed in Section 1(f) below, which, by reason of the selection and arrangement of their contents, constitute intellectual creations, in which the Work is included in its entirety in unmodified form along with one or more other contributions, each constituting separate and independent works in themselves, which together are assembled into a collective whole. A work that constitutes a Collection will not be considered an Adaptation (as defined above) for the purposes of this License.
- c. **"Distribute"** means to make available to the public the original and copies of the Work through sale or other transfer of ownership.
- d. **"Licensor"** means the individual, individuals, entity or entities that offer(s) the Work under the terms of this License.
- e. **"Original Author"** means, in the case of a literary or artistic work, the individual, individuals, entity or entities who created the Work or if no individual or entity can be identified, the publisher; and in addition (i) in the case of a performance the actors, singers, musicians, dancers, and other persons who act, sing, deliver, declaim, play in, interpret or otherwise perform literary or artistic works or expressions of folklore; (ii) in the case of a phonogram the producer being the person or legal entity who first fixes the sounds of a performance or other sounds; and, (iii) in the case of broadcasts, the organization that transmits the broadcast.
- f. **"Work"** means the literary and/or artistic work offered under the terms of this License including without limitation any production in the literary, scientific and artistic domain, whatever may be the mode or form of its expression including digital form, such as a book, pamphlet and other writing; a lecture, address, sermon or other work of the same nature; a dramatic or dramatico-musical work; a choreographic work or entertainment in dumb show; a musical composition with or without words; a cinematographic work to which are assimilated works expressed by a process analogous to cinematography; a work of drawing, painting, architecture, sculpture, engraving or lithography; a photographic work to which are assimilated works expressed by a process analogous to photography; a work of applied art; an illustration, map, plan, sketch or three-dimensional work relative to

geography, topography, architecture or science; a performance; a broadcast; a phonogram; a compilation of data to the extent it is protected as a copyrightable work; or a work performed by a variety or circus performer to the extent it is not otherwise considered a literary or artistic work.

- g. **"You"** means an individual or entity exercising rights under this License who has not previously violated the terms of this License with respect to the Work, or who has received express permission from the Licensor to exercise rights under this License despite a previous violation.
- h. **"Publicly Perform"** means to perform public recitations of the Work and to communicate to the public those public recitations, by any means or process, including by wire or wireless means or public digital performances; to make available to the public Works in such a way that members of the public may access these Works from a place and at a place individually chosen by them; to perform the Work to the public by any means or process and the communication to the public of the performances of the Work, including by public digital performance; to broadcast and rebroadcast the Work by any means including signs, sounds or images.
- i. **"Reproduce"** means to make copies of the Work by any means including without limitation by sound or visual recordings and the right of fixation and reproducing fixations of the Work, including storage of a protected performance or phonogram in digital form or other electronic medium.

**2. Fair Dealing Rights.** Nothing in this License is intended to reduce, limit, or restrict any uses free from copyright or rights arising from limitations or exceptions that are provided for in connection with the copyright protection under copyright law or other applicable laws.

**3. License Grant.** Subject to the terms and conditions of this License, Licensor hereby grants You a worldwide, royalty-free, non-exclusive, perpetual (for the duration of the applicable copyright) license to exercise the rights in the Work as stated below:

- a. to Reproduce the Work, to incorporate the Work into one or more Collections, and to Reproduce the Work as incorporated in the Collections; and,
- b. to Distribute and Publicly Perform the Work including as incorporated in Collections.

The above rights may be exercised in all media and formats whether now known or hereafter devised. The above rights include the right to make such modifications as are technically necessary to exercise the rights in other media and formats, but otherwise you have no rights to make Adaptations. Subject to 8(f), all rights not expressly granted by Licensor are hereby reserved, including but not limited to the rights set forth in Section 4(d).

**4. Restrictions.** The license granted in Section 3 above is expressly made subject to and limited by the following restrictions:

- a. You may Distribute or Publicly Perform the Work only under the terms of this License. You must include a copy of, or the Uniform Resource Identifier (URI) for, this License with every copy of the Work You Distribute or Publicly Perform. You may not offer or impose any terms on the Work that restrict the terms of this License or the ability of the recipient of the Work to exercise the rights granted to that recipient under the terms of the License. You may not sublicense the Work. You must keep intact all notices that refer to this License and to the disclaimer of warranties with every copy of the Work You Distribute or Publicly Perform. When You Distribute or Publicly Perform the Work, You may not impose any effective technological measures on the Work that restrict the ability of a recipient of the Work from You to exercise the rights granted to that recipient under the terms of the License. This Section 4(a) applies to the Work as incorporated in a Collection, but this does not require the Collection apart from the Work itself to be made subject to the terms of this License. If You create a Collection, upon notice from any Licensor You must, to the extent practicable, remove from the Collection any credit as required by Section 4(c), as requested.
- b. You may not exercise any of the rights granted to You in Section 3 above in any manner that is primarily intended for or directed toward commercial advantage or private monetary compensation. The exchange of the Work for other copyrighted works by means of digital file-sharing or otherwise shall not be considered to be intended for or directed toward commercial advantage or private monetary compensation, provided there is no payment of any monetary compensation in connection with the exchange of copyrighted works.
- c. If You Distribute, or Publicly Perform the Work or Collections, You must, unless a request has been made pursuant to Section 4(a), keep intact all copyright notices for the Work and provide, reasonable to the medium or

means You are utilizing: (i) the name of the Original Author (or pseudonym, if applicable) if supplied, and/or if the Original Author and/or Licensor designate another party or parties (e.g., a sponsor institute, publishing entity, journal) for attribution ("Attribution Parties") in Licensor's copyright notice, terms of service or by other reasonable means, the name of such party or parties; (ii) the title of the Work if supplied; (iii) to the extent reasonably practicable, the URI, if any, that Licensor specifies to be associated with the Work, unless such URI does not refer to the copyright notice or licensing information for the Work. The credit required by this Section 4(c) may be implemented in any reasonable manner; provided, however, that in the case of a Collection, at a minimum such credit will appear, if a credit for all contributing authors of Collection appears, then as part of these credits and in a manner at least as prominent as the credits for the other contributing authors. For the avoidance of doubt, You may only use the credit required by this Section for the purpose of attribution in the manner set out above and, by exercising Your rights under this License, You may not implicitly or explicitly assert or imply any connection with, sponsorship or endorsement by the Original Author, Licensor and/or Attribution Parties, as appropriate, of You or Your use of the Work, without the separate, express prior written permission of the Original Author, Licensor and/or Attribution Parties.

d. For the avoidance of doubt:

- i. **Non-waivable Compulsory License Schemes.** In those jurisdictions in which the right to collect royalties through any statutory or compulsory licensing scheme cannot be waived, the Licensor reserves the exclusive right to collect such royalties for any exercise by You of the rights granted under this License;
- ii. **Waivable Compulsory License Schemes.** In those jurisdictions in which the right to collect royalties through any statutory or compulsory licensing scheme can be waived, the Licensor reserves the exclusive right to collect such royalties for any exercise by You of the rights granted under this License if Your exercise of such rights is for a purpose or use which is otherwise than noncommercial as permitted under Section 4(b) and otherwise waives the right to collect royalties through any statutory or compulsory licensing scheme; and,
- iii. **Voluntary License Schemes.** The Licensor reserves the right to collect royalties, whether individually or, in the event that the Licensor is a member of a collecting society that administers voluntary licensing schemes, via that society, from any exercise by You of the rights granted under this License that is for a purpose or use which is otherwise than noncommercial as permitted under Section 4(b).

e. Except as otherwise agreed in writing by the Licensor or as may be otherwise permitted by applicable law, if You Reproduce, Distribute or Publicly Perform the Work either by itself or as part of any Collections, You must not distort, mutilate, modify or take other derogatory action in relation to the Work which would be prejudicial to the Original Author's honor or reputation.

## 5. Representations, Warranties and Disclaimer

UNLESS OTHERWISE MUTUALLY AGREED BY THE PARTIES IN WRITING, LICENSOR OFFERS THE WORK AS-IS AND MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND CONCERNING THE WORK, EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF TITLE, MERCHANTIBILITY, FITNESS FOR A PARTICULAR PURPOSE, NONINFRINGEMENT, OR THE ABSENCE OF LATENT OR OTHER DEFECTS, ACCURACY, OR THE PRESENCE OF ABSENCE OF ERRORS, WHETHER OR NOT DISCOVERABLE. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OF IMPLIED WARRANTIES, SO SUCH EXCLUSION MAY NOT APPLY TO YOU.

**6. Limitation on Liability.** EXCEPT TO THE EXTENT REQUIRED BY APPLICABLE LAW, IN NO EVENT WILL LICENSOR BE LIABLE TO YOU ON ANY LEGAL THEORY FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR EXEMPLARY DAMAGES ARISING OUT OF THIS LICENSE OR THE USE OF THE WORK, EVEN IF LICENSOR HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

## 7. Termination

- a. This License and the rights granted hereunder will terminate automatically upon any breach by You of the terms of this License. Individuals or entities who have received Collections from You under this License, however, will not have their licenses terminated provided such individuals or entities remain in full compliance with those licenses. Sections 1, 2, 5, 6, 7, and 8 will survive any termination of this License.

- b. Subject to the above terms and conditions, the license granted here is perpetual (for the duration of the applicable copyright in the Work). Notwithstanding the above, Licensor reserves the right to release the Work under different license terms or to stop distributing the Work at any time; provided, however that any such election will not serve to withdraw this License (or any other license that has been, or is required to be, granted under the terms of this License), and this License will continue in full force and effect unless terminated as stated above.

## 8. Miscellaneous

- a. Each time You Distribute or Publicly Perform the Work or a Collection, the Licensor offers to the recipient a license to the Work on the same terms and conditions as the license granted to You under this License.
- b. If any provision of this License is invalid or unenforceable under applicable law, it shall not affect the validity or enforceability of the remainder of the terms of this License, and without further action by the parties to this agreement, such provision shall be reformed to the minimum extent necessary to make such provision valid and enforceable.
- c. No term or provision of this License shall be deemed waived and no breach consented to unless such waiver or consent shall be in writing and signed by the party to be charged with such waiver or consent.
- d. This License constitutes the entire agreement between the parties with respect to the Work licensed here. There are no understandings, agreements or representations with respect to the Work not specified here. Licensor shall not be bound by any additional provisions that may appear in any communication from You. This License may not be modified without the mutual written agreement of the Licensor and You.
- e. The rights granted under, and the subject matter referenced, in this License were drafted utilizing the terminology of the Berne Convention for the Protection of Literary and Artistic Works (as amended on September 28, 1979), the Rome Convention of 1961, the WIPO Copyright Treaty of 1996, the WIPO Performances and Phonograms Treaty of 1996 and the Universal Copyright Convention (as revised on July 24, 1971). These rights and subject matter take effect in the relevant jurisdiction in which the License terms are sought to be enforced according to the corresponding provisions of the implementation of those treaty provisions in the applicable national law. If the standard suite of rights granted under applicable copyright law includes additional rights not granted under this License, such additional rights are deemed to be included in the License; this License is not intended to restrict the license of any rights under applicable law.


# Installation

## Extract install folder "X10ManagerDesktop\_Installer" from the ZIP Archive "X10ManagerDesktop\_Installer\_Release.zip"

- 1) Mouse-Right-Click Windows Start Menu
- 2) Select "File Explorer"
- 3) With "File Explorer" navigate to "X10ManagerDesktop\_Installer\_Release.zip"
- 4) Mouse-Right-Click "X10ManagerDesktop\_Installer\_Release.zip"
- 5) Select "Open"
- 6) Mouse-Right-Click "X10ManagerDesktop\_Installer"
- 7) Select "Copy"
- 8) With "File Explorer" navigate to "This PC"
- 9) Mouse-Right-Click "Local Disk (C:)"
- 10) Select "Paste"

## Import "X10ManagerDesktop\_Installer" Certificates.

- 1) With "File Explorer" navigate to "C:\X10ManagerDesktop\_Installer"
- 2) Mouse-Right-Click "ImportCert\_X10ManagerDesktop\_Installer.cmd"
- 3) Select "Run as administrator"
- 4) In "User Account Control" window Select "Yes"

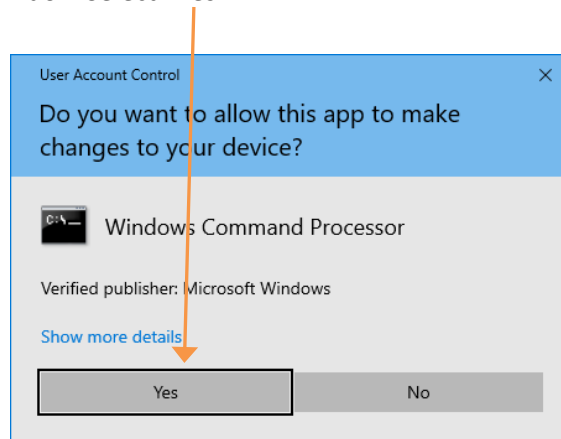


## Installation – continued

A normal **X10ManagerDesktop** and **X10Manager** (command line) installation will create new folders in the following locations:


- C:\X10ManagerDesktop\_Installer
- C:\Program Files (x86)\trekkerphotoart.com\X10ManagerDesktop\_Installer
- C:\X10Manager **Note: An existing “C:\X10Manager” folder and its contents will be replaced.**

### Install “X10ManagerDesktop”

- 1) With “File Explorer” navigate to “C:\ X10ManagerDesktop\_Installer”
- 2) Mouse-Right-Click “X10ManagerDesktop\_Installer.msi”
- 3) Select “Install”

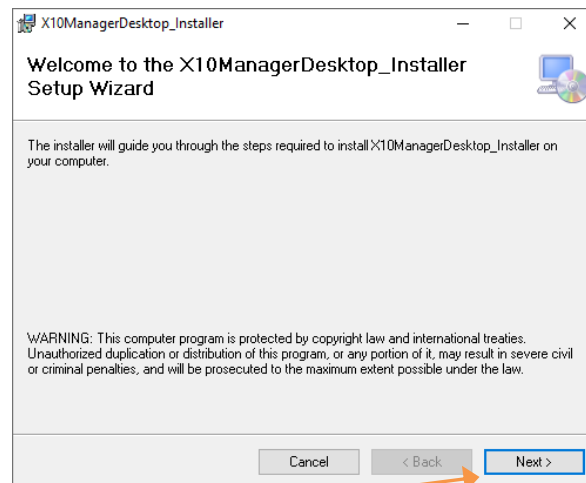


- 4) Select “Next”

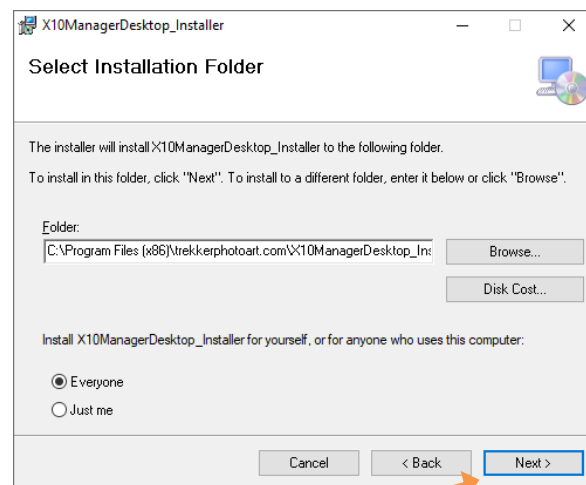



- 5) Use existing “Folder” location
- 6) Select “Everyone”
- 7) Select “Next”

## Installation – continued

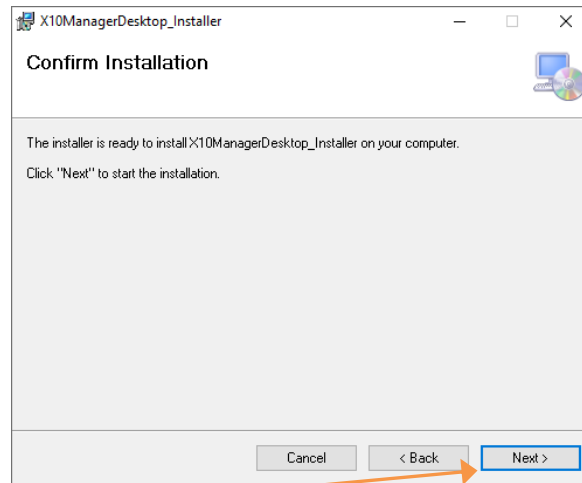

8) Select "Next"

9) In "User Account Control" window Select "Yes"

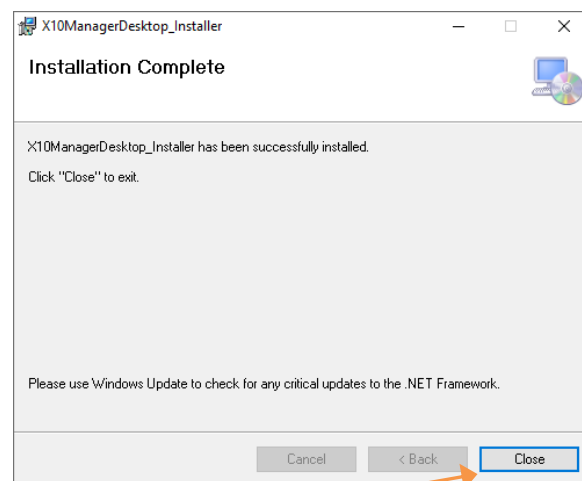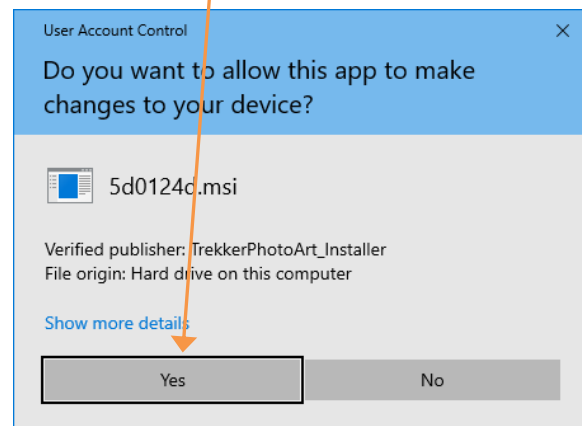

10) Select "Close" to finish Installation.




# Setup

## 1<sup>st</sup> Time Setup

Launch “**X10Manager Desktop**” by Double-Clicking on it’s Desktop Icon.



1<sup>st</sup> time **X10ManagerDesktop** program window will be displayed.

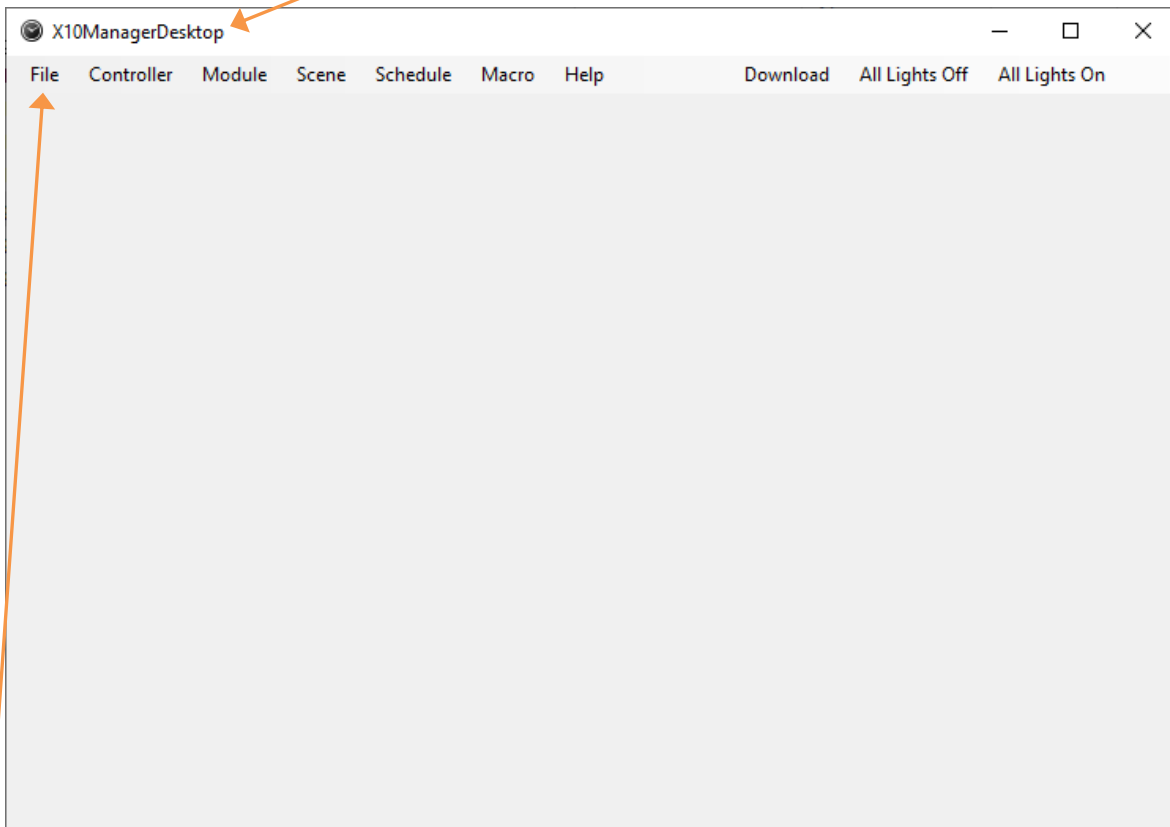

Select “File” – “Settings”

## Setup – continued

### 1st Time Setup – continued

“Settings” Form is Displayed.

Your locations “Longitude” and “Latitude” need to be defined. These are used for calculating Sunrise and Sunset times used by Timer Events.

Sites such as “[My Location](https://my-location.org/)” at <https://my-location.org/> can be used to find your “Longitude” and “Latitude” coordinates.

Settings

☒ Verify On Program Exit  
☐ Show Advanced Information

Longitude and Latitude are used for calculating current location's Sunrise and Sunset times.

Longitude:  ex: -88.201175  
Latitude:  ex: 43.031488

Backup Directory Path:   
Browse ex: C:\X10Manager\X10DbBackup\


X10DbConnectionString:   
ex: Provider=Microsoft.Jet.OLEDB.4.0;Data Source='C:\X10Manager\X10Db.mdb'

Reset Your Program Window Layouts

Update Cancel

Click “Update” when finished.

## Customize the X10Manager Desktop program Layout

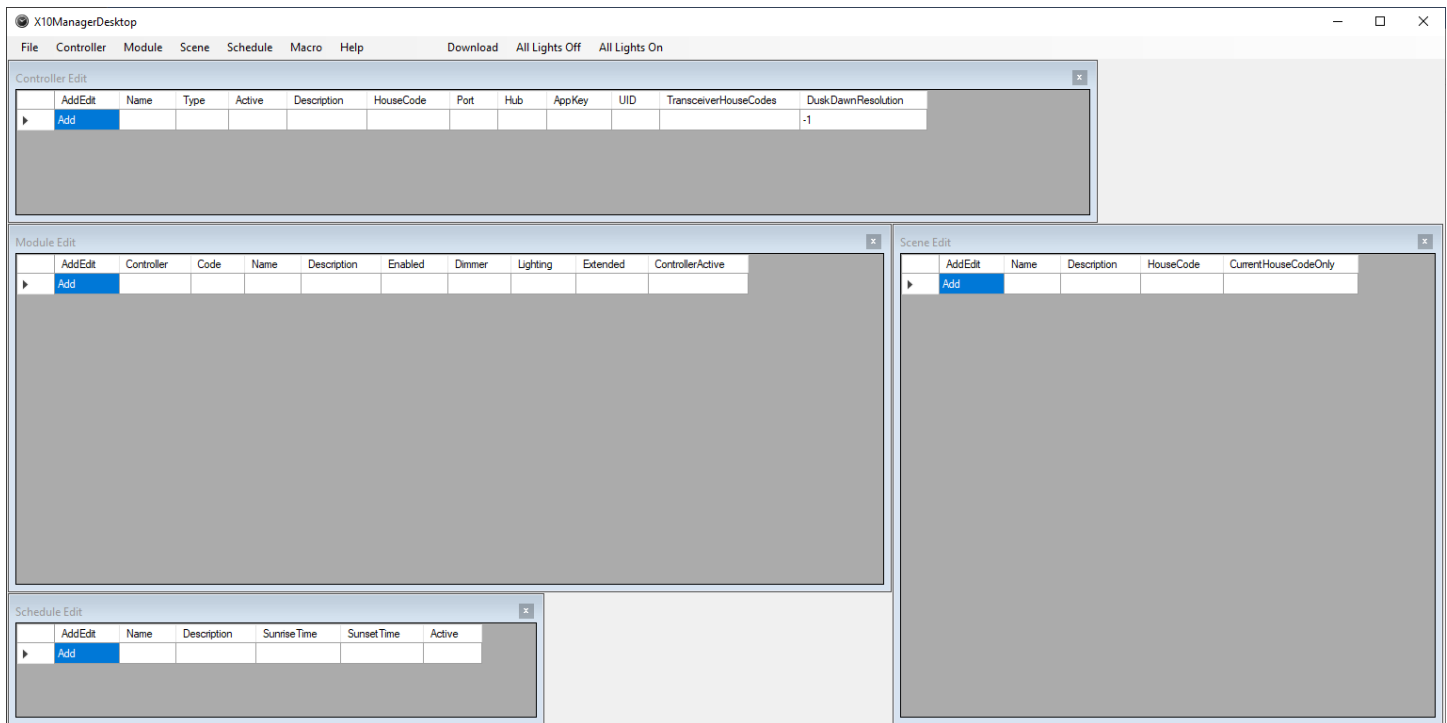

Above shows an example of the **X10ManagerDesktop** program run for the 1<sup>st</sup> time. The layout is accomplished by selecting “Edit” from each menu drop down, then sizing and placing the displayed Edit Window as desired.

The Window size and positions will be automatically saved per user at program close/exit.

The following sections discuss adding **Controllers**, **Modules**, **Scenes**, **Schedules** and their **Events**.

For 1<sup>st</sup> time setup “Add” at least one item to each category using the following order:


- 1) Controller
- 2) Module
- 3) Scene
- 4) Schedule
  - a. Event

# Repair Installation


## To Repair or Re-Install “X10ManagerDesktop”

- 1) With “File Explorer” navigate to “C:\X10ManagerDesktop\_Installer”
- 2) Mouse-Right-Click “X10ManagerDesktop\_Installer.msi”
- 3) Select “Install”

Select “Repair X10ManagerDesktop\_Installer”

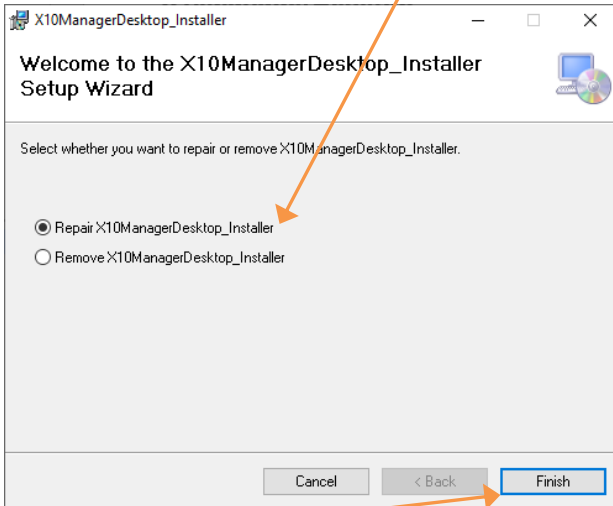

Click “Finish”

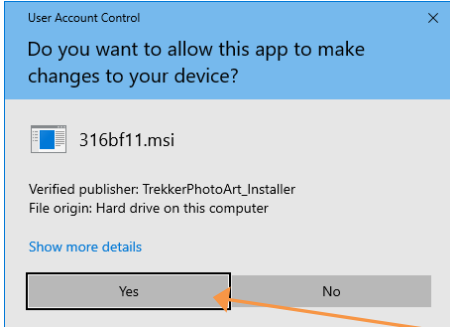

In “User Account Control” window Select “Yes”

The program will be re-Installed.

Note: **X10ManagerDesktop** and **X10Manager** folders will be replaced with a fresh copy of all original installed files and a clean X10 database. Any additional or modified files and script customizations in these folders, and data in the X10 database will be cleared.


Refer to “**Preserve Files and X10 database**” section for details on how to preserve additional files, script customizations and data in the X10 database.

# Remove Installation


## To Remove “X10ManagerDesktop”

- 1) With “File Explorer” navigate to “C:\ X10ManagerDesktop\_Installer”
- 2) Mouse-Right-Click “X10ManagerDesktop\_Installer.msi”
- 3) Select “Install”

Select “Remove X10ManagerDesktop\_Installer”

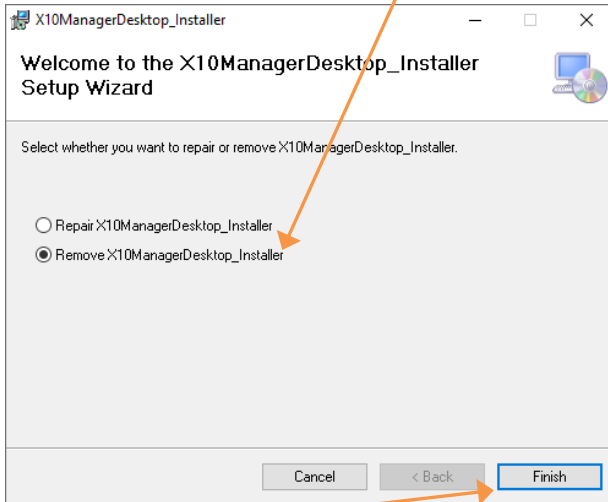

Click “Finish”

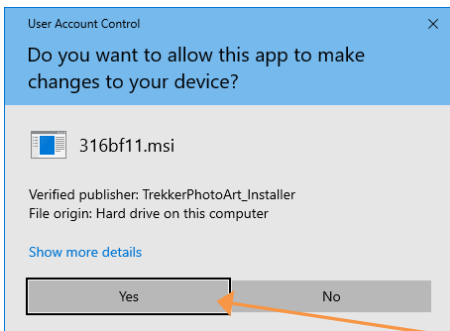

In “User Account Control” window Select “Yes”

The program will be removed.

Note: **X10ManagerDesktop** and **X10Manager** folders will be removed. Any additional or modified files and script customizations in these folders, and the X10 database will also be removed.

Refer to “**Preserve Files and X10 database**” section for details on how to preserve additional files, script customizations and data in the X10 database.

## Remove Installation – continued

### Preserve Files and X10 database

A normal **X10ManagerDesktop** and **X10Manager** (command line) installation will create new folders in the following locations:

- C:\X10ManagerDesktop\_Installer
- C:\Program Files (x86)\trekkerphotoart.com\X10ManagerDesktop\_Installer
- C:\X10Manager **Note: An existing “C:\X10Manager” folder and its contents will be replaced.**

The “C:\Program Files (x86)\trekkerphotoart.com\X10ManagerDesktop\_Installer” folder and its contents are also removed when a Repair or Remove Installation is performed. A Repair Installation will re-create this folder and its contents. Note: Do not add or modify files in this location.

“C:\X10Manager” contains files needed for operation of both **X10ManagerDesktop** and **X10Manager** (command line). When a Repair or Remove Installation is performed, the “C:\X10Manager” folder and its contents are removed. With a Repair Installation, the core files and some support command scripts (.cmd) are re-created.

The core files and folders within C:\X10Manager are:

- X10Db.mdb X10 Access database
- X10Manager.exe X10Manager (command line) executable
- X10Manager.exe.config Configuration file for X10Manager.exe
- X10Include.dll Library file for X10Manager.exe
- X10IncludeCM.dll Library file for X10Manager.exe
- ParadoxReader.dll Library file for X10Manager.exe
- PurgeFiles.vbs Used by command scripts (.cmd) to purge script run-time log files
- X10Manager\_backupX10Db.cmd
- X10Manager\_createX10DbTables.cmd Resets X10 database, all existing data and settings are cleared
- X10Manager\_downloadEventsToActiveControllers.cmd
- X10Manager\_exportModulesFromX10Db.cmd
- X10Manager\_importModulesToX10Db.cmd
- X10Manager\_restoreX10Db.cmd
- X10ManagerDesktop\_OperationsManual.pdf A copy of this Operations Manual
- C:\X10Manager\Examples Folder that contains example command scripts (.cmd)
- C:\X10Manager\X10DbBackup Default X10 database backup / restore location.

The next page shows steps for preserving and restoring files and X10 database.

## Remove Installation – continued

### Preserve Files and X10 database– continued

**BEFORE a Repair or Remove Installation is performed**, contents of the X10 database and your additional or customized command scripts need to be preserved.

- 1) Perform a X10 database backup by double-clicking on C:\X10Manager\X10Manager\_backupX10Db.cmd
- 2) Create a new folder, C:\X10Manager\_SAVE
- 3) Create a new folder, C:\X10Manager\_SAVE\X10DbBackup
- 4) Create a new folder, C:\X10Manager\_SAVE\Examples
- 5) Copy C:\X10Manager\\*.cmd command scripts only to C:\X10Manager\_SAVE
- 6) Copy C:\X10Manager\X10DbBackup\\*. \* to C:\X10Manager\_SAVE\X10DbBackup
- 7) Copy C:\X10Manager\Examples\\*. \* to C:\X10Manager\_SAVE\Examples

**After a Repair or Remove Installation is performed**, contents of the X10 database and your additional or customized command scripts can be restored ONLY if the above preserve steps were taken BEFORE the Repair or Remove Installation was performed.

- 1) Copy C:\X10Manager\_SAVE\X10DbBackup\\*. \* to C:\X10Manager\X10DbBackup
- 2) Perform a X10 database restore by double-clicking on C:\X10Manager\X10Manager\_restoreX10Db.cmd
- 3) Copy ONLY scripts and files you have added or customized:
  - a. C:\X10Manager\_SAVE\\*.cmd command scripts only to C:\X10Manager
  - b. C:\X10Manager\_SAVE\Examples\\*. \* to C:\X10Manager\Examples

# Controllers

## Add CP290 X10 Home Control Interface

“Controller” – “Add” will display the “Add Controller” form.

The screenshot shows the 'Add Controller' dialog box with the following fields and annotations:

- Name:** House Lighting CP290 (An arrow points to this field with the text: "Controller 'Name' is required.")
- ID:** (Empty field)
- Model:** CP290 (An arrow points to this dropdown with the text: "Select 'CP290' for Controller 'Model'".)
- Description:** CP290 X10 Controller for House Lighting (An arrow points to this field with the text: "After Controller 'Model' is selected, the remaining settings for the Controller will be displayed.")
- House Code:** J (Dropdown menu)
- Controller Base On/Off Switches:** (Text label)
- Port:** COM1 (Dropdown menu)
- 600 baud, no parity, 8 data bits, 1 stop bit:** (Text label)
- Active:** ☒ (An arrow points to this checkbox with the text: "Checking 'Active' allows 'Download Events to Controller'".)
- Buttons:** Add and Cancel

Click “Add” to finish adding Controller


Next page shows a “Successfully Added” result.



## Controllers – continued

### Add CP290 X10 Home Control Interface – continued

“Successfully Added” will be displayed in the status box.

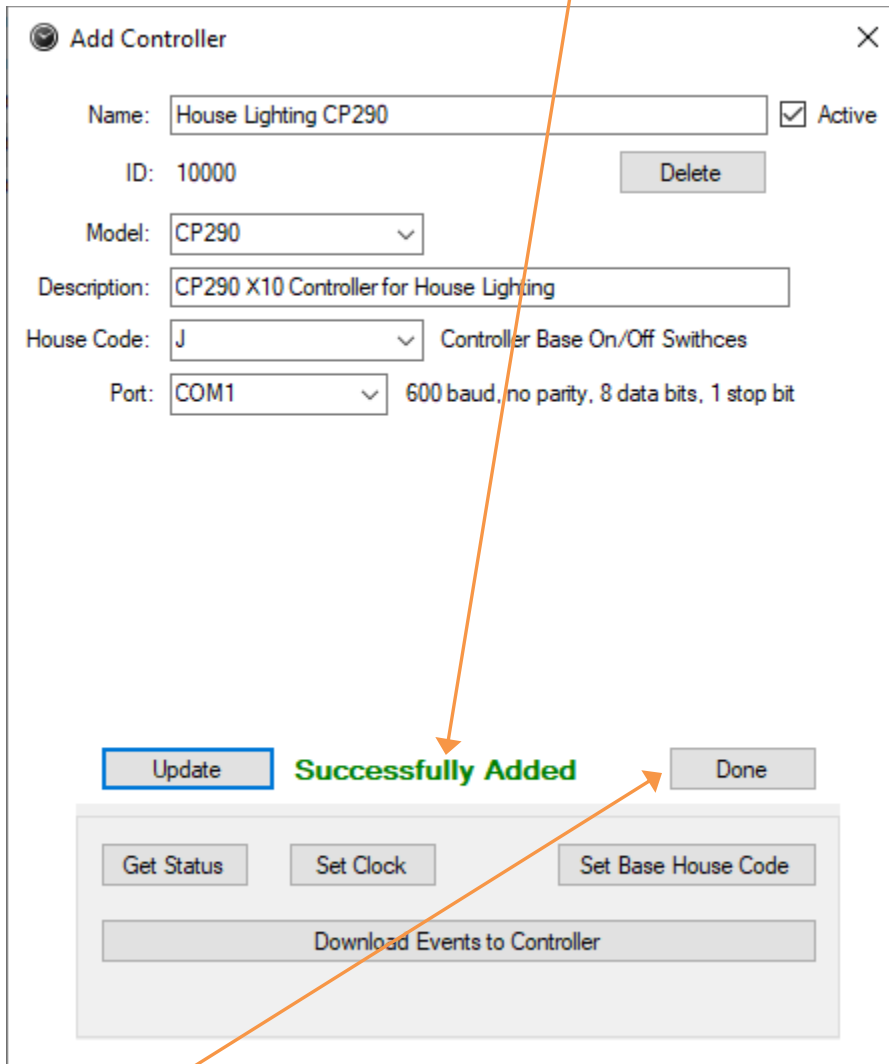

The screenshot shows the 'Add Controller' dialog box. The 'Name' field is 'House Lighting CP290', 'ID' is '10000', 'Model' is 'CP290', 'Description' is 'CP290 X10 Controller for House Lighting', 'House Code' is 'J', and 'Port' is 'COM1'. The 'Active' checkbox is checked. A 'Delete' button is next to the ID field. Below the form, the 'Update' button is highlighted with a blue border. The status box displays 'Successfully Added' in green text. An orange arrow points from the text above to the 'Successfully Added' message. Another orange arrow points from the 'Done' button to the text below.

Update **Successfully Added** Done

Get Status Set Clock Set Base House Code


Download Events to Controller

Click “Done” to close “Add Controller” form.

## Controllers – continued

### Edit CP290 X10 Home Control Interface

“Controller” – “Edit” will display the “Controller Edit” window containing a list of all added **Controllers**.

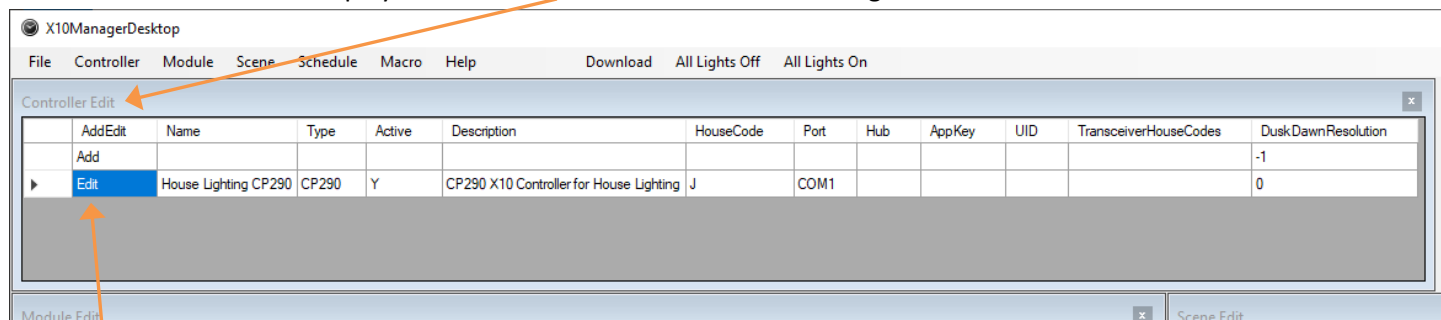

Click “**Edit**” on the row of the CP290 Controller to be edited.

The “**Update Controller**” form will be displayed

**Update Controller**

Name:  ☒ **Active**

ID:

Model:

Description:

House Code:  Controller Base On/Off Switches

Port:  600 baud, no parity, 8 data bits, 1 stop bit

**Controller Operations Panel**

Checking “**Active**” allows “**Download Events to Controller**”.

Items not ghosted can be modified.

Click “**Update**” to save changes.

Click “**Done**” when finished.

**Controller Operations Panel**

Click on an Operation button to perform operation directly to the **Controller**.

For Example, click on “**Set Clock**” to set the Controller’s time.

### Add CM15A X10 ActiveHome Pro

**Add Controller**

Name:  ☒ Active

ID:

Model:

Description:

House Code:  Monitored House Code

Port:  X10 USB ActiveHome (ACPI-compliant)

Transceiver House Codes

<input type="checkbox"/> A	<input type="checkbox"/> C	<input type="checkbox"/> E	<input type="checkbox"/> G	<input type="checkbox"/> I	<input type="checkbox"/> K	<input type="checkbox"/> M	<input type="checkbox"/> O
<input type="checkbox"/> B	<input type="checkbox"/> D	<input type="checkbox"/> F	<input type="checkbox"/> H	<input checked="" type="checkbox"/> J	<input type="checkbox"/> L	<input type="checkbox"/> N	<input type="checkbox"/> P

Dusk/Dawn Resolution:

Checking “**Active**” allows “**Download Events to Controller**”.

Controller “**Name**” is required.

The “**Name**” can be freely formatted. For this “**Add**” example, the **Controller** is given “House Lighting CM15A” as a name.

Select “**CM15A**” for **Controller “Model”**.

After **Controller “Model”** is selected, the remaining settings for the **Controller** will be displayed.

“**Port**” – “port.hub”

CM15A Controller must 1<sup>st</sup> be connected to computers USB port and powered.

If installing multiple CM15A Controllers, the “**Port**” – “port.hub” designation will be unique for each CM15A Controller.

The CM15A Controller must be directly connected to a computer’s USB port.

Connecting through an external USB expansion hub is not supported.

Click “**Add**” to finish adding **Controller**

Next page shows a “Successfully Added” result.

## Controllers – continued

### Add CM15A X10 ActiveHome Pro– continued

“Successfully Added” will be displayed in the status box.

**Add Controller**

Name:  ☒ Active

ID: 10000

Model:

Description:

House Code:  Monitored House Code

Port:  X10 USB ActiveHome (ACPI-compliant)

Transceiver House Codes

☐ A ☐ C ☐ E ☐ G ☒ I ☐ K ☐ M ☐ O

☐ B ☐ D ☐ F ☐ H ☒ J ☐ L ☐ N ☐ P

Dusk/Dawn Resolution:


**Successfully Added**

Click “Done” to close “Add Controller” form.

## Controllers – continued

### Edit CM15A X10 ActiveHome Pro

“Controller” – “Edit” will display the “Controller Edit” window containing a list of all added **Controllers**.

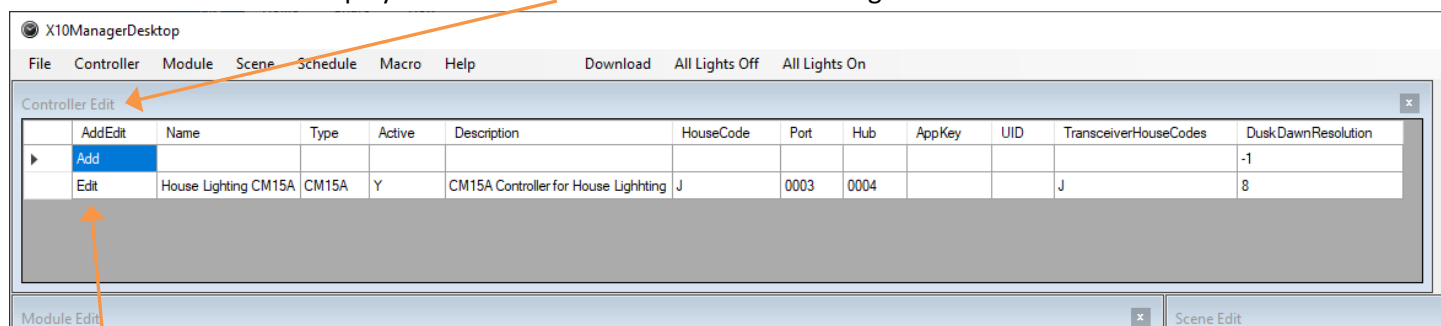

Click “Edit” on the row of the CM15A Controller to be edited.

The “Update Controller” form will be displayed

**Update Controller**

Name:  ☒ Active

ID: 10000

Model:

Description:

House Code:  Monitored House Code

Port:  X10 USB ActiveHome (ACPI-compliant)

Dusk/Dawn Resolution:

Transceiver House Codes

☐ A ☐ C ☐ E ☐ G ☐ I ☐ K ☐ M ☐ O

☐ B ☐ D ☐ F ☐ H ☒ J ☐ L ☐ N ☐ P

**Controller Operations Panel**

"Set Clock" also sets Monitored and Transceiver House Codes

Checking “Active” allows “Download Events to Controller”.

Items not ghosted can be modified.

Click “Update” to save changes.

Click “Done” when finished.


**Controller Operations Panel**

Click on an Operation button to perform operation directly to the **Controller**.

For Example, click on “Set Clock” to set the **Controller’s** time.

### Download Events to Controller

“Controller” – “Download” will display the “**Controllers Download**” window containing a list of all added **Controllers**.

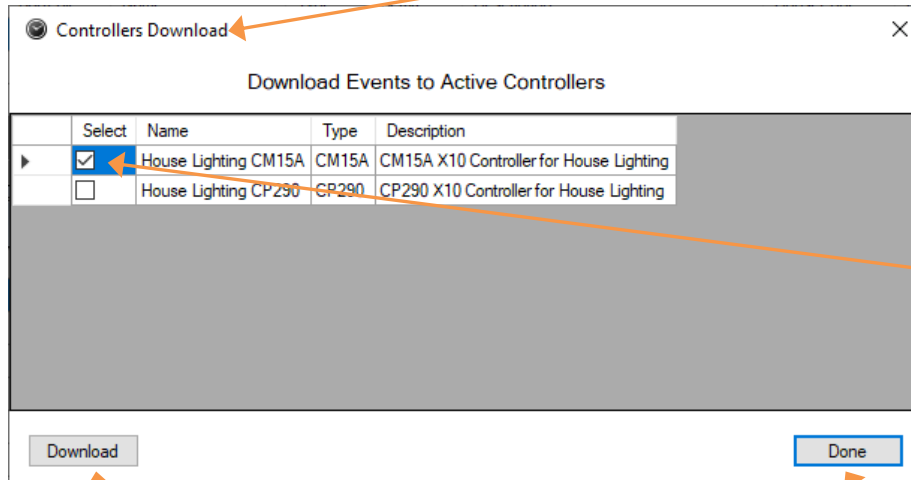

**Events** will be downloaded to Selected **Controllers**.

Active **Controllers** will be pre-selected.

Note: Changing a selection here will not permanently change the **Controller** “Active” setting.

Click “**Done**” when finished.

Click “**Download**” when ready to download **Events** to **Controllers**.

#### Notes:

- 8) “**Download**” on the main program Window will also display this “**Controllers Download**” window.
- 9) When editing a **Controller**, “**Download Events to Controller**” button will download to that **Controller**.
- 10) Refer to **X10Manager** (command line) section regarding setup of scheduled download **Events** to active **Controllers**.

# Modules

## Add X10 Module

“Module” – “Add” will display the “Add Module” form.

The screenshot shows the 'Add Module' dialog box. It contains the following fields and controls:

- Name:** A text input field containing 'HalFloor'. An arrow points to this field with the text: "Module 'Name' is required."
- Enabled:** A checked checkbox. An arrow points to it with the text: "Checking 'Enabled' allows the Module to be active in Scenes. When not checked, the Module with its state is still present in the Scene, just not active in the Scene."
- ID:** An empty text input field. An arrow points to it with the text: "The 'Name' can be freely formatted. For this 'Add' example, the Module is given 'HalFloor' as a name."
- Description:** A text input field containing 'Hallway Floor/Wall Light'.
- Controller:** A dropdown menu showing 'House Lighting CM15A [CM15A]'. An arrow points to it with the text: "Select a Controller that will control the Module."
- Controller Active:** A label 'Yes'.
- House Code:** A dropdown menu showing 'J'.
- Module Code:** A dropdown menu showing '9'.
- Dimmer:** An unchecked checkbox.
- Control Lights:** A checked checkbox.
- Extended Commands:** An unchecked checkbox.
- Buttons:** 'Add' and 'Cancel' buttons at the bottom. An arrow points to the 'Add' button with the text: "Click 'Add' to finish adding Module".

Click “Add” to finish adding Module

Next page shows a “Successfully Added” result.

## Modules – continued

### Add X10 Module– continued

“Successfully Added” will be displayed in the status box.

**Add Module** [Close]

Name:  ☒ Enabled

ID:

Description:

Controller:

Controller Active: Yes

House Code:

Module Code:

Dimmer: ☐

Control Lights: ☒

Extended Commands: ☐

**Successfully Added**

On/Off:


Click **Done** to close **Add Module** form.



## Modules – continued

### Edit X10 Module

“Module” – “Edit” will display the “Module Edit” window containing a list of all added **Modules**.

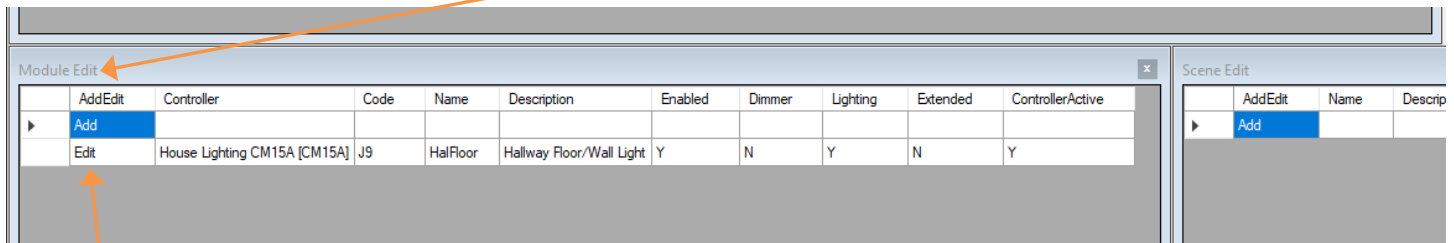

Click “Edit” on the row of the **Module** to be edited.

The “Update Module” form will be displayed

The screenshot shows the 'Update Module' form. It contains the following fields and controls:

- Name: HalFloor
- ID: 10000
- Description: Hallway Floor/Wall Light
- Controller: House Lighting CM15A [CM15A]
- Controller Active: Yes
- House Code: J
- Module Code: 9
- Dimmer: ☐
- Control Lights: ☒
- Extended Commands: ☐
- Buttons: Update, Done, Test
- On/Off: Off

Annotations with orange arrows point to various elements:

- “Enabled” checkbox: Checking “Enabled” allows the **Module** to be active in **Scenes**. When not checked, the **Module** with its state is still present in the **Scene**, just not active in the **Scene**.
- Update button: Click “Update” to save changes.
- Done button: Click “Done” when finished.
- Test button: Click on an Operation button to perform operation directly to the **Module** via its defined **Controller**. For Example, click on “Test” to turn the **Module** “Off”.

Items not ghosted can be modified.

# Scenes

## Add Scene

“Scene” – “Add” will display the “Add Scene” form.

Add Scene

Name: Doors On

ID:

Description: Turn On Outside Door Lights

House Code: J

Current house code only: ☒

Modules In Scene

	Code	Controller	Name	On/Off	Description
	J1	House Lighting CM15A [CM15A]	OutGar	On	Outside Garage Lights
	J2	House Lighting CM15A [CM15A]	FPorch	On	Front Porch Lights
▶	J3	House Lighting CM15A [CM15A]	BDoor	On	Back Door Lights
	J9	House Lighting CM15A [CM15A]	HalFloor		Hallway Floor/Wall Light
	J16	House Lighting CM15A [CM15A]	Den Test Dimmer Module		Dimmer LED Light in Dimmer Module

<

>

Set All Off

Set All On

Clear All

Add

Cancel

Scene “Name” is required.

The “Name” can be freely formatted. For this “Add” example, the Scene is given “Doors On” as a name.

Use “House Code” dropdown to Select House Code with active Modules used in this Scene.

If There are Modules in multiple House Codes, they can be added later using “Scene” – “Edit”.

Use “On/Off” dropdown to select which Modules and their state for this Scene.

Scene “On/Off” speed buttons.

Click “Add” to finish adding Scene

Next page shows a “Successfully Added” result.

## Scenes – continued

### Add Scene– continued

“Successfully Added” will be displayed in the status box.

**Add Scene**

Name:

ID:

Description:

House Code:  ☐ Current house code only: ☒

**Modules In Scene**

	Code	Controller	Name	On/Off	Description
▶	J1	House Lighting CM15A [CM15A]	OutGar	On ▼	Outside Garage Lights
	J2	House Lighting CM15A [CM15A]	FPorch	On ▼	Front Porch Lights
	J3	House Lighting CM15A [CM15A]	BDoor	On ▼	Back Door Lights
	J9	House Lighting CM15A [CM15A]	HalFloor	▼	Hallway Floor/Wall Light
	J16	House Lighting CM15A [CM15A]	Den Test Dimmer Module	▼	Dimmer LED Light in Dimmer Module

**Successfully Added**

Click “Done” to close “Add Scene” form.

## Scenes – continued

### Edit Scene

“Scene” – “Edit” will display the “Scene Edit” window containing a list of all added Scenes.

The screenshot shows the 'Scene Edit' window. At the top, there's a header bar with 'Controller for House Lighting', 'J', 'COM1', and '0'. Below this is a table with columns: Description, Enabled, Dimmer, Lighting, and Extended. The table lists four scenes: 'Outside Garage Lights', 'Front Porch Lights', 'Back Door Lights', and 'Hallway Floor/Wall Light'. To the right of this table is a 'Scene Edit' panel with columns: AddEdit, Name, Description, HouseCode, and CurrentHouseCodeOnly. The 'AddEdit' column has 'Add' and 'Edit' buttons. The 'Name' column has 'Doors On'. The 'Description' column has 'Turn On Outside Door Lights'. The 'HouseCode' column has 'J'. The 'CurrentHouseCodeOnly' column has 'Y'. An orange arrow points from the 'Edit' button in the 'AddEdit' column to the 'Edit' button in the 'AddEdit' column.

Click “Edit” on the row of the Scene to be edited.

The “Update Scene” form will be displayed

The screenshot shows the 'Update Scene' form. It has a title bar with a close button. The form contains the following fields: 'Name' (Doors On), 'ID' (10000) with a 'Delete' button, 'Description' (Turn On Outside Door Lights), 'House Code' (J) with a dropdown arrow, and 'Current house code only' (checked). Below these is a table titled 'Modules In Scene' with columns: Code, Controller, Name, On/Off, and Description. The table lists six modules: J1 (OutGar), J2 (FPorch), J3 (BDor), J9 (HalFloor), and J16 (Den Test Dimmer Module). Below the table are buttons for 'Set All Off', 'Set All On', 'Clear All', 'Update', and 'Done'. At the bottom is a button for 'Test Modules In Scene'. An orange arrow points from the 'Update' button to the 'Update' button.

Items not ghosted can be modified.

Click “Update” to save changes.

Click “Done” when finished.

Scene Operations Panel

Click on “Test Modules In Scene” to set each Module in the Scene to their specified “On/Off” state.

# Schedules

## Add Schedule

“Schedule” – “Add” will display the “Add Schedule” form.

The screenshot shows the 'Add Schedule' form with the following fields and annotations:

- Name:** A text box containing 'House Lighting'. An arrow points to this field with the text: "Schedule 'Name' is required."
- ID:** A text box that is empty.
- Description:** A text box containing 'House Lighting with Events'. An arrow points to this field with the text: "The 'Name' can be freely formatted. For this 'Add' example, the **Schedule** is given 'House Lighting' as a name."
- Sunrise Time:** A text box that is empty.
- Sunset Time:** A text box that is empty.
- Events:** A section titled "Events - New Schedule must first be added." with a table below it. An arrow points to this section with the text: "Events can be added after new **Schedule** is added."
- Buttons:** At the bottom, there are two buttons: "Add" and "Cancel". An arrow points to the "Add" button with the text: "Click 'Add' to finish adding **Schedule**".

Click “Add” to finish adding **Schedule**

Next page shows a “Successfully Added” result.

## Schedules – continued

### Add Schedule– continued

**Add Schedule**

Name:  ☒ Active

ID:

Description:

Sunrise Time:  Add sets Sunrise/Sunset times (also reset by Controller downloads).

Sunset Time:

Events

AddEdit	EventID	Scene	Days	Time	Security	Enabled
Add	-1					

**Successfully Added**

Checking “**Active**” allows **Schedule’s Events** to be included with **Controller** downloads.

**Events** can now be added.


**Add Event** section will show how an **Event** can be added.

“Successfully Added” will be displayed in the status box.

Click “**Done**” to close “**Add Schedule**” form.

### Edit Schedule

“Schedule” – “Edit” will display the “Schedule Edit” window containing a list of all added Schedules.

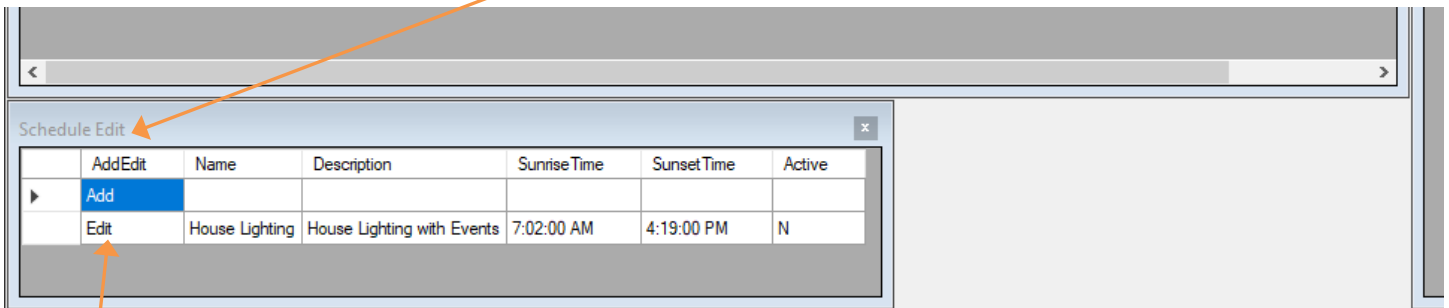

Click “Edit” on the row of the **Schedule** to be edited.

The “Update Schedule” form will be displayed

The 'Update Schedule' form contains the following fields and controls:

- Name: House Lighting
- ID: 10000
- Description: House Lighting with Events
- Sunrise Time: 7:02:00 AM
- Sunset Time: 4:19:00 PM
- Update resets Sunrise/Sunset times (also reset by Controller downloads).
- Active: ☒
- Delete button
- Events table:

	AddEdit	EventID	Scene	Days	Time	Security	Enabled
▶	Add	1					
	Edit	10000	Doors On	Every Day	Sunrise - 30 minutes	N	Y

Buttons: Update, Done

Checking “**Active**” allows **Schedule’s Events** to be included with **Controller** downloads.

Items not ghosted can be modified.

**Events** can be added or edited.

**Add Event** section will show how an **Event** can be added.

**Edit Event** section will show how an **Event** can be edited.


Click “**Done**” when finished.

Click “**Update**” to save changes.

# Events

## Add Event

In “**Schedule Edit**” window, click “**Edit**” on the row of the **Schedule** that will contain the **Event** to be added.

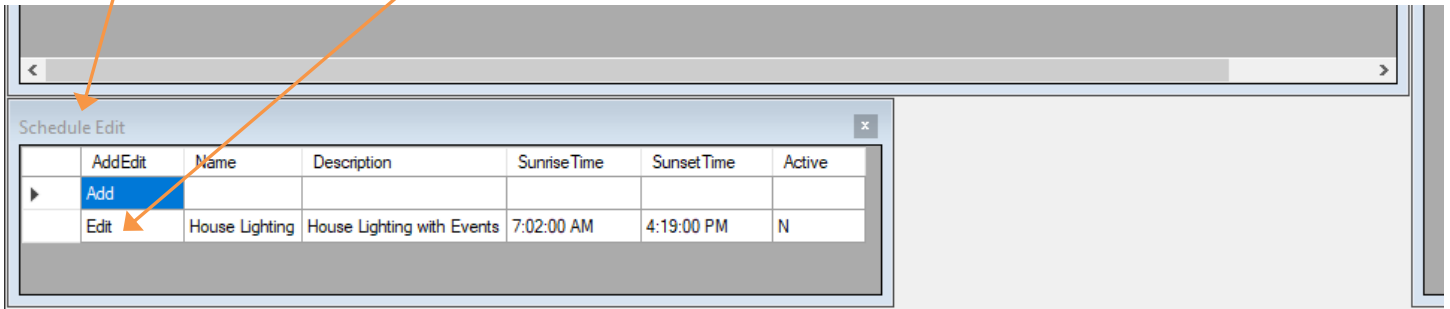

The “**Update Schedule**” form containing the selected **Schedule** will be displayed

The screenshot shows a window titled "Update Schedule" with a close button (X) in the top right corner. It contains the following fields and controls:

- Name: House Lighting
- ID: 10000
- Description: House Lighting with Events
- Sunrise Time: 7:02:00 AM
- Sunset Time: 4:19:00 PM
- Active: ☒ Active
- Delete: [Delete button]
- Update resets Sunrise/Sunset times (also reset by Controller downloads).
- Events table with columns: AddEdit, EventID, Scene, Days, Time, Security, Enabled. The first row has a blue "Add" button in the AddEdit column, and an arrow points to it.
- Update: [Update button]
- Done: [Done button]

Click “**Add**” to add an **Event**.

Next page shows “**Add Event**” form.



## Events – continued

### Add Event– continued

“Add Event” form.

The screenshot shows the 'Add Event' dialog box. It has a title bar with a close button. The form contains the following fields and controls:

- EventID:** A text input field.
- Schedule:** A text input field containing 'House Lighting'.
- Scene:** A dropdown menu showing 'Doors On'.
- Event Enabled:** A checked checkbox.
- Start Date:** A date picker showing 'Wednesday, January 1, 2020'.
- Stop Date:** A date picker showing 'Thursday, December 31, 2020'.
- Time:** A section with three radio buttons: 'Specific Time' (unselected), 'After Sunrise By' (selected), and 'After Sunset By' (unselected). The 'After Sunrise By' option has a text input field with '-30' and the word 'minutes'.
- Security Variations:** An unchecked checkbox.
- Day(s):** A section with radio buttons: 'Today' (unselected), 'Tomorrow' (unselected), 'Weekends' (unselected), 'Weekdays' (unselected), 'Every Day' (selected), and 'Selected Day(s)' (unselected).
- Days:** A row of checkboxes for 'Mon', 'Tue', 'Wed', 'Thu', 'Fri', 'Sat', and 'Sun', all of which are checked.
- Buttons:** 'Add' and 'Cancel' buttons at the bottom.

Annotations with orange arrows point to the following elements:

- The 'Add Event' title bar.
- The 'Schedule' field.
- The 'Scene' dropdown menu.
- The 'Start Date' and 'Stop Date' date pickers.
- The 'After Sunrise By' radio button and its associated minutes input field.
- The 'Add' button.

Schedule that owns Event.

Select from existing Scenes.

When **Events** are downloaded to **Controllers**, the “**Start Date**” and “**End Date**” year is updated to the current year.

**Controllers** such as the CM15A internally support “**Start Date**” and “**Stop Date**” as part of their Timer Initiators.

**Controllers** such as the CP290 need to have their **Events** regularly re-downloaded to have the Event “**Start Date**” and “**Stop Date**” implemented.

Refer to **X10Manager** (command line) section regarding setup of scheduled download **Events** to active **Controllers**.

“**After Sunrise**” and “**After Sunset**” minutes can be positive (+) or negative (-).

CM15A **Controller** maximum +-60 minutes.  
CP290 **Controller** maximum +-120 minutes.

Click “**Add**” when ready to Add new Event.

Next page shows a “Successfully Added” result.

## Events – continued

### Add Event– continued

**Add Event**

EventID: 10000 Delete

Schedule: House Lighting

Scene: Doors On

Event Enabled ☒

Start Date: Wednesday, January 1, 2020

Stop Date: Thursday, December 31, 2020

Time: ☐ Specific Time: 03:58 PM hh:mm AM/PM

☒ After Sunrise By: -30 minutes

☐ After Sunset By: minutes

☐ Security Variations

Day(s): ☐ Today

☐ Tomorrow

☐ Weekends

☐ Weekdays

☒ Every Day

☐ Selected Day(s)

☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat ☒ Sun

Update **Successfully Added** Done


“Successfully Added” will be displayed in the status box.

Click “Done” to close “Add Event” form.


Events – continued

Edit Event

In “Schedule Edit” window, click “Edit” on the row of the **Schedule** that will contain the **Event** to be edited.

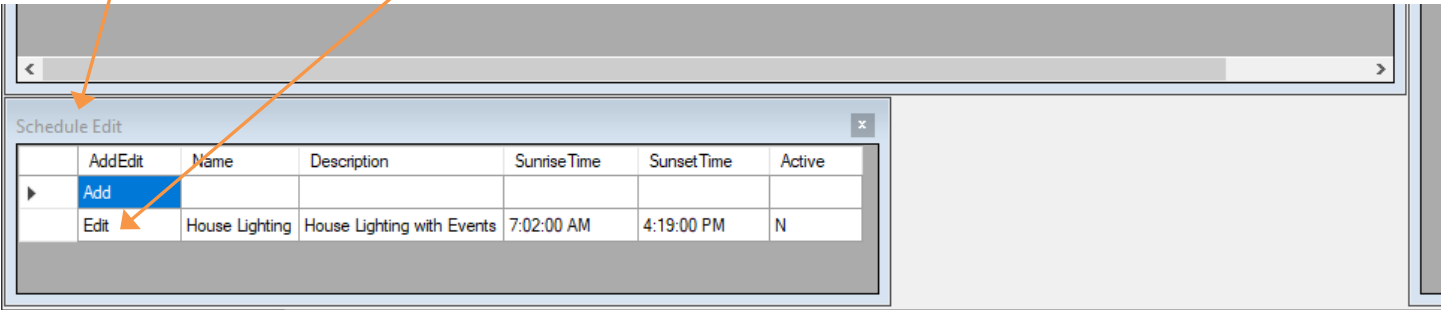

The “Update Schedule” form containing the selected **Schedule** will be displayed

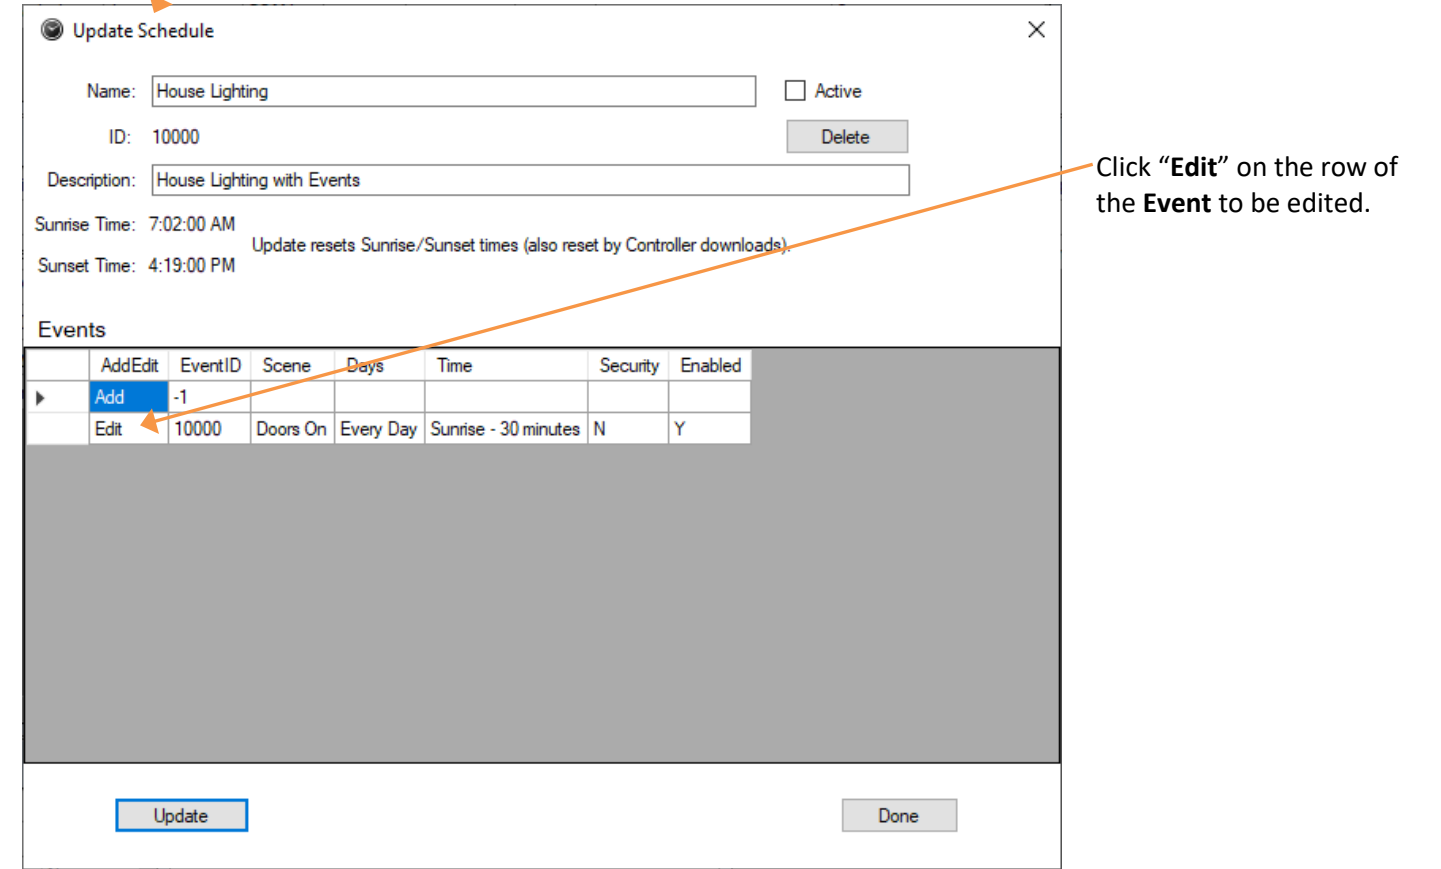

Next page shows “Edit Event” form.

## Events – continued

### Edit Event– continued

“Update Event” form.

The "Update Event" form is a window with a title bar and a close button. It contains the following fields and controls:

- EventID:** 10000
- Schedule:** House Lighting
- Scene:** Doors On
- Event Enabled:** ☒
- Start Date:** Wednesday, January 1, 2020
- Stop Date:** Thursday, December 31, 2020
- Time:**
  - ☐ Specific Time: 03:59 PM hh:mm AM/PM
  - ☒ After Sunrise By: -30 minutes
  - ☐ After Sunset By: minutes
- ☐ Security Variations
- Day(s):**
  - ☐ Today
  - ☐ Tomorrow
  - ☐ Weekends
  - ☐ Weekdays
  - ☒ Every Day
  - ☐ Selected Day(s)
- ☒ Mon ☒ Tue ☒ Wed ☒ Thu ☒ Fri ☒ Sat ☒ Sun
- Update** button
- Done** button

Schedule that owns Event.

Select from existing Scenes.

When **Events** are downloaded to **Controllers**, the “**Start Date**” and “**End Date**” year is updated to the current year.

**Controllers** such as the CM15A internally support “**Start Date**” and “**Stop Date**” as part of their Timer Initiators.

**Controllers** such as the CP290 need to have their **Events** regularly re-downloaded to have the Event “**Start Date**” and “**Stop Date**” implemented.

Refer to **X10Manager** (command line) section regarding setup of scheduled download **Events** to active **Controllers**.

“**After Sunrise**” and “**After Sunset**” minutes can be positive (+) or negative (-).

CM15A **Controller** maximum +-60 minutes.  
CP290 **Controller** maximum +-120 minutes.

Click “**Update**” to save changes.

Click “**Done**” to close “**Update Event**” form

# Macros

## Add Macro

Future feature

Next page shows a “Successfully Added” result.

**Macros** – continued

**Add Macro**– continued

Future feature

## **Macros** – continued

### **Edit Macro**

Future feature

Blank Page for the moment!

# Appendix

## X10Manager (command line)

**X10Manager** can be used to perform command line operations on X10 Database, X10 Controllers and X10 Modules.

After successful installation of **X10ManagerDesktop**, **X10Manager** (command line) is typically located at "C:\X10Manager". **X10Manager** Command Line settings and examples are found in **X10Manager.exe** section.

The Access Database "X10Db.mdb" used by **X10ManagerDesktop** and **X10Manager** (command line) must be in the same folder with "X10Manager.exe" and its operating support files "X10Manager.exe.config, ParadoxReader.dll, X10Include.dll and X10IncludeCM.dll".

**X10Manager** (command line) **Command Scripts** can be executed directly.

-or-

**X10Manager** (command line) **Command Scripts** can be submitted to the "Windows Task Scheduler".

This will allow automation of back-end tasks such as:

- 1) Setting a Controllers time and day clock  
C:\X10Manager\Examples\X10Manager\_setX10Time\_xxxxxxx.cmd
- 2) Get a Controllers operating status  
C:\X10Manager\Examples\X10Manager\_getControllerStatus\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_getX10DuskDawn\_CM15A\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_getX10TransceiverSetup\_CM15A\_xxxxxxx.cmd
- 3) Change a Controllers settings or operating status  
C:\X10Manager\Examples\X10Manager\_updateX10ControllerToX10Db\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_putX10TransceiverSetup\_CM15A\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_clearX10Memory\_CM15A\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_downloadX10BaseHousecode\_CP290\_xxxxxxx.cmd
- 4) Download Event Timers and Macros to Controllers  
C:\X10Manager\Examples\X10Manager\_downloadEventsToActiveControllers.cmd  
C:\X10Manager\Examples\X10Manager\_putTimersAndMacrosToX10Memory\_CM15A\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_getX10DbTimersPutX10\_CP290\_xxxxxxx.cmd
- 5) Directly execute Module Commands  
C:\X10Manager\Examples\X10Manager\_sendSceneUnitCommands.cmd  
C:\X10Manager\Examples\X10Manager\_sendUnitCommand\_xxxxxxx.cmd  
C:\X10Manager\Examples\X10Manager\_sendUnitExtendedCommand\_xxxxxxx.cmd

Above and additional **Command Script** (.cmd) examples can be found at "C:\X10Manager\Examples".

**Note:** Run-time **Command Scripts** (.cmd) must be placed in "C:\X10Manager".



## Appendix – continued

### X10Manager (command line) – continued

#### *X10Manager.exe*

/O:Operation

#### Operations common to all Controllers

[addX10ControllerToX10Db|backupX10Db|compileTimersFromX10DbEventsPlaceInX10Db|  
createX10DbTables|downloadEventsToActiveControllers|exportModulesFromX10Db|  
getControllerStatus|getX10MemoryPutToFile|getSerialPortsPutX10Db|getUSBPortsPutX10Db|  
importModulesToX10Db|restoreX10Db|sendAllLightsOff|sendAllLightsOn|  
sendAllUnitsOff|sendAllUnitsOn|sendSceneUnitCommands|sendUnitCommand|  
setX10Time|updateX10ControllerToX10Db]

#### CM15A Controller specific Operations

[clearX10Memory|getX10DuskDawn|getX10MemoryVersionStamp|getX10TransceiverSetup|  
putX10TransceiverSetup|putTimersAndMacrosToX10Memory|sendUnitExtendedCommand|  
setX10TimeClearBatteryTimers|setX10TimeClearMonitoredStatus|setX10TimePurgeTimers]

#### CP290 Controller specific Operations

[compareX10TimersToX10Db|downloadX10BaseHousecode|getX10DbTimersPutX10]

/F:Filename

/N:X10ControllerName

/T:X10ControllerType [CP290|CM15A]

/D:X10ControllerDescription

/E:Enabled [Y/N]

/P:Port [COMn| for USB ex: "0003"]

/B:Hub [for USB ex: "0004"]

/C:SceneName

/H:HouseCode [A|B|C|D|E|F|G|H|I|J|K|L|M|N|O|P]

/M:ModuleCode [comma delimited List within double quotes of numbers 1-16. ex: "1,3,5,7,9,16" or just a code ex: "10"]

/1:Dimmer [Y]

/2:OnOff [Off|On|100|94|88|81|75|69|63|56|50|44|38|31|25|19|13|6]

/O:BrightenDim [B|D] (B=Brighten, D=Dim)

If BrightenDim not specified, Dimmer Module will pre-brighten then Dim. Note: CP290 is not supported

/1:Dimmer [N]

/2:OnOff [Off|On]

/3:StandardExtended [S|E] (S=Standard transmission, E=Extended transmission)

/4:ExtendedData [Extended transmission Data byte as string]

/5:ExtendedCommand [Extended transmission Command byte as string]

/6:MemoryAddrLow [byte as string]

/7:MemoryAddrHigh [byte as string]

/8:TransceiverHouseCodes

[comma delimited List within double quotes of House Codes. ex: "A,B,C,D,E,F,G,H,I,J,K,L,M,N,O,P"]

/9:DuskDawnResolution [dusk/dawn resolution in Days as number. Use multiples of 8. ex: For every 8 Days, enter "8"]

## Appendix – continued

### X10Manager (command line) – continued

#### *Operations common to all Controllers*

##### *addX10ControllerToX10Db*

Caution: There are no defaults. All values for each Controller Type MUST be specified as shown in the following examples.

```
X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /D:<10ControllerDescription> /E:<Active> /H:<HouseCode> /P:<USBPort>  
/B:<USBHub> /8:<TransceiverHouseCodes> /9:<DuskDawnResolution>
```

```
X10Manager.exe /O:"addX10ControllerToX10Db" /T:"CM15A" /N:"House Lighting CM15A" /D:"CM15A X10 Controller House Lighting" /E:"Y" /H:"K" /P:"0003"  
/B:"0004" /8:"J,K" /9:"8"
```

```
X10Manager.exe /O:"addX10ControllerToX10Db" /T:"CP290" /N:"House Lighting CP290" /D:"CP290 X10 Controller House Lighting" /E:"Y" /H:"K" /P:"COM3"
```

##### *backupX10Db*

Backups by default are placed in "C:\X10Manager\ X10DbBackup".

Use **X10ManagerDesktop**—“File”—“Settings” to change backup folder location.

```
X10Manager.exe /O:<Operation>
```

```
X10Manager.exe /O:"backupX10Db"
```

##### *compileTimersFromX10DbEventsPlaceInX10Db*

Timers are compiled from Active Schedules, Enabled Events, Enabled Modules, Active Controllers

```
X10Manager.exe /O:<Operation>
```

```
X10Manager.exe /O:"compileTimersFromX10DbEventsPlaceInX10Db"
```

##### *createX10DbTables*

Caution: This operation clears/resets X10 database.

All Controllers, Modules, Scenes, Schedules, Events and Macros will be removed.

```
X10Manager.exe /O:<Operation>
```

```
X10Manager.exe /O:"createX10DbTables"
```

##### *downloadEventsToActiveControllers*

Steps performed on Controllers marked "Active":

- 1) Set Controllers Time
- 2) Set new Sunrise and Sunset times
- 3) *compileTimersFromX10DbEventsPlaceInX10Db*
- 4) Reset CP290 Controller Base House Code
- 5) Download Event Timers to Controllers CP290 Timers and CM15A Timer / Macro Initiators
- 6) Compare Event Timers in X10 database to Controllers CP290 Timers and CM15A Timer / Macro Initiators

```
X10Manager.exe /O:<Operation>
```

```
X10Manager.exe /O:"downloadEventsToActiveControllers"
```

##### *exportModulesFromX10Db*

```
X10Manager.exe /O:<Operation> /F:<Filename>
```

```
X10Manager.exe /O:"exportModulesFromX10Db" /F:"X10Db_Modules.csv"
```

## Appendix – continued

### X10Manager (command line) – continued

#### *Operations common to all Controllers* – continued

##### *getControllerStatus*

```
X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>
X10Manager.exe /O:"getControllerStatus" /T:"CM15A" /N:"House Lighting CM15A"
X10Manager.exe /O:"getControllerStatus" /T:"CP290" /N:"House Lighting CP290"
```

##### *getX10MemoryPutToFile*

```
X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /F:<Filename>
X10Manager.exe /O:"getX10MemoryPutToFile" /T:"CM15A" /N:"House Lighting CM15A" /F:"getX10MemoryPutToFile_CM15A_HouseLightingCM15A.txt"
X10Manager.exe /O:"getX10MemoryPutToFile" /T:"CP290" /N:"House Lighting CP290" /F:"getX10MemoryPutToFile_CP290_HouseLightingCM15A.txt"
```

##### *getSerialPortsPutX10Db*

```
X10Manager.exe /O:<Operation>
X10Manager.exe /O:"getSerialPortsPutX10Db"
```

##### *getUSBPortsPutX10Db*

All USB connected Controllers, such as the CM15A, must be connected and powered on.

```
X10Manager.exe /O:<Operation>
X10Manager.exe /O:"getUSBPortsPutX10Db"
```

##### *importModulesToX10Db*

###### **CSV Import File Format:**

Comma Delimited, each Cell with Double Quotes.  
".csv" Extension for file name. Example: X10Db\_Modules.csv

###### **Header Row:**

"ControllerName","UnitCode","UnitName","UnitDescription","UnitEnabledYN","UnitDimmerYN","UnitLightingYN","UnitExtendedCommandsYN"

###### **Data Row Examples:**

"House Lighting CP290","J1","OutGar","Outside Garage Lights","Y","N","Y","N"  
"Test CP290","J16","Den Test Dimmer Module","Dimmer LED Test Light in Dimmer Module","Y","Y","Y","N"

```
X10Manager.exe /O:<Operation> /F:<Filename>
X10Manager.exe /O:"importModulesToX10Db" /F:"X10Db_Modules.csv"
```

##### *restoreX10Db*

Backups by default are placed in "C:\X10Manager\ X10DbBackup".

Use **X10ManagerDesktop–“File”–“Settings”** to change backup folder location.

```
X10Manager.exe /O:<Operation>
X10Manager.exe /O:"restoreX10Db"
```

## Appendix – continued

### X10Manager (command line) – continued

#### *Operations common to all Controllers* – continued

##### *sendAllLightsOff*

X10Manager.exe /O:<Operation>  
X10Manager.exe /O:"sendAllLightsOff"

##### *sendAllLightsOn*

X10Manager.exe /O:<Operation>  
X10Manager.exe /O:"sendAllLightsOn"

##### *sendAllUnitsOff*

X10Manager.exe /O:<Operation>  
X10Manager.exe /O:"sendAllUnitsOff"

##### *sendAllUnitsOn*

X10Manager.exe /O:<Operation>  
X10Manager.exe /O:"sendAllUnitsOn"

##### *sendSceneUnitCommands*

X10Manager.exe /O:<Operation> /C:<SceneName>  
X10Manager.exe /O:"sendSceneUnitCommands" /C:"Hallway Floor Off"

##### *sendUnitCommand*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /H:<HouseCode> /M:<ModuleCode> /0:<Brighten> /1:<Dimmer> /2:<OnOff> /3:<StandardExtended>  
X10Manager.exe /O:"sendUnitCommand" /T:"CM15A" /N:"House Lighting CM15A" /H:"J" /M:"1,2,3,10" /1:"N" /2:"Off" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CM15A" /N:"House Lighting CM15A" /H:"J" /M:"1,2,3,10" /1:"N" /2:"On" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CM15A" /N:"House Lighting CM15A" /H:"K" /M:"6,7" /1:"Y" /2:"25" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CM15A" /N:"House Lighting CM15A" /H:"K" /M:"6,7" /0:"Y" /1:"Y" /2:"50" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CP290" /N:"House Lighting CP290" /H:"J" /M:"9" /1:"N" /2:"On" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CP290" /N:"House Lighting CP290" /H:"J" /M:"16" /1:"Y" /2:"50" /3:"S"  
X10Manager.exe /O:"sendUnitCommand" /T:"CP290" /N:"House Lighting CP290" /H:"J" /M:"16" /1:"Y" /2:"Off" /3:"S"

##### *setX10Time*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>  
X10Manager.exe /O:"setX10Time" /T:"CM15A" /N:"House Lighting CM15A"  
X10Manager.exe /O:"setX10Time" /T:"CP290" /N:"House Lighting CP290"

##### *updateX10ControllerToX10Db*

Values for ControllerName and ControllerType cannot be changed using this command.

User **X10ManagerDesktop** – “**Controller**” – “**Edit**” to change values for ControllerName and ControllerType

Caution: There are no defaults. All values for each Controller Type MUST be specified as shown in the following examples.

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /D:<10ControllerDescription> /E:<Active> /H:<HouseCode> /P:<USBPort> /B:<USBHub> /8:<TransceiverHouseCodes> /9:<DuskDawnResolution>  
X10Manager.exe /O:"updateX10ControllerToX10Db" /T:"CM15A" /N:"House Lighting CM15A" /D:"CM15A X10 Controller House Lighting" /E:"Y" /H:"K" /P:"0003" /B:"0004" /8:"J,K" /9:"8"  
X10Manager.exe /O:"updateX10ControllerToX10Db" /T:"CP290" /N:"House Lighting CP290" /D:"CP290 X10 Controller House Lighting" /E:"Y" /H:"K" /P:"COM3"

## Appendix – continued

### X10Manager (command line) – continued

#### *CM15A Controller specific Operations*

##### *clearX10Memory*

Caution: This operation will Clear all Timer and Macro Initiators from CM15A Controller.

A *downloadEventsToActiveControllers* or *putTimersAndMacrosToX10Memory* operation will need to be performed.

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /F:<Filename>

X10Manager.exe /O:"clearX10Memory" /T:"CM15A" /N:"House Lighting CM15A" /F:"clearX10Memory\_CM15A\_HouseLightingCM15A.txt"

##### *getX10DuskDawn*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"getX10DuskDawn" /T:"CM15A" /N:"House Lighting CM15A"

##### *getX10MemoryVersionStamp*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"getX10MemoryVersionStamp" /T:"CM15A" /N:"House Lighting CM15A"

##### *getX10TransceiverSetup*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"getX10TransceiverSetup" /T:"CM15A" /N:"House Lighting CM15A"

##### *putX10TransceiverSetup*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"putX10TransceiverSetup" /T:"CM15A" /N:"House Lighting CM15A"

##### *putTimersAndMacrosToX10Memory*

Steps performed on specified Controller with Enabled Events in all Active Schedules:

- 1) Set Controller Time
- 2) Set new Sunrise and Sunset times in X10 database
- 3) *compileTimersFromX10DbEventsPlaceInX10Db*
- 4) Download Event Timer / Macro Initiators to Controller Memory
- 5) Compare Event Timers in X10 database to Timer / Macro Initiators in Controller Memory

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /F:<Filename>

X10Manager.exe /O:"putTimersAndMacrosToX10Memory" /T:"CM15A" /N:"House Lighting CM15A"

/F:"putTimersAndMacrosToX10Memory\_CM15A\_HouseLightingCM15A.txt"

##### *sendUnitExtendedCommand*

X10Manager.exe /O:"sendUnitExtendedCommand" /T:<X10ControllerType> /N:<X10ControllerName> /H:<HouseCode> /M:<ModuleCode> /1:<Dimmer> /2:<OnOff> /3:<StandardExtended> /4:<ExtendedData> /5:<ExtendedCommand>

X10Manager.exe /O:"sendUnitExtendedCommand" /T:"CM15A" /N:"House Lighting CM15A" /H:"J" /M:"9" /1:"N" /2:"Off" /3:"E" /4:"0" /5:"15"

## **Appendix** – continued

### **X10Manager (command line)** – continued

#### ***CM15A Controller specific Operations*** – continued

##### ***setX10TimeClearBatteryTimers***

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>  
X10Manager.exe /O:"setX10TimeClearBatteryTimers" /T:"CM15A" /N:"House Lighting CM15A"

##### ***setX10TimeClearMonitoredStatus***

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>  
X10Manager.exe /O:"setX10TimeClearMonitoredStatus" /T:"CM15A" /N:"House Lighting CM15A"

##### ***setX10TimePurgeTimers***

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>  
X10Manager.exe /O:"setX10TimePurgeTimers" /T:"CM15A" /N:"House Lighting CM15A"

## Appendix – continued

### X10Manager (command line) – continued

#### *CP290 Controller specific Operations*

##### *compareX10TimersToX10Db*

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"compareX10TimersToX10Db" /T:"CP290" /N:"House Lighting CP290"

##### *downloadX10BaseHousecode*

Caution: This operation will Clear all Timers from CP290 Controller.

A *downloadEventsToActiveControllers* -or- *getX10DbTimersPutX10* operation will need to be performed.

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName> /H:<HouseCode>

X10Manager.exe /O:"downloadX10BaseHousecode" /T:"CP290" /N:"House Lighting CP290" /H:"J"

##### *getX10DbTimersPutX10*

Steps performed on specified Controller with Enabled Events in all Active Schedules:

- 1) Set Controller Time
- 2) Set new Sunrise and Sunset times in X10 database
- 3) *compileTimersFromX10DbEventsPlaceInX10Db*
- 4) Reset Controller Base House Code
- 5) Download Event Timers to Controller
- 6) Compare Event Timers in X10 database to Timers in Controller

X10Manager.exe /O:<Operation> /T:<X10ControllerType> /N:<X10ControllerName>

X10Manager.exe /O:"getX10DbTimersPutX10" /T:"CP290" /N:"House Lighting CP290"

## Appendix – continued

### X10Manager (command line) – continued

#### *Email Notifications*

X10Manager (command line) can use a SMTP server to send Email Notifications when run-time errors occur.

To enable Email Notifications:

- 1) Using “Windows” - “Accessories” - “Notepad” open “C:\X10Manager\X10Manager.exe.config”
- 2) In the **<appSettings>** section, add an Email Address to **<add key="MailErrorsTo" value="">**

For example:

```
<add key="MailErrorsTo" value="trekkerphotoart@gmail.com" />
```

- 3) Modify the SMTP server host and logon credentials information in section  
**<system.net>** - **<mailSettings>** - **<smtp deliveryMethod="network">**

*defaultCredentials* example:

```
<network host="127.0.0.1" port="25" defaultCredentials="true" />
```

*username and password* example:

```
<network host="127.0.0.1" port="25" userName="username" password="secret" defaultCredentials="false" />
```

- 4) Save the edited X10Manager.exe.config file
- 5) Exit the text editor



6) **Appendix** – continued

**Credits**

ParadoxReader.DLL (ParadoxReader ) contains source code from "Code Project", "Paradox database native .NET reader" by Petr Bříza, March 17, 2011, v1.2.

Modifications have been added by Alan Wagner that allow ParadoxReader, as used in X10ManagerDesktop and X10Manager, to read X10 Lighthouse Scene BLOB data.

Original ParadoxReader source code is Licensed under: "[The Code Project Open License \(CPOL\) 1.02](#)"

## *The Code Project Open License (CPOL) 1.02*

### Preamble

This License governs Your use of the Work. This License is intended to allow developers to use the Source Code and Executable Files provided as part of the Work in any application in any form.

The main points subject to the terms of the License are:

- Source Code and Executable Files can be used in commercial applications;
- Source Code and Executable Files can be redistributed; and
- Source Code can be modified to create derivative works.
- No claim of suitability, guarantee, or any warranty whatsoever is provided. The software is provided "as-is".
- The Article accompanying the Work may not be distributed or republished without the Author's consent

This License is entered between You, the individual or other entity reading or otherwise making use of the Work licensed pursuant to this License and the individual or other entity which offers the Work under the terms of this License ("Author").

### License

THE WORK (AS DEFINED BELOW) IS PROVIDED UNDER THE TERMS OF THIS CODE PROJECT OPEN LICENSE ("LICENSE"). THE WORK IS PROTECTED BY COPYRIGHT AND/OR OTHER APPLICABLE LAW. ANY USE OF THE WORK OTHER THAN AS AUTHORIZED UNDER THIS LICENSE OR COPYRIGHT LAW IS PROHIBITED.

BY EXERCISING ANY RIGHTS TO THE WORK PROVIDED HEREIN, YOU ACCEPT AND AGREE TO BE BOUND BY THE TERMS OF THIS LICENSE. THE AUTHOR GRANTS YOU THE RIGHTS CONTAINED HEREIN IN CONSIDERATION OF YOUR ACCEPTANCE OF SUCH TERMS AND CONDITIONS. IF YOU DO NOT AGREE TO ACCEPT AND BE BOUND BY THE TERMS OF THIS LICENSE, YOU CANNOT MAKE ANY USE OF THE WORK.

#### 1. Definitions.

- a. **"Articles"** means, collectively, all articles written by Author which describes how the Source Code and Executable Files for the Work may be used by a user.
- b. **"Author"** means the individual or entity that offers the Work under the terms of this License.
- c. **"Derivative Work"** means a work based upon the Work or upon the Work and other pre-existing works.
- d. **"Executable Files"** refer to the executables, binary files, configuration and any required data files included in the Work.
- e. **"Publisher"** means the provider of the website, magazine, CD-ROM, DVD or other medium from or by which the Work is obtained by You.
- f. **"Source Code"** refers to the collection of source code and configuration files used to create the Executable Files.

- g. **"Standard Version"** refers to such a Work if it has not been modified, or has been modified in accordance with the consent of the Author, such consent being in the full discretion of the Author.
  - h. **"Work"** refers to the collection of files distributed by the Publisher, including the Source Code, Executable Files, binaries, data files, documentation, whitepapers and the Articles.
  - i. **"You"** is you, an individual or entity wishing to use the Work and exercise your rights under this License.
- 2. **Fair Use/Fair Use Rights.** Nothing in this License is intended to reduce, limit, or restrict any rights arising from fair use, fair dealing, first sale or other limitations on the exclusive rights of the copyright owner under copyright law or other applicable laws.
- 3. **License Grant.** Subject to the terms and conditions of this License, the Author hereby grants You a worldwide, royalty-free, non-exclusive, perpetual (for the duration of the applicable copyright) license to exercise the rights in the Work as stated below:
  - a. You may use the standard version of the Source Code or Executable Files in Your own applications.
  - b. You may apply bug fixes, portability fixes and other modifications obtained from the Public Domain or from the Author. A Work modified in such a way shall still be considered the standard version and will be subject to this License.
  - c. You may otherwise modify Your copy of this Work (excluding the Articles) in any way to create a Derivative Work, provided that You insert a prominent notice in each changed file stating how, when and where You changed that file.
  - d. You may distribute the standard version of the Executable Files and Source Code or Derivative Work in aggregate with other (possibly commercial) programs as part of a larger (possibly commercial) software distribution.
  - e. The Articles discussing the Work published in any form by the author may not be distributed or republished without the Author's consent. The author retains copyright to any such Articles. You may use the Executable Files and Source Code pursuant to this License but you may not repost or republish or otherwise distribute or make available the Articles, without the prior written consent of the Author.

Any subroutines or modules supplied by You and linked into the Source Code or Executable Files of this Work shall not be considered part of this Work and will not be subject to the terms of this License.

- 4. **Patent License.** Subject to the terms and conditions of this License, each Author hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, import, and otherwise transfer the Work.
- 5. **Restrictions.** The license granted in Section 3 above is expressly made subject to and limited by the following restrictions:
  - a. You agree not to remove any of the original copyright, patent, trademark, and attribution notices and associated disclaimers that may appear in the Source Code or Executable Files.
  - b. You agree not to advertise or in any way imply that this Work is a product of Your own.
  - c. The name of the Author may not be used to endorse or promote products derived from the Work without the prior written consent of the Author.
  - d. You agree not to sell, lease, or rent any part of the Work. This does not restrict you from including the Work or any part of the Work inside a larger software distribution that itself is being sold. The Work by itself, though, cannot be sold, leased or rented.
  - e. You may distribute the Executable Files and Source Code only under the terms of this License, and You must include a copy of, or the Uniform Resource Identifier for, this License with every copy of the Executable Files or Source Code You distribute and ensure that anyone receiving such Executable Files and Source Code agrees that the terms of this License apply to such Executable Files and/or Source Code. You may not offer or impose any terms on the Work that alter or restrict the terms of this License or the recipients' exercise of the rights granted hereunder. You may not sublicense the Work. You must keep intact all notices that refer to this License and to the disclaimer of warranties. You may not

distribute the Executable Files or Source Code with any technological measures that control access or use of the Work in a manner inconsistent with the terms of this License.

- f. You agree not to use the Work for illegal, immoral or improper purposes, or on pages containing illegal, immoral or improper material. The Work is subject to applicable export laws. You agree to comply with all such laws and regulations that may apply to the Work after Your receipt of the Work.

6. **Representations, Warranties and Disclaimer.** THIS WORK IS PROVIDED "AS IS", "WHERE IS" AND "AS AVAILABLE", WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES OR CONDITIONS OR GUARANTEES. YOU, THE USER, ASSUME ALL RISK IN ITS USE, INCLUDING COPYRIGHT INFRINGEMENT, PATENT INFRINGEMENT, SUITABILITY, ETC. AUTHOR EXPRESSLY DISCLAIMS ALL EXPRESS, IMPLIED OR STATUTORY WARRANTIES OR CONDITIONS, INCLUDING WITHOUT LIMITATION, WARRANTIES OR CONDITIONS OF MERCHANTABILITY, MERCHANTABLE QUALITY OR FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY OF TITLE OR NON-INFRINGEMENT, OR THAT THE WORK (OR ANY PORTION THEREOF) IS CORRECT, USEFUL, BUG-FREE OR FREE OF VIRUSES. YOU MUST PASS THIS DISCLAIMER ON WHENEVER YOU DISTRIBUTE THE WORK OR DERIVATIVE WORKS.

7. **Indemnity.** You agree to defend, indemnify and hold harmless the Author and the Publisher from and against any claims, suits, losses, damages, liabilities, costs, and expenses (including reasonable legal or attorneys' fees) resulting from or relating to any use of the Work by You.

8. **Limitation on Liability.** EXCEPT TO THE EXTENT REQUIRED BY APPLICABLE LAW, IN NO EVENT WILL THE AUTHOR OR THE PUBLISHER BE LIABLE TO YOU ON ANY LEGAL THEORY FOR ANY SPECIAL, INCIDENTAL, CONSEQUENTIAL, PUNITIVE OR EXEMPLARY DAMAGES ARISING OUT OF THIS LICENSE OR THE USE OF THE WORK OR OTHERWISE, EVEN IF THE AUTHOR OR THE PUBLISHER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

9. **Termination.**

- a. This License and the rights granted hereunder will terminate automatically upon any breach by You of any term of this License. Individuals or entities who have received Derivative Works from You under this License, however, will not have their licenses terminated provided such individuals or entities remain in full compliance with those licenses. Sections 1, 2, 6, 7, 8, 9, 10 and 11 will survive any termination of this License.
- b. If You bring a copyright, trademark, patent or any other infringement claim against any contributor over infringements You claim are made by the Work, your License from such contributor to the Work ends automatically.
- c. Subject to the above terms and conditions, this License is perpetual (for the duration of the applicable copyright in the Work). Notwithstanding the above, the Author reserves the right to release the Work under different license terms or to stop distributing the Work at any time; provided, however that any such election will not serve to withdraw this License (or any other license that has been, or is required to be, granted under the terms of this License), and this License will continue in full force and effect unless terminated as stated above.

10. **Publisher.** The parties hereby confirm that the Publisher shall not, under any circumstances, be responsible for and shall not have any liability in respect of the subject matter of this License. The Publisher makes no warranty whatsoever in connection with the Work and shall not be liable to You or any party on any legal theory for any damages whatsoever, including without limitation any general, special, incidental or consequential damages arising in connection to this license. The Publisher reserves the right to cease making the Work available to You at any time without notice

11. **Miscellaneous**

- a. This License shall be governed by the laws of the location of the head office of the Author or if the Author is an individual, the laws of location of the principal place of residence of the Author.
- b. If any provision of this License is invalid or unenforceable under applicable law, it shall not affect the validity or enforceability of the remainder of the terms of this License, and without further action by the parties to this License, such provision shall be reformed to the minimum extent necessary to make such provision valid and enforceable.

- c. No term or provision of this License shall be deemed waived and no breach consented to unless such waiver or consent shall be in writing and signed by the party to be charged with such waiver or consent.
- d. This License constitutes the entire agreement between the parties with respect to the Work licensed herein. There are no understandings, agreements or representations with respect to the Work not specified herein. The Author shall not be bound by any additional provisions that may appear in any communication from You. This License may not be modified without the mutual written agreement of the Author and You.