
Hola Mundo.




Lo guardamos en el escritorio y si lo queremos comprobar, lo podemos ejecutar desde línea de comandos con el cliente php:

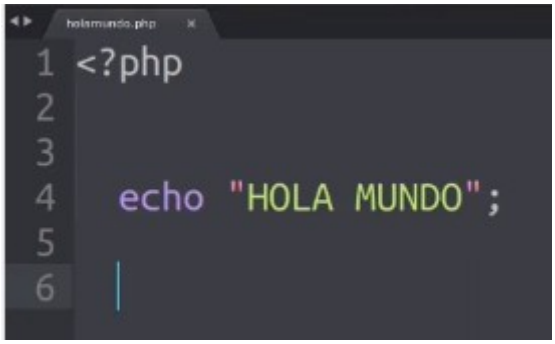


En instalaciones Windows con XAMPP guardaremos los ficheros php, html, etc en el directorio htdocs, ya que para XAMPP ese es como su directorio raíz. Por lo tanto, guardaremos holaMundo.php en xampp/htdocs. Posteriormente abrimos un navegador y en la barra de direcciones pondremos:

http://localhost/holaMundo.php

Y el navegador buscará el fichero holaMundo.php en el directorio htdocs de XAMPP y lo ejecutará.

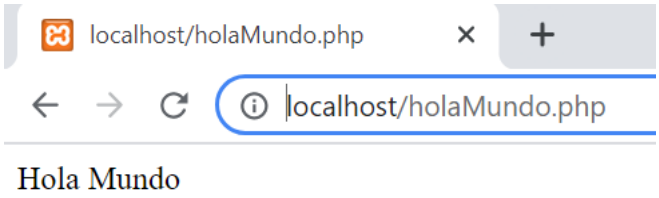

Para que esto funcione se ha de haber activado “Apache” y “MySQL” de XAMPP:

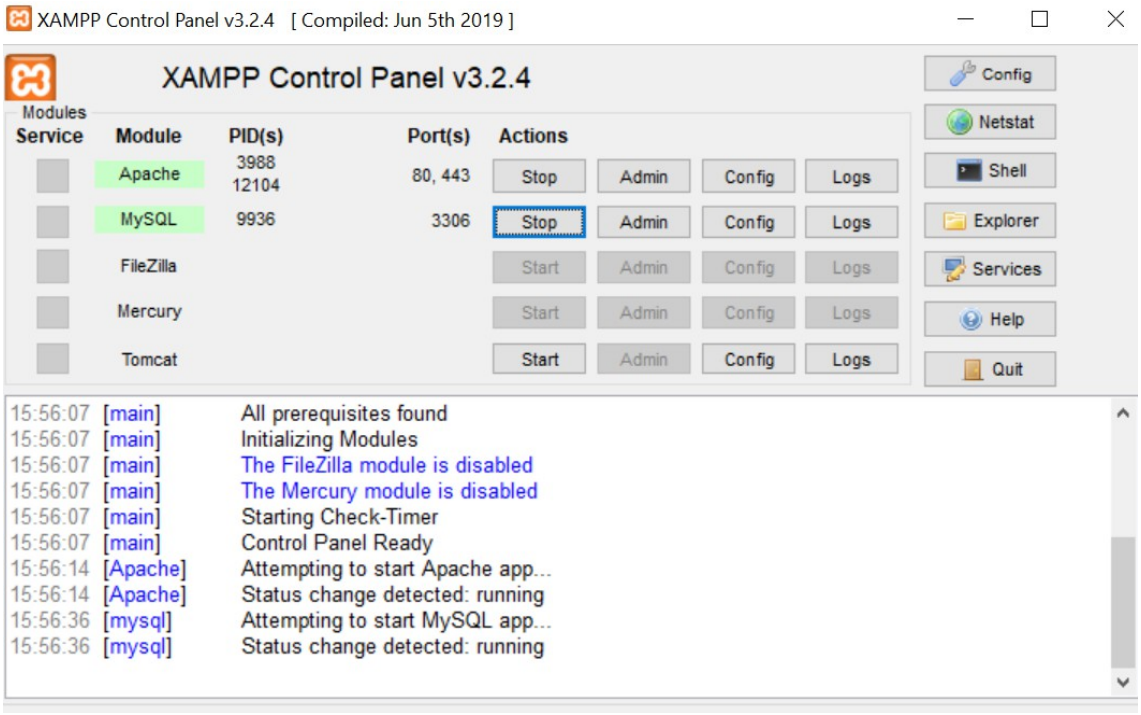
XAMPP Control Panel v3.2.4 [Compiled: Jun 5th 2019]
XAMPP Control Panel v3.2.4
Modules
Service
Module
PID(s)
Port(s)
Actions
Apache
3988
12104
80, 443
Stop
Admin
Config
Logs
MySQL
9936
3306
Stop
Admin
Config
Logs
FileZilla
Start
Admin
Config
Logs
Mercury
Start
Admin
Config
Logs
Tomcat
Start
Admin
Config
Logs
Config
Netstat
Shell
Explorer
Services
Help
Quit
15:56:07 [main] All prerequisites found
15:56:07 [main] Initializing Modules
15:56:07 [main] The FileZilla module is disabled
15:56:07 [main] The Mercury module is disabled
15:56:07 [main] Starting Check-Timer
15:56:07 [main] Control Panel Ready
15:56:14 [Apache] Attempting to start Apache app...
15:56:14 [Apache] Status change detected: running
15:56:36 [mysql] Attempting to start MySQL app...
15:56:36 [mysql] Status change detected: running